


## V2 Link - WAGO

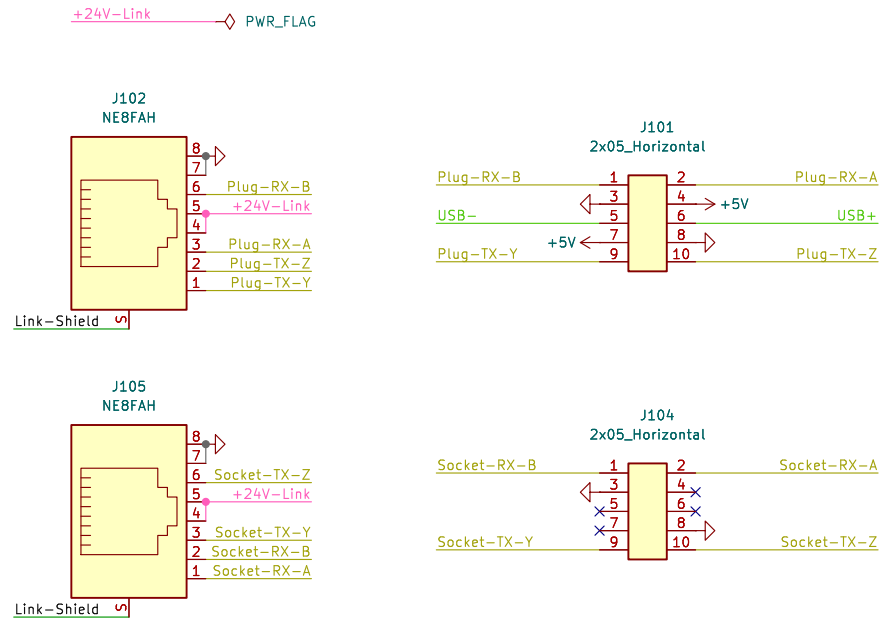


PoE Passive +24V  
IEEE 802.3af Mode B

RS-422 3MHz


The cables used to connect the device and the power adapter reverse the order of the wires.

## USB


PWR\_FLAG → VBUS  
PWR\_FLAG → USB-Shield  
PWR\_FLAG → USB-Shield

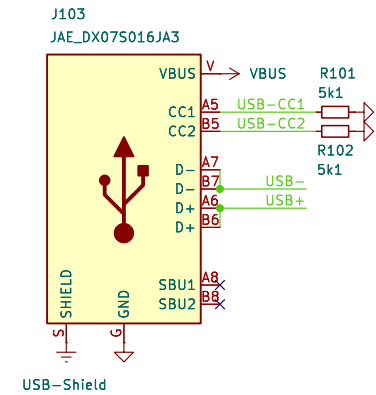

## Power Input / +5V Power

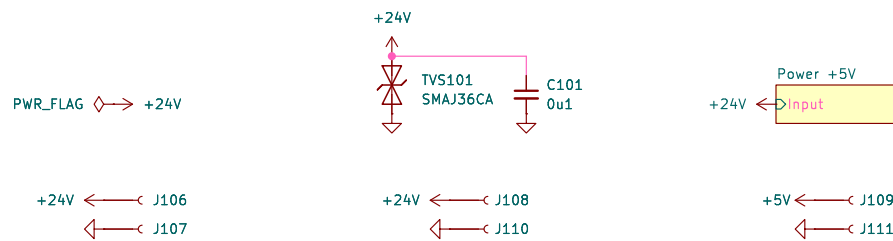


## Mechanical / Production

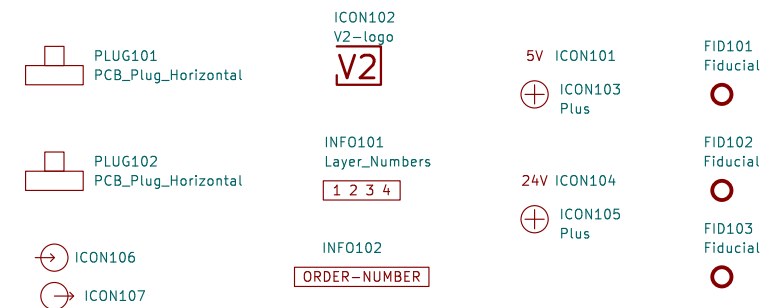

V2 Link WAGO  
Versio Duo  
External Power Supply

Rev: 2  
Id: 1/2  
Sheet: Root  
Date: 2026-01-06

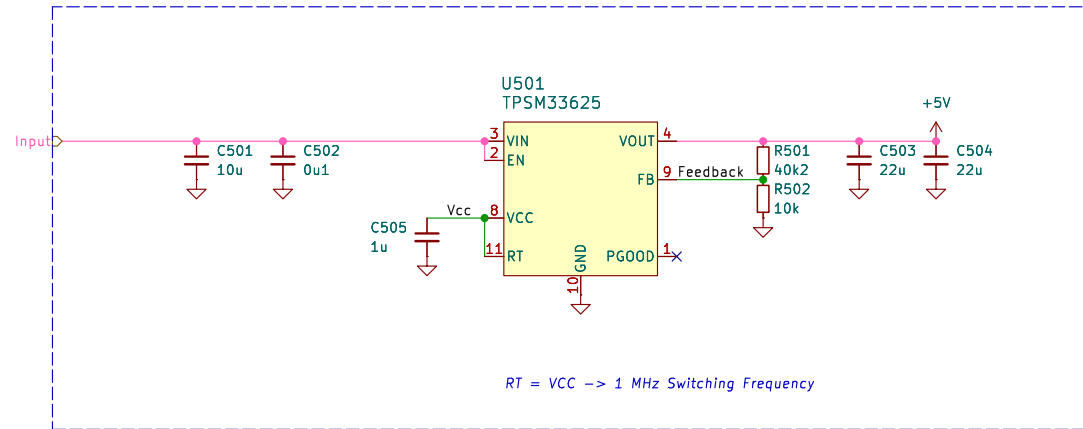

**Power Supply**  
+5V

Rev: 4  
Id: 5/2  
Sheet: Power +5V  
Date: 2024-03-28