


V2 Link - PoE

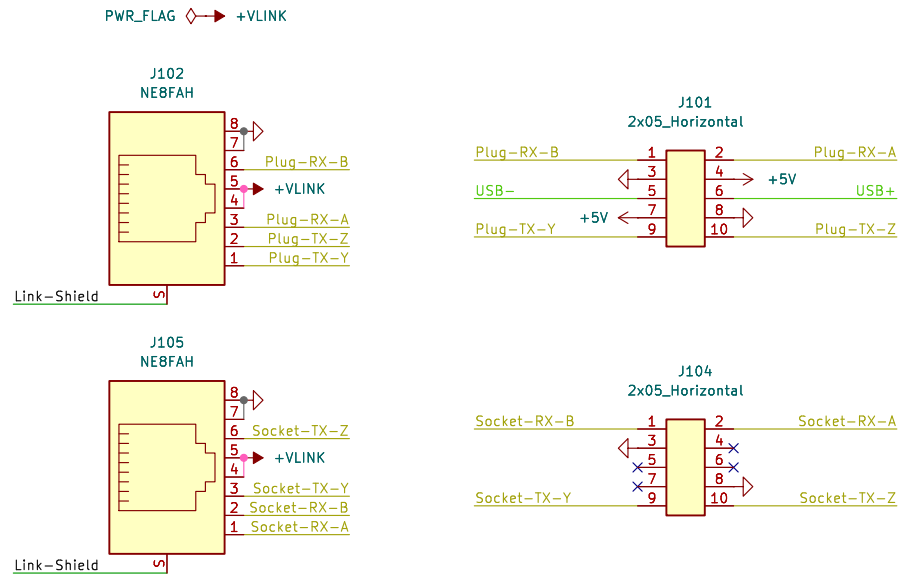


PoE Passive +24V
IEEE 802.3af Mode B


RS-422 3MHz

The cables used to connect the device and the power adapter
reverse the order of the wires.


USB

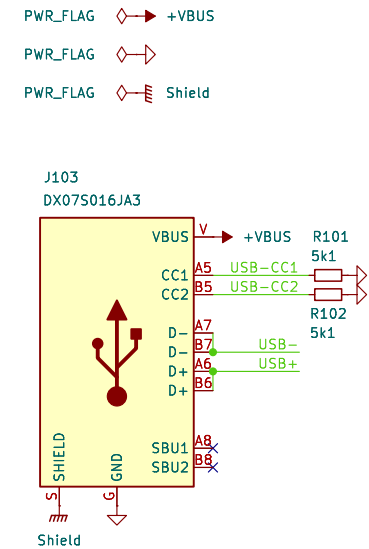

Polarity Protection / +5V Power

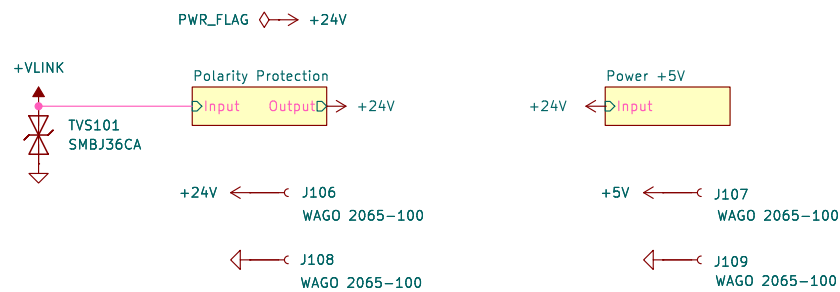



Mechanical / Production

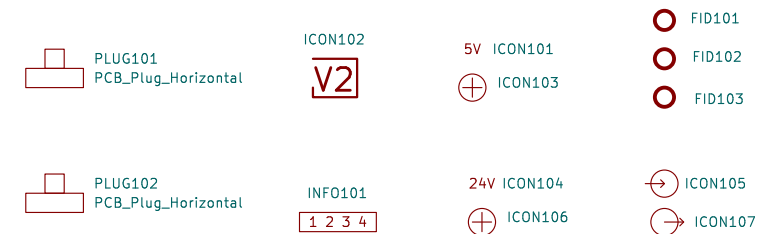

V2 Link PoE
Versio Duo
CAT Cable Power Supply

Rev: 7
Id: 1/3
Sheet: Root
Date: 2026-01-12

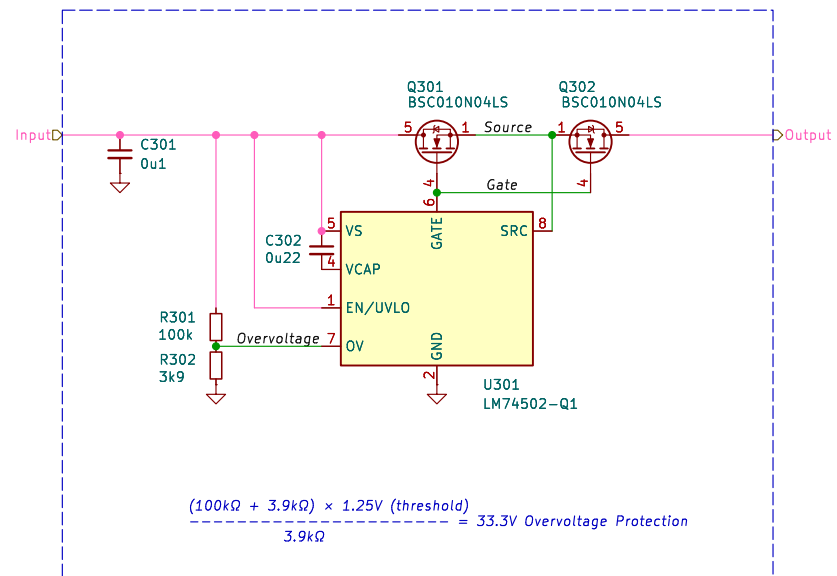

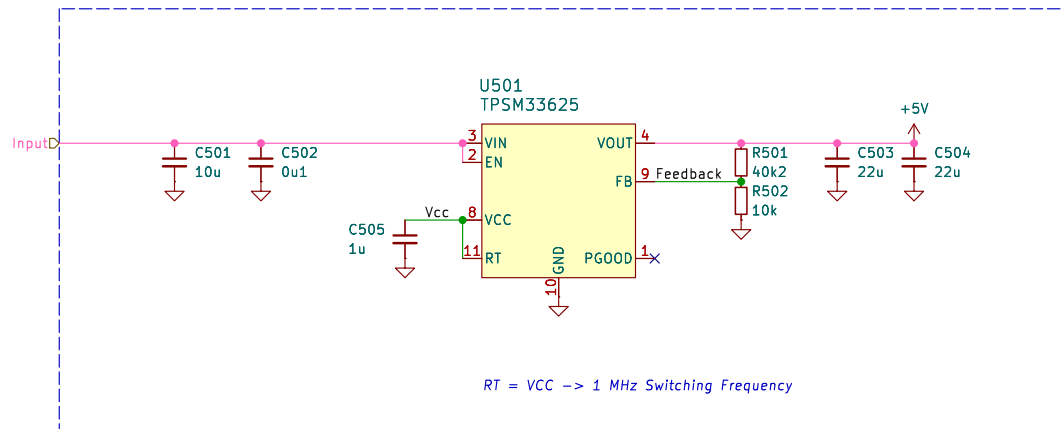

Power Supply
+5V

Rev: 4
Id: 5/3
Sheet: Power +5V
Date: 2024-03-28