



V2 Link - PoE

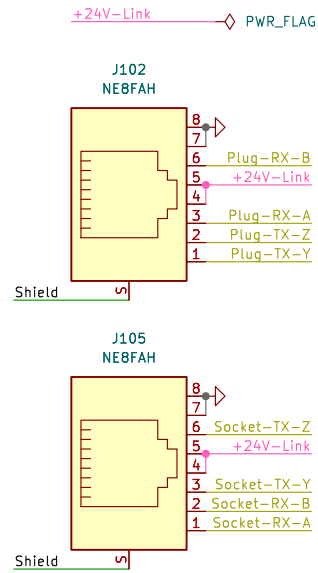

PoE Passive +24V
IEEE 802.3af Mode B


RS-422 3MHz

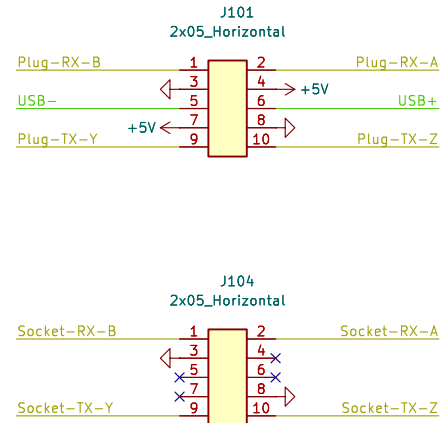


The cables used to connect the device and the power adapter reverse the order of the wires.

USB


PWR_FLAG \rightarrow VBUS
PWR_FLAG \rightarrow
PWR_FLAG \rightarrow USB-Shield

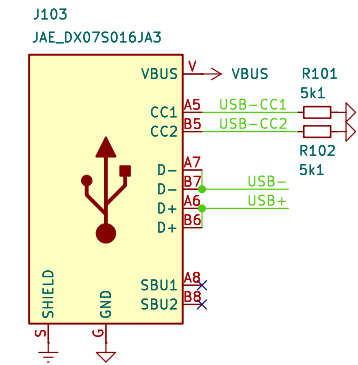

Polarity Protection / +5V Power

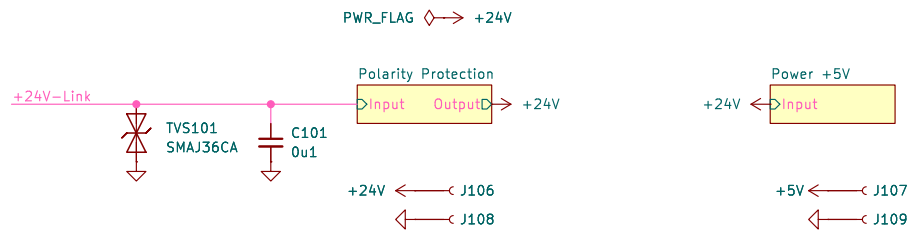



Mechanical / Production

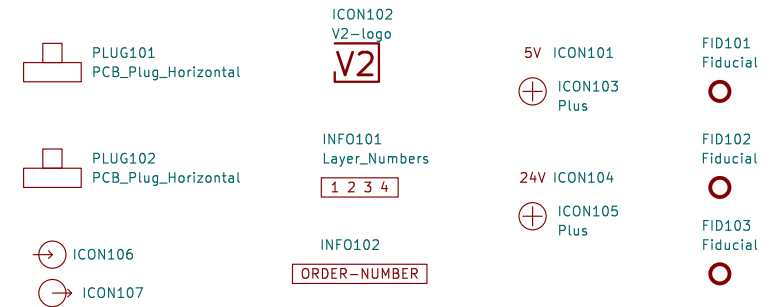

V2 Link PoE
Versio Duo
CAT Cable Power Supply

Rev: 6
Id: 1/3
Sheet: Root
Date: 2026-01-06

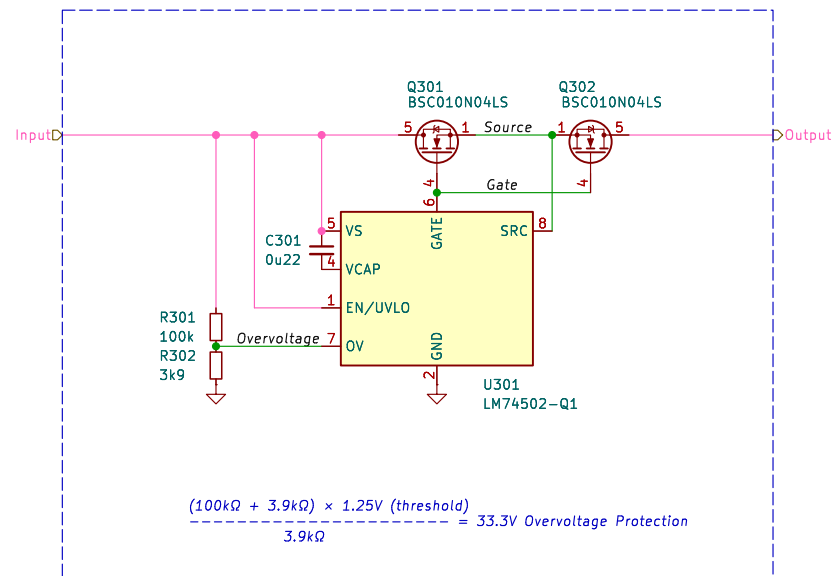

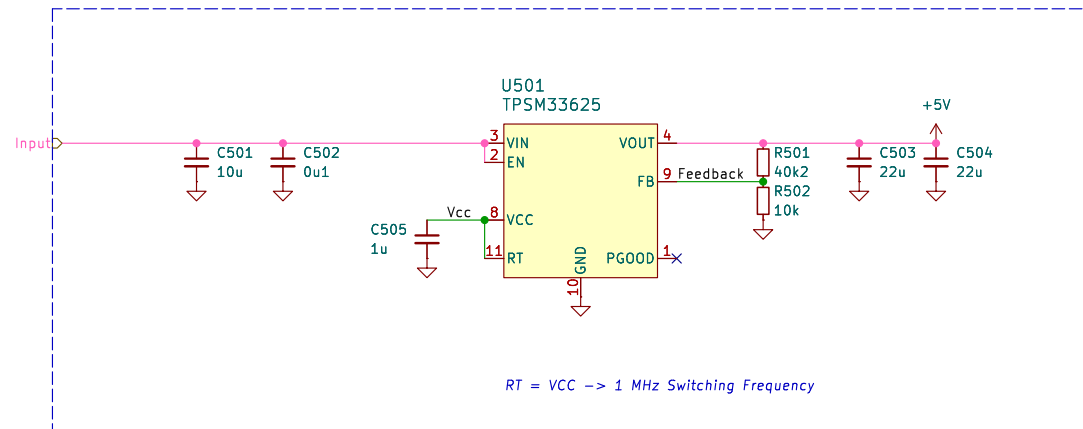

Power Supply
+5V

Rev: 4
Id: 5/3
Sheet: Power +5V
Date: 2024-03-28