




V2 express
Versio Duo
Expression Controller


Rev: 3
Id: 1/18
Sheet:
Date: 2023-06-03

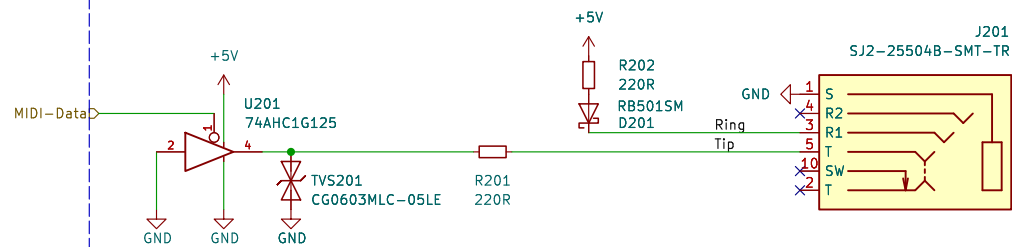


Open Collector switching to ignore short-circuiting.
 The output enters a high impedance state when
 HIGH-level is applied to the output enable (OE) pin.

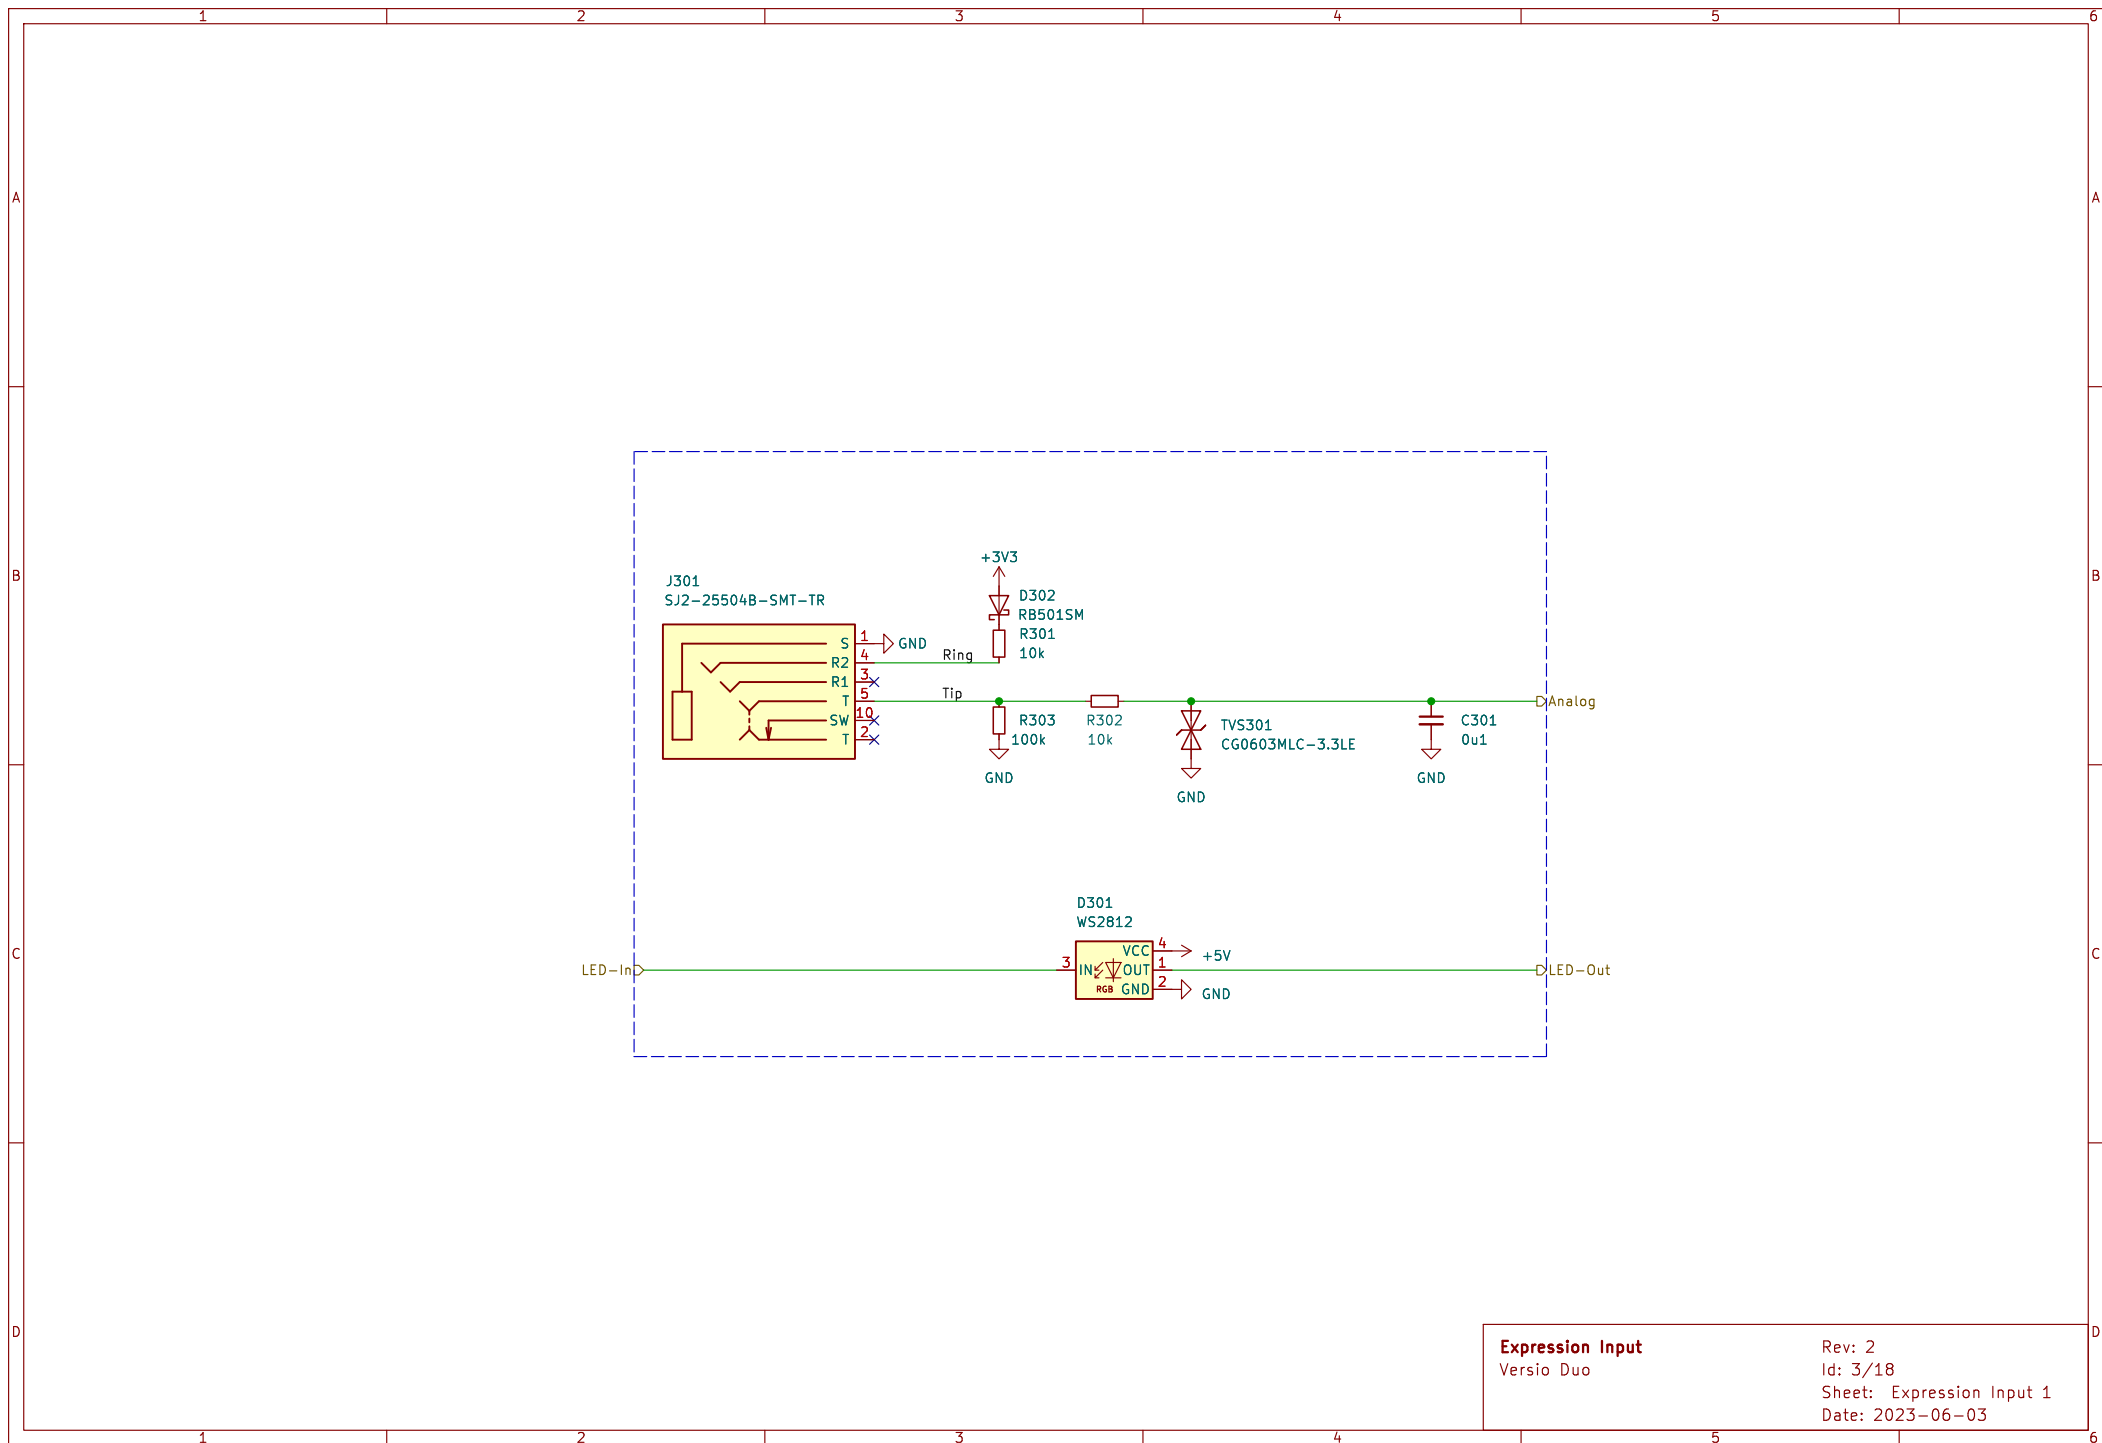

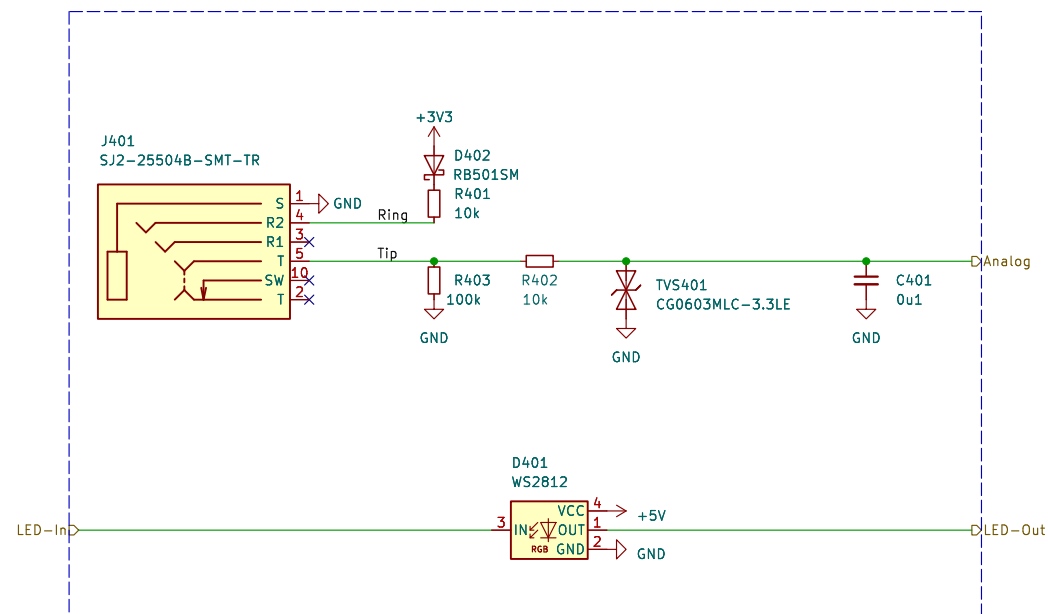


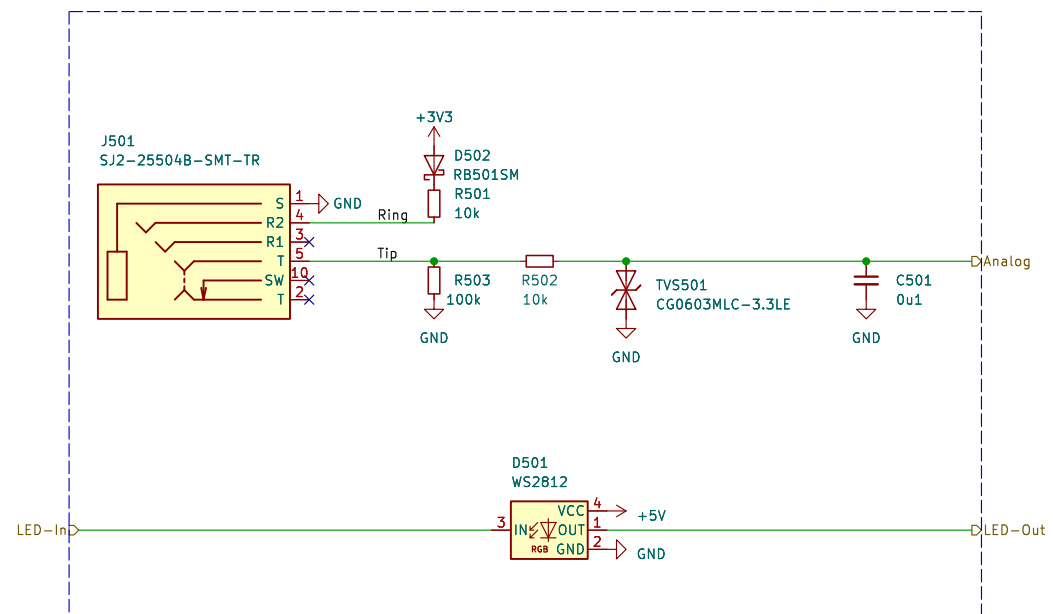

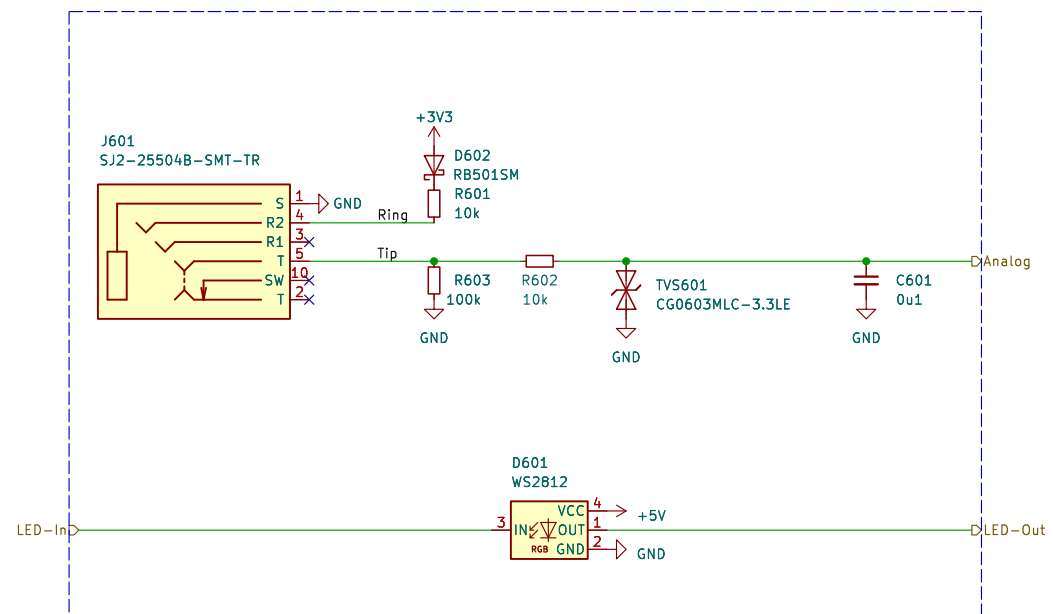


Expression Input
Versio Duo


Rev: 2
Id: 6/18
Sheet: Expression Input 4
Date: 2023-06-03

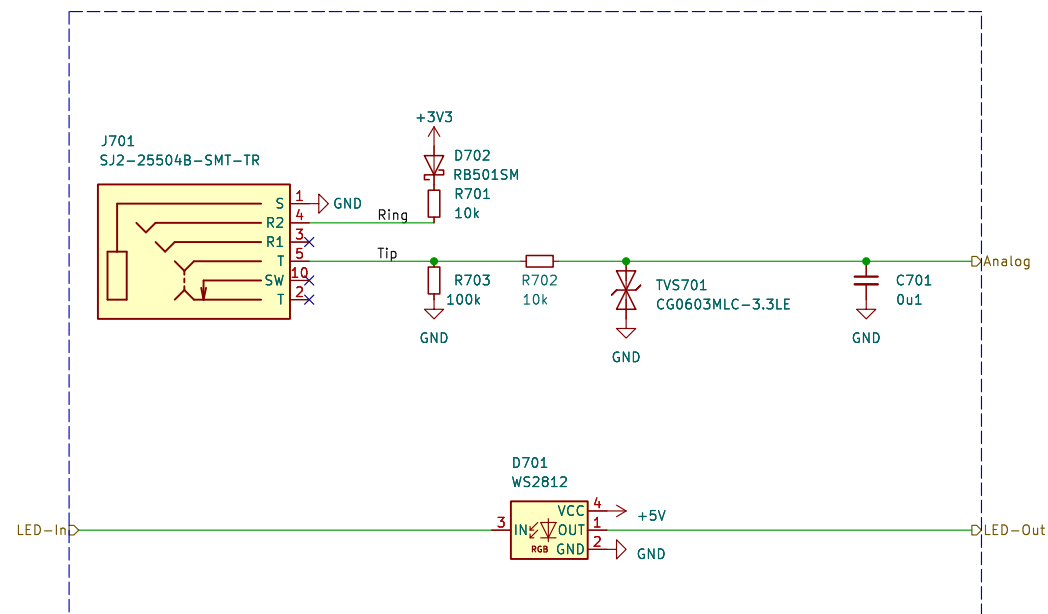



Expression Input
Versio Duo


Rev: 2
Id: 7/18
Sheet: Expression Input 5
Date: 2023-06-03

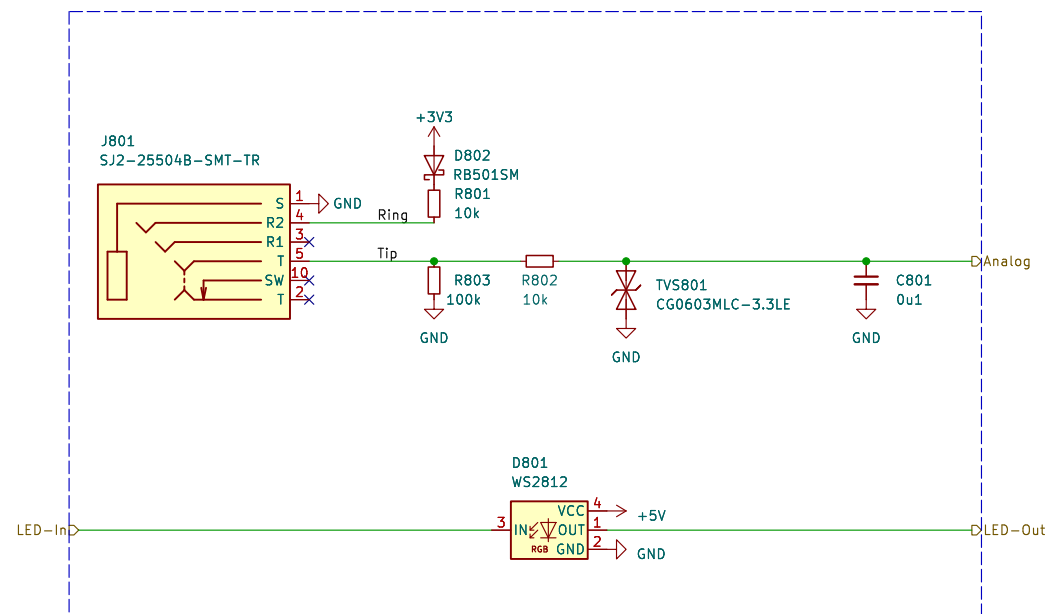

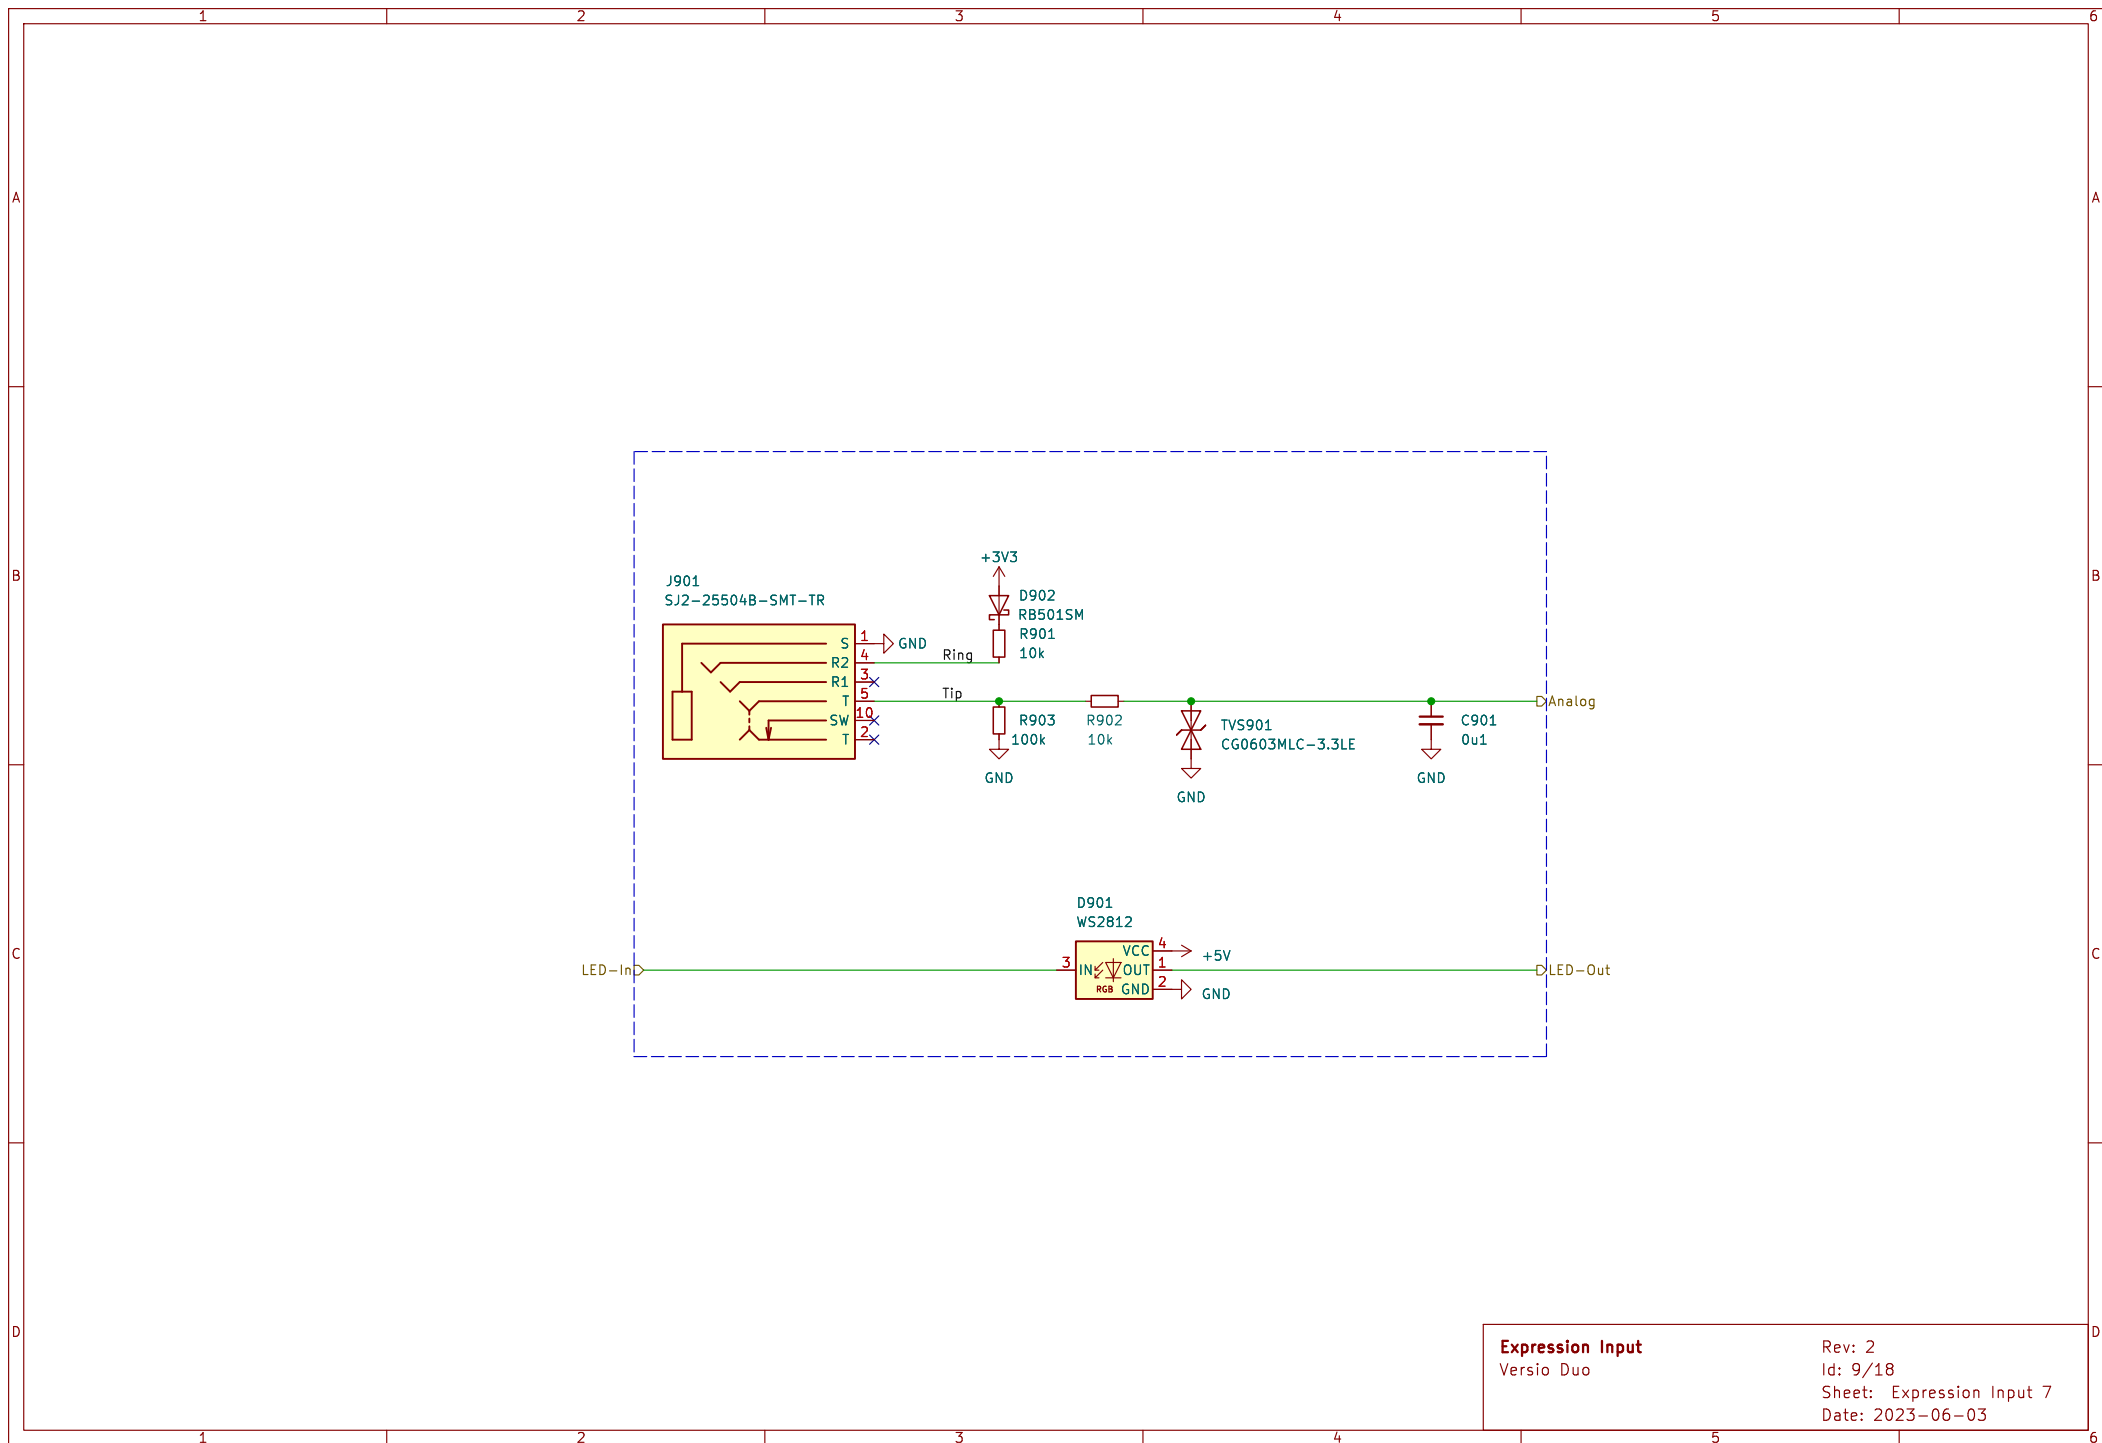

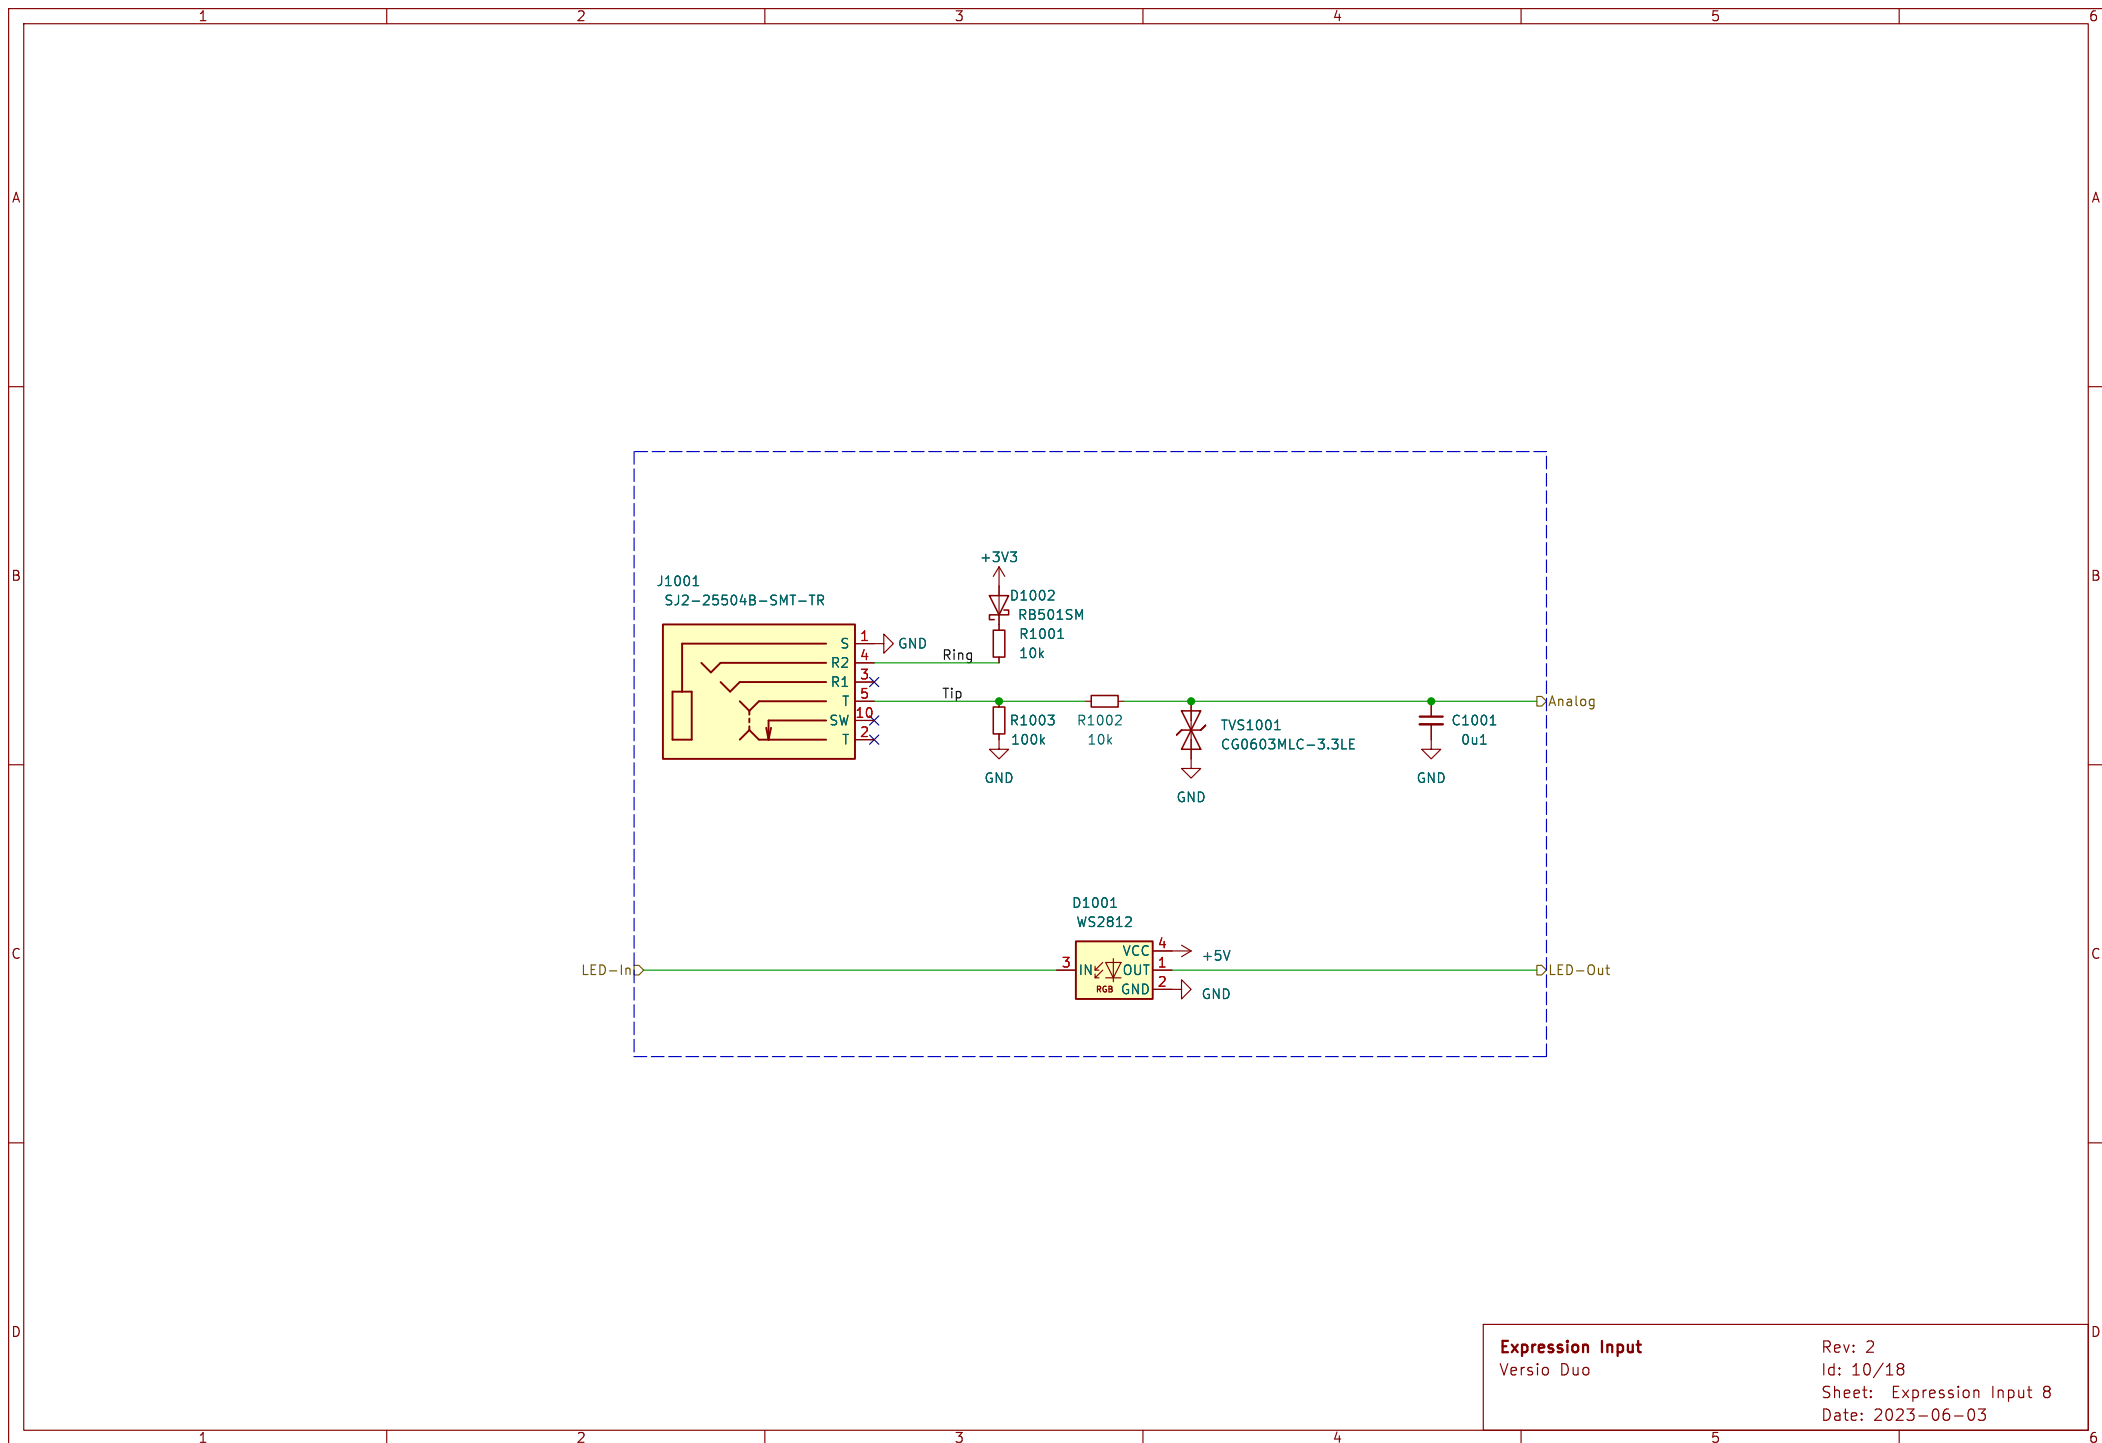

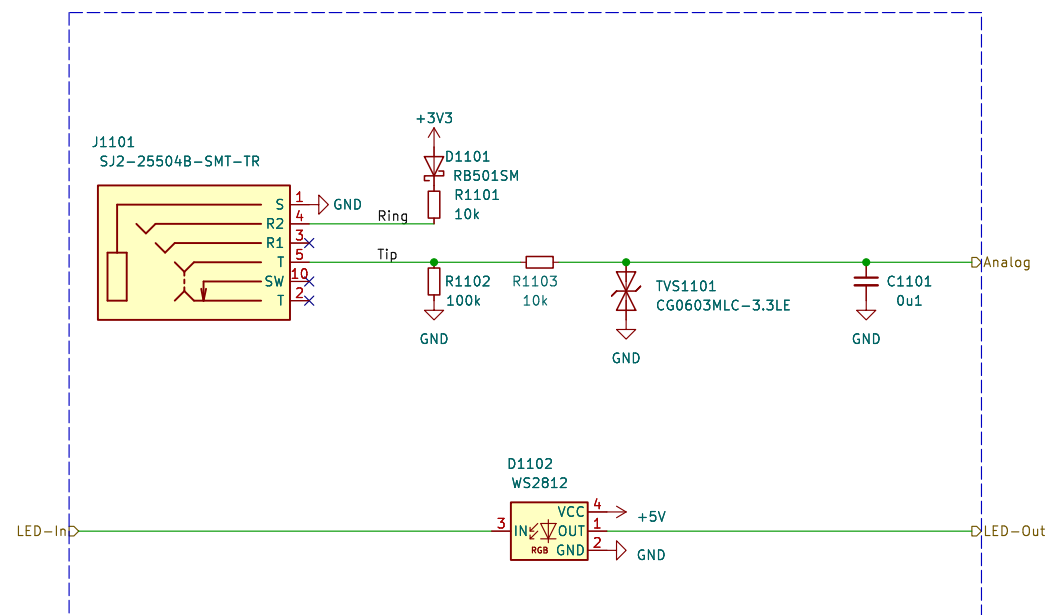

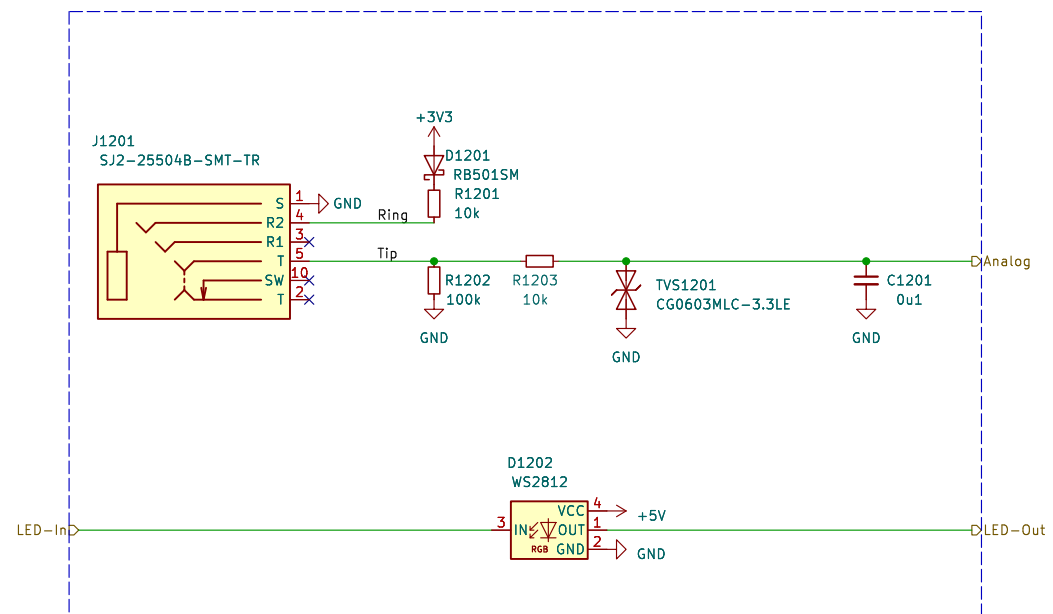

Expression Input
Versio Duo

Rev: 2
Id: 12/18
Sheet: Expression Input 10
Date: 2023-06-03

