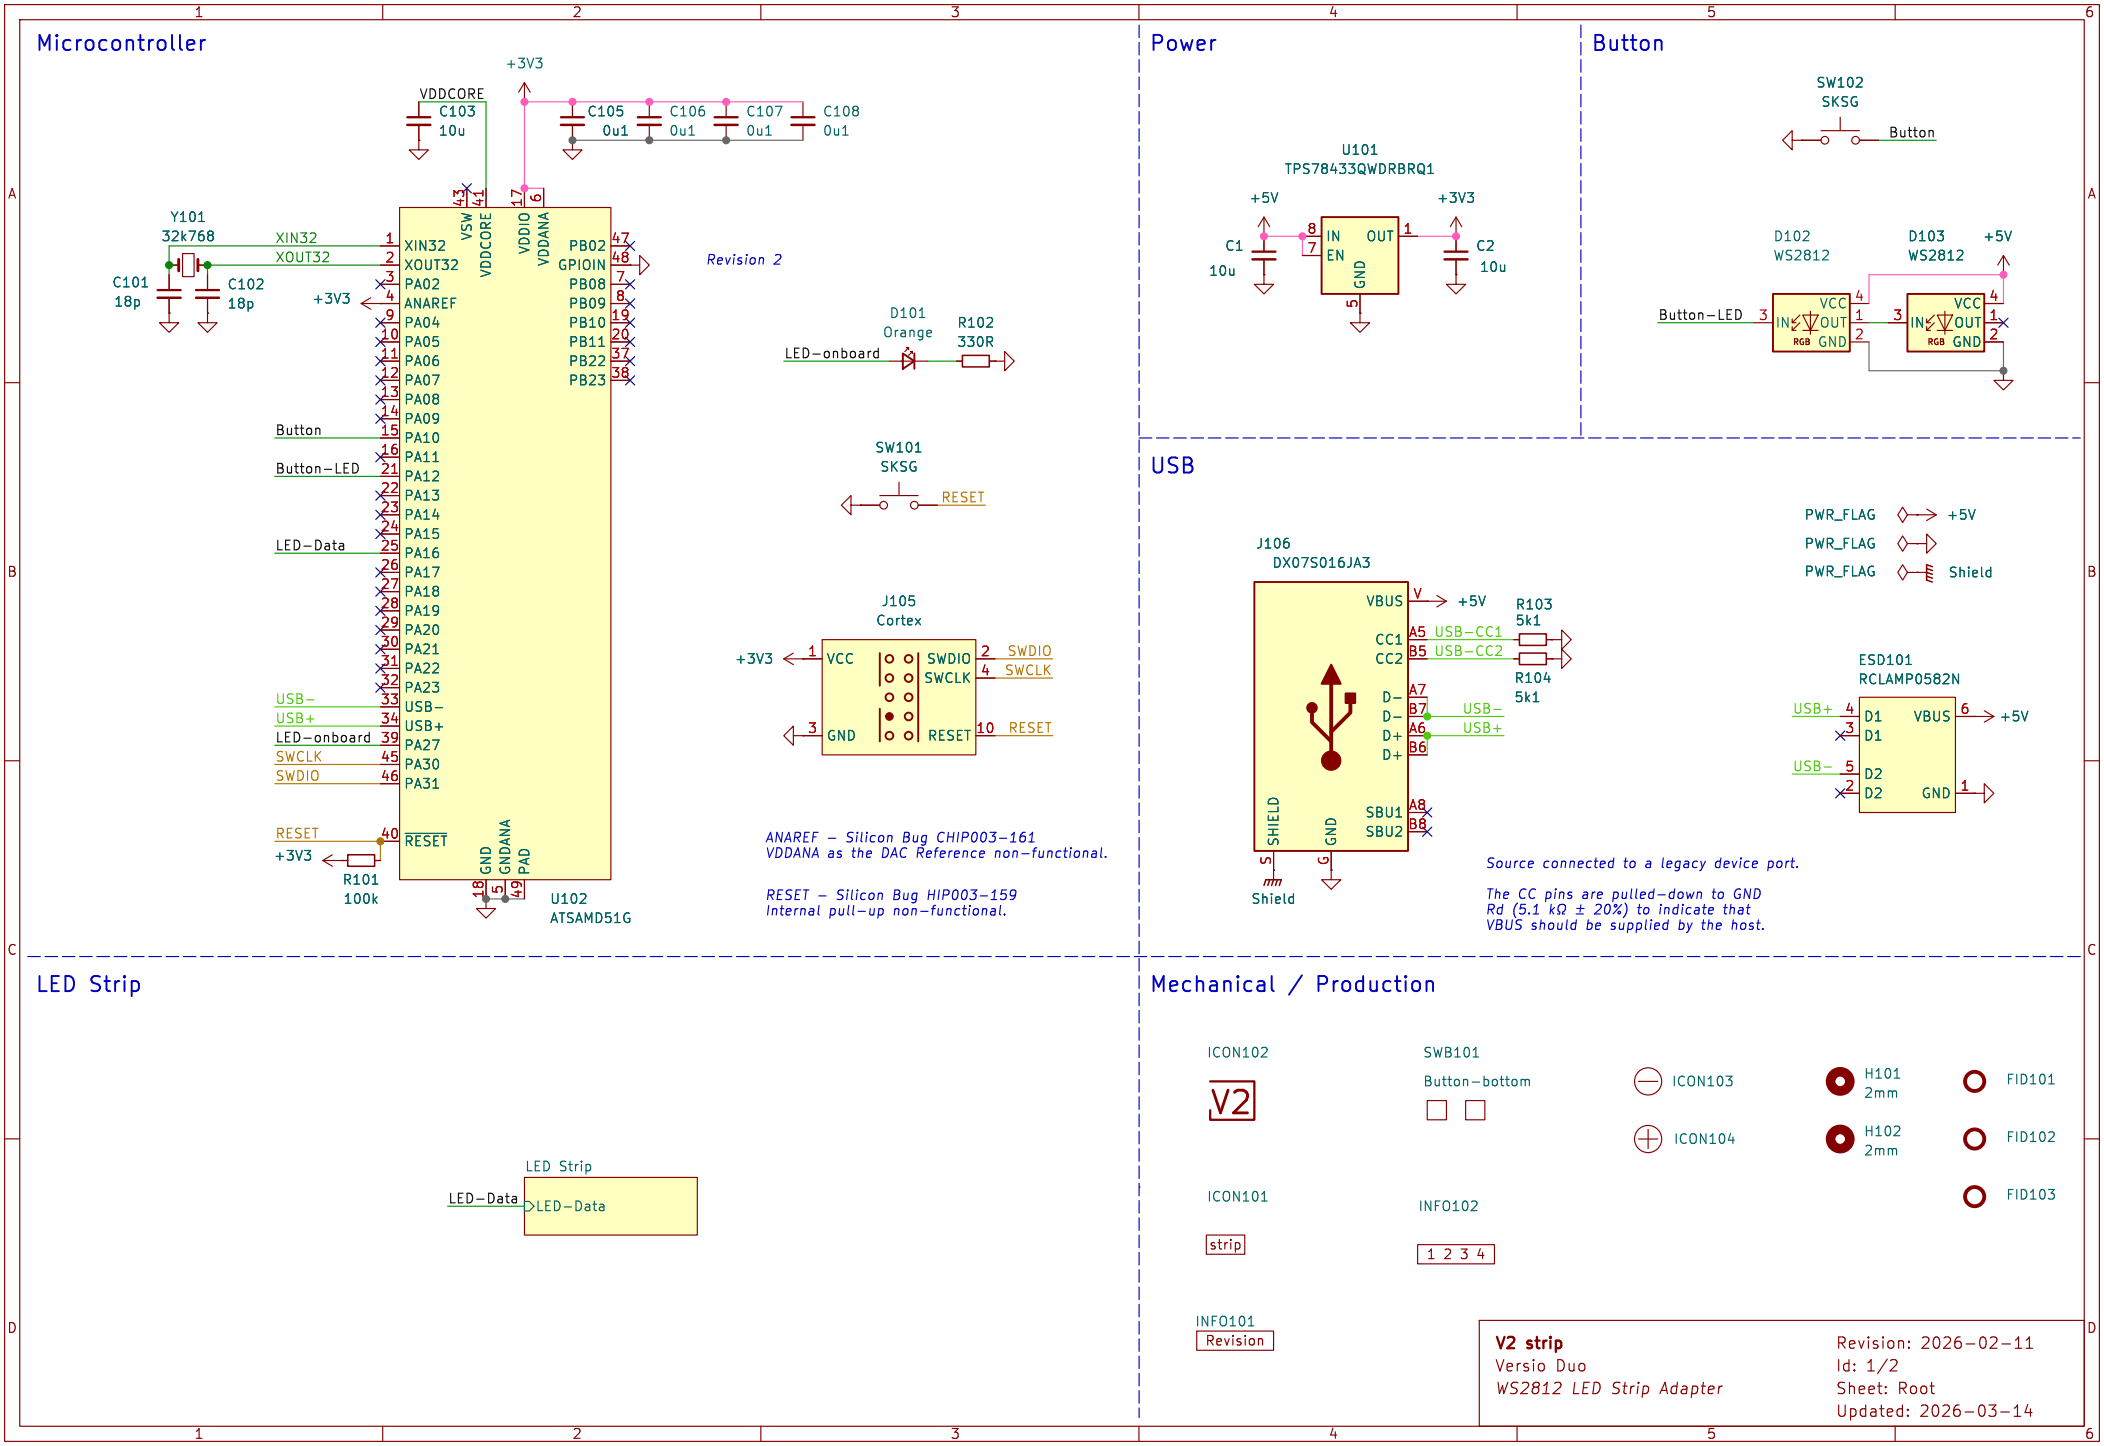
Microcontroller
+3V3
VDDCORE
C103
10u
C105
0u1
C106
0u1
C107
0u1
C108
0u1
Y101
32k768
C101
18p
C102
18p
XIN32
XOUT32
+3V3
Button
Button-LED
LED-Data
USB-
USB+
LED-onboard
SWCLK
SWDIO
RESET
+3V3
R101
100k
U102
ATSAMD51G
VSW
VDDCORE
VDDIO
VDDANA
GND
GNDANA
PAD
XIN32
XOUT32
PA02
ANAREF
PA04
PA05
PA06
PA07
PA08
PA09
PA10
PA11
PA12
PA13
PA14
PA15
PA16
PA17
PA18
PA19
PA20
PA21
PA22
PA23
USB-
USB+
PA27
PA30
PA31
RESET
PB02
GPIOIN
PB08
PB09
PB10
PB11
PB22
PB23
Revision 2
D101
Orange
R102
330R
LED-onboard
SW101
SKSG
RESET
J105
Cortex
+3V3
VCC
GND
SWDIO
SWCLK
RESET
SWDIO
SWCLK
RESET
ANAREF – Silicon Bug CHIP003-161
VDDANA as the DAC Reference non-functional.
RESET – Silicon Bug HIP003-159
Internal pull-up non-functional.
Power
U101
TPS78433QWDRBRQ1
+5V
C1
10u
IN
EN
OUT
GND
+3V3
C2
10u
Button
SW102
SKSG
Button
D102
WS2812
D103
WS2812
+5V
Button-LED
VCC
IN
OUT
RGB
GND
USB
J106
DX07S016JA3
VBUS
+5V
CC1
CC2
A5 USB-CC1
B5 USB-CC2
R103
5k1
R104
5k1
D-
D-
D+
D+
USB-
USB+
SHIELD
GND
SBU1
SBU2
Shield
PWR_FLAG
+5V
PWR_FLAG
PWR_FLAG
Shield
ESD101
RCLAMP0582N
USB+
USB-
D1
D1
D2
D2
VBUS
GND
+5V
Source connected to a legacy device port.
The CC pins are pulled-down to GND
Rd (5.1 kΩ ± 20%) to indicate that
VBUS should be supplied by the host.
LED Strip
LED Strip
LED-Data
LED-Data
Mechanical / Production
ICON102
V2
SWB101
Button-bottom
ICON103
ICON104
H101
2mm
H102
2mm
FID101
FID102
FID103
ICON101
strip
INFO102
1 2 3 4
INFO101
Revision
V2 strip
Versio Duo
WS2812 LED Strip Adapter
Revision: 2026-02-11
Id: 1/2
Sheet: Root
Updated: 2026-03-14

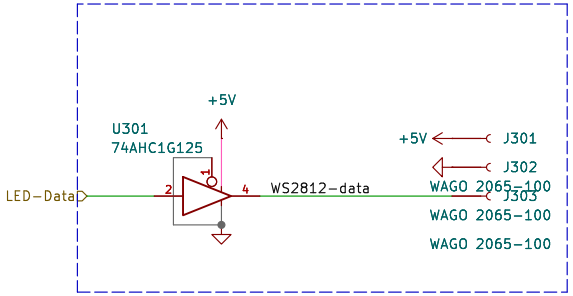

LED Strip
Versio Duo

Revision: 2026-02-11
Id: 2/2
Sheet: LED Strip
Updated: 2026-02-11