

TrapGate

User guide

Table of Contents

TrapGate	3
Graphical Setup Tutorial for Trapgate	7
Step #1: Unpacking the archive	8
Step #2: Running Trapgate for the first time	9
Step #3: Configuring the connection types	10
Step #4: The area and city code	11
Step #5: Registration	12
Step #6: The main screen	13
Step #7: Configuration -> Paths	14
Step #8: Configuration -> Nodelist	15
Step #9: Configuration -> Passwords	17
Step #10: Configuration -> Mailer line	19
Step #11: Configuration -> Modem(s)	21
Step #12: Configuration -> Modem -> Restrictions... ..	23
Step #13: Configuration -> Line	24
Step #14: Configuration -> TCP/IP Daemon	26
Step #15: Configuration -> TCP/IP Daemon-> General	27
Step #16: Configuration -> TCP/IP Daemon -> Station	28
Step #17: Configuration -> TCP/IP Daemon -> Banner	29
Step #18: Configuration -> TCP/IP Daemon -> DNS	30
Step #19: Configuration -> TCP/IP Daemon -> Nodes	31
Step #20: Config -> Externals	33
Step #21: Configuration -> Externals -> Postprocessors	34
Step #22: Configuration -> Externals -> Doors	35
Step #23: Configuration -> Start-up	36
Step #24: Addendum	37

TrapGate

TrapGate the ultimate multi mail system.

By Frans Lupschen



Design and Programming

Max Masyutin

Administrative Management

Sergey Demchenko

Stefan Tanurkov

Help Authoring

Vladimir Januszkiewicz

Max Masyutin

Stefan Tanurkov

Joerg Doering (German)

Erwin Van Onderbergen (Dutch)

Jose-Luis Velasco (Spanish)

Quality Assurance

Fyodor Ustinov

Special Thanks

Aurel Branzeanu

Victor Buzdugan

Sean Rima

Jury Fradkin

Peter Hampf

Credits

Sergio Aleksandrov

Sergey Avdeyev

Stephen Avdeyev

Ilya Bagdasarov

Valentiva Bajenova

Vladimir Bakhvaloff

Igor Balashov

Andrei Barcari
Dmitry Baronov
Alex Berez
Ivan Berger
Alex Bolibot
Vitaly Boroday
Alexey Bugrov
Egons Bush
Vladimir Dobrachev
Andy Elkin
Alex Exler
Max Feduloff
Slava Filimonov
Peter Gannushkin
John Gladkih
Boris Glavan
Juriy Goloveshkin
Sergey Golubev
Vladislav Halyavin
Vlad Kalinovsky
Michael Karpov
Sergey Kasatikoff
Dmitry Kondratjev
Sergey Korowkin
Yevgeniy Kruglov
Marc Kuhnert
Kirill Lebedev
Pavel Levshin
Serj Li
Gerhard Lustig
Dima Maloff
Dmitri Panev
Diman Pavlov
Alex Petin
Vladimir Petrov
Lelio della Pietra
Vladimir Polozhencev
James Roberts-Thomson
Oleg Redut
Nicolas Rodionov
Pavel Romanov
Damien Sam
Sergey Shenderuk
Gleb Shirenikov
Serge Sivenco
Dennis Sorokin
Alex Stepanov
Andrew Tanas
Dmitry Tarasov
Dimitri Tarassenko
Serge Terekhov
Ilja Teterin
Dimmy Timchenko
Dmitry Toporkov
Dmitry Troopin

Oleg Vasenyoff
Sergey Vishnevsky
Yurii Vorobiov

Trapgate FTN Mailer
Frans Lupschen

ARCmail & SEAlink (FTS-0007) File Transfer Protocol Design

System Enhancement Associates

BinkP Transfer Protocol Design

Dima Maloff

EMSI Handshake Protocol Design

Chris Irwin
Joaquim H. Homrighausen

Hydra (FSC-0072) File Transfer Protocol Design

A.G.Lentz
Joaquim H. Homrighausen

IEMSI Specification Design

Joaquim H. Homrighausen
Andrew Milner

Kermit File Transfer Protocol Design

Columbia University

Niagara Transfer Protocol Design

Max Masyutin / RIT Research Labs

XModem Dile Transfer Protocol Design

Ward Christensen

YModem/ZModem File Transfer Protocols Design

Chuck Forsberg / Omen Technology Inc

Zyrion
Dynacom Systems Inc
International Communication Research [I.C.R]

YooHoo (FTS-0006) Handshake Protocol Design

Wynn Wagner III
Vince Perriello

[Graphical Setup Tutorial for Trapgate](#)

Graphical Setup Tutorial for Trapgate

by Frans Lupschen at 2:280/216 (webmaster@dreamcastle-entertainment.com)

This document contains screen shots and instructions to setup a basic Trapgate system. There are many more things you can do to automate and make life easier, but following these steps will get you started!

This HLP-File version of this document and images are made by [JDoering](#). original version of this document is available to download at <http://home.rochester.rr.com/kraut/download.htm>

I assume no liability what so ever if you follow any of the steps outlined below. I am simply showing what I had to do to setup my Trapgate system.

My thanks goes to the following people:

Frans Lupschen	for writing Trapgate out of two sources Argus and Radius
Bluefire Ghost	for testing trapgate, recreating the sound files
Lothar Behet	for promoting the use of IP-class Fidonet mailers and his IP flag proposal
David Halford	for creating the IPNODELIST extract from the Fidonet nodelist
Bob Satti and Ward Dossche	for having the vision to permit and promote the use of IP – Mailers, Flags and Nodelist entries in their respective zones
Pat (http://www.nestsoft.com/)	for writing a great freeware program that made the screen captures possible...

[Unpacking the archive](#)

Step #1: Unpacking the archive

UnRAR, UnZIP or otherwise de-arc the Trapgate files into a directory of your choice. For purposes of this tutorial I have used C:\Trapgate (how original!)

After you have done so you'll create manual these folders :

c:\trapgate\in
c:\trapgate\out
c:\trapgate\secin
c:\trapgate\nodelist
c:\trapgate\snd
c:\trapgate\intmp
c:\trapgate\log
c:\trapgate\flags

You will find another RAR file called sound.rar, copy this file into the folder snd or c:\trapgate\snd once done click on it and unrar them here that means in the same folder, if you did it right, you will see some sound files with the .wav extention.

Now go back to c:\trapgate and richt click on the delphi icon how orginal again, and click on create shortcut. Then drag that shortcut to your desktop.

You can change the icon on your desktop later so it look like you want that it looks like.


Now make the window from this folder small or minimize it and click twice or once on the shortcut from trapgate and it will start, now lets set it up.

[Next Step](#)

Step #2: Running Trapgate for the first time

This is the main screen from TrapGate, from here we will setup several sections, just follow each step.

Before we start, Zyrion does not need any setup because it will use the parameters from Deamon and the Modem section. Zyrion will operate on both transfers communication ports and IP/TCP.

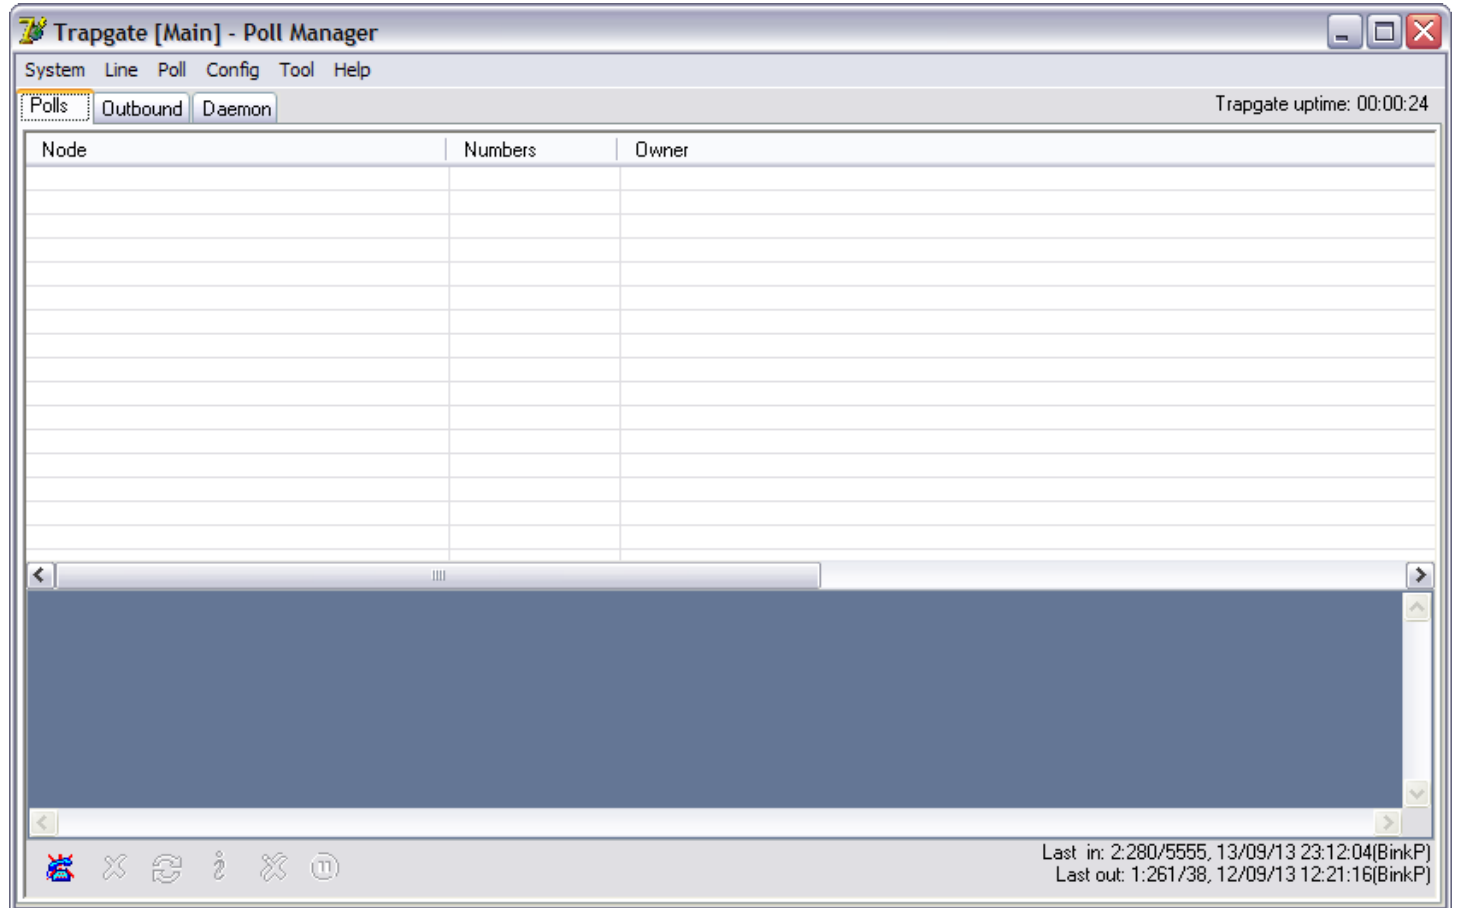


Double click on Trapgate.EXE
This is what you'll see: [Next Step](#)

Step #3: Configuring the connection types

If you are running a regular Fidonet Mailer and Trapgate is supposed to replace that Mailer check "Modem for direct dial-up..."


If you want to use the IP functions make sure you'll also check "TCP/IP connections with destination nodes"

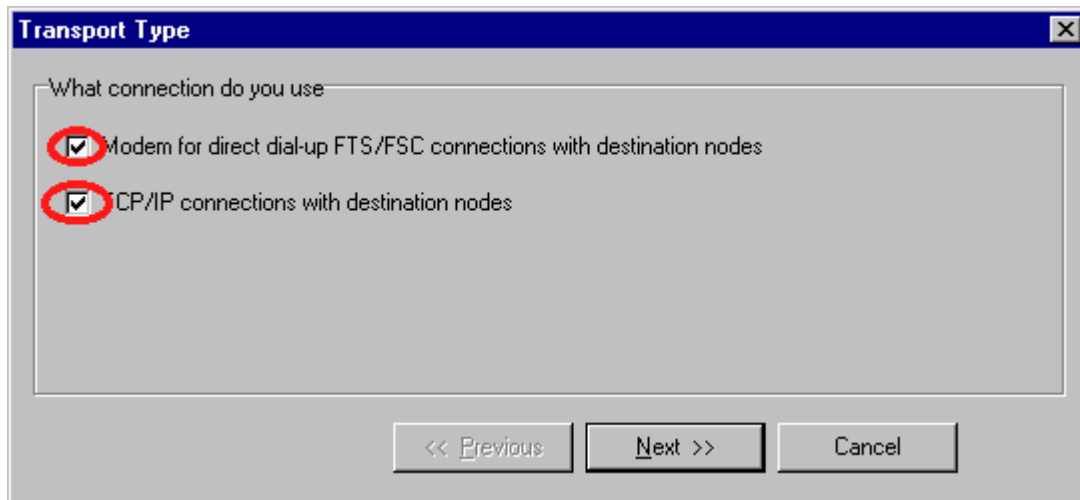

[Next Step](#)

Step #4: The area and city code

Enter your area (or city) code, select pulse or tone dialing, and select your modem's (or primary modem's) comport.

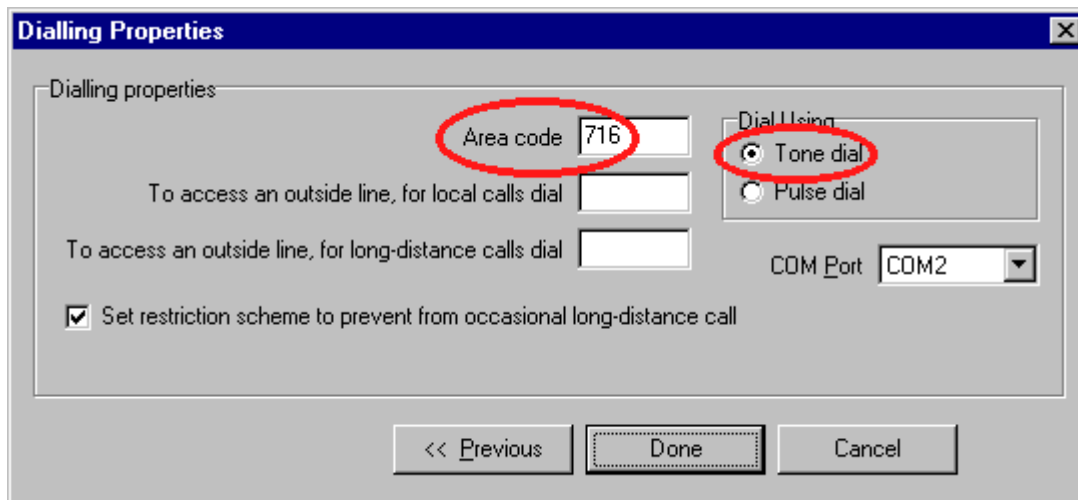

Dialling Properties

Dialling properties

Area code

To access an outside line, for local calls dial

To access an outside line, for long-distance calls dial

☒ Set restriction scheme to prevent from occasional long-distance call

Dial Using

☒ Tone dial

☐ Pulse dial

COM Port

<< Previous Done Cancel

[Next Step](#)


Step #5: Why you should register ...

Skip this page click next

[Next Step](#)

Step #6: The main screen


You have reached the main screen. From here you'll configure and control all Trapgate functions. Once the Mailer lines are open you will see additional tabs appear.

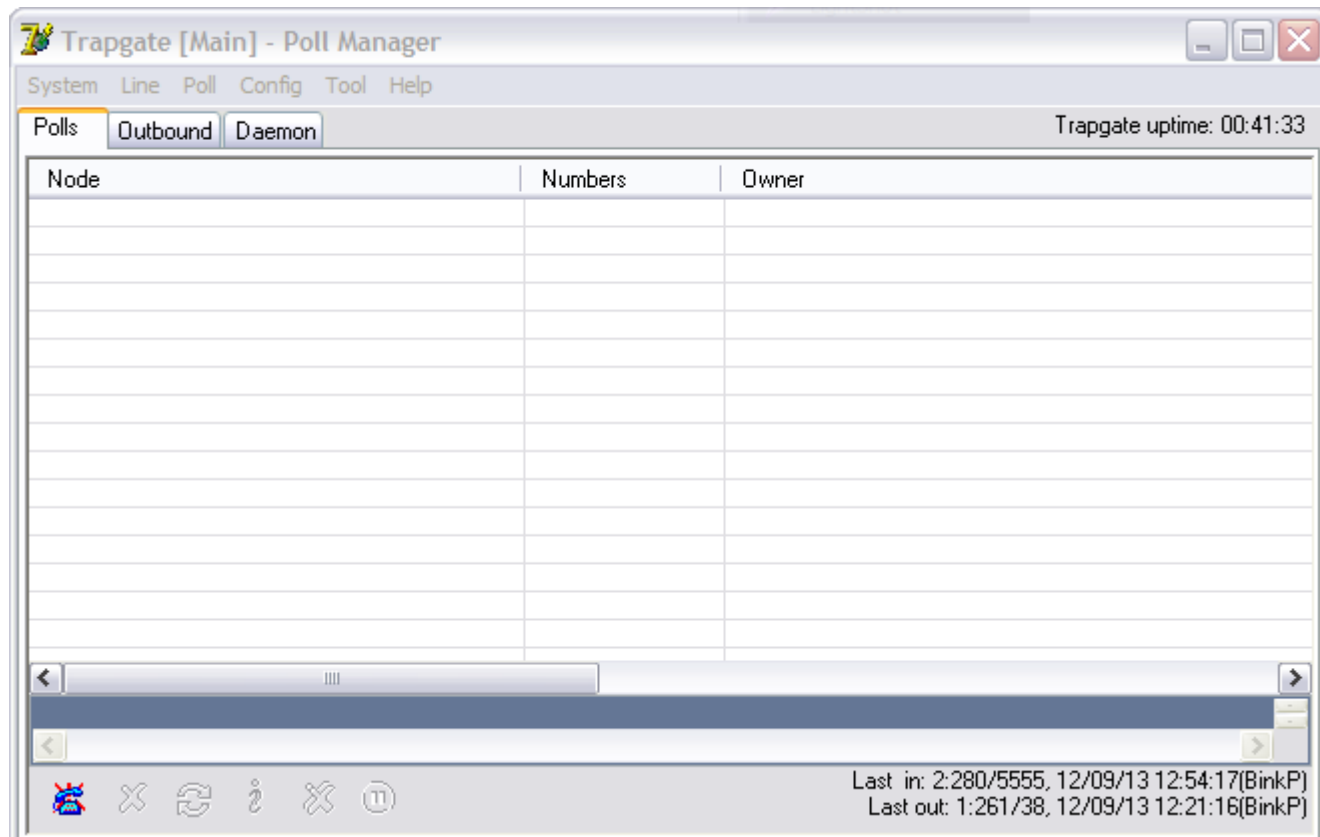

Next Step


Step #7: Configuration -> Paths

Go to CONFIG -> PATHS

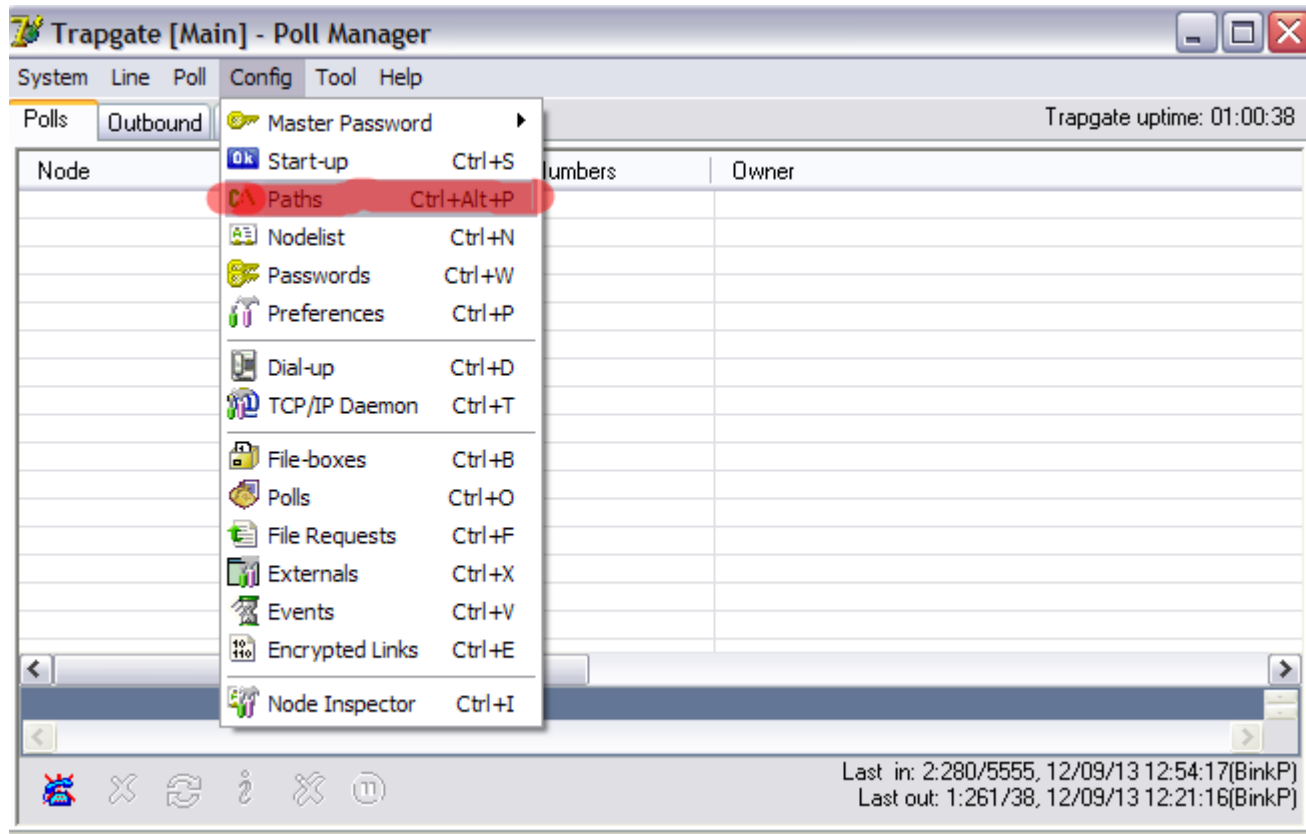


This is how the default window appears. Change your default Zone to reflect your Zone number. I suggest leaving all other settings as they are.

Of course in your case it will be either C:\ or another drive letter

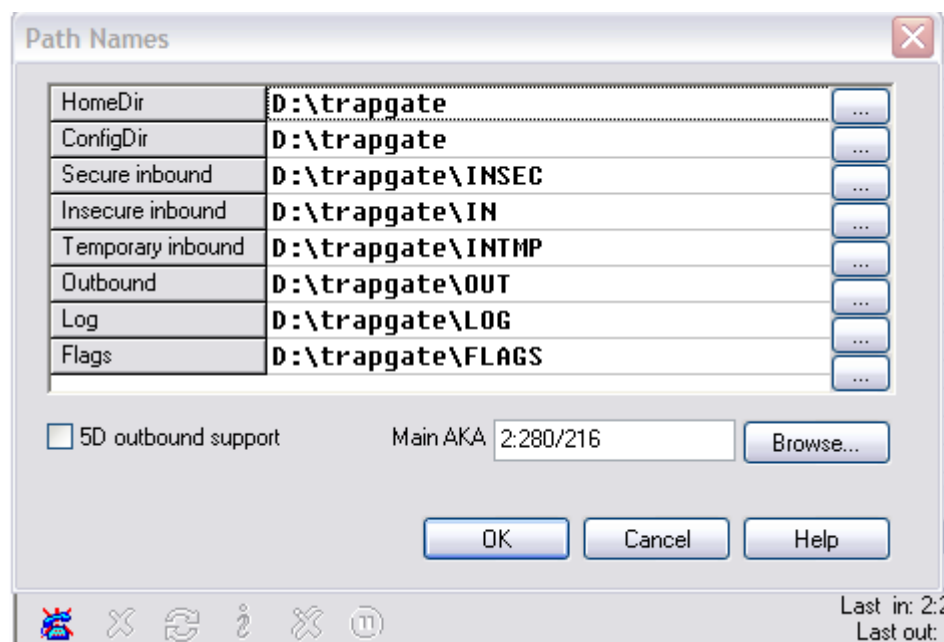


[Next Step](#)

Step #8: Configuration -> Nodelist

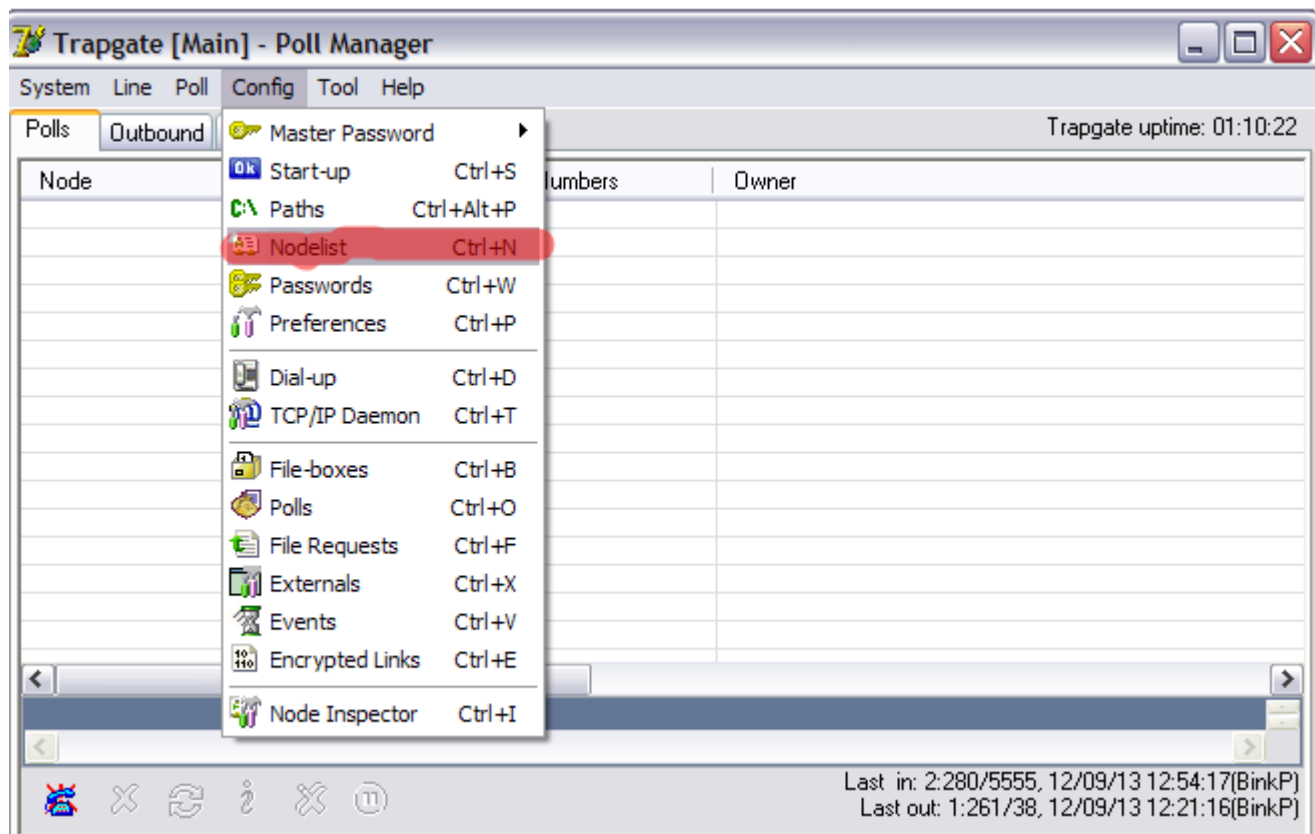

This is the nodelist configuration. The following window shows how you enter the default Fidonet nodelist.

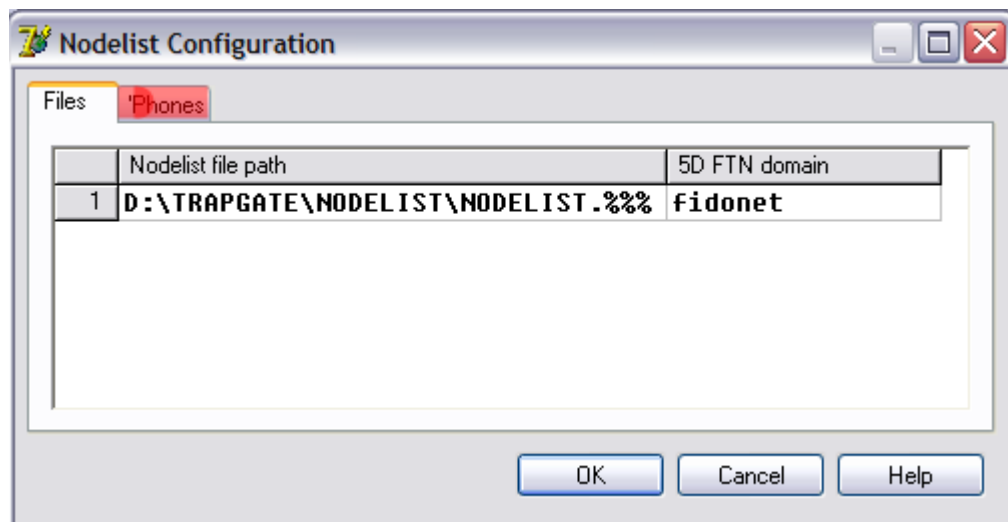

This is the dial configuration. The following window shows the way I had to setup my Mailer:

Line 1: All entries beginning with "1-716" are dialed without the "1-716"

Line 2: All entries beginning with "1-" are dialed just like they appear in the nodelist

Line 3: All other entries (starting other country codes) are dialed with 011- in front of it. 011- is the "international dial code", similar to 00 in many other countries.

Nodelist Configuration


Files Phones

	Phone prefix	Replace with
1		


OK Cancel Help

[Next Step](#)

Step #9: Configuration -> Passwords

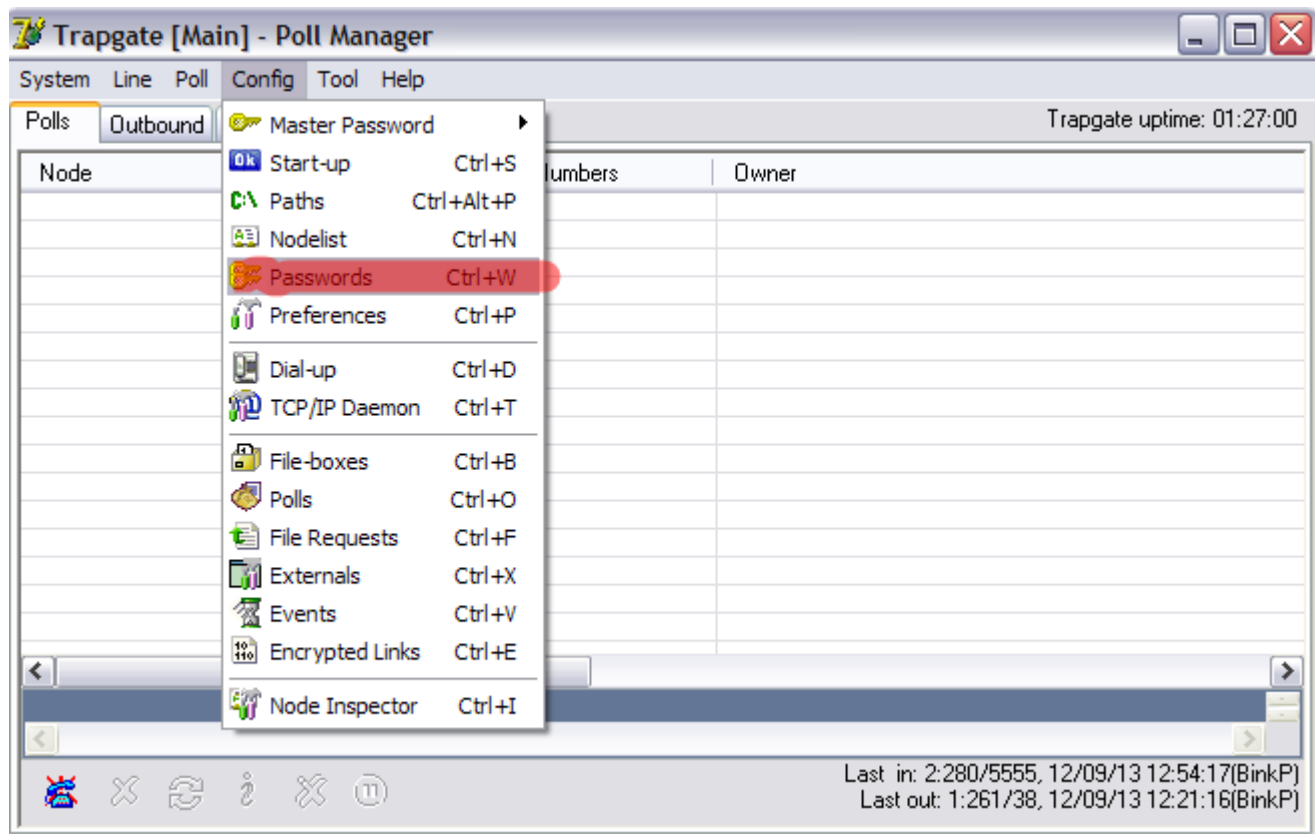

Here you have the option of importing an existing password file, i.e. from FrontDoor, InterMail, etc. simply push the import button, choose the correct file format and off you go. You can also manually enter the passwords,

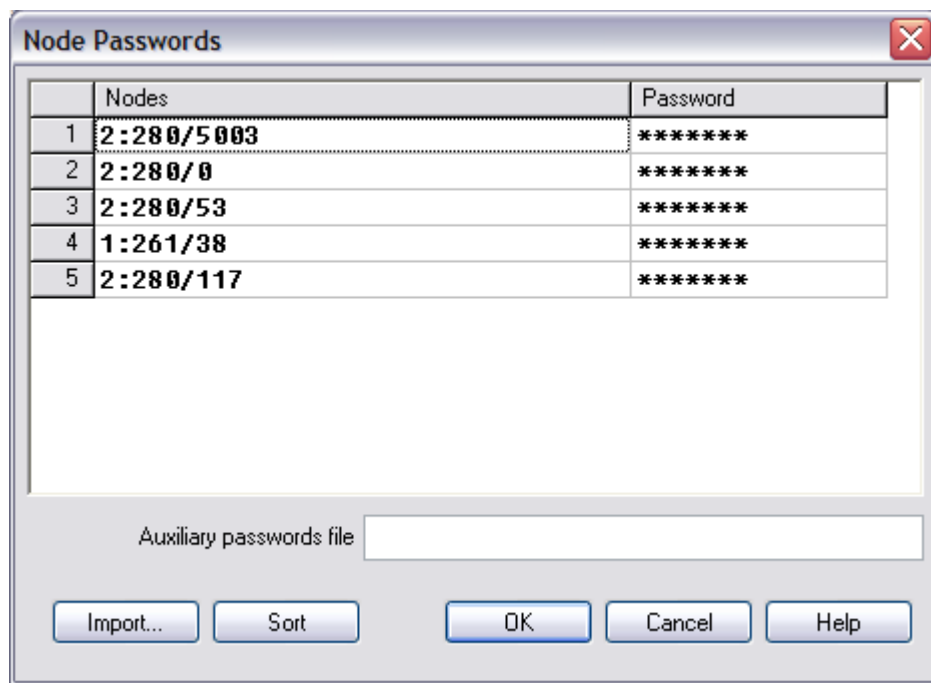

Or specify a text file which is loaded at start-up and contains the passwords. The syntax of the text file is node|password – one node per line.

Node Passwords

	Nodes	Password
1	2:280/5003	*****
2	2:280/0	*****
3	2:280/53	*****
4	1:261/38	*****
5	2:280/117	*****

Auxiliary passwords file

Import...

Sort

OK


Cancel

Help

[Next Step](#)

Step #10: Configuration -> Mailer line

Change the above defaults to reflect your correct information, as shown below. Make sure to change the "Template Name" to your system name.

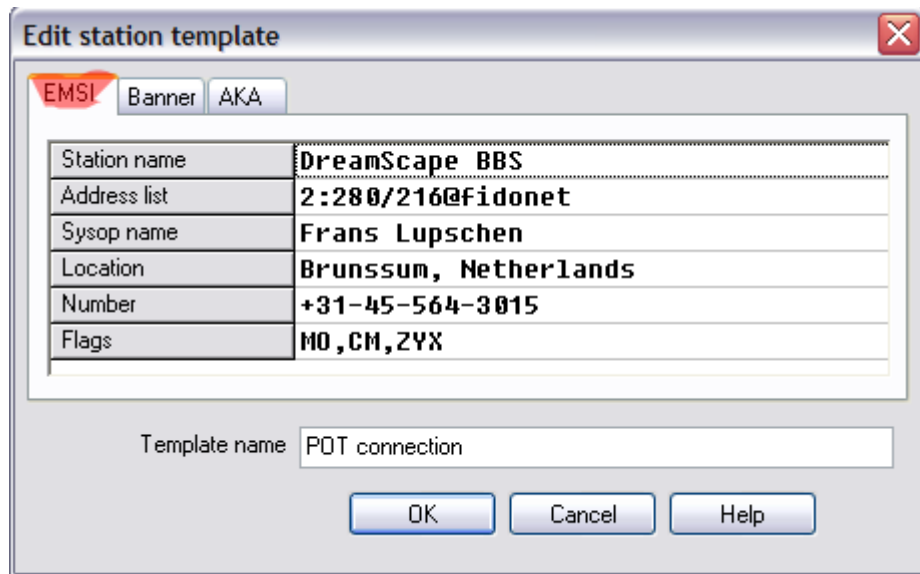


The screenshot shows the 'Edit station template' dialog box with the 'EMSI' tab selected. The dialog contains a table with station information and a text field for the template name.

Station name	DreamScape BBS
Address list	2:280/216@fidonet
Sysop name	Frans Lupschen
Location	Brunssum, Netherlands
Number	+31-45-564-3015
Flags	MO,CM,ZYX

Template name: POT connection

Buttons: OK, Cancel, Help

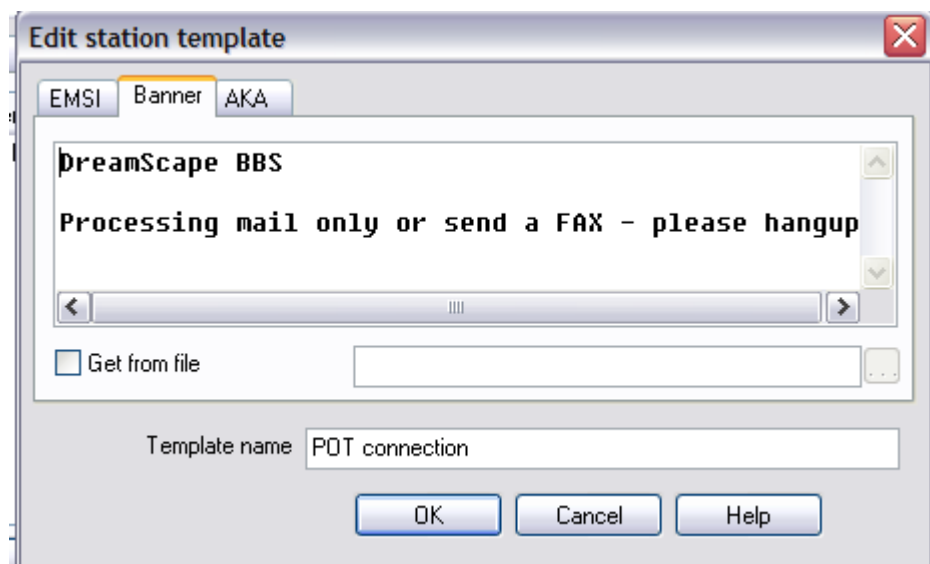

The screenshot shows the 'Edit station template' dialog box with the 'Banner' tab selected. The dialog contains a text area for the banner message and a checkbox for 'Get from file'.

Banner text:
DreamScape BBS
Processing mail only or send a FAX - please hangup

☐ Get from file

Template name: POT connection

Buttons: OK, Cancel, Help

Edit station template

EMSI | Banner | AKA

Station name	DreamScape BBS
Address list	2:280/216@fidonet
Sysop name	Frans Lupschen
Location	Brunssum, Netherlands
Number	+31-45-564-3015
Flags	MO,CM,ZYX

Template name: POT connection

OK Cancel Help

As you can see, the template name changed...

Dial-up Configuration

Lines | Station | Ports | Modems | Restrictions | Nodes


Line name	Station template	Port	Modem
New line	POT connection	COM1	New ...

New Edit Copy Delete Undelete Default


OK Cancel Help

[Next Step](#)

Step #11: Configuration -> Modem(s)

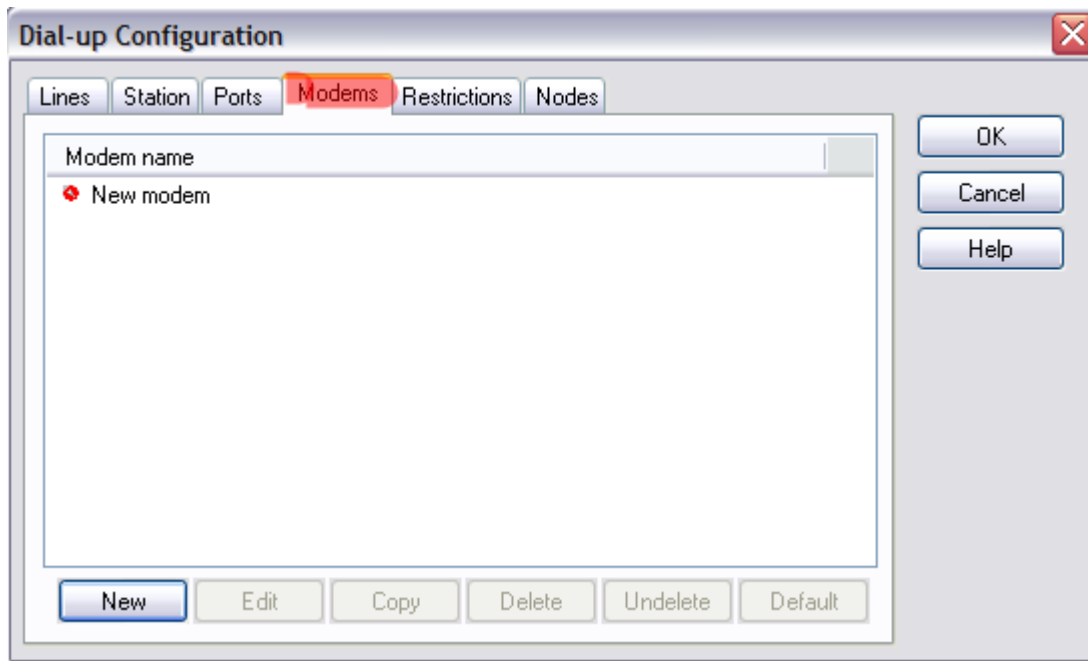

Click on new, because its a new modem

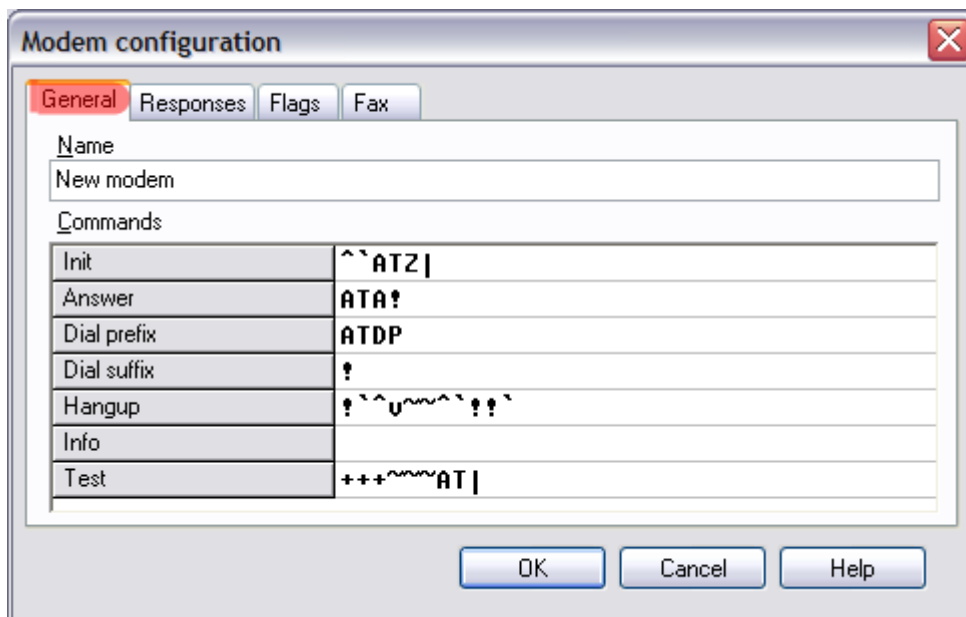

New modem, lets give it the name USR for US Robotics

Modem configuration

General Responses Flags Fax

Name
USA

Commands




Init	^`ATZ
Answer	ATA!
Dial prefix	ATDT
Dial suffix	!
Hangup	? ^`u~^`! ?
Info	
Test	+++~`AT

OK Cancel Help

And in my case change the dial prefix to ATDT and not Pulse ATDP



[Next Step](#)

Step #12: Configuration -> Modem -> Restrictions...

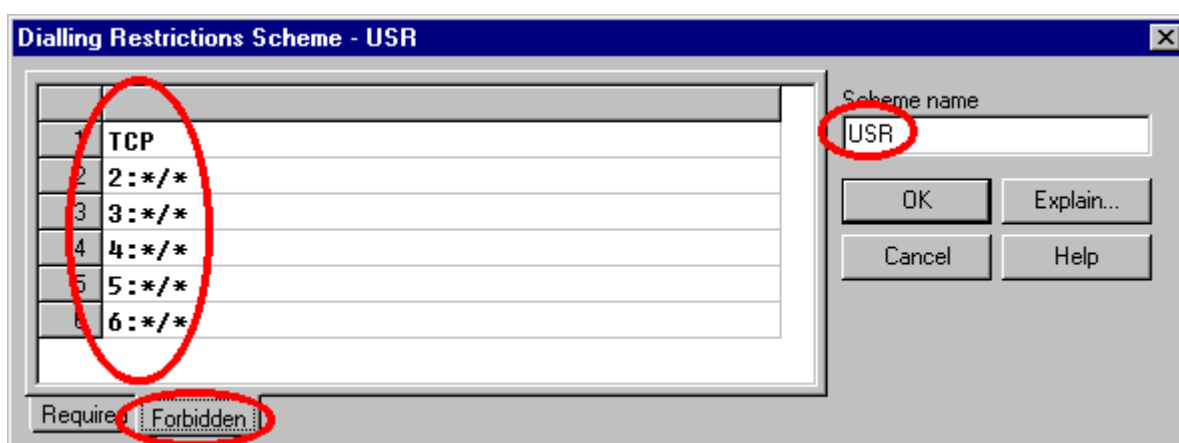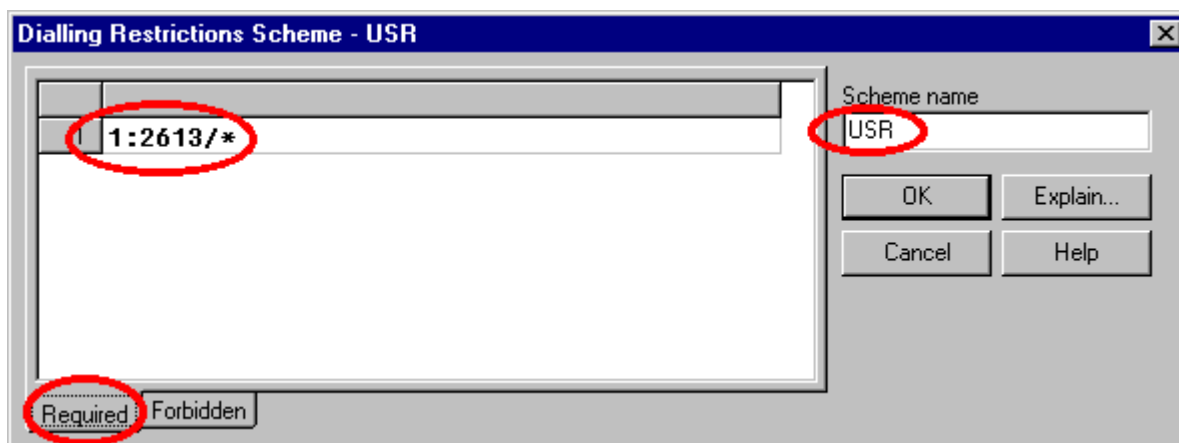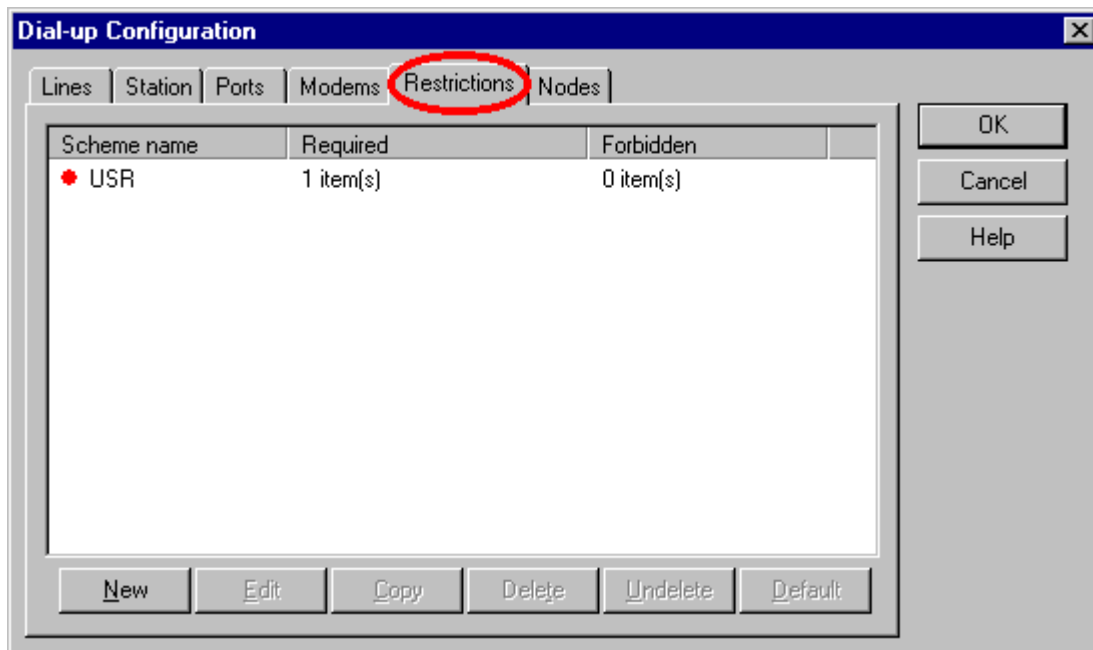


[Next Step](#)

Step #13: Configuration -> Line

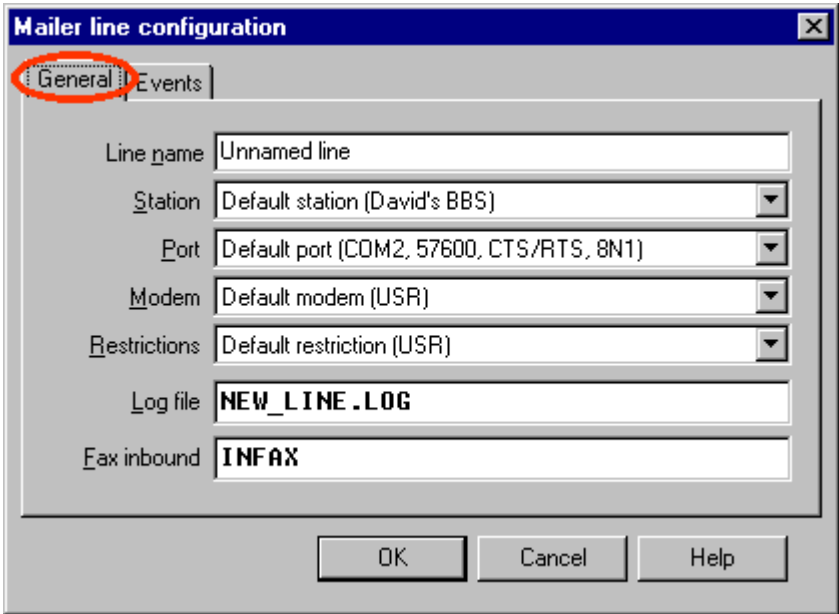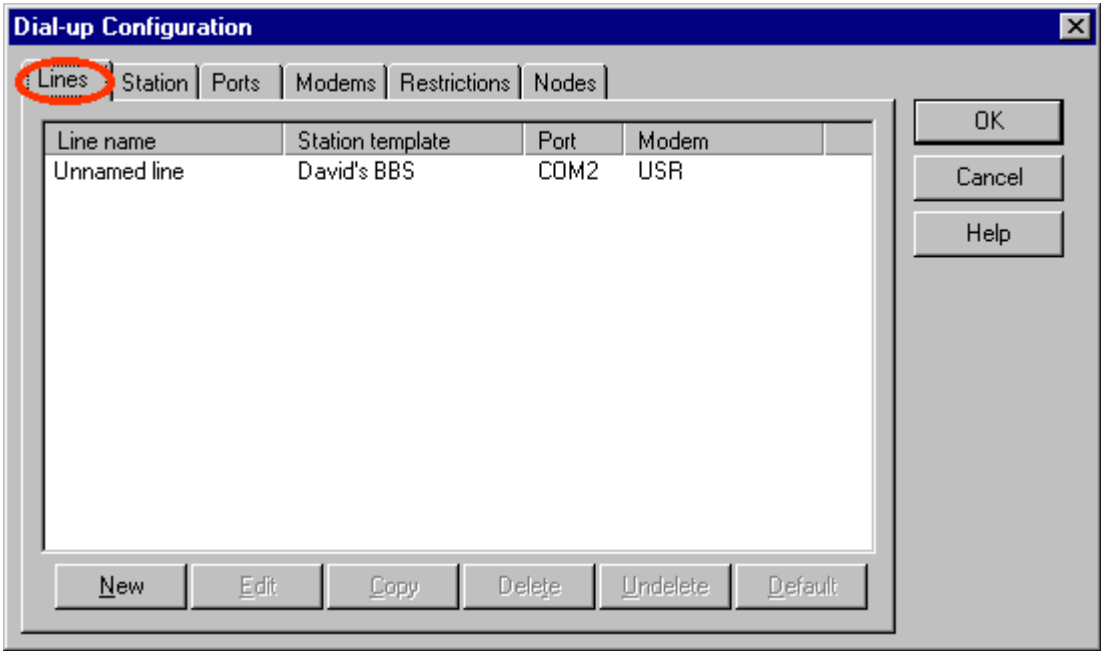

Step #14: Configuration -> TCP/IP Daemon

This section requires a little more explanation to the TCP/IP rookie. Just like there are several modem I/O ports (i.e. COM ports), TCP has multiple ports. As a result, you can tell your Mailer to "listen" on multiple ports at a time. However, just like a modem port, only one device can listen at a time.

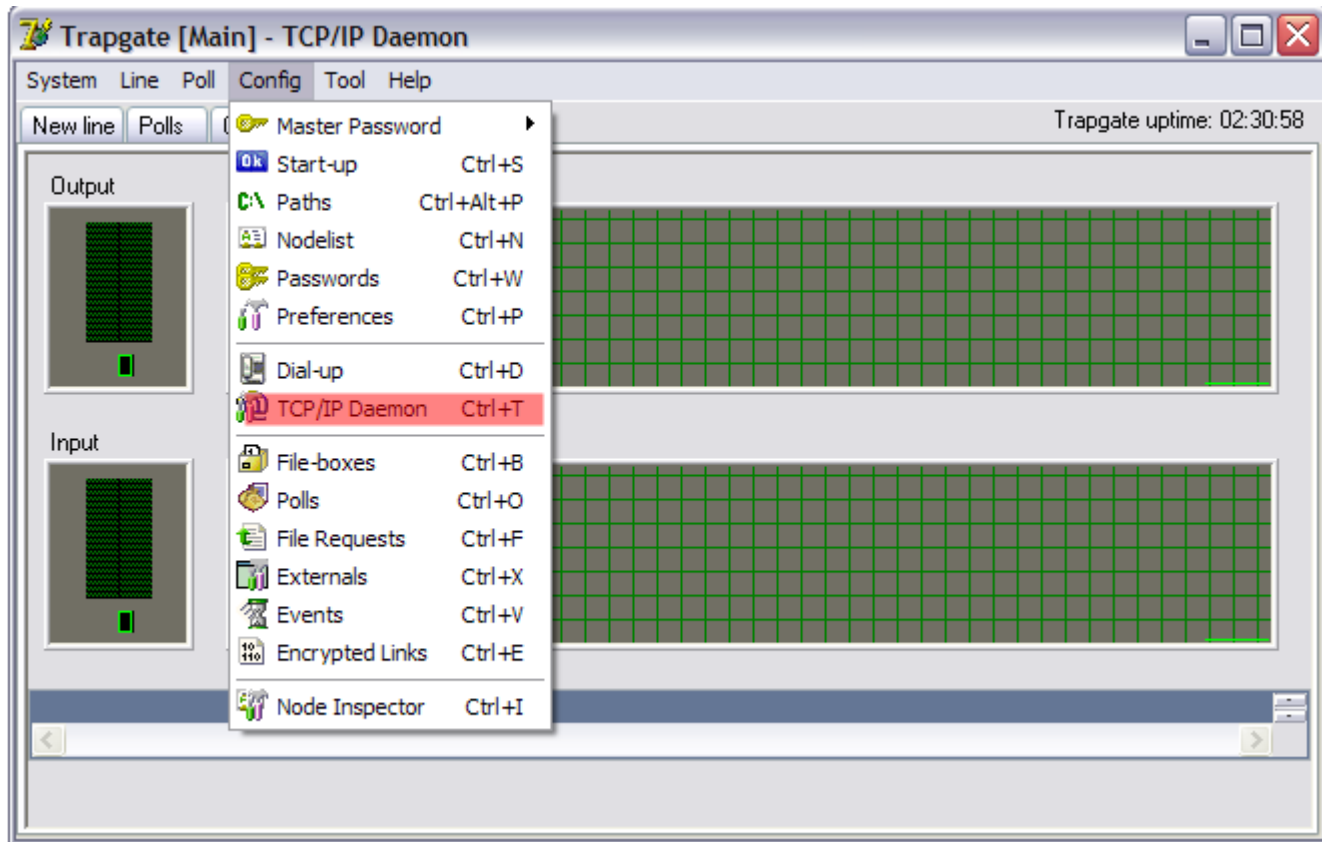

[Next Step](#)

Step #15: Configuration -> TCP/IP Daemon -> General

If you plan on running a telnetable BBS on the standard telnet port (23), you must remove port 23 from the TCP/IP port listing. I suggest you add port 3141 (SIO/Vmodem) to the list of telnetable ports. The beauty with this setup is that it does not interfere with your BBS operations.

TCP/IP Daemon Configuration

General Station AKA Banner Restrictions Events DNS Nodes

Incoming ports

Protocol	Ports
raw (ifcico)	60179
Telnet	60177 23
BinkP	24554

Max connections

In 16

Out 4

Speed 600

Proxy type

☒ None ☐ HTTP <PUT>

☐ Socks v4 ☐ HTTP <CONNECT>

☐ Socks v5

Traffic shaper

In 0

Out 0

Address Port

☐ Authenticate Name Password

☐ All via proxy ☐ Encrypt password in config

OK Cancel Help

TCP/IP Daemon Configuration

General Station AKA Banner Restrictions Events DNS Nodes

Incoming ports

Protocol	Ports
raw (ifcico)	60179
Telnet	60177 3141
BinkP	24554

Max connections

In 16

Out 4

Speed 600

Proxy type

☒ None ☐ HTTP <PUT>

☐ Socks v4 ☐ HTTP <CONNECT>

☐ Socks v5

Traffic shaper

In 0

Out 0

Address Port

☐ Authenticate Name Password


☐ All via proxy ☐ Encrypt password in config

OK Cancel Help

[Next Step](#)

Step #16: Configuration -> TCP/IP Daemon -> Station

Customize the following entries to your needs

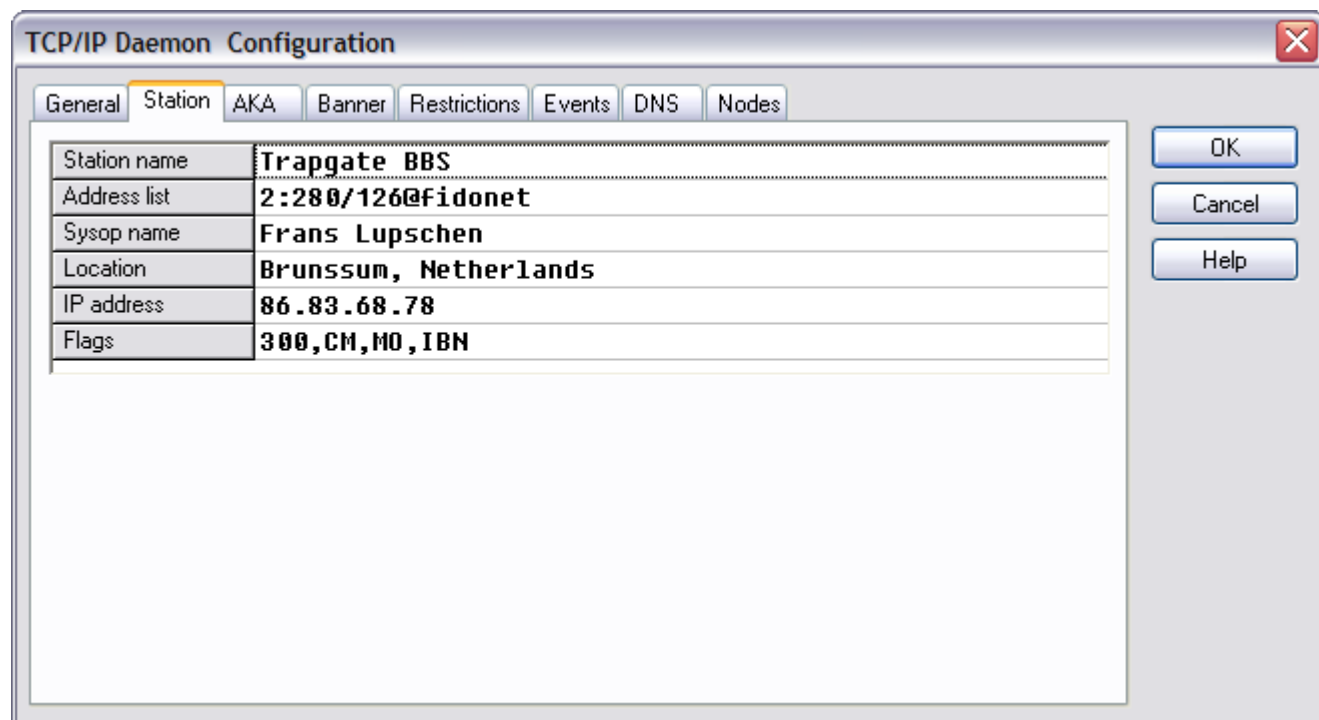

The image shows a window titled "TCP/IP Daemon Configuration" with a close button in the top right corner. The window has several tabs: "General", "Station", "AKA", "Banner", "Restrictions", "Events", "DNS", and "Nodes". The "Station" tab is currently selected. Inside the window, there is a table with the following entries:


Station name	Trapgate BBS
Address list	2:280/126@fidonet
Sysop name	Frans Lupschen
Location	Brunssum, Netherlands
IP address	86.83.68.78
Flags	300,CM,M0,IBN

To the right of the table are three buttons: "OK", "Cancel", and "Help".


[Next Step](#)

Step #17: Configuration -> TCP/IP Daemon -> Banner

Now change the banner if you want to

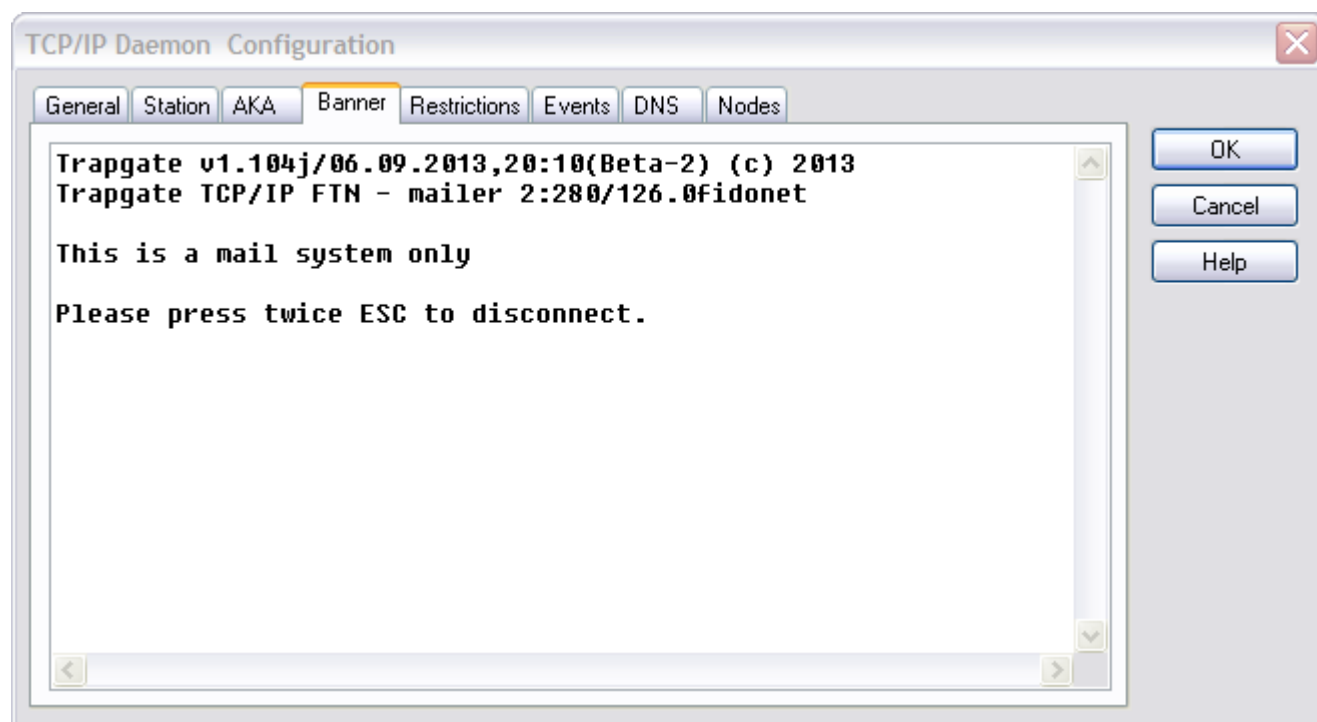

Make sure you enter TCP into the "required" section...

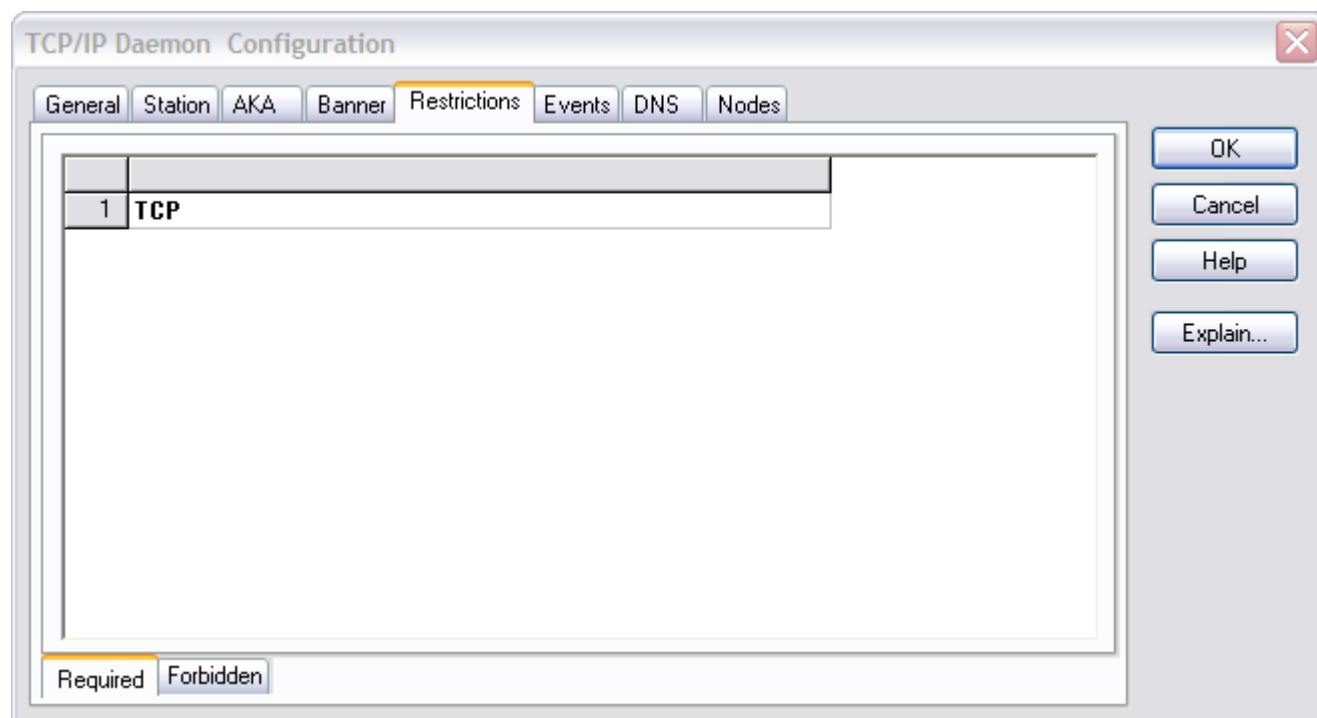

[Next Step](#)

Step #18: Configuration -> TCP/IP Daemon -> DNS

TCP/IP Daemon Configuration

GeneralStationAKABannerRestrictionsEventsDNSNodes

	Mask list	Root domain	FTN domain
1	1:*/* 2:*/* 3:*/*	fidonet	fidonet

OK
Cancel
Help


[Next Step](#)

Step #19: Configuration -> TCP/IP Daemon -> Nodes

Here comes an important section:

The nodelist was originally not designed to contain IP addressing and protocol information. Fidonet inherently was a "modem" network. Therefore, all IP information has to be entered as an override to the standard nodelist information. There are several ways to accomplish this. You can manually enter the information.

You can import the information from the Trapgate.TXT file contained in INODELST.Z**, which is a weekly file in the INODELST file echo. You can specify Trapgate.TXT as an auxiliary file.

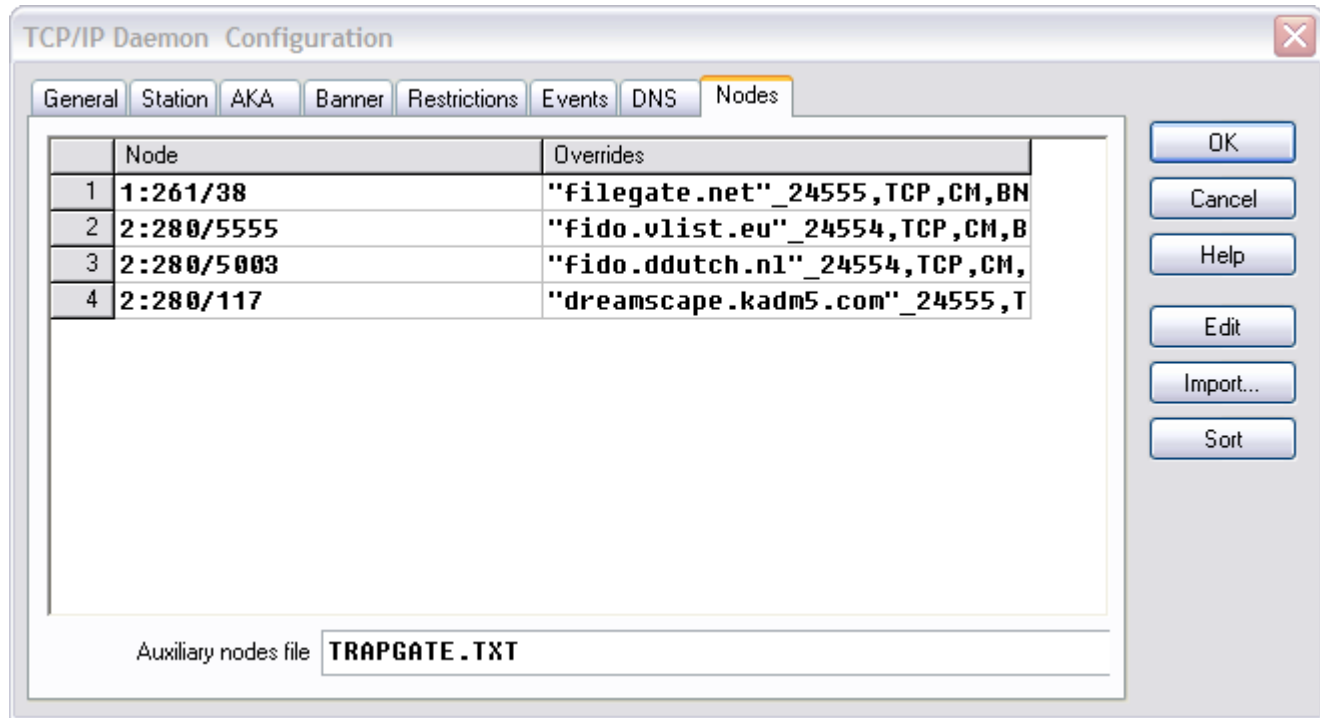

The above three entries show different ways of entering the IP information.

All FQDN (Fully Qualified Domain Names) must be put into quotation marks. The node must show a "TCP" flag and a protocol flag. If an on-line flag, such as "CM" is shown Trapgate will honor those times.



IP numbers do not go into quotation marks, and non-standard ports, such as "10023" for telnet are entered as shown in line three.

In order to import Trapgate.TXT **DO NOT USE THE IMPORT BUTTON!**

Simply right-hand mouse click on the grid and use the import function from the resulting drop down menu.

To use Trapgate.TXT, or any other text file you create, as an auxiliary file simply specify the file name. The file must be located in the Trapgate system directory.


When you're done, save the information and restart the daemon:

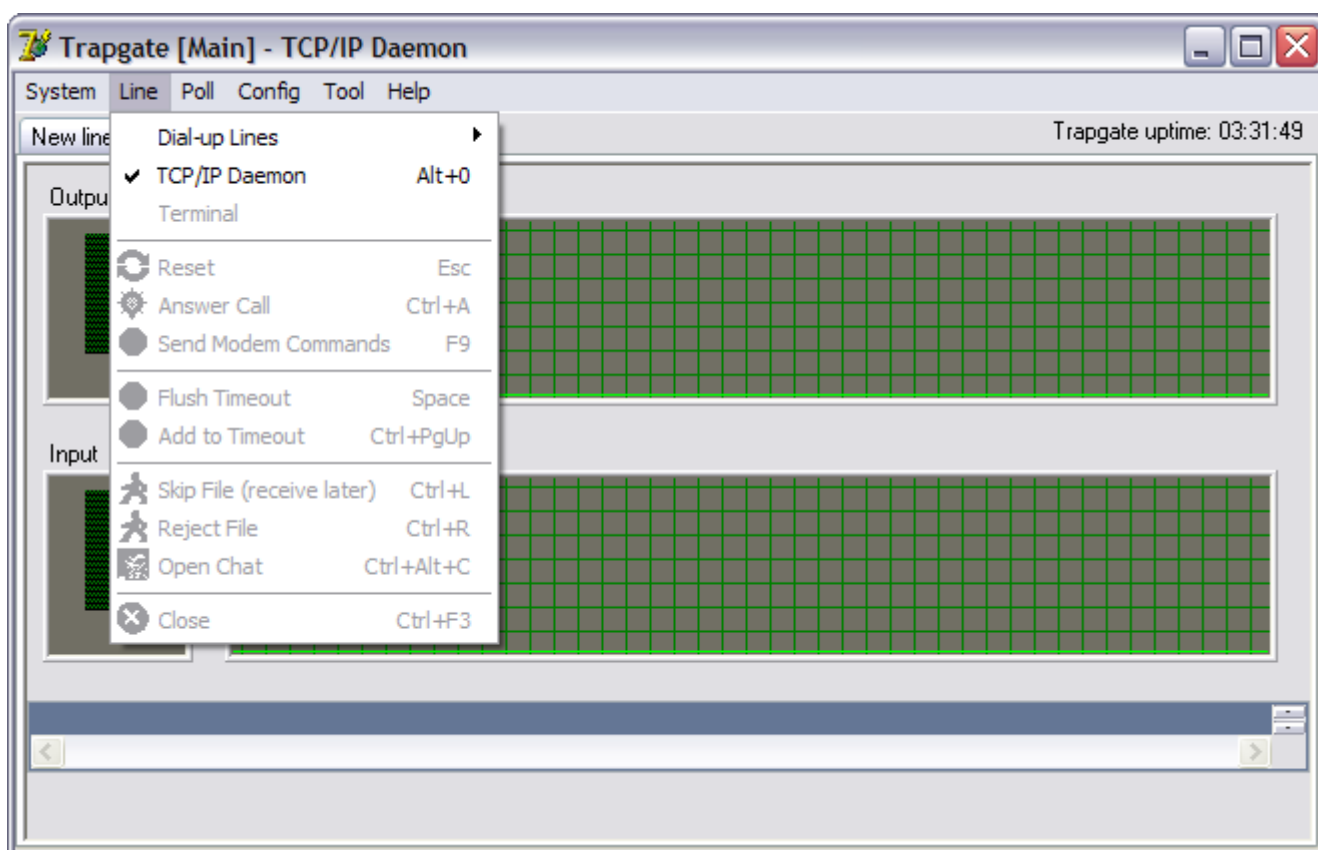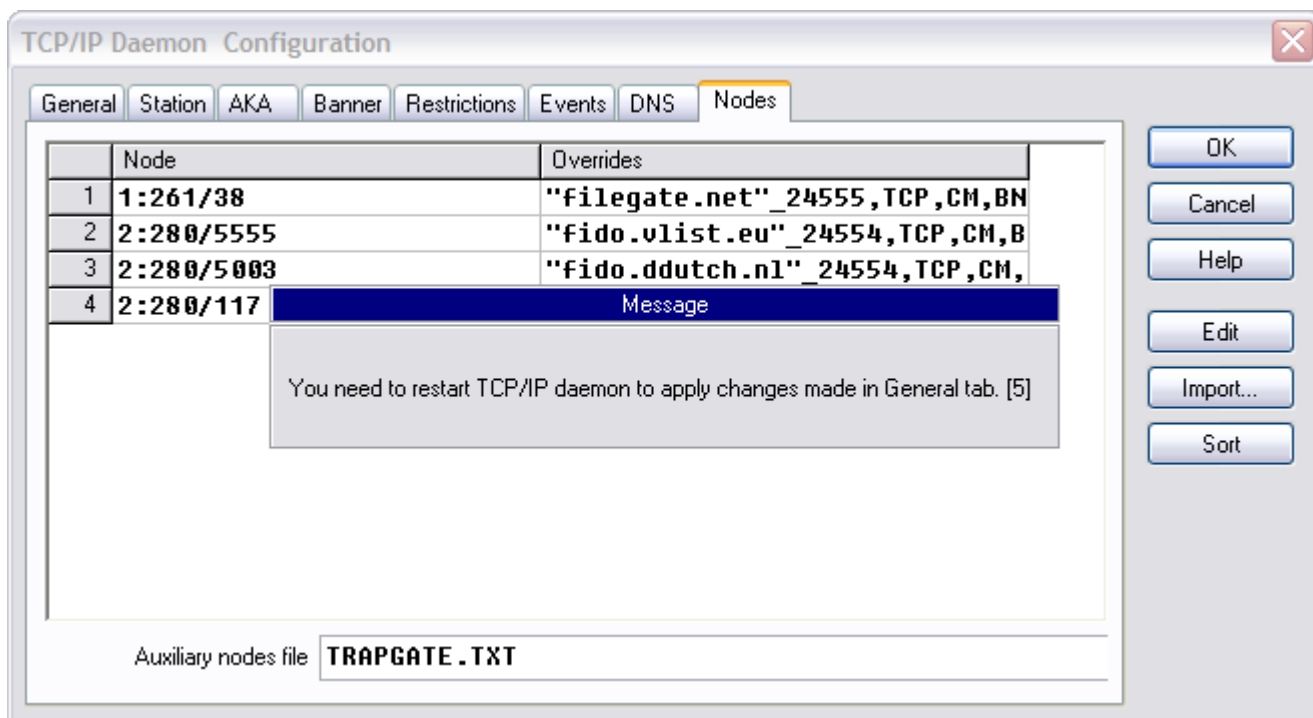

[Next Step](#)


Step #20: Config -> Externals

Unlike a DOS Mailer, Trapgate does not exit with an error level when it receives mail or files. Rather, it calls a specified batch file...

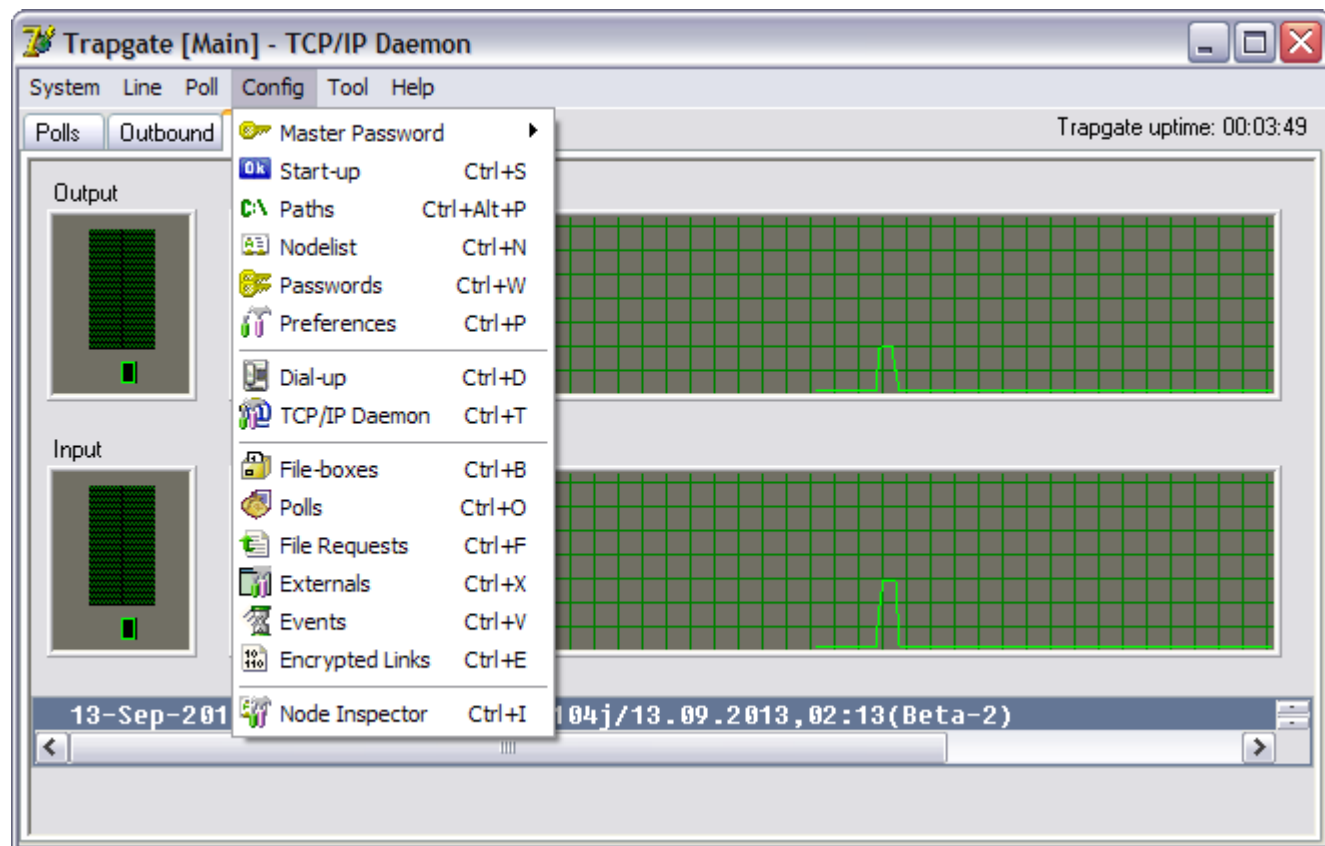

[Next Step](#)

Step #21: Configuration -> Externals -> Postprocessors

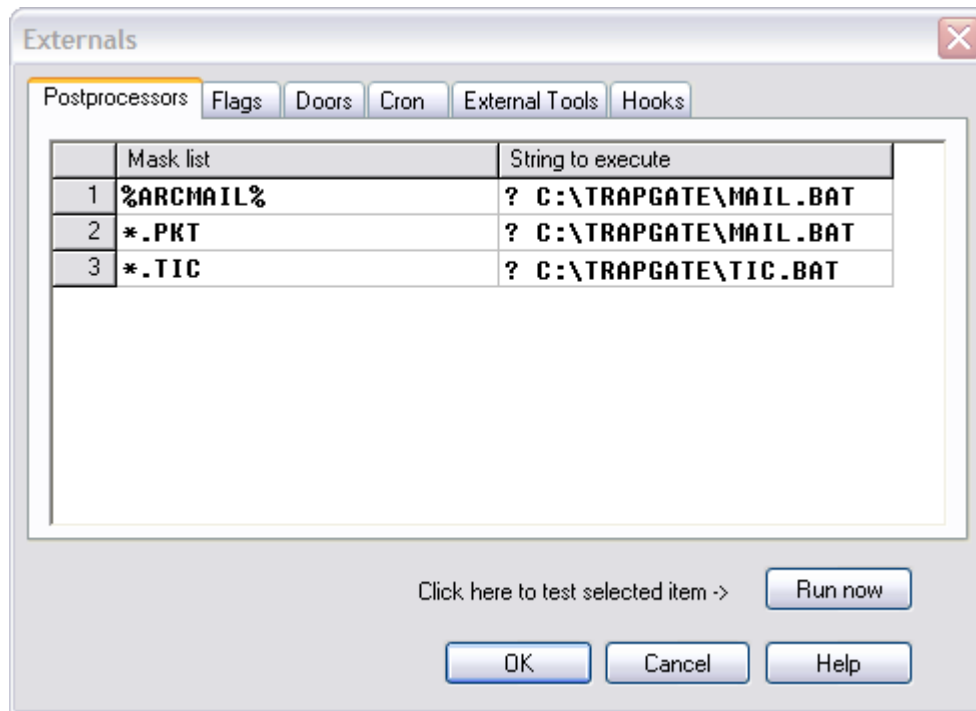


%ARCMail% collectively specifies Fidonet ARCmail packets ending in .M01, .TU2, WE8, etc. When such a file is received, MAIL.BAT is called. The "?" question mark specifies to run the batch job hidden in the background. The same is true for entries 2 and 3.

[Next Step](#)

Step #22: Configuration -> Externals -> Doors

Running Trapgate as front end

In order to run Trapgate as the front end of a dial-up BBS you specify a command line similar to this one, calling a batch file...

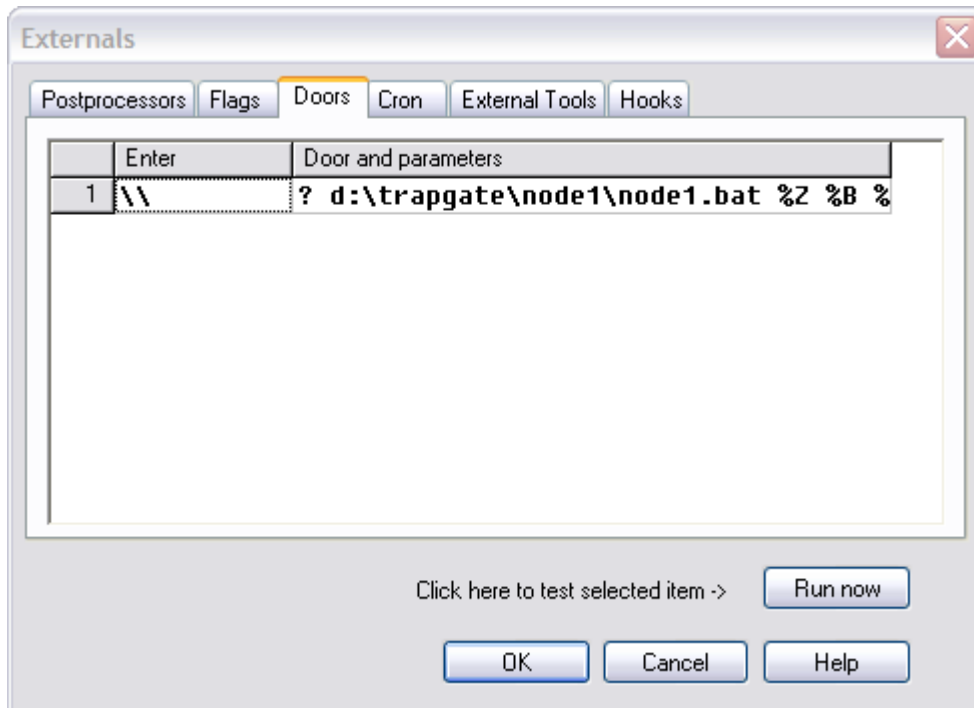

The two back slashes symbolize the double ESC sequence.


[Next Step](#)

Step #23: Configuration -> Start-up

Configuring your start-up settings:

If you want your Mailer line to open automatically upon start-up move the modem line to Auto-Open. Likewise, if the TCP/IP modem should answer at startup check the appropriate box.

A word on "Fast Logging": If you use any utility that chops, trims, or otherwise accesses your logs uncheck the box.

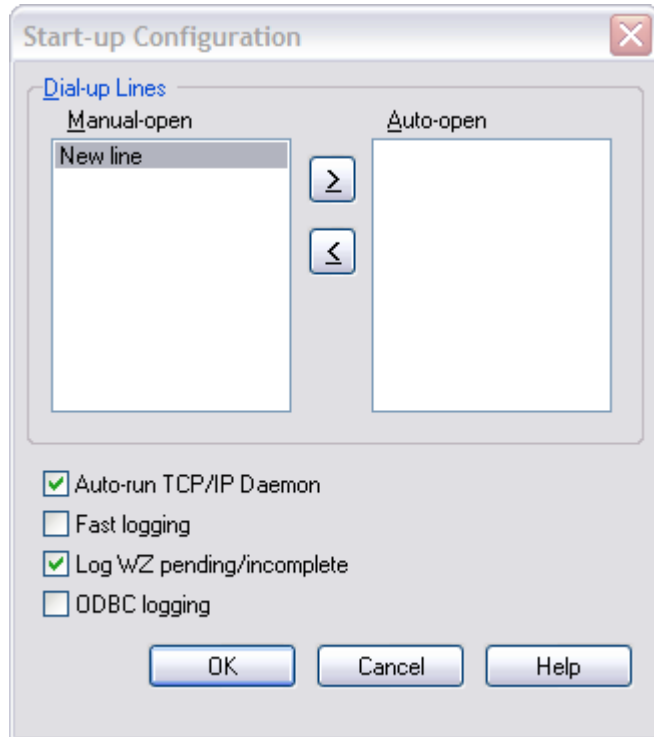


Guess what...

That's it. You should have a working setup.

[Addedum](#)

Step #24: Addendum

Step #24:

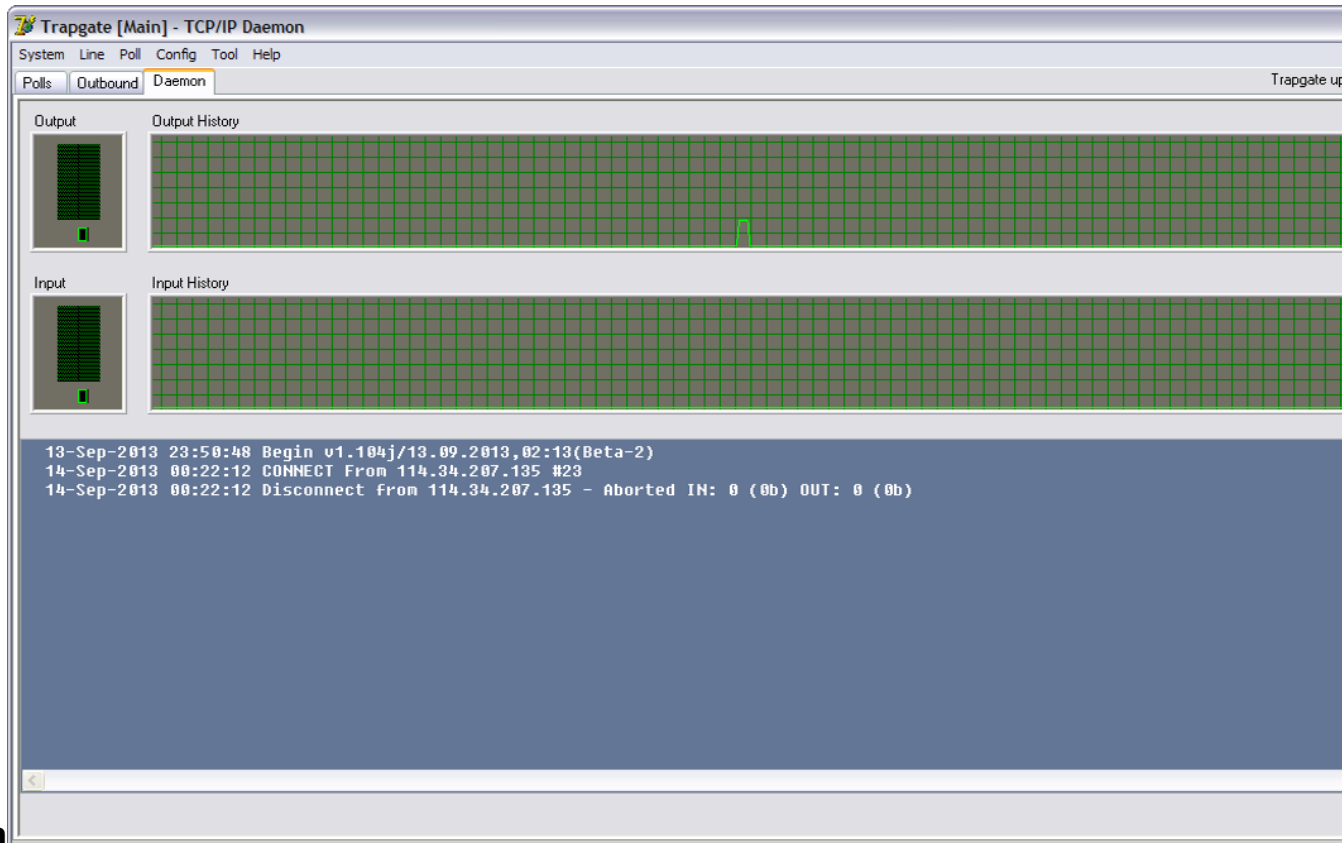

Addendum

This part was added to show you how it looks like if TrapGate is in progress, in Telnet mode it uses blinkP while due modem transfer several protocols, the main handshake used would be EMSI and the data transfer protocol Zmodem 8k blocks also called Zedzap, also Hydra would be used because its a bidirectional with chat.

However here are some screen shots from Trapgate, Zyrion only works between two Trapgate transfers, what does Zyrion do:

BSR or Bit Shift Rotation, kind of bit manipulation to gain more Bytes per second, in 1998 Zyrion was a stand alone protocol for BB like ZModem created by Frans Lupschen.

Trapgate has been changed internal a lot and is still in Beta test. Also there are commercial parts in trapgate so th source can not I want to thank the creator from Argus and Radius whitout them i would not have started this project.

Thanks to Bluefire Ghost for her voice to create the sound files, better a nice voice as fun sounds don't you agree?

Now here some screen shots from Trapgate :

Main
System
Interface
Colors
Tray
Logs
RCC
RAS DialUp
Protocols
Netmail
Tariff
Sounds
Paths

Main

Address options

Main address: 2:280/216 ... Synch clock with: 1:261/38 ...

Session options

Synch time shift: 0 CPS min bytes: 256 CPS min secs: 10

Periods and timeouts

Max BSY age: 259200 Max BWZ age: 259200 Max UDL age: 0

Msgs autoclose: 10 Outb. rescan: 2000

<< Prev Next >>

OK Cancel Apply Help

Main
System
Interface
Colors
Tray
Logs
RCC
RAS DialUp
Protocols
Netmail
Tariff
Sounds
Paths

Colors

Colors

Gauge fore	Gauge back		
Black	Custom...	Def	Sys
Logger fore	Logger back		
White	Custom...	Def	Sys
BadWaZoo fore	BadWaZoo back		
Black	White	Def	Sys
Mail 7 days old fore	Mail 7 days old back		
Custom...	Red	Def	Sys
Mail 14 days old fore	Mail 14 days old back		
Custom...	Red	Def	Sys
Mail 21 days old fore	Mail 21 days old back		
Custom...	Red	Def	Sys
Mail 28 days old fore	Mail 28 days old back		
Custom...	Red	Def	Sys

OK Cancel Apply Help

Trapgate [Main] - TCP/IP 2

System Line Poll Config Tool Help

Polls Outbound Daemon TCP/IP 2

Trapgate uptime: 00:47:39

Sending

was there ever life on M17,116 CPS

Size: 1,352,190 / 18,403,472

File time: 00:16:36 Total time: 00:16:36

18.4M

Receiving

- end -

Session

Total elapsed time 00:01:17 Cost 00.00

Connect	To 84.106.175.38 #24554
Station	Double Dutch
Address	2:280/5003 2:280/0 2:280/53
SysOp	Kees Van Eeten
Location	Heerhugowaard, The Netherlands
Number	"fido.ddutch.nl" 24554
Flags	115200,TCP,BINKP
Mailer	binkd/1.1a-19/Linux binkp/1.1

```

14-Sep-2013 00:37:07 Establishing BinkP transfer protocol
14-Sep-2013 00:37:07 M_NUL : OPT CRAM-MD5-5F5b93b9dd9c2013eb5edf59072dcaee
= 14-Sep-2013 00:37:08 Station : Double Dutch
= 14-Sep-2013 00:37:08 Address : 2:280/5003 2:280/0 2:280/53
: 14-Sep-2013 00:37:08 SysOp : Kees Van Eeten from Heerhugowaard, The Netherlands
: 14-Sep-2013 00:37:08 Number : "fido.ddutch.nl" 24554
: 14-Sep-2013 00:37:08 Flags : 115200,TCP,BINKP
: 14-Sep-2013 00:37:08 Mailer : binkd/1.1a-19/Linux binkp/1.1
= 14-Sep-2013 00:37:08 Time : Sat, 14 Sep 2013 00:37:07 +0200
14-Sep-2013 00:37:08 Password-protected session (auth=CRAM-MD5)
14-Sep-2013 00:37:08 M_NUL : OPT EXTCMD G2 B22
14-Sep-2013 00:37:08 Remote submitted insecure session
14-Sep-2013 00:37:08 Handshake time - 0 seconds
14-Sep-2013 00:37:08 We have 0b of mail and 18,403,472b of files for them
14-Sep-2013 00:37:08 Sending 'F:\was there ever life on Mars.mp4' (18,403,472b)
14-Sep-2013 00:37:08 RECE: End of batch

```

DCD DSR CTS TXD RXD

Sending

was there ever life on M17,616 CPS

Size: 2,378,238 / 18,403,472

File time: 00:15:09 Total time: 00:15:09

18.4M

Receiving

- end -

Session

Total elapsed time 00:02:13 Cost 00.00

The bink File transfer window, like Hydra, sending and receiving time included chat.

Connect	To 84.106.175.38 #24554
Station	Double Dutch
Address	2:280/5003 2:280/0 2:280/53
Sysop	Kees Van Eeten
Location	Heerhugowaard, The Netherlands
Number	"fido.ddutch.nl" 24554
Flags	115200,TCP,BINKP
Mailer	binkd/1.1a-19/Linux binkp/1.1
	



Session

window.