


MODEL CONFIGURATION AND OPTICS DATA

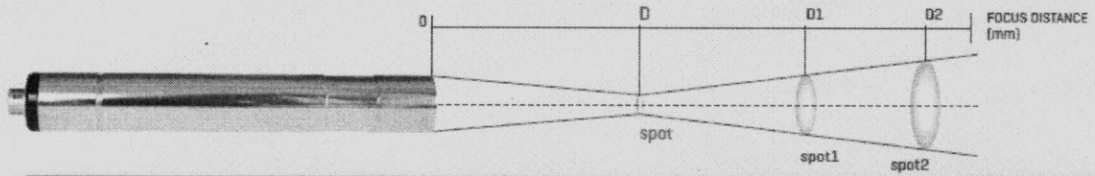

MODEL	Close-up lens	D distance (mm)	Spot diameter (mm)	D1 distance 1 (mm)	Spot 1 diameter (mm)	D2 distance 2 (mm)	Spot 2 diameter (mm)
SH15/SLE-550-D1 176 ... 1292°F (80 ... 700°C)	Included	550	12.5	1000	36	2000	86
	CL240/SH15	240	4.5	500	24	1000	63
	CL120/SH15	120	2.5	250	19	500	52
	CL60/SH15	60	0.5	150	18.5	300	51
SH15/SLE-550-D2 248 ... 1652°F (120 ... 900°C)	Included	550	4.5	1000	21	2000	57
	CL240/SH15	240	1.5	500	18	1000	51
	CL120/SH15	120	1	250	17	500	46
	CL60/SH15	60	<0.4	150	19	300	50
SH15/SLE-550-D3 392 ... 2912°F (200 ... 1600°C)	Included	550	2	1000	16.5	2000	47
	CL240/SH15	240	0.6	500	16	1000	47
	CL120/SH15	120	<0.4	250	15	500	44
SH15/SLE-550-D4 932 ... 3632°F (500 ... 2000°C)	Included	550	2	1000	16.5	2000	47
	CL240/SH15	240	0.6	500	16	1000	47
	CL120/SH15	120	<0.4	250	15	500	44
SH2C/SLE 572 ... 3992°F (300 ... 2200°C)	Included	550	12.5	1000	36	2000	86
	CL240/SH15	240	4.5	500	24	1000	63
	CL120/SH15	120	2.5	250	19	500	52