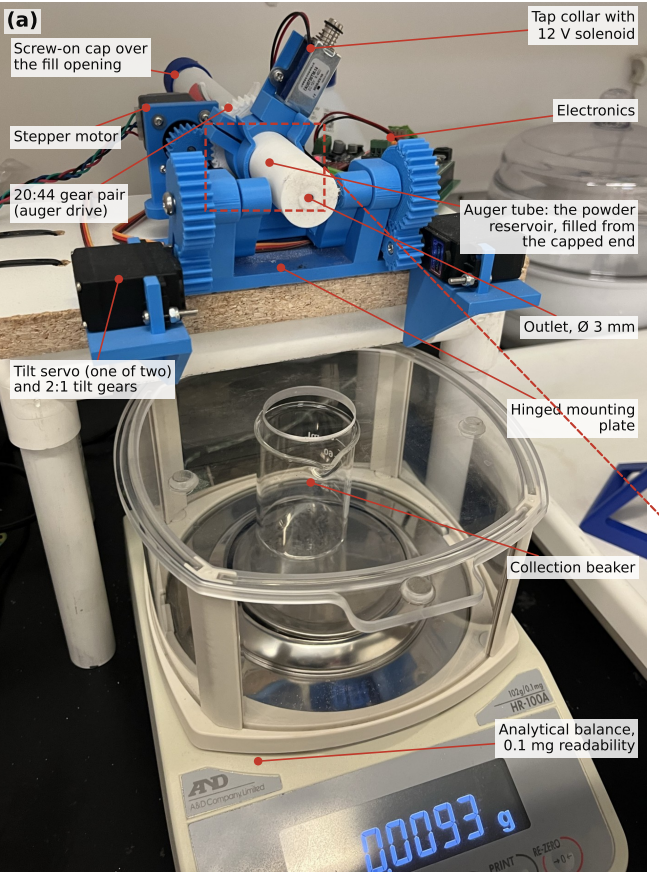
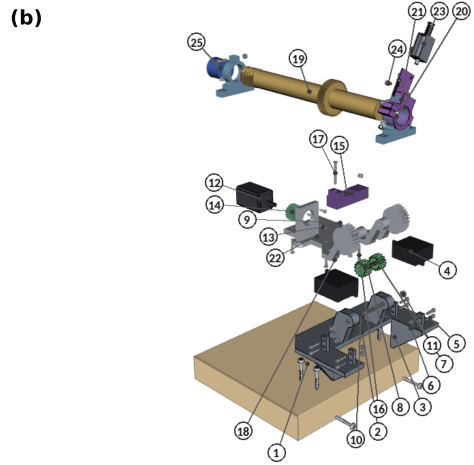
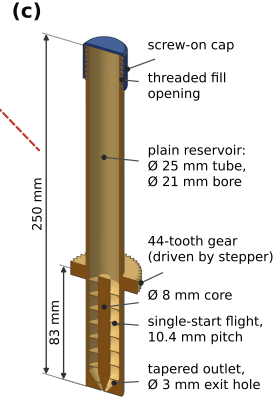


(a)
Screw-on cap over the fill opening
Tap collar with 12 V solenoid
Electronics
Stepper motor
20:44 gear pair (auger drive)
Auger tube: the powder reservoir, filled from the capped end
Outlet, Ø 3 mm
Tilt servo (one of two) and 2:1 tilt gears
Hinged mounting plate
Collection beaker
Analytical balance, 0.1 mg readability
A&D Company Limited
HR-100A
00093 g
PRINT
RE-ZERO


(b)
25
19
21
23
20
24
17
15
12
14
9
13
22
4
11
5
7
6
16
8
3
18
10
2
1


(c)
screw-on cap
threaded fill opening
plain reservoir: Ø 25 mm tube, Ø 21 mm bore
44-tooth gear (driven by stepper)
Ø 8 mm core
single-start flight, 10.4 mm pitch
tapered outlet, Ø 3 mm exit hole
250 mm
83 mm


(d)