



CHAOCHENG TECHNOLOGY

Design

21/07/12

Verify

Approve

Name

Technical Specification

Dept.

R&D

Department

Version

A

Page

1/3

Client Name:**Part Number:** TAU0730TM-14**Client Part Number:****1. Applicability**This specification applies only for Open frame solenoid TAU0730TM-14**2. Standard test conditions**

2-1 Environment

Ambient temperature: $60 \pm 2^\circ\text{C}$ Relative humidity: $65 \pm 5\%$

Atmospheric pressure : 1013mbar

2-2 Test load

Empty load

2-3 Power supply

Adjustable DC 12V power supply

2-4 Test Method

(1) Attraction force: when the armature is in a vertical position, push style conducts pressure test while the pull style conducts tensile test.

(2) The initial force : read by the *force vs stroke graph* on the specified stroke range.(3) Retentivity : read by the *force vs stroke* when energized closed.**3. Outside drawing**

3-1 Overall dimension : refer to page 3

4. Nominal parameter

4-1 Voltage (According to the clients requirement, recommend voltage are DC12V、DC24V、DC36V) :

... DC 12V

4-2 Resistance (20°C) :... 40 Ω 4-3 Current ($I=U/R \pm 5\%$) :

... 0.3A

4-4 Power ($P=U^2/R$) :

... 3.6W

4-5 Duty cycle (ED= Power on duaration/ (Power on duaration+ Power off duaration)*100%):

... 50%

4-6 Insulation grade (According to the clients requirement, B or F):

... B

N0.	Date	Change Content	Revise	Verify	N0.	Date	Change Content	Revise	Verify
1					3				
2					4				



CHAOCHENG TECHNOLOGY

Design 21/07/12

Verify

Approve

Name

Technical Specification

Dept.

R&D

Department

Version

A

Page

2/3

Client Name:**Part Number:** TAU0730TM-14**Client Part Number:****5. Electrical characteristics**

5-1 Attraction force

Items	Stroke (mm)	Force (N)
The initial force	4mm	$\approx 0.5N$
Retentivity	0mm	$\geq 5N$

5-2 Insulation resistance

Between coil and frame 100M Ω (DC 500V in regular temperature/humidity) .

5-3 The withstanding voltage

Between coil and frame AC 500V (50 / 60 Hz) 1 Min or AC 1000V (50 / 60 Hz) 1 Sec (breakdown current 0.15mA) .

5-4 Temperature rise

At the rated voltage of DC 12V, temperature rise is 65 °C Max (power on 1 sec, power off 1 sec) .

5-5 Life time

Normally is 50000 times (power on 1 sec, power off 1 sec) .

5-6 Lead strength

When it is loaded 1 kgf (30 sec), broken is not allowed.

5-7 Operation temperature and humidity

-5 °C ~ 60 °C, 45 %RH ~ 85 %RH

N0.	Date	Change Content	Revise	Verify	N0.	Date	Change Content	Revise	Verify
1					3				
2					4				



Approve

Technical Specification

R&D Department

3/3


Client Part Number:

T A U — 0730 TM (12 , 40)

Push type

Voltage

7-1 If the product specification or manufacturing method need to make changes, the parties shall negotiate to determine its position, expected result and change effect. The *Technical Specification* should be promptly update relatively.

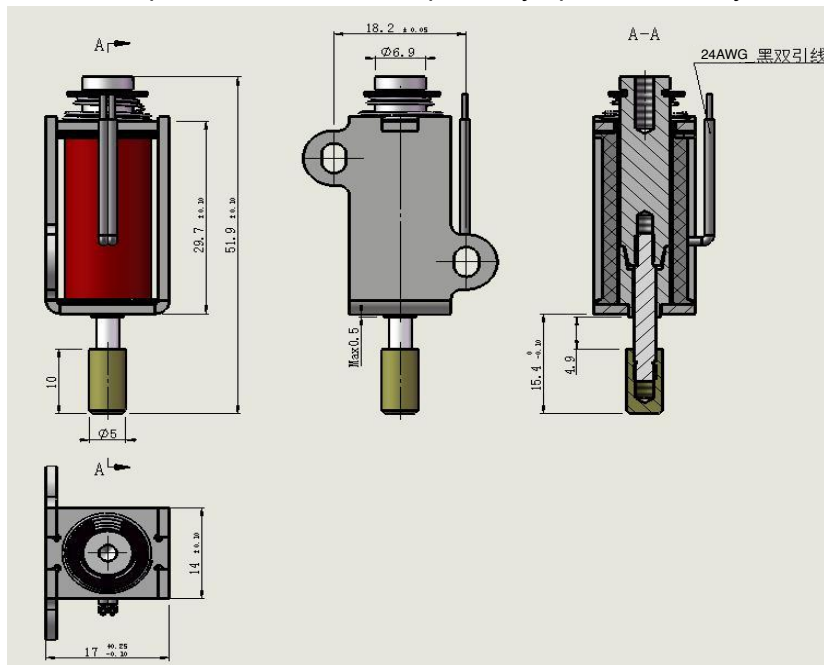

N0.	Date	Change Content	Revise	Verify	N0.	Date	Change Content	Revise	Verify
1					3				
2					4				