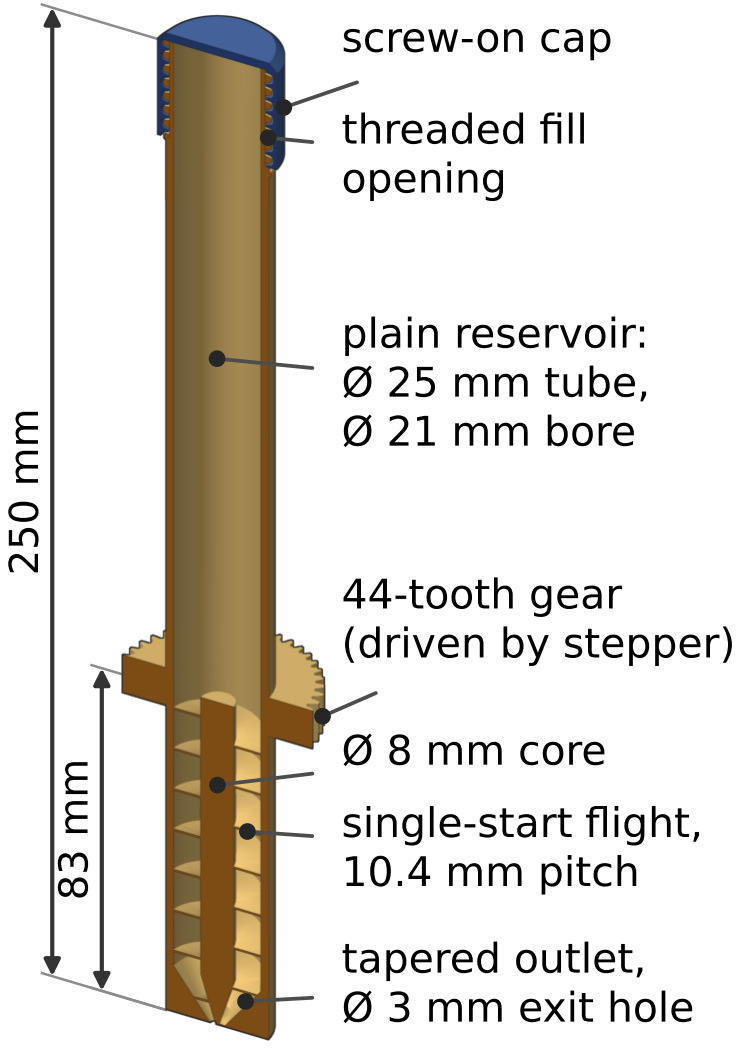

screw-on cap
threaded fill opening
plain reservoir: Ø 25 mm tube, Ø 21 mm bore
44-tooth gear (driven by stepper)
Ø 8 mm core
single-start flight, 10.4 mm pitch
tapered outlet, Ø 3 mm exit hole
250 mm
83 mm