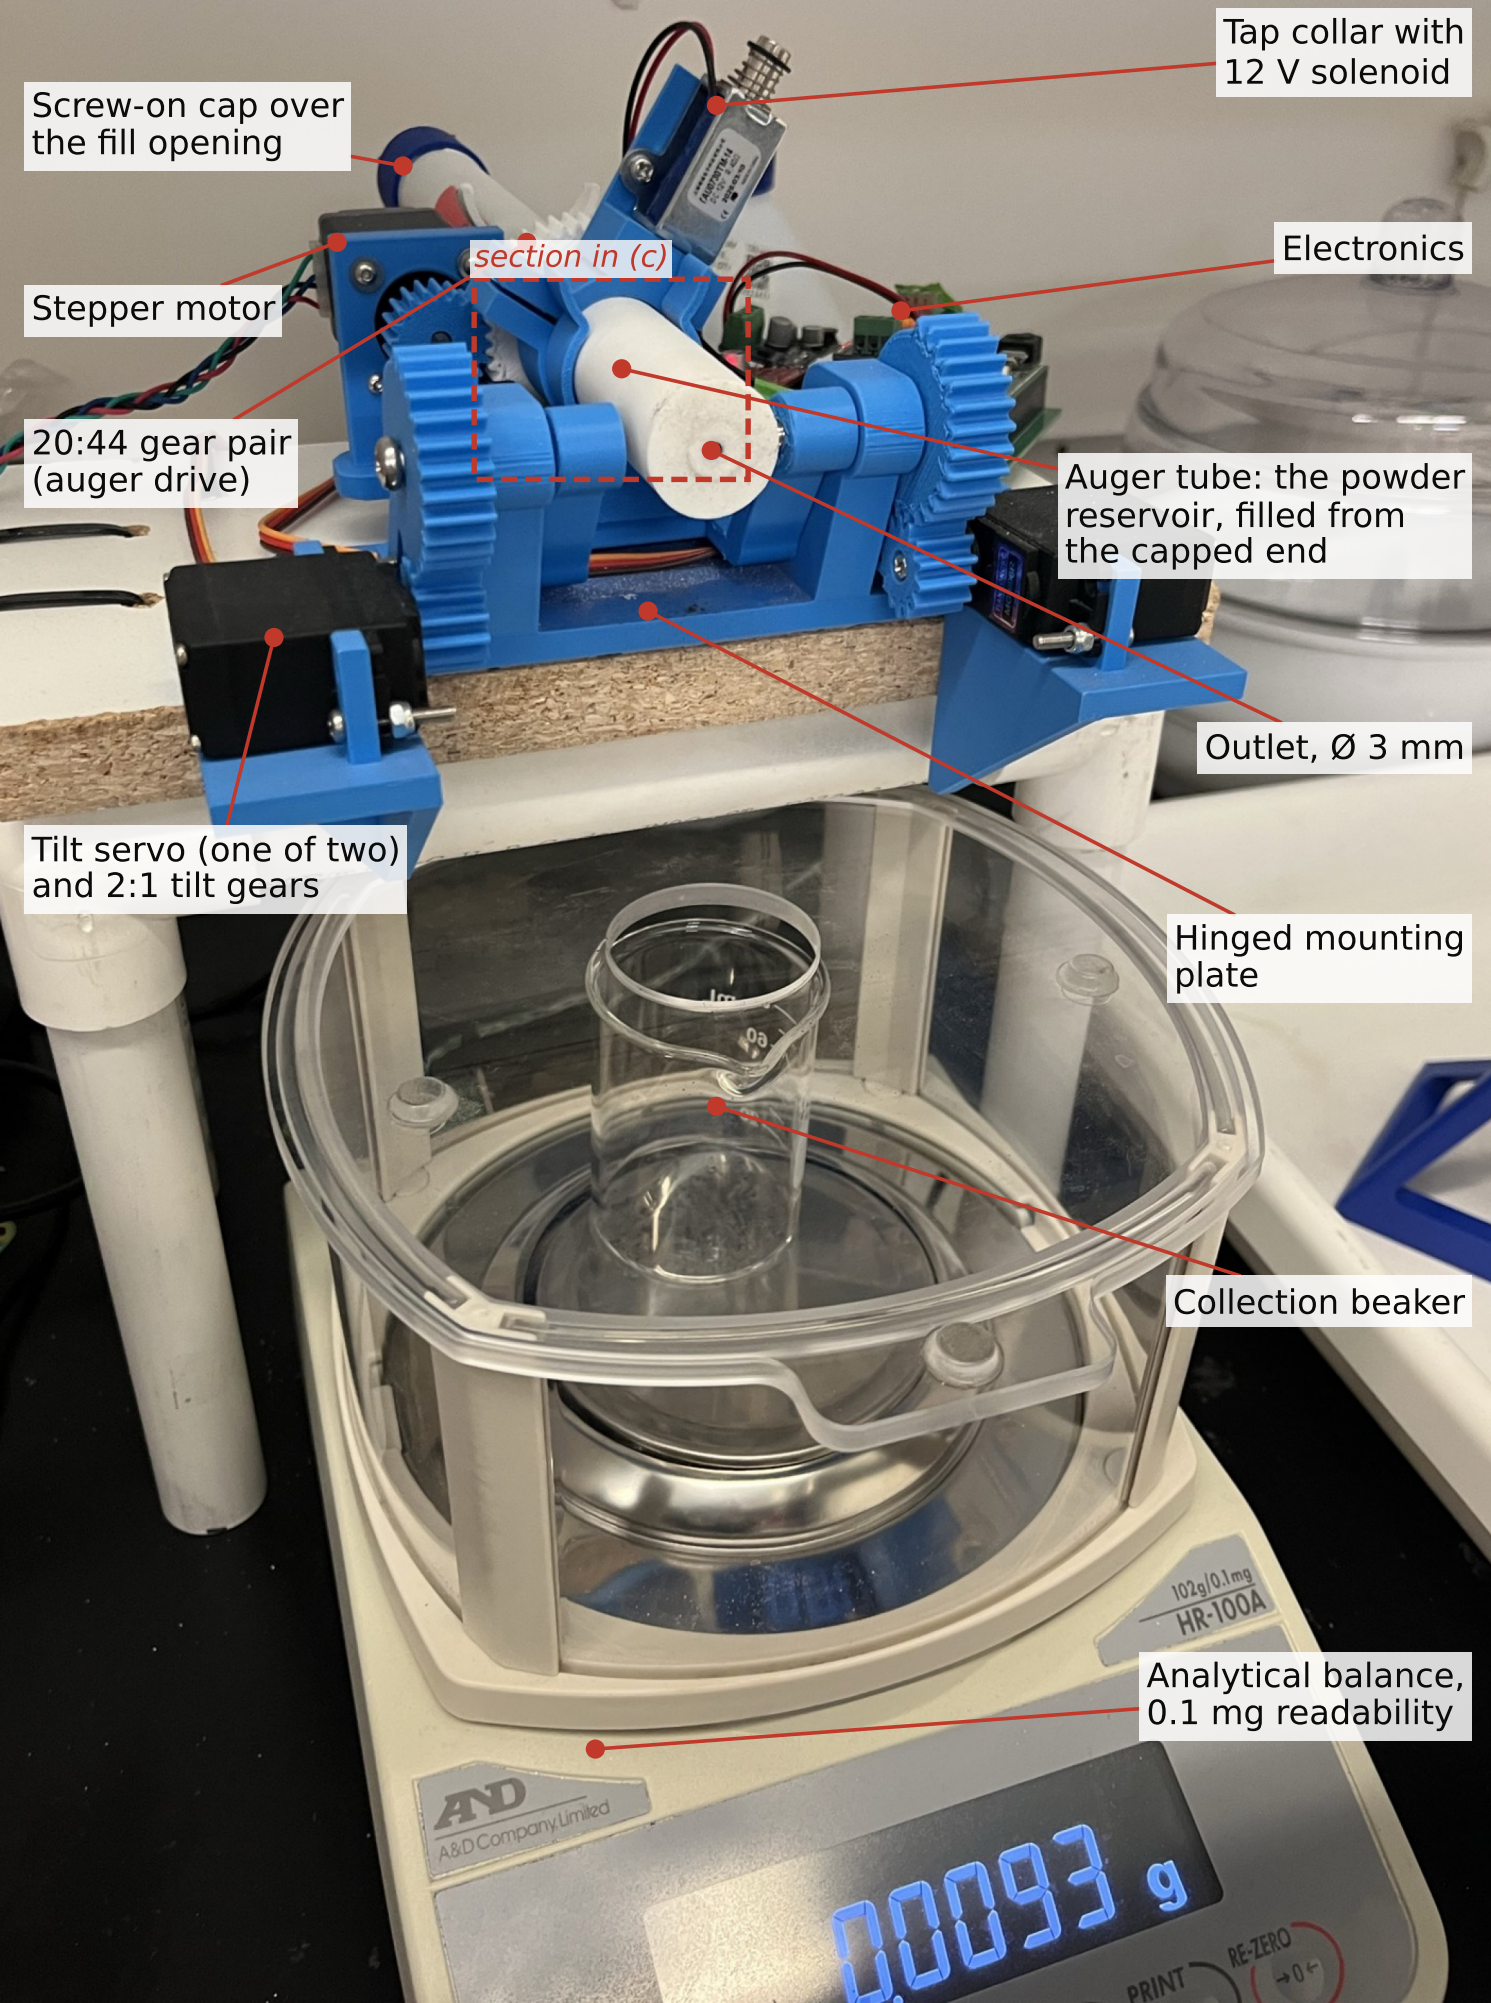

Tap collar with 12 V solenoid
Screw-on cap over the fill opening
section in (c)
Electronics
Stepper motor
20:44 gear pair (auger drive)
Auger tube: the powder reservoir, filled from the capped end
Outlet, Ø 3 mm
Tilt servo (one of two) and 2:1 tilt gears
Hinged mounting plate
Collection beaker
Analytical balance, 0.1 mg readability
102g/0.1mg
HR-100A
A&D
A&D Company,Limited
0.0093 g
PRINT
RE-ZERO