

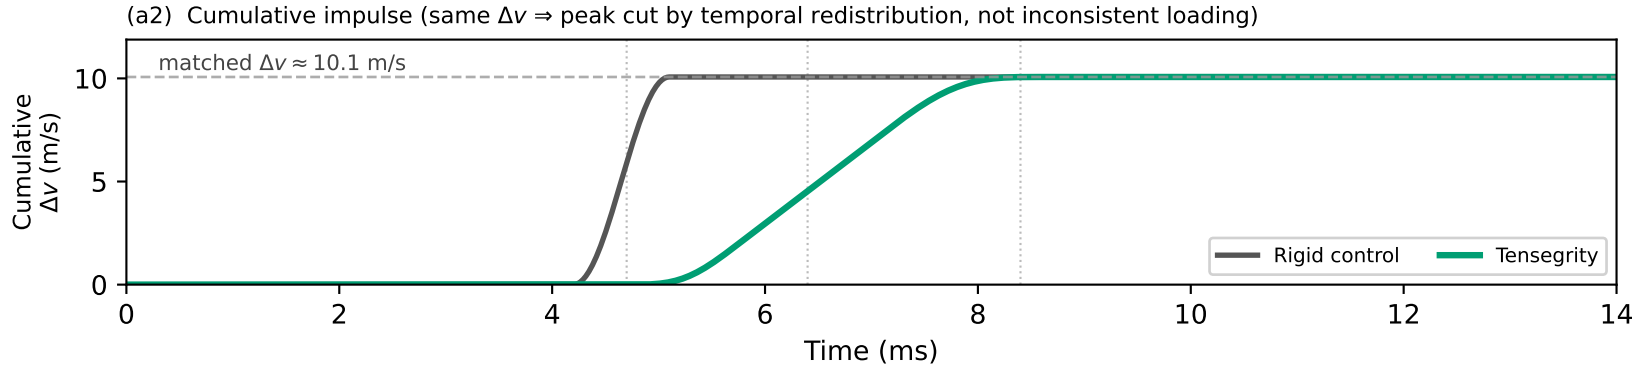



EXAMPLE (mock-up, synthetic data): mechanism-oriented drop-test figure

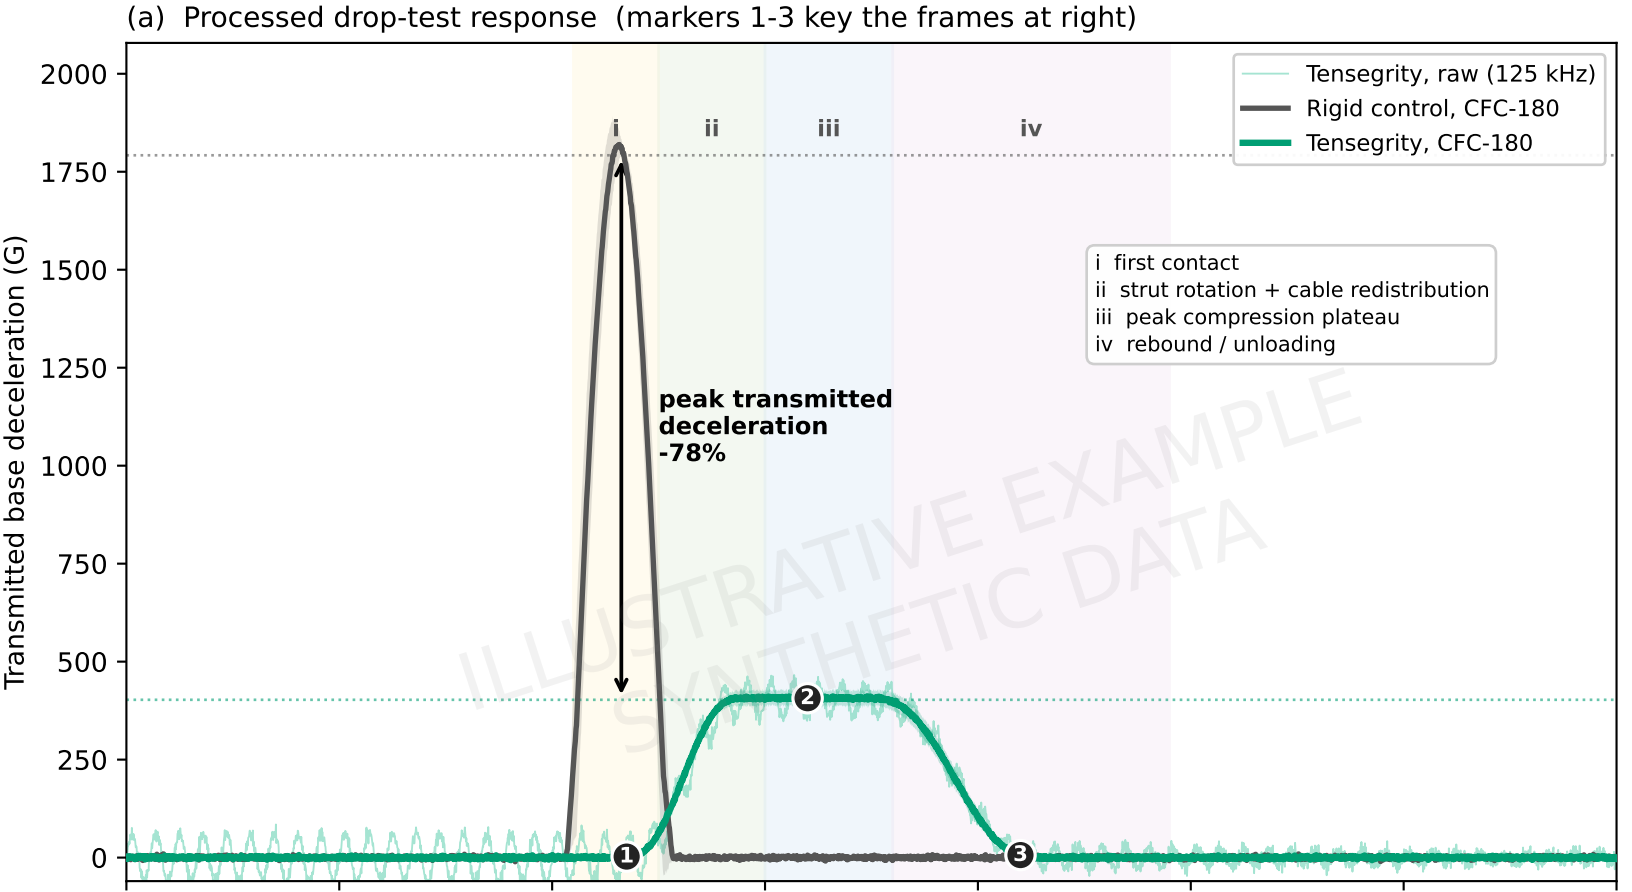


(b) 1: first contact
1 4.7 ms




(c) 2: peak compression
2 6.4 ms



(d) 3: rebound / unloading
3 8.4 ms



(e) joint callout (circled in frame 1)
PLA strut end (rigid cage)



Synthetic illustration. In a real figure: transmitted base deceleration of a rigid control vs. T3-prism tensegrity, both SAE J211 CFC-180 filtered (125 kHz raw shown faint), zero-phase (filtfilt), time-aligned on the CH4 first-contact index. Curves are the mean of $n=5$ replicates; bands are ± 1 s.d. Frames 1-3 are high-speed/DIC stills at markers 1-3; (e) shows the internal cable-anchor joint that spreads the impulse.