

Contents**ATPL Book 1 Air Law**

D. Definitions	1
1. International Agreements and Organizations.....	21
2. Airworthiness of Aircraft	53
3. Aircraft Nationality and Registration Marks.....	59
4. Flight Crew Licensing - EASA Part-FCL & Part-MED.....	67
5. Rules of the Air	101
6. Instrument Procedures - Departures.....	157
7. Approach Procedures	173
8. Circling Approach.....	207
9. Holding Procedures	215
10. Altimeter Setting Procedure.....	227
11. Parallel or Near-parallel Runway Operation.....	239
12. SSR and ACAS.....	253
13. Airspace	263
14. Air Traffic Services.....	279
15. Separation.....	297
16. Control of Aircraft	331
17. Aeronautical Information Service (AIS).....	357
18. Aerodromes - Physical Characteristics	375
19. Aerodromes - Visual Aids, Markings and Signs	399
20. Aerodrome Lighting	425
21. Obstacle Marking and Aerodrome Services	447
22. Facilitation	461
23. Search and Rescue	471
24. Security	481
25. Aircraft Accident and Incident Investigation	495
26. Revision Questions.....	505
27. EU Regulation 216/2008.....	547
28. Index	55

Chapter

D

Definitions

Introduction.....	3
Air Law.....	3
Abbreviations	3
Definitions.....	9

D

Definitions

Air Law

The subject of Air Law is a misnomer. The content of the subject is effectively airmanship with the addition of information concerning some of the international conventions that have been adopted to regularize the administration of aviation and the aviation industry. The subject matter is diverse ranging from international agreements through the rules of the air, flight crew licensing, instrument procedures, ATC and the physical characteristics of aerodromes. A student does not need to be a lawyer to pass this subject. Most of the requirements are common sense, the majority of which will be familiar to a PPL holder. The ab initio student should approach the subject from the ‘need to know’ principle and be guided by the examination feedback as well as the syllabus. The end of chapter questions are based on examination questions and should give the student a feel for the level of knowledge required on completion of the course.

Abbreviations

Air Law, perhaps more than any other subject, is inundated with abbreviations, some of which are examinable. Where this is the case, the abbreviations are specified in the appropriate chapter and ‘decoded.’ The following is a list (not exhaustive) of abbreviations commonly used in aviation.

AAIB	Air Accident Investigation Board
AAL	Above Aerodrome Level
ABIP	Advisory Body of Interested Parties
ABN	Aerodrome Beacon
a/c	Aircraft
ACC	Area Control Centre
AD	Airworthiness Directive
ADA	Advisory Airspace
ADF	Automatic Direction Finding
ADO	Approved Design Organization
ADR	Advisory Route
ADS	Automatic Dependent Surveillance
ADT	Approved Departure Time
AFI	Assistant Flying Instructor
AFIS	Aerodrome Flight Information Service
AFS	Aeronautical Fixed Service
AFTN	Aeronautical Fixed Telecommunications Network
AGL	Above Ground Level
AGNA	Advisory Group of National Authorities
AIC	Aeronautical Information Circular
AIP	Aeronautical Information Publication
AIREP	Air Report
AIS	Aeronautical Information Service
a/l	Airline

D

Definitions

ALT	Altitude
AMC	Acceptable Means of Compliance
AME	Aero Medical Examiner
AMO	Approved Maintenance Organization
AMOSS	Airline Maintenance and Operation Support System
AMSL	Above Mean Sea Level
AMT	Approved Maintenance Training
ANO	Air Navigation Order
A-NPA	Advance Notice of Proposed Amendment
AOC	Air Operator's Certificate
A/P	Autopilot
APO	Approved Production Organization
APU	Auxiliary Power Unit
ARC	Airworthiness Review Certificate
ARP	Aerodrome Reference Point
ARN	ATS Route Network
ASDA	Accelerate-Stop Distance Available
ASL	Above Sea Level
ASR	Altimeter Setting Region
ATAS	Air Traffic Advisory Service
ATC	Air Traffic Control
ATCC	Air Traffic Control Centre
ATCU	Air Traffic Control Unit
ATCRU	Air Traffic Control Radar Unit
ATFM	Air Traffic Flow Management
ATIS	Automatic Terminal Information Service
ATM	Air Traffic Management
ATO	Approved Training Organization
ATS	Air Traffic Service
ATSU	Air Traffic Service Unit
ATTCS	Automatic Take-off Thrust Control System
ATZ	Air Traffic Zone
AUW	All Up Weight
AWD	Airworthiness Division
AWO	All Weather Operations
AWY	Airway
BEA	Bureau d'Enquêtes Accidents (French equivalent of NTSB)
BR	Basic Regulation
CAA	Civil Aviation Authority
CAME	Continuous Airworthiness Maintenance Exposition
CANP	Civil Aviation Notification Procedure
CAS	Controlled Airspace
CAT	Commercial Air Transport
CDFA	Constant Descent Final Approach
CF	Certification
CJAA	Central Joint Aviation Authorities
C of A	Certificate of Airworthiness
COM	(European) Commission
CRD	Comment Response Document
CRI	Certification Review Item
CRS	Certificate of Release to Service
CS	Certification Specification

CSP	Certification Standardization Panel
CTR	Control Zone
DA	Decision Altitude
db	Decibel (acoustic measurement unit)
DF	Direction Finding
DG TREN	Directorate-General for Transport and Energy (European Commission)
DH	Decision Height
DME	Distance Measuring Equipment
DOA	Design Organization Approval
DOE	Design Organization Exposition
DR	Dead Reckoning
E	Engine
EASA	European Aviation Safety Agency
EAT	Expected Approach Time
EC	European Commission
ECAC	European Civil Aviation Conference
ED	Emergency Distance
EET	Estimated Elapsed Time
ELT	Emergency Location Transmitter
EPA	European Part Approval
EPIRB	Emergency Position Indicating Radio Beacon
EPR	Environmental Protection Requirements
ER	Essential Requirements
ETA	Estimated Time of Arrival
ETSO	European Technical Standard Order
ETSOa	European Technical Standard Order authorization
ETOPS	Extended Twin Jet Operations
EU	European Union
FAA	Federal Aviation Administration
FAL	Facilitation of Air Transport
FAT	Final Approach Track
FCL	Flight Crew Licensing
FFS	Full Flight Simulator
FI	Flying Instructor
FIR	Flight Information Region
FIS	Flight Information Service
FL	Flight Level
FLPFM	Foot Launched Powered Flying Machine
FTD	Flight Training Device
FTL	Flight Time Limitations
GA	General Aviation
GASIL	General Aviation Safety Information Leaflet
GCA	Ground Controlled Approach
GM	Guidance Material
GMT	Greenwich Mean Time
GPS	Global Positioning System
H24	Day and Night Operating Hours
HF	High Frequency
Hz	Hertz Radio Frequency
IAS	Indicated Air Speed
Ibn	Identification Beacon
ICAO	International Civil Aviation Organization

IFR	Instrument Flight Rules
ILS	Instrument Landing System
IMC	Instrument Meteorological Conditions
IPC	Illustrated Parts Catalogue
IR	Implementing Rules
IR	Instrument Rating
IRE	Instrument Rating Examiner
IRVR	Instrument Runway Visual Range
ISA	International Standard Atmosphere
JAA	Joint Aviation Authorities
JAR	Joint Aviation Requirements
k	thousand
kHz	Kilohertz
KIAS	Indicated Airspeed in Knots
kt	Knots (nautical miles/ hour)
LAPL(A)	Light Aircraft Pilot Licence (Aeroplanes)
LARS	Lower Airspace Radar Service
LATCC	London Air Traffic Control Centre
LDA	Landing Distance Available
LHA	Lowest Holding Altitude
LF	Low Frequency
LHA	Lowest holding altitude
LoA	Letter of Agreement
MATZ	Military Air Traffic Zone
MB	Management Board (EASA)
MCC	Multi-crew Co-operation
MDH	Minimum Descent Height
MEHT	Minimum Eye Height (PAPIs)
MEL	Minimum Equipment List
METAR	Aviation Routine Weather Report
MF	Medium Frequency
MHz	Megahertz
MMEL	Master Minimum Equipment List
MNPS	Minimum Navigation Performance Specification
MOA	Maintenance Organization Approval
MoC	Means of Compliance
MoD	Ministry of Defence
MOE	Maintenance Organization Exposition
MOM	Maintenance Organization Manual (Subpart F)
MOTNE	Meteorological Operational Telecommunications Network
MRSA	Mandatory Radar Service Area
MSA	Member States Administration
MS	Member State (of the European Community)
MTOA	Maintenance Training Organization Approval
MTOE	Maintenance Training Organization Exposition
MTOM	Maximum Take-off Mass
MTOP	Maximum Take-off Power
MTWA	Maximum Take-off Weight Authorized
NAA	National Aviation Authority
NAPs	Noise Abatement Procedures
NAV	Navigation
NATS	National Air Traffic Services
NCC	Non-commercial Complex Aircraft

NDB	Non-directional Beacon
NDB(L)	Locator (a low-powered NDB serving approaches)
NOH	Notified Operating Hours
NOSIG	No Significant Change
NOTAM	Notice to Airmen
NPA	Notice of Proposed Amendment
OCA	Oceanic Control Area
OCA	Obstacle Clearance Altitude
OCH	Obstacle Clearance Height
OCL	Obstacle Clearance Limit
OCP	Organizations Certification Procedure
OEM	Original Equipment Manufacturer
OIS	Obstacle Identification Surface
Ops	Operations
P	Propeller
PAD	Proposed Airworthiness Directive
	Part 145
	Part 21
	Part 22
PANS	Procedures for Air Navigation
PAR	Precision Approach Radar
PAPI	Precision Approach Path Indicator
Pax	Passengers
PCM	Project Certification Manager
PCP	Products Certification Procedure
PIC	Pilot-in-command
PICUS	Pilot-in-command Under Supervision
POA	Production Organization Approval
POE	Production Organization Exposition
PPA	Products, Parts and Appliances
PT	Public Transport
RCC	Rescue Co-ordination Centre
RG	Rulemaking
RIA	Regulatory Impact Assessment
RIS	Radar Information Service
RLCE	Request Level Change En route
RNOTAM	Royal NOTAM
RP	Responsible Party
RTA	Request for Technical Advice
RTF	Radio Telephony
RTOW	Regulated Take-off Weight
RTG	Radio Telegraphy
RTR	Radar Termination Range
RVR	Runway Visual Range
RVSM	Reduced Vertical Separation Minima
Rwy	Runway
SAR	Search and Rescue
SARP	ICAO Standards and Recommended Practices
SARSAT	Search and Rescue Satellite Tracking System
SDF	Step-down Fix
SELCAL	Selective Calling
Sfc	Surface

SID	Standard Instrument Departure
SIGMET	Significant Meteorological Warning
SNOCLO	Closed by Snow
SoD	State of Design
SoR	State of Registry
SPECI	Special Met Report
SPIC	Student Pilot-in-command
SPL	Supplementary Flight Plan
SSCC	Safety Standards Consultative Committee
SSR	Secondary Surveillance Radar
STAR	Standard Instrument Arrival
STC	Supplemental Type Certificate
STD	Synthetic Training Device
STCH	STC Holder
SVFR	Special Visual Flight Rules
TAF	Aerodrome Meteorological Forecast
TAS	True Airspeed
TC	Type Certificate
TCA	Terminal Control Area
TCDS	Type Certificate Data Sheet
TCH	Type Certificate Holder
TMA	Terminal Manoeuvring Area
TMG	Touring Motor Glider
ToA	Terms of Approval
TODA	Take-off Distance Available
TOM	Take-off Minima
ToR	Terms of Reference
TORA	Take-off Run Available
TP	Turning Point
TR	Type Rating
TRE	Type Rating Examiner
TL	Transition Level
TVOR	Terminal VHF Omni-ranging
TVP	Type Validation Principles
Twr	Tower (Aerodrome Control)
UAV	Unmanned Aerial Vehicle
UHF	Ultra High Frequency
UIR	Upper Information Region
U/s	Unserviceable
UTC	Co-ordinated Universal Time
VASI	Visual Approach Slope Indicator
VFR	Visual Flight Rules
VHF	Very High Frequency
VLA	Very Light Aeroplane
VLR	Very Light Rotorcraft
VMC	Visual Meteorological Conditions
VOR	VHF Omni-ranging
VSTOL	Very Short Take-off and Landing
WA	Working Arrangement
WEF	With Effect From
WG	Working Group
WIP	Work in Progress
Wpt	Waypoint

Definitions

Some of the examination questions relate to the wording of definitions and the LOs require the student to be able to identify the correct definition from a list of offered alternatives. The following are the definitions used in the Annexes to the Convention on International Civil Aviation.

Advisory Airspace. Airspace of defined dimensions, or designated route, within which air traffic advisory service is available.

Advisory Route. A designated route along which air traffic advisory service is available.

Aerial Work Aircraft means an aircraft (other than a public transport aircraft) flying, or intended by the operator to fly, for the purpose of aerial work.

Aerial Work Undertaking means an undertaking whose business includes the performance of aerial work.

Aerobic Manoeuvres includes loops, spins, rolls, bunts, stall turns, inverted flying and any other similar manoeuvre.

Aerodrome means any area of land or water designed, equipped, set apart or commonly used for affording facilities for the landing and departure of aircraft and includes any area or space, whether on the ground, on the roof of a building or elsewhere, which is designed, equipped or set apart for affording facilities for the landing and departure of aircraft capable of descending or climbing vertically, but shall not include any area the use of which for affording facilities for the landing and departure of aircraft has been abandoned and has not been resumed.

Aerodrome Control Service means an air traffic control service for any aircraft on the manoeuvring area or apron of the aerodrome in respect of which the service is being provided or which is flying in, or in the vicinity of, the aerodrome traffic zone of that aerodrome by visual reference to the surface.

Aerodrome Flight Information Unit means a person appointed by the Authority or by any other person maintaining an aerodrome to give information by means of radio signals to aircraft flying or intending to fly within the aerodrome traffic zone of that aerodrome and aerodrome flight information service shall be construed accordingly.

Aerodrome. A defined area on land or water (including any buildings, installations and equipment) intended to be used either wholly or in part for the arrival, departure and surface movement of aircraft.

Aerodrome Control Tower. A unit established to provide air traffic control service to aerodrome traffic.

Aerodrome Operating Minima in relation to the operation of an aircraft at an aerodrome means the cloud ceiling and runway visual range for take-off, and the decision height or minimum descent height, runway visual range and visual reference for landing, which are the minimum for the operation of that aircraft at that aerodrome.

Aerodrome Traffic. All traffic on the manoeuvring area of an aerodrome and all aircraft flying in the vicinity of an aerodrome.

Aerodrome Traffic Zone. Airspace of defined dimensions established around an aerodrome for the protection of aerodrome traffic.

Aeronautical Ground Light means any light specifically provided as an aid to air navigation, other than a light displayed on an aircraft.

Aeronautical Part. That part of an aerodrome including buildings to which access is limited by security measures (airside).

Aeronautical Radio Station means a radio station on the surface, which transmits or receives signals for the purpose of assisting aircraft.

Aeronautical Station. A land station in the aeronautical mobile service. In certain instances, an aeronautical station may be located, for example, on board ship or on a platform at sea.

Aeroplane. A power driven heavier than air aircraft, deriving its lift in flight chiefly from aerodynamic reactions on surfaces which remain fixed under given conditions of flight.

Aircraft. Any machine that can derive support in the atmosphere from the reactions of the air other than the reactions of the air against the earth's surface.

Aircraft Category. Classification of aircraft according to specified basic characteristics e.g. aeroplane, helicopter, glider, free balloon.

Aircraft certified for Single-pilot Operation. A type of aircraft which the State of Registry has determined, during the certification process, can be operated safely with a minimum crew of one pilot.

Aircraft - Type of. All aircraft of the same basic design including all modifications thereto except those modifications which result in change in handling or flight characteristics

Air Traffic. All aircraft in flight or operating on the manoeuvring area of an aerodrome.

Air Traffic Advisory Service. A service provided within advisory airspace to ensure separation, in so far as practical, between aircraft which are operating on IFR flight plans.

Air Traffic Control Clearance Authorization for an aircraft to proceed under conditions specified by an air traffic control unit.

Note. For convenience, the term "air traffic control clearance" is frequently abbreviated to "clearance" when used in appropriate contexts.

Note 2. The abbreviated term "clearance" may be prefixed by the words "taxi", "take-off", "departure", "en route", "approach" or "landing" to indicate the particular portion of flight to which the air traffic control clearance relates.

Air Traffic Control Service. A service provided for the purpose of:

- Preventing collisions:
 - Between aircraft
 - On the manoeuvring area between aircraft and obstructions
- Expediting and maintaining an orderly flow of air traffic.

Air Traffic Control Unit. A generic term meaning variously, area control centre, approach control office or aerodrome control tower.

Air Traffic Services Airspaces. Airspaces of defined dimensions alphabetically designated, within which specific types of flights may operate and for which air traffic services and rules of operation are specified.

Air Traffic Services Reporting Office. A unit established for the purpose of receiving reports concerning air traffic services and flight plans submitted before departure.

Air Traffic Services Unit. A generic term meaning variously, air traffic control unit, flight information centre or air traffic services reporting office.

Air Transport Undertaking means an undertaking whose business includes the undertaking of flights for the purposes of public transport of passengers or cargo.

Airborne Collision Avoidance System (ACAS). An aircraft system based on secondary surveillance radar (SSR) transponder signals which operates independently of ground-based equipment to provide advice to the pilot on potential conflicting aircraft that are equipped with SSR transponders.

Airway. A control area or portion thereof established in the form of a corridor equipped with radio navigation aids.

Alerting Service. A service provided to notify appropriate organizations regarding aircraft in need of search and rescue aid, and to assist such organizations as required.

Alternate Aerodrome. An aerodrome to which an aircraft may proceed when it becomes either impossible or inadvisable to continue to or to land at, the aerodrome of intended landing. Alternate aerodromes include the following:

- Take-off alternate. An aerodrome at which an aircraft can land should this become necessary shortly after take-off where it is not possible to use the aerodrome of departure.
- En route alternate. An aerodrome at which an aircraft would be able to land after experiencing an abnormal or emergency condition while en route.
- Destination alternate. An aerodrome to which an aircraft may proceed should it become either impossible or inadvisable to land at the aerodrome of intended landing.

Note. The aerodrome from which a flight departs may also be an en route or a destination alternate aerodrome for that flight.

Altitude. The vertical distance of a level, a point or an object considered as a point, measured from mean sea level.

Annual Costs in relation to the operation of an aircraft means the best estimate reasonably practicable at the time of a particular flight in respect of the year commencing on the first day of January preceding the date of the flight, of the cost of keeping and maintaining and the indirect costs of operating the aircraft, such costs in either case excluding direct costs and being those actually and necessarily incurred without a view to profit.

Annual Flying Hours. The best estimate reasonably practicable at the time of a particular flight by an aircraft of the hours flown or to be flown by the aircraft in respect of the year commencing on the first day of January preceding the date of the flight.

Approach Control Office. A unit established to provide air traffic control service to controlled flights arriving at, or departing from, one or more aerodromes.

Approach Control Service. Air traffic control service for arriving or departing controlled flights.

Approach to Landing means that portion of the flight of the aircraft, when approaching to land, in which it is descending below a height of 1000 ft above the relevant specified decision height or minimum descent height.

Appropriate ATS Authority. The relevant authority designated by the State responsible for providing air traffic services in the airspace concerned.

Appropriate Authority.

- Regarding flight over the high seas: the relevant authority of the State of Registry
- Regarding flight other than over the high seas: the relevant authority of the State having sovereignty over the territory being overflown

Apron. A defined area, on a land aerodrome, intended to accommodate aircraft for the purposes of loading or unloading passengers, mail or cargo, fuelling, parking or maintenance.

Area Control Centre. An air traffic control unit established to provide an area control service to aircraft flying within a notified flight information region which are not receiving an aerodrome control service or an approach control service.

Area Control Service. Air traffic control service for controlled flights in control areas.

Area Navigation Equipment (RNAV). Equipment carried on board an aircraft which enables the aircraft to navigate on any desired flight path within the coverage of appropriate ground based navigation aids or within the limits of that on-board equipment or a combination of the two.

ATS Route. A specified route designed for channelling the flow of traffic as necessary for the provision of air traffic services.

Note. The term “ATS route” is used to mean variously, airway, advisory route, controlled or uncontrolled route, arrival or departure route, etc.

Authorized Person means:

- Any constable
- Any person authorized by the Secretary of State (whether by name, or by class or description) either generally or in relation to a particular case or class of cases
- Any person authorized by the Authority (whether by name or class or description) either generally or in relation to a particular case or class of cases

Cabin Attendant in relation to an aircraft means a person on a flight for the purpose of public transport carried for the purpose of performing in the interests of the safety of passengers duties to be assigned by the operator or the commander of the aircraft but who shall not act as a member of the flight crew.

Captive Flight means flight by an uncontrollable balloon during which it is attached to the surface by a restraining device.

Cargo includes mail and animals.

Certified for Single-pilot Operation means an aircraft which is not required to carry more than one pilot.

Change-over Point. The point at which an aircraft navigating on an ATS route segment defined by reference to very high frequency omni-directional radio ranges (VOR) is expected to transfer its primary navigational reference from the facility behind the aircraft to the next facility ahead of the aircraft. They are normally every 60 NM.

Note. Change-over points are established to provide the optimum balance in respect of signal strength and quality between facilities at all levels to be used and to ensure a common source of azimuth guidance for all aircraft operating along the same portion of a route segment.

Clearance Limit. The point to which an aircraft is granted an air traffic control clearance.

Cloud Ceiling in relation to an aerodrome means the vertical distance from the elevation of the aerodrome to the lowest part of any cloud visible from the aerodrome which is sufficient to obscure more than one-half of the sky so visible.

Commander in relation to an aircraft means the member of the flight crew designated as commander of that aircraft by the operator thereof, or, failing such a person, the person who is for the time being the pilot-in-command of the aircraft.

Commercial Pilot Licence (CPL). A licence held by a professional pilot which permits the holder to:

- Exercise all the privileges of a PPL
- Act as PIC in any aeroplane engaged in operations other than commercial air transport
- Act as PIC in commercial air transport in any aeroplane certificated for single-pilot operation
- To act as co-pilot in commercial air transport in aeroplanes required to be operated with a co-pilot

Competent Authority. The authority responsible under the law of the State for promoting the safety of civil aviation.

Contracting State means any state which is party to the Convention on International Civil Aviation signed at Chicago on the 7 December 1944.

Control Area. A controlled airspace extending upwards from a specified limit above the earth.

Controlled Aerodrome. An aerodrome at which air traffic control service is provided to aerodrome traffic.

Note. The term “controlled aerodrome” indicates that air traffic control service is provided to aerodrome traffic but does not necessarily imply that a control zone exists.

Controlled Airspace. An airspace of defined dimensions within which air traffic control service is provided to IFR flights and to VFR flights in accordance with the airspace classification.

Note. Controlled airspace is a generic term which covers ATS airspace Classes A, B, C, D and E.

Controlled Flight. Any flight which is subject to an air traffic control clearance.

Control Zone. A controlled airspace extending upwards from the surface of the earth to a specified upper limit.

Configuration (as applied to the aeroplane). A particular combination of the positions of the moveable elements, such as wing flaps, landing gear, etc., which affect the aerodynamics of the aeroplane.

Co-pilot. A licensed pilot serving in any piloting capacity other than as pilot-in-command but excluding a pilot who is on board the aircraft for the sole purpose of receiving flight instruction.

CPL (Current Flight Plan). The Flight Plan, including changes if any, brought about by subsequent clearances.

Crew means a member of the flight crew, a person carried on the flight deck who is appointed by the operator of the aircraft to give or to supervise the training, experience, practice and periodical tests as required and in respect of the flight crew or as a cabin attendant.

Critical Power-Units(s). The power-unit(s), failure of which gives the most adverse effect on the aircraft characteristics relative to the case under consideration.

Cross-country. A flight between the point of departure and a point of arrival following a pre-planned route using standard navigation procedures.

Cruise Climb. An aeroplane cruising technique resulting in a net increase in altitude as the aeroplane mass decreases.

Cruising Level. A level maintained during a significant portion of a flight.

Danger Area. An airspace of defined dimensions within which activities dangerous to the flight of aircraft may exist at specified times.

Day means the time from half an hour before sunrise until half an hour after sunset (both times exclusive), sunset and sunrise being determined at surface level.

Decision Height in relation to the operation of an aircraft at an aerodrome means the height in a precision approach at which a missed approach must be initiated if the required visual reference to continue that approach has not been established.

Design Landing Mass. The maximum mass of the aircraft at which, for structural design purposes, it is assumed to be planned to land.

Design Take-off Mass. The maximum mass at which the aircraft, for structural design purposes, is assumed to be planned to be at the start of the take-off run.

Design Taxiing Mass. The maximum mass of the aircraft, at which the structural provision is made for load liable to occur during the use of the aircraft, on the ground prior to the start of take-off.

Destination Alternate. An alternate aerodrome to which an aircraft may proceed should it become either impossible or inadvisable to land at the aerodrome of intended landing.

Dual Instruction Time. Flight time during which a person is receiving flight instruction from a properly authorized pilot on board the aircraft.

En route Clearance. Where an ATC clearance is issued for the initial part of a flight solely as a means of expediting departing traffic, the subsequent clearance to the aerodrome of intended landing is an en route clearance.

Essential Local Traffic. Any aircraft, vehicle or personnel on or near the runway to be used, or traffic in the take-off, climb-out or final approach areas, which may constitute a collision hazard to a departing or arriving aircraft.

Estimated Off Blocks Time. The estimated time at which the aircraft will commence movement associated with departure.

Estimated Time of Arrival. For IFR flights, the time at which it is estimated that the aircraft will arrive over that designated point, defined by reference to navigation aids, from which it is intended that an instrument approach procedure will be commenced, or, if no navigation aid is associated with the aerodrome, the time at which the aircraft will arrive over the aerodrome.

Expected Approach Time. The time at which ATC expects that an arriving aircraft, following a delay, will leave the holding point to complete its approach to landing.

Note. The actual time of leaving a holding point will depend on the approach clearance.

Final approach and take-off area/FATO (helicopters). A defined area over which the final phase of the approach manoeuvre to hover or landing is completed and from which the take-off manoeuvre is commenced and, where the FATO is to be used by performance class 1 helicopters, includes the rejected take-off area available.

Filed Flight Plan. The flight plan as filed with an ATS unit by the pilot or a designated representative, without any subsequent changes.

Note. When the word “message” is used as a suffix to this term, it denotes the content and format of the filed flight plan data as transmitted.

Flight Crew Member. A licensed crew member charged with duties essential to the operation of an aircraft during flight time.

Flight Information Service. A service provided for the purpose of giving advice and information useful for the safe and efficient conduct of flights.

Flight Level. A surface of constant atmospheric pressure which is related to a specific pressure datum, 1013.2 hPa, and is separated from other such surfaces by specific pressure intervals.

Note 1. A pressure type altimeter calibrated in accordance with the Standard Atmosphere:

- When set to QNH, altimeter will indicate altitude
- When set to QFE, altimeter will indicate height above the QFE reference datum
- When set at a pressure of 1013.2 hPa, may be used to indicate flight levels

Note 2. The terms “height” and “altitude”, used in Note 1 above, indicate altimetric rather than geometric heights or altitudes.

Flight Plan. Specified information provided to air traffic services units, relative to an intended flight or portion of a flight of an aircraft.

Flight Procedures Trainer. See Synthetic flight trainer.

Flight Simulator. See Synthetic flight trainer.

Flight Recording System means a system comprising either a flight data recorder or a cockpit voice recorder or both.

Flight time – Aeroplanes. The total time from the moment an aircraft first moves for the purpose of taking off until the moment it finally comes to rest at the end of the flight.

Note 1. Flight time as here defined is synonymous with the term “block to block” time or “chock to chock” time in general usage which is measured from the time an aircraft moves from the loading point until it stops at the unloading point.

Note 2. Whenever helicopter rotors are engaged, the time will be included in the flight time.

Flight Time as Student Pilot-in-command. Flight time during which the flight instructor will only observe the student acting as PIC and shall not influence or control the flight of the aircraft.

Flight Visibility. The visibility forward from the cockpit of an aircraft in flight.

Free Balloon means a balloon which when in flight is not attached to the surface by any form of restraining device.

Free Controlled Flight means flight during which a balloon is not attached to the surface by any form of restraining device (other than a tether not exceeding 5 metres in length which may be used as part of the take-off procedure) and during which the height of the balloon is controllable by means of a device attached to the balloon and operated by the commander of the balloon or by remote control.

Ground Visibility. The visibility at an aerodrome, as reported by an accredited observer.

Government Aerodrome means any aerodrome in the United Kingdom which is in the occupation of any Government Department or visiting force.

Heading. The direction in which the longitudinal axis of an aircraft is pointed, usually expressed in degrees from North (true, magnetic, compass or grid).

Heavier Than Air Aircraft. Any aircraft deriving its lift in flight chiefly from aerodynamic forces

Height. The vertical distance of a level, a point or an object considered as a point, measured from a specified datum.

IFR. The symbol used to designate the instrument flight rules.

IFR Flight. A flight conducted in accordance with the instrument flight rules.

IMC. The symbol used to designate instrument meteorological conditions.

Instrument Approach Procedure. A series of predetermined manoeuvres by reference to flight instruments with specified protection from obstacles from the initial approach fix, or where applicable, from the beginning of a defined arrival route to a point from which a landing can be completed and thereafter, if a landing is not completed, to a position at which holding or en route clearance criteria apply.

Instrument Flight Time. Time during which a pilot is piloting an aircraft solely by reference to instruments and without external reference points.

Instrument Ground Time. Time during which a pilot is practising, on the ground, simulated instrument flight in a synthetic flight trainer approved by the Licensing Authority.

Instrument Meteorological Conditions. Meteorological conditions expressed in terms of visibility, distance from cloud, and ceiling, less than the minima specified for visual meteorological conditions.

Note. In a control zone, a VFR flight may proceed under instrument meteorological conditions if and as authorized by air traffic control.

Instrument Time. Instrument flight time or instrument ground time.

JAA means the Joint Aviation Authorities, an associated body of the European Civil Aviation Conference.

JAR means a joint aviation requirement of the JAA bearing that number as it has effect under the Technical Harmonization Regulation and reference to a numbered JAR is a reference to such a requirement.

Landing Area. That part of a movement area intended for the landing or take-off of aircraft.

Landing Surface. That part of the surface of an aerodrome which the aerodrome authority has declared available for the normal ground or water run of aircraft landing in a particular direction.

Level. A generic term relating to the vertical position of an aircraft in flight and meaning variously, height, altitude or flight level.

Lifejacket includes any device designed to support a person individually in or on the water.

Log Book in the case of an aircraft log book, engine log book or variable pitch propeller log book, or personal flying log book includes a record kept either in a book, or by any other means approved by the Authority in the particular case.

Manoeuvring Area. That part of an aerodrome to be used for the take-off, landing and taxiing of aircraft, excluding aprons.

Maintenance. Tasks required to ensure the continued airworthiness of an aircraft including any one or combination of overhaul, repair, inspection, replacement, modification or defect rectification.

Medical Assessment. The evidence issued by a Contracting State that the licence holder meets specific requirements of medical fitness. It is issued following an evaluation by the Licensing Authority of the report submitted by the designated medical examiner who conducted the examination of the applicant for the licence.

Minimum Descent Height in relation to the operation of an aircraft at an aerodrome means the height in a non-precision approach below which descent may not be made without the required visual reference.

Multiple Pilot Aeroplanes. Aeroplanes certificated for operation with a minimum crew of at least two pilots.

Multi-crew Co-operation. The function of the flight crew as a team of co-operating members led by the pilot-in-command.

Movement Area. That part of an aerodrome to be used for the take-off, landing and taxiing of aircraft, consisting of the manoeuvring area and the apron(s).

Nautical Mile means the International Nautical Mile, that is to say, a distance of 1852 metres.

Night. The hours between the end of evening civil twilight and the beginning of morning civil twilight or such other period between sunset and sunrise, as may be prescribed by the appropriate authority.

Note. Civil twilight ends in the evening when the centre of the sun's disc is 6 degrees below the horizon and begins in the morning when the centre of the sun's disc is 6 degrees below the horizon.

Non-precision Approach means an instrument approach using non-visual aids for guidance in azimuth or elevation but which is not a precision approach.

Normal Residency. The place where a person lives for at least 185 days in each calendar year because of personal and occupational ties, or in the case of a person with no occupational ties, because of personal ties which show close links between that person and the place where he or she is living.

Private Pilot Licence (PPL). The licence held by a pilot which prohibits the piloting of an aircraft for which remuneration is given.

(To) Pilot. To manipulate the flight controls of an aircraft during flight time.

Pilot-in-command. The pilot responsible for the operation and safety of the aircraft during flight time.

Pilot-in-command under supervision (PICUS). A co-pilot performing, under the supervision of the pilot-in-command, the duties and the functions of a pilot-in-command

Power Unit. A system of one or more engines and ancillary parts which are together necessary to provide thrust, independently of the continued operation of any other power unit(s), but not including short period thrust-producing devices.

Precision Approach means an instrument approach using Instrument Landing System, Microwave Landing System or Precision Approach Radar for guidance in both azimuth and elevation.

Pressure Altitude. An atmospheric pressure expressed in terms of altitude which corresponds to the pressure in the Standard Atmosphere.

Proficiency Check. Demonstration of skill to revalidate or renew ratings, and including such oral examinations as the examiner may require.

Prohibited Area. An airspace of defined dimensions above the land areas or territorial waters of a State within which flight of aircraft is prohibited.

Rating. An authorization entered on or associated with a licence and forming part thereof, stating special conditions, privileges or limitations pertaining to such licence.

Renewal. The administrative action taken after a rating has expired.

Rendering a Licence Valid. The action taken by a Contracting State, as an alternative to issuing its own licence, in accepting a licence issued by any other State as an equivalent of its own licence.

Repetitive Flight Plan (RPL). A flight plan related to a series of frequently recurring, regularly operated individual flights with identical basic features, submitted by an operator for retention and repetitive use by ATS units.

Reporting Point. A specified geographical location in relation to which the position of an aircraft can be reported.

Residency - Normal. The place where a person lives for at least 185 days in each calendar year because of personal and occupational ties, or in the case of a person with no occupational ties, because of personal ties which show close links between that person and the place where he or she is living.

Restricted Area. An airspace of defined dimensions above the land areas or territorial waters of a State within which flight of aircraft is restricted in accordance with certain specified conditions.

Revalidation. The administrative action taken within the period of validity of a rating or approval that allows the holder to continue to exercise the privileges of a rating or approval for a further specified period consequent upon the fulfilment of specified requirements.

Runway. A defined rectangular area on a land aerodrome prepared for the landing and take-off of aircraft.

Runway Visual Range in relation to a runway means the distance in the direction of take-off or landing over which the runway lights or surface markings may be seen from the touchdown zone as calculated by either human observation or instruments in the vicinity of the touchdown zone or where this is not reasonably practicable in the vicinity of the mid-point of the runway; and the distance, if any, communicated to the commander of an aircraft by or on behalf of the person in charge of the aerodrome as being the runway visual range for the time being.

Scheduled Journey means one of a series of journeys which are undertaken between the same two places and which together amount to a systematic service.

Signal Area. An area of an aerodrome used for the display of ground signals.

Skills Test. Demonstration of skills for licence or rating issue including such oral examinations as the examiner may require.

Solo Flight Time. Flight time during which a student pilot is the sole occupant of an aircraft.

Special VFR Flight. A VFR flight cleared by air traffic control to operate within a control zone in meteorological conditions below VMC.

State of Design. The State having jurisdiction over the organization responsible for the type design.

State of Registry. The State on whose register the aircraft is entered.

Strayed Aircraft. An aircraft that has deviated significantly from its intended track or reports that it is lost.

Student pilot-in-command (SPIC). A student pilot acting as pilot-in-command on a flight with an instructor where the latter will only observe the student pilot and shall not influence or control the flight of the aircraft

Synthetic Flight Trainer. Any one of the following three types of apparatus in which flight conditions are simulated on the ground:

- A Flight Simulator. Which provides an accurate representation of the flight deck of a particular aircraft type to the extent that the mechanical, electrical, electronic etc aircraft control functions; the normal environment of flight crew members, and the performance and flight characteristics of that type of aircraft are realistically simulated
- A Flight Procedures Trainer. Which provides a realistic flight deck environment, and which simulates instrument responses, simple control functions of mechanical, electric, electronic etc aircraft systems, and the performance and flight characteristics of aircraft of a particular class
- A Basic Instrument Flight Trainer. Which is equipped with appropriate instruments, and which simulates the flight deck environment of an aircraft in flight in instrument flight conditions

Take-off Surface. That part of the surface of an aerodrome which the aerodrome authority has declared available for the normal ground or water run of aircraft taking off in a particular direction.

Taxiing. Movement of an aircraft on the surface of an aerodrome under its own power, excluding take-off and landing.

Taxiway. A defined path on a land aerodrome established for the taxiing of an aircraft and intended to provide a link between one part of the aerodrome and another, including:

- Aircraft stand taxi-lane. A portion of an apron designated as a taxiway and intended to provide access to aircraft stands only
- Apron taxiway. A portion of a taxiway system located on an apron and intended to provide a through taxi route across the apron
- Rapid exit taxiway. A taxiway connected to a runway at an acute angle and designed to allow landing aeroplanes to turn off at higher speeds than are achieved on other exit taxiways thereby minimizing runway occupancy times

Terminal Control Area (TCA). A control area normally established at the confluence of ATS routes in the vicinity of one or more major aerodromes.

Total Estimated Elapsed Time. For IFR flights, the estimated time required from take-off to arrive over that designated point, defined by reference to navigation aids, from which it is intended that an instrument approach procedure will be commenced, or, if no navigation aid is associated with the destination aerodrome, to arrive over the destination aerodrome. For VFR flights, the estimated time required from take-off, to arrive over the destination aerodrome.

Track. The projection on the Earth's surface of the path of an aircraft, the direction of which path at any point is usually expressed in degrees from North (true, magnetic or grid).

Traffic Avoidance Service. Advice provided by an air traffic service unit specifying manoeuvres to assist a pilot to avoid a collision.

Traffic Information. Information issued by an air traffic service unit to alert a pilot to other known or observed air traffic which may be in proximity to the position or intended route of flight and to help the pilot avoid a collision.

Transition Altitude. The altitude at or below which the vertical position of an aircraft is controlled by reference to altitudes.

Unidentified Aircraft is one of which the Air Traffic Control Unit is aware but of which the identity is not known.

VFR. The symbol used to designate the visual flight rules.

VFR Flight. A flight conducted in accordance with the visual flight rules.

Visibility. The ability, as determined by atmospheric conditions and expressed in units of distance, to see and identify prominent unlighted objects by day and prominent lighted objects by night.

Visual Meteorological Conditions. Meteorological conditions expressed in terms of visibility; distance from cloud, and ceiling equal to or better than specified minima.

VMC. The symbol used to designate visual meteorological conditions.

Chapter

1

International Agreements and Organizations

The Chicago Convention.....	23
International Law	24
Commercial Considerations.....	25
Customs and Excise, and Immigration	25
International Obligations of Contracted States	26
Duties of ICAO Member States	27
Status of Annex Components	28
The International Civil Aviation Organization (ICAO).....	28
The Organization of ICAO	29
Regional Structure of ICAO.....	30
Regional Structure and Offices	30
ICAO Publications.....	31
Other International Agreements	32
The Conventions of Tokyo and the Hague	33
The Warsaw Convention	35
The Rome Conventions	36
IATA	37
ECAC.....	37
EASA	38
Eurocontrol.....	38
Single European Sky (SES)	39
Geneva Convention	39
EU Regulations - Passenger Rights.....	39
Relevant International Conventions and Agreements	43
Questions	47
Answers	52

The Chicago Convention

1.1 Historical Background. As far as modes of transport are concerned, civil aviation has been the fastest growing and the most technically innovative of any. From the first attempts at powered manned flight to regular space flight we have only just exceeded 100 years of aviation and we have had scheduled commercial air services since 1919. The first International Conference on Civil Aviation also took place in 1919 at Paris. Since then, the field of our chosen profession has been subjected to far more international legislation and regulation, than any other. The overriding need, which is recognized by all, regardless of political inclination, is for higher and higher safety standards. The degree of international co-operation in this respect is outstanding and shows that where there is a genuine desire to achieve international agreement, it is forthcoming.

1.2 The Second World War. The Second World War had a major effect upon technical development of the aeroplane condensing a quarter of a century of normal peacetime development into just six years. The strategic use of aeroplanes for the movement of men and materiel to and from theatres of war laid the foundation for the air transport industry we have today. It was foreseen that a vast network of passenger and freight services would be set up but also many problems were foreseen to which solutions had to be found to benefit and support a world subsequently at peace. There was the question of commercial rights - what arrangements would be made for the airlines of one country to fly into and through the territories of another? There were other concerns with regard to the legal and economic conflicts that might come with peace-time flying across national borders such as how to maintain existing air navigation facilities, many of which were located in sparsely populated areas. However, international commercial aviation was considered to be of such importance and a priority issue, that the government of the United States conducted exploratory discussions with other allied (friendly) nations during the early months of 1944. Subsequently, invitations were sent to 55 states to meet in Chicago in November 1944.

1.3 The Meeting at Chicago. For five weeks the delegates of the 52 nations who attended, considered the problems of international civil aviation. The outcome was the Convention on International Civil Aviation, the purpose of which was "... to foster the future development of International Civil Aviation, to help to create and preserve friendship and understanding among peoples of the world, so as to prevent its abuse becoming a threat to the general security thus promoting co-operation between peoples". The 52 States agreed on policy and arrangements so that civil aviation may be developed in a safe and orderly manner and that international air transport services might be established on the basis of equality of opportunity and economically sound operation. A permanent body was subsequently charged with the administration of the principles, the International Civil Aviation Organization (known throughout the world by the acronym ICAO pronounced eye-kay-oh).

1.4 The "Chicago" Convention. The Chicago Convention, consisting of ninety-six articles (legislative items of agreement), accepts the principle that every State has complete and exclusive sovereignty over the airspace above its territory and provides that no scheduled international air service may operate over or into the territory of a Contracting State without that State's previous consent. It established the privileges and restrictions of all Contracting States, to provide for the adoption of International Standards and Recommended Practices for:

- Regulating air navigation
- The installation of navigation facilities by Contracting States
- The facilitation of air transport by the reduction of customs and immigration formalities

International Law

1.5 Applicable law. There is no world parliament or global legislative body so there is legally no such thing as international law. However, at conventions of States (meetings for the purpose of reaching consensus between States), arrangements are made to regulate activities affecting more than one State through common agreement. The agreements themselves are not legally enforceable as there is no global police force, and all States are entitled to their sovereignty (see definition). What happens is that the national delegation to the convention places before the national parliament (or legislative body) a proposal to make the text of the agreement (and any codicils, appendices, protocols etc...) the law of that State. This process is known as adoption and subsequently, ratification. In this manner what has been agreed internationally, becomes locally enforceable law in the states concerned. An offence committed against such law would be try-able and punishable under national penal legislation in any Contracting State anywhere in the world.

1.6 Territorial airspace. The application of national law is only applicable to the territory over which that state has jurisdiction. In aviation, the extent of jurisdiction is limited by the lateral limits of territorial airspace, but unlimited vertically. (An interesting situation regarding satellites and space craft!). Lateral territorial limits have been agreed internationally where such a limit is not coincident with a land boundary. The airspace of Switzerland is easily defined because the country is land-locked. For the UK however, the limit is defined by the limit of territorial waters, which was agreed at the Geneva Convention on the Territorial Sea and Contiguous Zones (1958).

1.7 High Seas. The early international maritime agreements concerned the right to use the “high seas” unhindered. The right of free aviation operation over the high seas was embodied in the Geneva Convention on the High Seas (also of 1958), in which the high seas are defined as ‘...all the seas outside of territorial seas’. In these (and other) conventions, the established privileges and freedoms of mariners, including those of the flag state (the State in which a vessel is registered and the flag of which the vessel is allowed to fly), were applied to aeroplanes. The rights of non-coastal states to ply the seas under the flag of those countries, requires the co-operation of coastal States to allow free access to the sea. In aviation, similar freedoms are embodied in the Chicago Convention to allow Contracting States to fly over the territory of other Contracting States for the purpose of international civil aviation operations. At the subsequent UN Convention on the Law of the Sea (1982) the original agreements were updated and reinforced.

1.8 Territory. As defined in international legislation, in aviation terms applies to the airspace existing over the defined limits of a country’s territory at ground level.

1.9 Sovereignty. This is the right of a country (or Contracting ICAO State) to impose national law to users of the State’s territorial airspace.

1.10 Suzerainty (from the French “Suzerain” - Feudal overlord) is the acceptance by a State of all the rules and regulations agreed by common consent at international conventions, even if there is no practical requirement for a State to adopt all of the rules.

Commercial Considerations

1.11 International Civil Aviation. A matter to which the Chicago Conference attached great importance was the question of exchange of commercial rights in international civil aviation. The States addressed the subject, resulting in Contracting States agreeing, bilaterally, to grant each other certain rights regarding the commercial exploitation of civil aviation. These rights are now known as the Freedoms of the Air. The freedoms give rights to transit the airspace of Contracting States to scheduled flights.

1.12 Bilateral Agreements. Due to political and national rivalries, it was not found possible to reach a single agreement satisfactory to all 52 States, therefore two supplementary bilateral agreements were set up which gave each State the opportunity to enter into agreements with other States on a ‘one-to-one’ basis if considered desirable between those **States**:

1.13 The International Air Services Transit Agreement permits aircraft of a signatory State to fly over, or land for technical reasons in, the territory of another signatory State;

1.14 The International Air Transport Agreement allows the carriage of traffic between the State of Registration and another signatory State. (Traffic: the carriage of mail, cargo or passengers).

1.15 Definitions. The following definitions are required knowledge.

1.16 Scheduled flight is a flight, for which agreement has been reached between States (at government level), concerning the schedule. For instance, how many flights would be allowed in any period, what aerodromes could be used, what time of day the flights would be allowed, and what reciprocal arrangements would be required. A State is not obliged to grant permission for an operator to operate a schedule.

1.17 Non-scheduled flights are those to which a schedule is not attached. i.e. one-off flights or charter flights that are not flown on a regular basis. It is an embodiment of the freedoms that a State cannot refuse, on political or economic grounds, to accept a non-scheduled flight.

1.18 Cabotage. Cabotage is defined as the transport of goods or passengers between two points in the same country by a vessel or aircraft registered in another country or State. Most countries refuse cabotage. However, an EU State may not refuse cabotage by another EU State.

Customs and Excise, and Immigration

1.19 Facilitation. Under international law the imposition of customs tariffs and the prohibition of the importation of proscribed items, is allowed. In order to allow Contracting States to maintain national Customs and Excise regulations, international flights are required to make the first point of landing in a Contracting State at a recognized international airport which provides customs, health and immigration facilities. (In the UK these are known as customs airports). Within the EU the removal of restrictions to free trade now allows flights from one EU State to another to make the first point of landing at a non-customs aerodrome providing certain rules are observed. These rules are explored in the section of this manual concerning Facilitation. Other rules apply to immigration.

International Obligations of Contracted States

1.20 National and ‘International’ Law. In becoming an ICAO Contracting State, states agree to observe the International Standards specified by ICAO. From the standards, the international rules and regulations governing civil aviation are drawn. By accepting contracted status, each state accepts the responsibility for enforcement of the rules and regulations within its sovereign territory and airspace (through national law). Article 38 of the Chicago Convention requires each Sovereign State to notify ICAO of any differences between their national regulations and the International Standards adopted. Furthermore States are to publish these differences in their national Aeronautical Information Publication (AIP). Thus a situation is recognized where national legislation and regulations have precedent over international rules within the territorial airspace of that State. Where flights are conducted over the high seas, the international rules apply without exception. The International (ICAO) Rules of the Air are promulgated (Annex 2) to standardize the procedures for civil aviation specifically for the safety of aircrew and passengers. Other regulations are established to facilitate the smooth and expeditious flow of air traffic by the adoption of Standards and Recommended Practices (SARPs).

1.21 Right to Prosecute Offenders. Where an offence is committed in an aeroplane contrary to the ‘international’ law, the state, in whose airspace the offence occurs, has the right to try and punish offenders. If the offence occurs over ‘the high seas’ the state of registration of the aircraft has the right to prosecute the offender(s). Note: The international agreements oblige states to prosecute. If a state does not want to (for political reasons) another state may do so. For instance: A bomb is placed on an American aeroplane (contrary to the Montreal Convention and Protocols) by 2 Libyans, in Frankfurt or Rome. The aeroplane explodes over Scotland. Who has the power to prosecute? The order is as follows:

- The UK (under Scottish law) - the offence happened over Scotland
- The United States - the aeroplane was registered in the USA
- The Italians - because the bomb was placed on board in Rome
- The Germans - because the aeroplane made an intermediate stop in Frankfurt
- Any other state, the citizens of which were killed or injured
- Libya - because the suspects are Libyan

Note: If the UK had not prosecuted, the US most certainly would have.

1.22 Search and Rescue. In accepting Contracted State status, each State specifically undertakes to provide procedures and facilities for Search and Rescue (SAR) within the territory of that State. The provision of SAR services in areas of high seas, and areas of undetermined sovereignty, will be established on the basis of Regional Air Navigation (RAN) agreements. The standards governing the provision of SAR services oblige the State to provide at least the minimum service compatible with the type and frequency of the air traffic using the airspace for which the State is responsible, and that service is to be available 24 hours per day. The requirement also imposes upon the State the need to maintain a degree of co-operation with adjacent States and the readiness to assist with SAR operations if requested.

1.23 Conditions to be fulfilled with respect to aircraft as stipulated by the Chicago Convention.

- a. **Documents to be carried in aircraft.** Every aircraft engaged in international navigation shall carry the following documents :
 1. Certificate of Registration
 2. Certificate of Airworthiness
 3. Crew member licences
 4. Journey Logbook

5. Aircraft radio station licence - if equipped with a radio
 6. If passengers are carried, a list of names and place of both embarkation and destination
 7. If cargo is carried, a manifest and detailed declaration of the cargo
- b. **Cargo restrictions.** No munitions of war may be carried in or above the territory of a State without the permission of that State
- c. **Photographic apparatus.** Each Contracting State may prohibit or regulate the use of photographic apparatus in an aircraft over its territory.

Duties of ICAO Member States

1.24 Standards and Recommended Practices (SARPs). The stated aim of the Convention on International Civil Aviation and subsequently the aims of ICAO are to ensure safety, regularity and efficiency of international civil aviation operations. In order to achieve this, the Contracting States are required to comply with the Standards and Recommended Practices (SARPs). There are 18 annexes to the Convention. The SARPs are established after consultation with the Contracting States and interested international organizations, finalized by the ICAO Air Navigation Commission and submitted to the Council where a two-thirds majority is required for adoption. The SARPs are considered binding on Contracting States but if a State finds it impossible to implement the SARPs, it must inform ICAO under the terms of Article 38 of any differences that will exist on the applicability date of the amendment. Such differences will be detailed in the national aeronautical information publication (AIP) and summarized in a supplement to each annex of the Chicago Convention.

1.25 Customs Duty and Excise. ICAO has addressed taxation in the field of international aviation and Member States are required to follow the resolutions and recommendation of the Council in this respect. States are asked to exempt fuel, lubricants, and other technical consumables taken on an aircraft in a State other than the State of registry, providing such supplies are for consumption in flight. Also to reduce or eliminate taxes on international air transport (fares) and to grant, reciprocally to air transport enterprises of other States, exemption from taxation on income and profits. Within the area of customs duty and excise charges, Annex 9 (Facilitation) requires states to apply procedures, which allow expeditious handling of goods and cargo intended for import or which are passing through. The establishment of 'free zones' is encouraged.

1.26 Aircraft Certificates, Registration and Licences. Annex 7 (Aircraft Nationality and Registration Markings) requires Contracting States to apply standard procedures for registration. It includes the format of registration marks and nationality symbols, including the size and where these are to be displayed on aircraft. The annex also calls for the registration of all aircraft and provides a sample of a certificate of registration for use by States. Annex 8 (Airworthiness of Aircraft) requires States to provide a Certificate of Airworthiness, for each registered aircraft, declaring that the aircraft is fit to fly. Under the terms of Annex 1 (Personnel Licensing), SARPs are established requiring each State to apply standardization in the licensing of personnel involved in international aviation including flight crew members (pilots, flight engineers), air traffic controllers and maintenance technicians. The overriding purpose of such standardization is to ensure that all involved in air transport operations are licensed to common standards and able to operate throughout the world, thus generating greater trust in aviation on the part of the traveller. A licence issued by the authority in one State is not automatically valid in another State. In this instance, the annex requires States to establish procedures for the validation of licences issued in other States and defines the method by which such validation shall be annotated.

1.27 Carriage of Dangerous Cargo. More than half the cargo carried by all modes of transport in the world is classified as dangerous. Because of the speed advantages of air transport, a great deal of this cargo is carried by aircraft. In Annex 18 (The Safe Transport of Dangerous Goods by Air), States are required to accept the SARPs associated with the carriage of dangerous goods and to implement the Technical Instructions for the Safe Transport of Dangerous Goods by Air.

1.28 Searching of aircraft. Contracting States have the right, without unreasonable delay, to search aircraft of another Contracting State on landing or departure. They also have the right to inspect the certificates and other documents prescribed by the Chicago Convention

Status of Annex Components

1.29 Definition. An annex is made up of the following component parts, not all of which are necessarily found in every annex. They have the status indicated:

1.30 Standards and Recommended Practices (SARPs) are adopted by the Council and are considered binding upon all Contracting States unless a state has notified a 'difference' as defined under article 38 of the convention. SARPs defined thus:

1.31 A Standard is any specification for physical characteristics, configuration, materiel, performance, personnel or procedure, the uniform application of which is recognized as necessary for the safety or regularity of international air navigation and to which Contracting States will conform in accordance with the Convention. In the event of impossibility of compliance, notification to the Council is compulsory under article 38 of the Convention.

1.32 A Recommended Practice is any specification for physical characteristics, configuration, materiel, performance, personnel or procedure, the uniform application of which is recognized as desirable in the interest of safety, regularity or efficiency of international air navigation and to which Contracting States will endeavour to conform in accordance with the Convention.

The International Civil Aviation Organization (ICAO)




1.33 Status. ICAO, created by the Chicago Convention, is an inter-governmental organization, which has become a specialized agency in relationship with the United Nations. The headquarters of ICAO is in Montreal and it provides the machinery to achieve standardization

and agreement between Contracting States of all technical, economic and legal aspects of international civil aviation.

1.34 ICAO Aims and Objectives. The aims and objectives of ICAO are to develop the principles and techniques of international civil air navigation and to foster the planning and development of international air transport so as to:

- Ensure the safe and orderly growth of international civil aviation throughout the world.
- Encourage arts of aircraft design and operation.
- Encourage the development of airways, airports and air navigation facilities.
- Meet the need for safe, regular, efficient and economical air transport.
- Prevent waste caused by unreasonable competition.
- Ensure the rights of Contracting States are fully respected.
- Avoid discrimination between Contracting States.
- Promote the safety of flight in international aviation.
- Generally promote all aspects of international civil aeronautics.

The Organization of ICAO

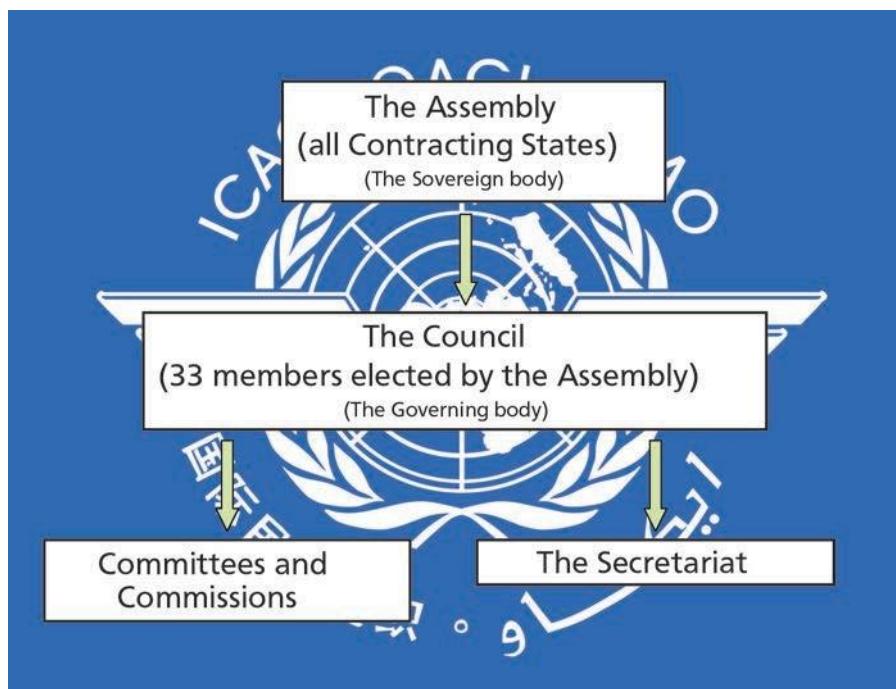

1.35 The Assembly. The sovereign body of ICAO is the Assembly, which meets at least once every three years and is convened by the Council. Each Contracting State is entitled to one vote and decisions of the Assembly are by majority vote of the Contracting States.

1.36 The Council. The Council of ICAO is a permanent body responsible to the Assembly and is composed of 33 Contracting States elected by the Assembly for a three-year term. The Council is the governing body of ICAO.

1.37 The Commissions and Committees of ICAO are composed of members, appointed by the Council, from nominations of Contracting States or elected from amongst Council members.

They are:

- The Air Navigation Commission
- The Air Transport Committee
- The Legal Committee
- The Committee on Joint Support of Air Navigation Services
- The Personnel Committee
- The Finance Committee
- The Committee on Unlawful Interference

1.38 Air Navigation Commission. This is the body that proposes, formulates and finalizes the SARPs and presents them for adoption by the Council.

1.39 The ICAO Secretariat is divided into sections, each corresponding to a Committee, and supplies technical and administrative aid to the Council. It is headed by a Secretary-General, appointed by the Council, and is divided into five main divisions:

- Air Navigation Bureau
- Air Transport Bureau
- Technical Assistance Bureau
- Legal Bureau
- Bureau of Administration and Services

Regional Structure of ICAO

1.40 Regions and Offices. ICAO maintains seven regional offices: Bangkok, Cairo, Dakar, Lima, Mexico City, Nairobi and Paris. Each regional office is accredited to a group of Contracting States (making up nine recognized geographic regions) and the main function of regional offices is maintaining, encouraging, assisting, expediting and following-up the implementation of air navigation plans. The nine geographic regions are:

AFI - Africa - Indian Ocean; NAM - North America; ASIA - Asia; CAR - Caribbean;

NAT - North Atlantic; EUR - Europe; PAC - Pacific; MID - Middle East; SAM - South America

1.41 The Need for a Regional Structure. In dealing with international civil aviation, there are many subjects that ICAO considers on a regional basis as well as on a worldwide scale in order to facilitate:

- The planning of facilities and services
- The formulation of supplementary procedures to support increases in traffic density
- New air routes
- The introduction of new types of aircraft

Regional Structure and Offices

1.42 Regional Air Navigation (RAN) meetings are held periodically to consider the requirements of air operations within specified geographic areas. The plan, which emerges from a regional meeting, is so designed that, when the states concerned implement it, it will lead to an integrated, efficient system for the entire region and contribute to the global system. In addition to the duties detailed above, the regional offices are responsible for keeping the regional plans up to date.

1.43 Financial Assistance. Through the regional offices, financial assistance is provided to assist states in specific circumstances. The provision of air traffic control, navigation aids and meteorological services in Greenland and Iceland are examples of this specific aid, where due to the intense air traffic using the airspace of those states such expenditure is disproportionate to the gross national product of those states.

ICAO Publications

1.44 The Annexes. One of the major duties of the ICAO Council is to adopt International Standards and Recommended Practices (SARPs) and incorporate these as annexes to the Convention on International Civil Aviation. There are now 18 annexes to the 1944 convention which are constantly under review to ensure that the content realistically meets the requirements of civil aviation now. You are required to be able to identify the annex and content. The 18 annexes are:

- Annex 1. Personnel Licensing
- Annex 2. Rules of the Air
- Annex 3. Meteorological Services for International Air Navigation
- Annex 4. Aeronautical Charts
- Annex 5. Units of Measurement to be used in Air and Ground Operations
- Annex 6. Operation of Aircraft
- Annex 7. Aircraft Nationality and Registration Marks
- Annex 8. Airworthiness of Aircraft
- Annex 9. Facilitation
- Annex 10. Aeronautical Telecommunications
- Annex 11. Air Traffic Services
- Annex 12. Search and Rescue
- Annex 13. Aircraft Accident Investigations
- Annex 14. Aerodromes
- Annex 15. Aeronautical Information Services
- Annex 16. Environmental Protection
- Annex 17. Security - Safeguarding International Civil Aviation against Acts of Unlawful Interference
- Annex 18. The Safe Transport of Dangerous Goods by Air]

1.45 PANS. Where the content of the SARPs is somewhat technical and requires further explanation or discussion, Procedures for Air Navigation Services (PANS) are published by ICAO. PANS are approved by the Council, unlike SARPs which are adopted by the Council.

1.46 PANSOPS (Doc 8168) Procedures for Air Navigation Services - Aircraft Operations. This publication (in two parts) describes the Operational Procedures recommended for the guidance of flight operations personnel (Vol. 1) and procedures for specialists in the essential areas of obstacle clearance requirements for the production of instrument flight charts (Vol. 2).

1.47 PANS ATM (Doc 4444) Procedures for Air Navigation Services – Air Traffic Management. This document specifies the requirements for the establishment of an Air Traffic Control Service.

1.48 PANS - RAC Procedures for Air Navigation Services - Rules of the Air and Air Traffic Services. This contains certain procedures applicable to pilots, for the provision of flight information, the alerting service and the operation of ATC.

1.49 Regional Supplementary Procedures (Doc 7030/4). Where navigational procedures, which differ from the worldwide procedures, are deemed necessary for a specific geographic region by the appropriate Regional Air Navigation Meeting, such procedures are recorded in the relevant region section of Doc 7030/4, and are known as Regional Supplementary Procedures (SUPPS). As in the case of PANS, SUPPS are approved by the Council, but only for regional use.

Other International Agreements

1.50 The International Air Services Transit Agreement and the International Air Transport Agreement. The Chicago Convention attached great importance to the question of the exchange of commercial rights in international civil aviation. It was not found possible to reach an agreement satisfactory to all the original 52 states, but the conference set up two supplementary agreements - the International Air Services Transit Agreement, and the International Air Transport Agreement. The first agreement made provision for aircraft of any participating state to fly over, or to land for technical reasons in, the territory of any other participating state. The second provided, among other things, for the carriage of traffic (passengers, mail and cargo) between the State of Registration of the aircraft and any other signatory state.

1.51 The Freedoms of the Air. The International Air Services Transit Agreement established two technical freedoms of the air (known as the first and second freedoms). In this context the word 'freedom' refers to the privilege conferred by virtue of signatory status to a bilateral agreement. Because the two agreements require bilateral understandings between the parties, ICAO has produced the 'Chicago Standard Form for Bilateral Agreement for Regular Air Transport' based on the definitions for the Freedoms of the Air, as defined in the International Air Services Transit and the International Air Transport Agreements. For general aviation and non-scheduled commercial operations, the filing of an international flight plan is the method by which a flight gives notification to exercise the privileges of the appropriate freedoms.

1.52 The Technical Freedoms: These comprise the first two freedoms and were established through the International Air Services Transit Agreement:

1.53 First Freedom: The privilege to fly across the territory of another participating state without landing.

1.54 Second Freedom: The privilege to land in another participating state for non-traffic purposes (i.e. refuelling or repair, but not for uplift or discharge of traffic passengers, cargo or mail).

1.55 The Commercial Freedoms. The International Air Transport Agreement established three further freedoms. These are defined as commercial and whilst still bilateral, are subject to inter-government negotiation.

1.56 Third Freedom: The privilege to put down in another state (e.g. the USA) traffic taken on in the state of registration (e.g. the UK).

1.57 Fourth Freedom: The privilege to take on in another state (e.g. the USA), traffic destined for the state of airline registration (e.g. the UK).

1.58 Fifth Freedom: The privilege for an airline registered in one state (e.g. the UK) and en route to or from that state, to take on traffic in a second state (e.g. Greece) and put them down in a third state (e.g. Italy).

1.59 Modern Freedoms. Due to the process of growth in air transport and the evolution of airlines operating on a global basis, further commercial freedoms have evolved. However, these are not covered by the LOs for Air Law.

1.60 Bermuda Agreement. The first bilateral Air Transport Agreement (ATA) was signed at Bermuda in 1946 between the UK government and the US government and set an example for other states to follow. Currently there are some 3000 ATAs in force globally.

The Conventions of Tokyo and the Hague

1.61 Unlawful acts against the safety of Civil Aviation. The fact that unlawful acts of violence endanger the safety of persons and jeopardize the safe operation of airports and the fact this undermines the confidence of the peoples of the world in the safety of civil aviation, led to the signing of the Conventions of Tokyo, Hague and Montreal.

1.62 The Tokyo Convention of 1963. This convention provides that the State of Registration of an aircraft is competent to exercise jurisdiction over offences and acts committed on board. Its object is to ensure that offences, wherever committed should not go unpunished. As certain acts committed on board an aircraft may jeopardize the safety of the aircraft or persons and property on board or may prejudice good order and discipline on board, the aircraft commander and others are empowered to prevent such acts being committed and to deliver the person concerned to the appropriate authority. In the case of an anticipated or actual unlawful or forcible seizure of an aircraft in flight by a person on board, the States party to the Convention are obliged to take all appropriate measures to restore and preserve control of the aircraft to its lawful commander.

1.63 The Hague Convention of 1970. After a spate of politically motivated terrorist hijackings of aircraft in the 1960s, the international community, under the auspices of ICAO, resolved to work together to prevent or deter (suppress) such acts. Otherwise known as the Convention for the Suppression of Unlawful Seizure of Aircraft, signed at The Hague in December 1970, the convention defines the act of unlawful seizure of aircraft (hijacking), and lists which contracting states have undertaken to make such offences punishable by severe penalties. The convention contains detailed provisions on the establishment of jurisdiction by states over the offence; on the taking of the offender into custody; and on the prosecution or extradition of the offender. This convention came into effect on 14 October 1971.

1.64 The Montreal Convention of 1971.

This Convention is correctly titled the Convention for the Suppression of Unlawful Acts against the Safety of Civil Aviation. It makes it an offence to attempt any of the unlawful acts specified or to be an accomplice to such acts. The contracting states have undertaken to make these offences punishable by severe penalties. The convention contains similar detailed provisions regarding jurisdiction, custody, prosecution and extradition of the alleged offender as the Hague Convention of 1970. This convention came into force on 26 January 1973. It is mainly concerned with acts other than those pertaining to the unlawful seizure i.e.:

- Acts of violence on board which endanger people and property and the safety of the aeroplane
- The destruction of an aircraft in service or causing damage which renders it incapable of flight or which is likely to endanger its safety in flight
- Placing in an aircraft any device likely to destroy, damage or render unfit for flight any aircraft

- Destroying or damaging any air navigation facility or interference with its correct operation
- The communication of information known to be false which endangers the safety of an aeroplane in flight

1.65 The Protocol Supplementary to the Montreal Convention of 1971. This protocol was adopted by a conference, which met at Montreal in 1988. It extends the definition of offence given in the 1971 Convention to include specified acts of violence at airports serving international civil aviation. Such acts include:

- The intentional and unlawful use of any device, substance or weapon in performing an act of violence against a person at an airport serving international civil aviation, which causes or is likely to cause serious injury or death
- The intentional and unlawful use of any device, substance or weapon to:
 - Destroy or seriously damage the facilities of an airport
 - Destroy or seriously damage aircraft not in service at the airport
 - Disrupt the services at an airport

1.66 Enforcement. Contracting States have undertaken to make these offences punishable by severe penalties. The protocol also contains provisions on jurisdiction.

1.67 Annex 17. The measures taken by ICAO have resulted in the adoption of the SARPs detailed in Annex 17 - Security. The provisions of the SARPs are applicable to all Contracting States. The annex requires all Contracting States to:

- Establish national civil aviation security programmes
- designate an authority responsible for security
- keep the level of threat under constant review
- co-ordinate activities with other relevant national agencies and liaise with the corresponding authority in other States

1.68 Programmes and Plans. In order to make such activities workable and efficient, States are also required to set up training programmes, establish airport security committees and to have contingency plans drawn up.

1.69 International Co-operation. As an on-going commitment to security, each State is required to co-operate with other States in research and development of security systems and equipment which will better satisfy civil aviation security objectives.

1.70 The Authority of the Commander. The aircraft commander may order or authorize the assistance of other crew members and may request and authorize, but not order, the assistance of passengers to restrain any person he is required to restrain. The aircraft commander may, when he has reasonable ground to believe that a person has committed, or is about to commit, an act which may or does jeopardize the safety of the aircraft or persons or property on board or which jeopardize good order and discipline on board, impose reasonable measures, which may include restraint, necessary:

- To protect the safety of the aircraft, or of persons or property on board
- To maintain good order and discipline on board
- To enable him to deliver such a person to competent authorities or to disembark him in accordance with provision of the Convention

Note: *The PIC may request - but not require - the assistance of passengers in the restraint of an unruly passenger.*

The Warsaw Convention

1.71 Liability of the Carrier. The Warsaw Convention of 1929 concerned itself with responsibilities and liabilities of the Carrier and the Agents of aircraft together with matters of compensation for loss of life or injury to passengers, delays and loss of baggage. This limited the liability, except in cases of gross negligence, to roughly the equivalent of US\$10 000 in International Bank Special Drawing Rights (SDRs). In 1955 an amendment to the Convention was adopted by a diplomatic conference at The Hague (known as The Hague Protocol) which doubled the existing limits of liability and the present limit is a maximum amount of US\$100 000 per person. By agreeing to the terms of the Warsaw agreement, an airline agrees to pay compensation without further process of law however, the amounts payable are nowadays relatively small in litigation circumstances. Some airlines state that they will not be bound by the Warsaw agreement and will pay higher amounts of compensation if awarded by a Court.

1.72 Issue of a Ticket. The issuing of a passenger ticket, luggage ticket or cargo consignment note, forms a contract between the carrier and the person receiving the ticket/note. The contract is defined by the Warsaw Convention including the previously mentioned exclusion or limitation of liabilities. If a carrier accepts a passenger, luggage or cargo on board an aeroplane without a ticket/note, then the carrier is liable for any loss which is occasioned without the protection of the limits set by the Warsaw Convention. The loss, irregularity or absence of a ticket/note does not affect the existence or the validity of the contract. If applicable, the Operator is required to draw the passenger's attention to the Warsaw Convention limits of liability where 'electronic' tickets are issued.

1.73 Delay. The carrier is liable for damage occasioned by delay in the carriage by air of passengers, baggage or cargo. Nevertheless, the carrier shall not be liable for damage occasioned by delay if it proves that it and its servants and agents took all measures that could reasonably be required to avoid the damage or that it was impossible for it or them to take such measures.

1.74 Limits of Liability in Relation to Delay, Baggage and Cargo. In the case of damage caused by delay as specified in Article 19 in the carriage of persons, the liability of the carrier for each passenger is limited to 4150 Special Drawing Rights.

In the carriage of baggage, the liability of the carrier in the case of destruction, loss, damage or delay is limited to 1000 Special Drawing Rights for each passenger unless the passenger has made, at the time when the checked baggage was handed over to the carrier, a special declaration of interest in delivery at destination and has paid a supplementary sum if the case so requires. In that case the carrier will be liable to pay a sum not exceeding the declared sum, unless it proves that the sum is greater than the passenger's actual interest in delivery at destination.

In the carriage of cargo, the liability of the carrier in the case of destruction, loss, damage or delay is limited to a sum of 17 Special Drawing Rights per kilogram, unless the consignor has made, at the time when the package was handed over to the carrier, a special declaration of interest in delivery at destination and has paid a supplementary sum if the case so requires. In that case the carrier will be liable to pay a sum not exceeding the declared sum, unless it proves that the sum is greater than the consignor's actual interest in delivery at destination.

In the case of destruction, loss, damage or delay of part of the cargo, or of any object contained therein, the weight to be taken into consideration in determining the amount to which the carrier's liability is limited shall be only the total weight of the package or packages concerned. Nevertheless, when the destruction, loss, damage or delay of a part of the cargo, or of an object contained therein, affects the value of other packages covered by the same airway bill, or the same receipt, or if they were not issued, by the same record preserved by the other means referred to in paragraph 2 of Article 4, the total weight of such package or packages shall also be taken into consideration in determining the limit of liability.

The foregoing provisions of paragraphs 1 and 2 of the Article shall not apply if it is proved that the damage resulted from an act or omission of the carrier, its servants or agents, done with intent to cause damage or recklessly and with knowledge that damage would probably result; provided that, in the case of such an act or omission of a servant or agent, it is also proved that such servant or agent was acting within the scope of its employment.

The limits prescribed in Article 21 and in this Article shall not prevent the court from awarding, in accordance with its own law, in addition, the whole or part of the court costs and of the other expenses of the litigation incurred by the plaintiff, including interest. The foregoing provision shall not apply if the amount of the damages awarded, excluding court costs and other expenses of the litigation, does not exceed the sum which the carrier has offered in writing to the plaintiff within a period of six months from the date of the occurrence causing the damage, or before the commencement of the action, if that is later.

The Montreal Convention of 1999

1.75 Compensation in Case of Death or Injury of Passengers. (The Warsaw Convention as amended by the Montreal Convention in 1999.) For damages arising under paragraph 1 of Article 17 not exceeding 100 000 Special Drawing Rights for each passenger, the carrier shall not be able to exclude or limit its liability.

The carrier shall not be liable for damages arising under paragraph 1 of Article 17 to the extent that they exceed for each passenger 100 000 Special Drawing Rights if the carrier proves that:

- a. such damage was not due to the negligence or other wrongful act or omission of the carrier or its servants or agents; or
- b. such damage was solely due to the negligence or other wrongful act or omission of a third party.

The Rome Conventions

1.76 The Rome Convention of 1952 dealt with damage caused by foreign aircraft to third parties on the ground. It permits a claimant to pursue a claim against a foreign operator through the Court in the state of residence. Any resulting judgement would then be enforceable in the state of the Operator.

The Rome Convention of 1933 deals with the safeguarding of aircraft in that it prevents certain categories of aircraft from being attached (arrested).

3 categories of aircraft are exempt:

- a. Aircraft appropriated to state service including postal service but excluding commercial service.

b. Aircraft actually in service on a regular line of public transport, together with the indispensable reserve aircraft.

c. Every other aircraft appropriated for the carriage of persons or goods for reward, where such aircraft is ready to start on such a carriage, unless the arrest is in respect of a contract debt incurred for the purposes of the journey which the aircraft is about to make, or of a claim which has arisen in the course of the journey.

The convention points out the way in which attachment may be prevented. This may be done by pledging an adequate guarantee (that covers the debt to the creditor).

IATA



1.77 The International Air Transport Association (IATA) is the air transport industry global trade organization. Over 60 years, IATA has developed the commercial standards that have built a global industry. Today, IATA's mission is to represent, lead and serve the airline industry. Its members comprise some 260 airlines - the world's leading passenger and cargo airlines among them - representing 94 percent of international scheduled air traffic. IATA seeks to improve understanding of the industry among decision makers and increase awareness of the benefits that

aviation brings to national and global economies. It fights for the interests of airlines across the globe, challenging unreasonable rules and charges, holding regulators and governments to account, and striving for sensible regulation.

ECAC

1.78 European Civil Aviation Conference (ECAC)

(ECAC) is the driving force for a common civil aviation policy in Europe. It was set up under the auspices of the Council for Europe and ICAO. Membership now extends from Iceland to Turkey (all the European Commission countries are members of ECAC). ECAC is an inter-governmental organization founded in 1955 from the Conference on the Co-ordination of Air Transport in Europe (CATE), with the aim of promoting the continued development of a safe, efficient and sustainable European air transport system. ECAC seeks to:

- Harmonize civil aviation policies and practices amongst its member states
- Promote understanding on policy matters between member states and other parts of the world



1.79 Aims. Within Europe, because of its established position, ECAC is the only forum for consideration of major civil aviation topics relevant to all European states. The strength of ECAC is derived from:

- Membership across Europe
- Active co-operation with institutions of the EU, including the EC and the European Parliament
- Close liaison with ICAO
- Established relationships with organizations representing all parts of the air transport industry including consumer and airline interests

EASA



1.80 European Aviation Safety Agency (EASA). The European Aviation Safety Agency is the centrepiece of the European Union's strategy for aviation safety. Its mission is to promote the highest common standards of safety and environmental protection in civil aviation. While national authorities continue to carry out the majority of operational tasks - such as certification of individual aircraft or licensing of pilots - the Agency ensures common safety and environmental standards at the European level. The agency's current responsibilities include:

- Rulemaking: drafting safety legislation and providing technical advice to the European institutions and the member states
- Inspections, training and standardization programmes to ensure uniform implementation of European aviation safety legislation in all member states
- Safety and environmental type-certification of aircraft, engines and parts
- Approval and oversight of aircraft design organizations world-wide and of production and maintenance organizations outside the EU
- Data collection, analysis and research to improve aviation safety

Eurocontrol

1.81 History and Role. Eurocontrol was founded in 1960 with the objective of providing common ATC services in the upper airspace of Member States and strengthening co-operation between Member States in matters of air navigation. Eurocontrol was established under the International Convention Relating to Co-operation for the Safety of Air Navigation signed at Brussels on 13 December 1960. Initially, six countries signed the agreement: Germany (FDR); Belgium; France; United Kingdom; Luxembourg and the Netherlands. The Eurocontrol ATCC is at Maastricht, Holland. The role of Eurocontrol is now much wider than originally envisaged. The limit of operations, to just the upper airspace, was abandoned in 1986 and Eurocontrol now has



EUROCONTROL

a much wider remit, placed on the Organization by ECAC, most notably in the area of Air Traffic Flow Management (ATFM) which led to the establishment of the Eurocontrol Central Flow Management Unit (CFMU) in 1988. Eurocontrol has a training centre in Luxembourg and an experimental research centre at Brétigny, France, with a new ATCC in Vienna (CEATS).

Single European Sky (SES)

1.82 Single European Sky (SES). This agreement between European States was published in a document EC 550/2004. Its objectives are:

- a. The provision of air navigation services in the single European sky.
- b. To establish common requirements for the safe and efficient provision of air navigation services in the Community. These requirements include:
 - (i) technical and operational competence and suitability
 - (ii) systems and processes for safety and quality management
 - (iii) reporting systems
 - (iv) quality of services
 - (v) financial strength
 - (vi) liability and insurance cover
 - (vii) ownership and organizational structure, including the prevention of conflicts of interest
 - (viii) human resources, including adequate staffing plans
 - (ix) security

Geneva Convention

1.83 The Convention on International Recognition of Rights in Aircraft (Geneva 1947) established the right of the seller of an aircraft to secure any lending (mortgage) granted to the buyer, by a mortgage against the aircraft. Specifically the convention:

- Outlawed double registration
- Made it a requirement that the registering authority address appeared on the certificate of registration
- Contained requirements regarding salvage of aircraft
- Stipulated that an aircraft could not be transferred from one register to another unless all interested parties had been informed
- Stipulated that the articles of the Convention would not prevent a State imposing its laws relating to immigration, customs or air navigation

EU Regulations - Passenger Rights

1.84 The regulation applies to any passenger:

- departing from an airport located in the territory of a Member State

The protection accorded to passengers departing from or to an airport located in a Member State should be extended to those leaving an airport located in a third country for one situated in a Member State, when a Community carrier operates the flight.

- departing from an EU member state, or
 - travelling to an EU member state on an airline based in an EU member state
- if that person has:
- a confirmed reservation on the flight, and
 - arrived in time for check-in as indicated on the ticket or communication from the airline, or, if no time is so indicated, no less than 45 minutes prior to the scheduled departure time of the flight
- or
- has been transferred from the flight for which he/she held a reservation to some other flight
- unless
- the passenger is travelling on a free or discounted ticket not available to the general public, other than a ticket obtained from a frequent flyer programme.

1.85 Denied boarding. Before denying passengers boarding involuntarily, the airline is required to first seek volunteers to give up their reservation in return for whatever benefit is negotiated between the airline and the volunteers. Irrespective of such negotiation, such volunteers are also entitled to reimbursement or re-routing as described below.

If insufficient volunteers are obtained, the airline may then proceed to involuntarily deny passengers the right to board their flight. All passengers so denied must be offered all three types of compensation and assistance described below.

1.86 Cancellation. If a flight is cancelled, passengers are automatically entitled to their choice of (a.) re-routing to the same destination at the earliest opportunity; (b.) later re-routing, at the passenger's convenience, to the same destination under comparable conditions; or (c.) a refund of the ticket as well as a return flight to the point of first departure. Any ticket refund is the price paid for the flight(s) not used, plus the cost of flights already flown in cases where the cancellation has made those flights of no purpose. Where applicable, passengers are also entitled to refreshments, communication and accommodation as described below. Where re-routing is to another airport serving the same destination, the airline must pay for onward transport to the original airport or to a close-by destination agreed with the passenger. These choices, and the entitlement to refreshments, etc., apply to all cancellations, regardless of whether the circumstances are extraordinary or not.

The airline is also required to pay cash compensation as described below, unless one of the following conditions applies:

- the airline notifies the passengers at least two weeks prior to departure
- the airline notifies the passengers between one and two weeks prior to departure, and re-routes passengers so that they can:
 - depart no more than two hours earlier than scheduled, and
 - arrive no more than four hours later than scheduled
- the airline notifies the passengers less than one week prior to departure, and re-routes passengers so that they can:
 - depart no more than one hour earlier than scheduled, and
 - arrive no more than two hours later than scheduled

- the cancellation was caused by extraordinary circumstances that could not have been avoided by any reasonable measure.

The airline must also provide an explanation to passengers of alternative transport.

1.87 Delays. If an airline expects a flight to be delayed, passengers are entitled to refreshments and communication if the expected delay is more than:

- two hours, in the case of a type 1 flight
- three hours, in the case of a type 2 flight
- four hours, in the case of a type 3 flight

Additionally, if the flight is expected to depart on the day after the original scheduled departure time, passengers are entitled to accommodation.

If a flight is delayed by five hours, passengers are additionally entitled to abandon their journey and receive a refund for all unused tickets, a refund on tickets used already if the flight no longer serves any purpose in relation to their original travel plan, and, if relevant, a flight back to their original point of departure at the earliest opportunity.

1.88 Compensation and assistance. There are three broad categories of compensation and assistance that may be required in the case of cancellations or denied boarding.

1.89 Cash compensation. Cash compensation is a payment of:

1. €250/400/600 for flights type 1/2/3 respectively.

Where re-routing is offered and results in the passenger arriving within two/three/four hours of the scheduled arrival time for a type 1/2/3 flight, the compensation payable is halved.

The Airline is not obliged to provide Cash compensation in the case of “Extraordinary Circumstances”.

1.90 Re-routing or refunding. Re-routing or refunding is, at the passenger’s choice, one of the following three compensations:

1. Repayment of the cost of unused flight tickets, and for used tickets where the flight(s) taken no longer serve(s) any purpose in relation to the passenger’s original travel plan, and where applicable, a flight back to the original point of departure at the earliest opportunity
2. Re-routing under similar conditions to the intended final destination at the earliest opportunity
3. Re-routing under similar conditions to the intended final destination at the passenger’s leisure, subject to the availability of seats.

If a passenger’s destination is an airport at a city with multiple airports and re-routing results in the passenger being taken to another of those airports, the airline must also pay for transport for the passenger to the original intended airport or an agreed nearby destination.

1.91 Refreshments, communication and accommodation. When passengers become entitled to these assistances, they must be offered, free of charge:

- Meals and refreshments in proportion to the waiting time

- Two telephone calls, fax or telex messages, or emails
- Hotel accommodation and transport between the airport and the hotel, if a stay of one or more nights, or a stay additional to that intended by the passenger becomes necessary

In the case of a delay, the airline may withdraw these entitlements if offering them would delay the flight further.

1.92 Upgrades and downgrades. If a passenger is placed in a higher class than that for which a ticket was purchased, the airline may not request any additional payment.

If a passenger is placed in a lower class than that for which a ticket was purchased, the airline must refund 30/50/75% of the cost of the ticket for type 1/2/3 flights.

1.93 Method of refund. Refunds payable under this regulation may be paid in cash, by electronic bank transfer, bank draft, or cheque. With the signed agreement of a passenger, they may also be paid in travel vouchers or other services.

1.94 Obligation to notify passengers. Airlines are obliged to display a notice at their check-in counters stating:

“If you are denied boarding or if your flight is cancelled or delayed for at least two hours, ask at the check-in counter or boarding gate for the text stating your rights, particularly with regard to compensation and assistance.”

Additionally, when an airline cancels a flight, denies a person boarding, or incurs a delay exceeding two hours to a flight, it is obliged to provide each passenger affected with a written notice setting out their rights under the regulation, and the contact details of the national body tasked with enforcing the regulation.

Flight types are as follows:

Type 1 : A flight of less than 1500 km in distance

Type 2 : A flight within the EU of greater than 1500 km in distance, or any other flight of greater than 1500 km but less than 3500 km in distance

Type 3 : A flight not within EU of greater than 3500 km in distance

Summary Relevant International Conventions and Agreements

DATE	PLACE	TITLE	CONTENT
October 1919	Paris	Convention Relating to the Regulation of Air Navigation	Sovereignty over airspace. Standards for airworthiness. Certificates of competency for crews. Definition of 'aircraft'.
October 1929	Warsaw	Convention for the Unification of Certain Rules Relating to International Carriage by Air	Carrier's liability for damage caused to passengers, baggage and goods. Damage caused by delay.
May 1933	Rome	Convention for the Unification of Certain Rules Relating to Damage Caused by Aircraft to Third Parties on the Surface	Recognized the liability of carrier for damage caused on the ground. Led to the Brussels Insurance Protocol of 1938. Replaced by the Rome Convention of 1952 (drafted by ICAO)
May 1933	Rome	Convention for the Unification of Certain Rules Relating to Precautionary Arrest of Aircraft	Specified which aircraft can be arrested or 'attached'. Excludes government aircraft (incl postal transport), aircraft in service on public transport (and back-up aircraft), aircraft apportioned for the carriage of persons or goods for reward.
September 1938	Brussels	Protocol Supplementing the Convention for the Unification of Certain Rules Relating to Damage Caused by Aircraft to Third Parties on the Surface	Obligation of carrier to arrange third party insurance. This is what eventually killed off Pan Am!
December 1944	Chicago	Convention on International Civil Aviation	Regulation of Civil Aviation. Led to the creation of ICAO. 18 Annexes to the Chicago Convention
December 1944	Chicago	International Air Services Transit Agreement	The two technical freedoms of the air
December 1944	Chicago	International Air Transport Agreement	The three commercial freedoms of the Air (Known as the 5 freedoms agreement ; 2 + 3 = 5) Note: The other freedoms 6, 7 and 8 are really no more than minor variations of these 5.

June 1948	Geneva	Convention on the International Recognition of Rights in Aircraft	To protect the rights of the seller where aircraft are bought on HP, mortgage or lease.
October 1952	Rome	Convention on Damage by Foreign Aircraft to Third Parties on the Surface	Replaced the 1933 Convention. Poor ratification. USA, UK, Canada, Germany and many other major players refused to ratify because compensation too low; National Law more powerful. El Al crash in Holland, neither states contracting.
September 1955	The Hague	Protocol to Amend the Convention for the Unification of Certain Rules Relating to International Carriage by Air	<ul style="list-style-type: none"> a. Removed exemptions for all except military aircraft b. Raised compensation limit to 250 000 gold francs c. Simplified the requirements for tickets and baggage checks d. Made carrier liable for 'pilot error'
April 1956	Paris	Multilateral Agreement on Commercial Rights of Non-Scheduled Air Services in Europe	An ECAC convention. Covers international flights within Europe of a non-scheduled nature: Humanitarian and emergency; taxi class services (seating limited to 6 and not to be re-sold); hiring by a single person (or company); single flights.
April 1960	Paris	Multilateral Agreement relating to Certificates of Airworthiness for Imported Aircraft	ECAC agreement. Allows states to render valid an existing C of A or issue a new one.
September 1961	Guadalajara	Convention Supplementary to the Convention for the Unification of Certain Rules Relating to International Carriage by Air Performed by a Person Other than the Contracting Carrier	Covers charter services and 'wet-leasing'. Defines who the contracting carrier and the actual carrier is in a charter or wet-lease situation. Defines the liability of the carrier(s).

September 1963	Tokyo	Convention on Offences and Certain Other Acts Committed on Board Aircraft	Determines whose penal law is applicable Defines the rights and obligations of the aircraft Commander Defines the rights and obligations of the authorities of the state in which the aircraft lands Defines unlawful seizure of aircraft
December 1970	The Hague	Convention for the Suppression of Unlawful Seizure of Aircraft	Applicable to domestic and international flights. Defines 'in flight'. Allocates jurisdiction after offence committed: <ul style="list-style-type: none"> a. State of Registration b. State of landing if offender still on board c. State of Operator d. State in which offender is apprehended if that state does not wish to extradite
March 1971	Guatemala City	Protocol to Amend the Convention for the Unification of Certain Rules Relating to International Carriage by Air	Makes the carrier absolutely liable. Replaces 'fault' liability with 'risk' liability i.e. in the case of death or injury caused by sabotage or hijacking. Limits liability to \$100 000 for passengers and baggage including negligence. Exceptions: <ul style="list-style-type: none"> a. self inflicted or wilful damage by the claimant b. death or injury resulting from ill health of passenger
September 1971	Montreal	Convention for the Suppression of Unlawful Acts Against the Safety of Civil Aviation	Deals with a person who: <ul style="list-style-type: none"> a. acts violently on board an aircraft b. destroys or damages an aircraft in service c. places a bomb or similar device on board an aircraft d. destroys or damages a nav aid or interferes with operation e. passes false information thus endangering an aircraft
September 1971	Montreal	Supplementary to the Convention for the Suppression of Unlawful Acts Against the Safety of Civil Aviation	Deals with offences committed at an airport serving international aviation

September 1975	Montreal	Additional Protocols (1 - 4) to Amend the Convention for the Unification of Certain Rules Relating to International Carriage by Air	Allows payment to be made in IMF Special Drawing Rights (SDR) Replaces limits in Hague Protocol with SDRs Replaces limits in Guatemala Protocol with SDRs Changes liability regarding goods - applies SDRs
September 1978	Montreal	Protocol to Amend the Convention on Damage by Foreign Aircraft to Third Parties on the Surface	Extended Rome 1952 to include damage caused by an aircraft registered to an Operator of another contracting state.
December 1982	Montego Bay	UN Convention of the High Seas	Air Piracy an offence Hot pursuit permitted Territorial waters extended to 12 NM 200 NM economic zone respected - freedom to overfly Right to transit straits without permission no longer allowed - freedom to transit straits under 1st freedom reinforced Established the authority of the Hamburg Court regarding disputes of overflying rights in territorial waters, contiguous zones, etc..
September 1990	Cyprus	The Convention of Cyprus	Established the JAA
October 1995	Kuala Lumpur	IATA Intercarrier Agreement on Passenger Liability	Agreement by IATA members to waive limitations of liability and recoverable damages established by the Warsaw Convention. Damages to be awarded by reference to the law of domicile of the passenger.

Questions

1. **What does cabotage refer to?**
 - a. Domestic air services within a state
 - b. An international air carrier
 - c. A flight above territorial waters
 - d. Crop spraying
2. **The Convention signed by the states relating to damage caused by foreign aircraft to persons and property on the ground is:**
 - a. the Tokyo convention
 - b. the Rome convention
 - c. the Warsaw convention
 - d. the Paris convention.
3. **The Convention on offences and other acts committed on board an aeroplane is:**
 - a. the Tokyo convention
 - b. the Paris convention
 - c. the Rome convention
 - d. the Chicago convention
4. **Which of the following is an obligation of being an ICAO contracting state?**
 - a. ICAO must be informed about all new flight crew licences and any suspended validity of such licences
 - b. ICAO must be informed about differences from the standards detailed in any of the annexes to the Chicago Convention
 - c. ICAO must approve the pricing of tickets on international airline connections
 - d. ICAO must be informed about changes to national regulations
5. **Which of the following annexes to the Chicago Convention contains the minimum specifications for the construction of aerodromes?**
 - a. Annex 6
 - b. Annex 11
 - c. Annex 10
 - d. Annex 14
6. **The ICAO annex containing the standards and recommended practices for Personnel Licensing is:**
 - a. Annex 1
 - b. Annex 2
 - c. Annex 11
 - d. Annex 12
7. **The aircraft commander may, when he/she has reasonable grounds to believe that a person has committed or is about to commit an offence against penal law on board the aircraft:**
 - a. ask the person to disembark
 - b. ask the crew to assist in restraining the person
 - c. order the passengers to assist the crew in restraining the person
 - d. deliver the person to the competent authority

8. The international convention concerning the responsibilities of international air carriers (operators), for the carriage of passengers, baggage and freight is the:
- Tokyo convention
 - Hague convention
 - Montreal convention
 - Warsaw convention
9. The Rome convention and its later amendments deals with:
- offences and other acts committed on board an aeroplane
 - damage caused by foreign aircraft to third parties on the ground
 - regulation of the transportation of dangerous goods
 - damage caused by any aircraft to third parties on the ground
10. The Warsaw convention and its later amendments deals with:
- regulation of the transportation of dangerous goods
 - operator's licence for international scheduled operations
 - security systems at airports
 - limitation of the Operator's liability concerning passengers and goods transported
11. The objectives of ICAO were defined by:
- the Geneva Convention of 1936
 - the Chicago Convention of 1944
 - the Warsaw Convention of 1929
 - the Geneva Convention of 1948
12. The annex to the Chicago convention which deals with the entry and departure of cargo and other articles on international flights is:
- Annex 15
 - Annex 16
 - Annex 9
 - Annex 8
13. Which freedom of the air is applicable to a flight which wishes to land in a foreign state for technical reasons?
- 1st freedom
 - 3rd freedom
 - 4th freedom
 - 2nd freedom
14. ICAO establishes:
- aeronautical standards adopted by all states
 - proposals for aeronautical regulations in the form of 18 annexes
 - standards and recommended practices applied without exception by all states which are signatory to the Chicago Convention of 1944
 - standards and recommended practices for contracting states

15. **The first freedom of the air is:**
- a. The right to board passengers from the state where the aircraft is registered and fly to any other state
 - b. The right to over fly without landing
 - c. The right to land for a technical stop
 - d. The right to operate a commercial flight with passengers on board between two states
16. **The Convention which deals with offences against penal law is:**
- a. the convention of Rome
 - b. the convention of Madrid
 - c. the convention of Tokyo
 - d. the convention of Warsaw
17. **One of the main objectives of ICAO is to:**
- a. develop principles and techniques for international aviation
 - b. approve the ticket prices set by international airlines
 - c. approve new airlines operating turbine engine powered aircraft
 - d. approve new international airlines
18. **Which international convention established ICAO?**
- a. Chicago
 - b. The Hague
 - c. Warsaw
 - d. Montreal
19. **The standards contained in the annexes to the Chicago convention are to be considered:**
- a. binding upon all airlines operating international routes
 - b. binding for contracting states that have not notified ICAO about national differences
 - c. advice and guidance for the aviation legislation within contracting states
 - d. binding for all contracting states
20. **Which body of ICAO finalizes the SARPs to be submitted for adoption?**
- a. The Council
 - b. The Regional Air Navigation Committee
 - c. The Air Navigation Commission
 - d. The Assembly
21. **The second freedom of the air is the:**
- a. right to cabotage traffic
 - b. right to operate a commercial passenger flight with passengers on board between two states
 - c. right to land in a foreign state for a technical stop
 - d. right to over fly a foreign state without landing

- 22. Which annex contains information concerning Air Traffic Services?**
- a. Annex 11
 - b. Annex 10
 - c. Annex 14
 - d. Annex 15
- 23. With reference to passenger rights, to which passengers do EU Regulations apply?**
- a. To all passengers travelling on an EU registered aircraft wherever it may be operating
 - b. Those departing from an EU member state or travelling to an EU member state on an airline based in an EU member state
 - c. Only to those departing from an EU member state or travelling on an airline based in an EU member state
 - d. To all passengers who are citizens of an EU member state
- 24. With reference to passenger rights, to which passengers do EU Regulations apply? Those who**
- a. arrived in time for check-in as indicated on the ticket or communication from the airline, or, if no time is so indicated, no less than 30 minutes prior to the scheduled departure time of the flight
 - b. arrived in time for check-in as indicated on the ticket or communication from the airline, or, if no time is so indicated, no less than 45 minutes prior to the scheduled departure time of the flight
 - c. arrived in time for check-in as indicated on the ticket or communication from the airline, or, if no time is so indicated, no less than 1 hour prior to the scheduled departure time of the flight
 - d. arrived in time for check-in as indicated on the ticket or communication from the airline, or, if no time is so indicated, no less than 2 hours prior to the scheduled departure time of the flight
- 25. How much is the cash compensation given to a passenger under the EU Regulations travelling on a flight not within the EU of greater than 3500 km if the flight is cancelled?**
- a. €250
 - b. €400
 - c. €600
 - d. €800
- 26. How or where are airlines obliged to inform passengers stating that : “If you are denied boarding or if your flight is cancelled or delayed for at least two hours, ask at the check-in counter or boarding gate for the text stating your rights, particularly with regard to compensation and assistance.”**
- a. This is given verbally to individual passengers by airline staff at check-in
 - b. Printed on the airline ticket or the on-line receipt
 - c. Printed on a leaflet attached to the boarding pass
 - d. On a notice and on display at the passenger check-in counter

Answers

1	2	3	4	5	6	7	8	9	10	11	12
a	b	a	b	d	a	d	d	b	d	b	c

13	14	15	16	17	18	19	20	21	22	23	24
d	d	b	c	a	a	b	c	c	a	b	b

25	26
c	d

Chapter

2

Airworthiness of Aircraft

Introduction.....	55
Airworthiness	55
Questions	57
Answers	58

Introduction

2.1 Background. The Chicago Convention placed great emphasis on safety, and one particular ‘area of interest’ was in the airworthiness of aeroplanes. In order to ensure that an aeroplane was safe to use it was agreed that all aeroplanes would have a certificate that stated that the aircraft was airworthy when manufactured, and that through the continued validation of that certificate, the continuing airworthiness of the aircraft would be ensured. During the design and building stage of the life of a type of aeroplane, rigorous rules and regulations are applied to the manufacturing processes and the flight testing process, to ensure that the aircraft does what it is intended to do. Once the testing procedures have been successfully completed, the State of Manufacture (the USA in the case of Boeing aircraft and France in the case of Airbus) issues a Type Certificate and this is then applicable to all subsequent production models (issued to the individual aircraft by the State of Registry after a short ‘compliance’ air test). The initial certificate would also be applicable to all subsequent marks or upgrades of the type, within reason. The FAA and UK CAA decided that the 747-400 was not the same aeroplane as the original 747, and required re-certification. An expensive process for Boeing! For the initial flight testing, the prototype is permitted to fly under a Permit to Fly issued by the State of Manufacture.

2.2 Standards. The Airworthiness standards of Annex 8 of the Chicago Convention are related to the standards of Annex 6, part 1, which deals with aeroplane performance operating limitations. An element of the safety of an operation is the intrinsic safety of the aircraft. That is, its airworthiness. The airworthiness of an aircraft is not fully defined by the application of the airworthiness Standards of Annex 8, but also requires the application of the Standards of Annex 6 that are complementary. In other words, Annex 8 deals with airworthiness from the engineering point of view, whereas Annex 6 deals with the safety standards necessary for any operation. The standards apply to both performance and flying qualities.

2.3 Applicability. The Standards of Airworthiness, detailed in Annex 8 Part 3 are applicable to aeroplanes with certificated maximum take-off mass greater than 5700 kg, intended for the carriage of passengers, cargo or mail in international air navigation. Unless specifically exempted, the standards apply to the complete aeroplane including power-units, systems and equipment. For the standards to be applicable; the aircraft must have at least two engines. The EASA equivalent is EASA Certification Specifications (CS).

Airworthiness

2.4 Certificate of Airworthiness. A Certificate of Airworthiness (C of A) is issued by the State of Registration when satisfactory evidence is provided that the aeroplane complies with the appropriate airworthiness requirements. ICAO has specified a standard form of C of A which is to include the nationality and registration marks, manufacturer and designation of the aircraft (e.g. Boeing 747-400), aircraft serial number (i.e. the airframe number like a car chassis number) and categories/operation.

*	<i>State of Registry Issuing Authority</i>		*
CERTIFICATE OF AIRWORTHINESS			
1. Nationality and registration marks	2. Manufacturer and manufacturer's designation of aircraft**	3. Aircraft serial number	
.....	
4. Categories and/or operation***			
5. This Certificate of Airworthiness is issued pursuant to the Convention on International Civil Aviation dated 7 December 1944 and †..... in respect of the above-mentioned aircraft which is considered to be airworthy when maintained and operated in accordance with the foregoing and the pertinent operating limitations.			
Date of issue.....		Signature	
† Insert reference to appropriate Airworthiness Code.			
6. ****			

* For use of the State of Registry.

** Manufacturer's designation of aircraft should contain the aircraft type and model.

*** This space is normally used to indicate the certification basis, i.e. certification code, with which the particular aircraft complies and/or its permitted operational category, e.g. commercial air transportation, aerial work or private.

**** This space shall be used either for periodic endorsement (giving date of expiry) or for a statement that the aircraft is being maintained under a system of continuous inspection.

Figure 2.1 Certificate of Airworthiness

2.5 Continuing Airworthiness. The State of Registry is responsible for determining if an aircraft continues to be airworthy. The state is required to maintain a system for recording faults, malfunctions, defects or other occurrences which might affect the airworthiness of aircraft with maximum take-off mass greater than 5700 kg.

2.6 Structural Integrity/Corrosion Control. The State of Design is required to ensure that a structural integrity programme exists to ensure the airworthiness of aircraft with a maximum take-off mass greater than 5700 kg. The programme is to include information concerning corrosion control.

2.7 Validity of C of A. The C of A will be renewed or will remain valid provided that the continued airworthiness of the aircraft has been determined by a periodic inspection. The period between the inspections is to be established by the state. Where an aircraft is damaged, it is the responsibility of the State of Registry to judge whether the damage is of such a nature that the aircraft is no longer airworthy. Where a damaged aircraft is repaired, the State of Registry is to specify the necessary repairs and to determine that such repairs have been properly carried out before re-issuing a C of A.

2.8 Aircraft Limitations and Information. Each aircraft is required to have a flight manual (or other means) in which the approved limitations are defined and additional information is contained necessary for the safe operation of the aeroplane. Where the determined limiting speeds are specified as a Mach number, the aircraft is to be fitted with a Mach meter.

2.9 Information. When a Contracting State first enters on its register an aircraft and issues or validates a Certificate of Airworthiness, it shall inform the State of Design that it has done so.

Questions

1. **The State of Design is to ensure that a continuing structural integrity programme, including information concerning corrosion control, is maintained in respect of aeroplanes:**
 - a. with maximum certificated take-off mass less than 5700 kg
 - b. with maximum certificated take-off mass greater than 5700 kg
 - c. with maximum certificated take-off mass equal to 5700 kg
 - d. with maximum certificated take-off mass not more than 5700 kg
2. **The continuing validity of a Certificate of Airworthiness of an aircraft is subject to the laws of:**
 - a. the State of Registration
 - b. the State of Registration or the State of the Operator
 - c. the State of the Operator
 - d. the State of Registration and the State of Design
3. **When a Contracting State first enters on its register an aircraft and issues or validates a Certificate of Airworthiness, it shall inform:**
 - a. The State of Registry
 - b. The State of Manufacture
 - c. The State of Design
 - d. The State of the Operator
4. **Which document contains information concerning the flight limitations of the aircraft ?**
 - a. The C of A
 - b. The C of R
 - c. The C of L
 - d. The aircraft Flight Manual

Answers

1	2	3	4
b	a	c	d

Chapter

3

Aircraft Nationality and Registration Marks

Introduction.....	61
Nationality and Registration Marks.....	61
Certification of Registration	62
Aircraft Markings	62
Classification of Aircraft	63
Questions	64
Answers	66

Introduction

3.1 **Annex 7.** The Paris Convention of 1919 requires all aircraft to be registered and to carry a nationality mark and a registration mark. Annex 7 of the Chicago Convention covers Aircraft Nationality and Registration Marks. The annex contains only Standards without any recommendations. An Authority may temporarily exempt an aircraft from registration (test flying of a prototype) or the carriage of markings (an historic aircraft or ex-military aeroplane).



Figure 3.1

Nationality and Registration Marks

3.2 Differences

Annex 7 also contains lists of those Contracting States which have :

- a. Notified ICAO of differences which exist between their national regulations and the International ICAO standards set down in Annex 7
- b. Notified ICAO that no differences exist
- c. Given no information to ICAO on this subject

3.3 **Markings.** The nationality and registration mark is to consist of a group of characters.

G-ABCD

In this case G is the nationality mark and is always to precede the registration mark, in this case ABCD. When the first character of the registration mark is the same type of character as the last character of the nationality mark, it is preceded by a hyphen (-). The nationality mark is selected from the series of nationality symbols included in the radio call signs allocated to the State of Registry by the International Telecommunications Union (an agency of the United Nations). The nationality mark is to be notified by the State of Registry, to ICAO and may consist of single letters, multiple letters or a combination of letters and numbers. It may also include a symbol of the State (e.g. the Red Cross in the case of Switzerland). The registration

mark may consist of letters, numbers or a combination of both and is assigned by the State of Registry, or the common mark registering authority, from a list of available (not previously issued) marks applicable to the State of Registry.

3.4 Common Mark. A common mark replaces a nationality mark where the aircraft is owned (operated) by an operator registered in more than one country. In this case, a ‘common mark’ is allocated by the ITU, and ICAO specifies a state to exercise the responsibilities of the State of Registry (known as the common mark registering authority). The common mark registering authority also performs the function of the State of Registry with regard to the continuing airworthiness of the aircraft. Presently, the common mark 4YB is issued by ICAO to Arab Air Cargo Incorporated (based in Jordan and Iraq) for registering aircraft operated by that organization. ICAO has specified that Jordan performs the other functions of the common mark registering authority.

3.5 Exclusions. Certain combinations of letters are not permitted to be used as registration letters or parts of a registration mark. These are those combinations of letters used for specific distress traffic indicators or internationally accepted communication abbreviations. Specifically:

- SOS (Distress - morse)
- PAN (Urgency)
- XXX (Urgency - morse)
- TTT (Safety / Sécurité - morse)
- ‘Q’ codes (i.e. QNH; QRT; QUG etc....)
- 5 letter combinations of the international Code of Signals

Certification of Registration

3.6 Status and Content. The certificate of registration is an official document certifying that the State of Registry has registered an aircraft. The certificate is to be carried in the aircraft at all times. The certificate contains:

- Nationality or Common mark,
- Registration mark,
- Manufacturer’s designation of the aircraft,
- Serial number of the aircraft,
- Name and address of the owner,
- A certificate that it has been entered on the register of the State,
- Dated signature of the registering officer.

Aircraft Markings

3.7 Location of Nationality and Registration Marks. The nationality or common mark and registration mark are to be painted on the aircraft or shall be affixed by any other means ensuring a similar degree of permanence. The marks shall be kept clean and visible at all times.

3.8 Heavier than Air Aircraft. The required markings are to appear on the lower surface (underside) of the wing, the fuselage between the wings and the tail, or on the upper half of the vertical tail surface.

3.9 Size of Markings. The markings on the wings are to be at least 50 cm high, and on the fuselage and vertical surfaces, 30 cm high.

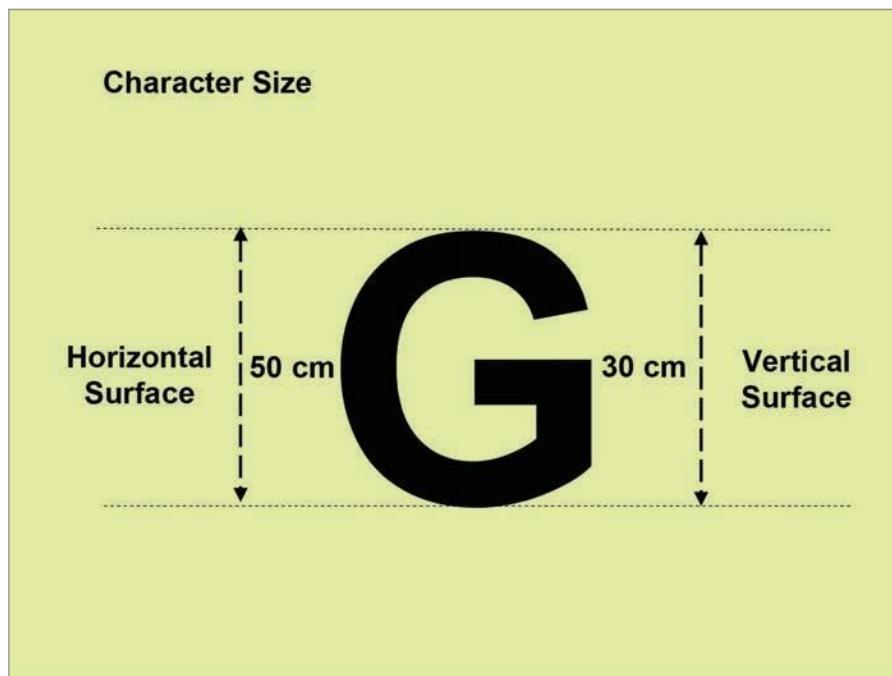


Figure 3.2

Classification of Aircraft

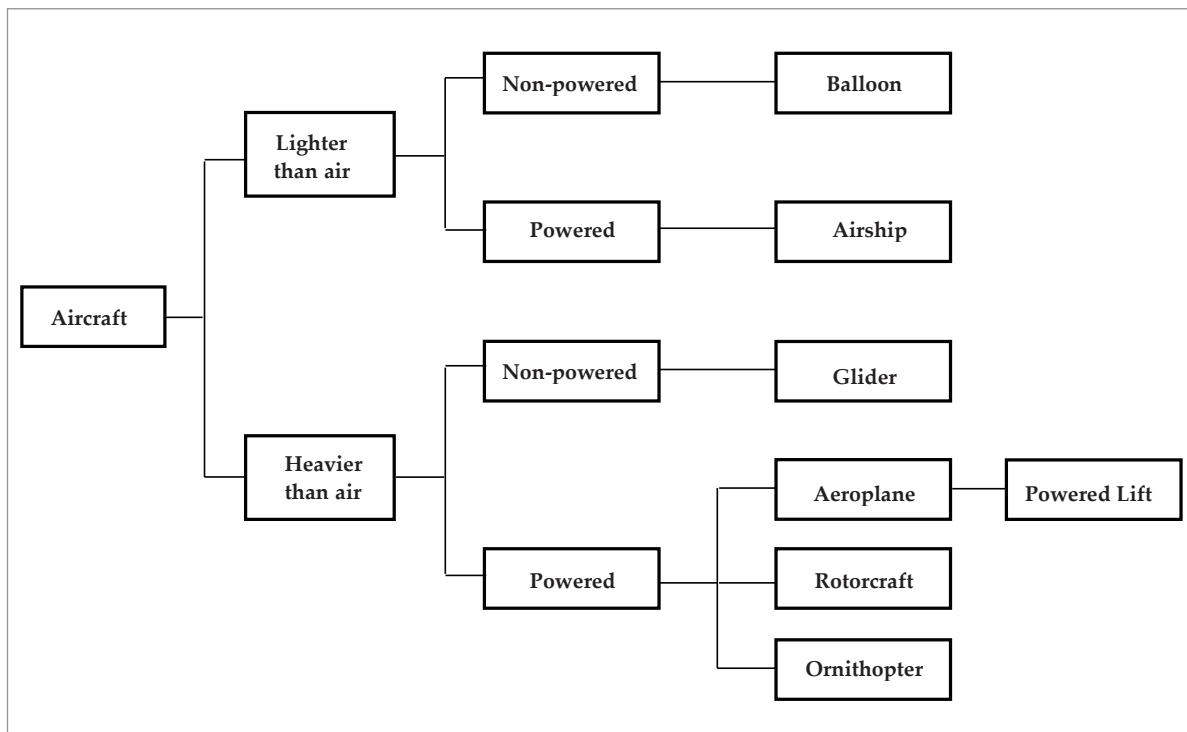


Figure 3.3

Questions

- 3
Questions
- 1. What cannot be included in a registration mark?**
 - a. LLL
 - b. RCC
 - c. TTT
 - d. FFF
 - 2. What letters are prohibited for registration marks?**
 - a. 4 letter international codes.
 - b. 5 letter international codes.
 - c. 4 letter codes preceded by Q.
 - d. Any number referring to an ICAO document.
 - 3. Which of the following is not allowed in a registration mark?**
 - a. NNN
 - b. XXX
 - c. RCC
 - d. DDD
 - 4. What registration is disallowed because of possible confusion with distress/urgency signals?**
 - a. RCC
 - b. NNN
 - c. XXX
 - d. ZZZ
 - 5. Which of the following is not permitted in the registration mark of an aircraft?**
 - a. Four letter Q codes.
 - b. Five letter international code signals.
 - c. Three letter international code signals.
 - d. Any number identifying an ICAO document.
 - 6. Concerning aircraft registration, no combination of letters can be used which can be confused with distress codes, for example:**
 - a. RCC
 - b. DDD
 - c. LLL
 - d. PAN
 - 7. Which of the following registration marks would not be permitted?**
 - a. G-PRAT
 - b. SY-PAN
 - c. 3T-SSS
 - d. YT-LLL

8. Concerning aircraft registration markings, no combinations can be used if they can be mistaken for:
 - a. codes which are used for identification of ICAO documents.
 - b. letter combinations including the letter Q.
 - c. 3 letter combinations which are used by international code of signals.
 - d. 5 letter combinations which are used by international code of signals.
9. According to Annex 7, the registration mark shall be letters, numbers or a combination of letters and numbers and shall be that assigned by:
 - a. the State of Registry or Common Mark Registering Authority.
 - b. the State of Registry only.
 - c. the International Civil Aviation Organisation.
 - d. the International Telecommunication Union.
10. The common mark shall be selected from the series of symbols included in the radio call signs allocated:
 - a. to ICAO by the ITU.
 - b. to the State of Registry by ICAO.
 - c. to the State of Registry by the ITU.
 - d. to the State of the Operator.
11. The height of the markings under the wings of a heavier than air aircraft shall be:
 - a. at least 30 cm.
 - b. at least 40 cm.
 - c. at least 50 cm.
 - d. more than 40 cm but not more than 50 cm.
12. The height of the markings on the fuselage (or equivalent surface) and on the vertical tail surface of a heavier than air aircraft shall be:
 - a. at least 20 cm.
 - b. more than 20 cm but not more than 30 cm.
 - c. at least 30 cm.
 - d. at least 40 cm.

Answers

1	2	3	4	5	6	7	8	9	10	11	12
c	b	b	c	b	d	b	d	a	a	c	c

Chapter

4

Flight Crew Licensing - EASA Part-FCL & Part-MED

Introduction.....	69
European Aviation Safety Agency (EASA).....	69
Licences	75
Ratings.....	81
Certificates	83
EASA Part-MED	85
Questions	90
Answers	100

Introduction

4.1 Requirement. The Learning Objectives and the Syllabus for 010 Air Law require the student to have knowledge of the SARPs detailed in Annex 1 (Personnel Licensing).

4.2 International Standard. Each annex to the Chicago Convention includes a supplement, which is a summary of the changes notified by each state (in alphabetical order) under article 38 of the convention. The supplement for Annex 1 is the biggest of all the annex supplements and signifies the disparity in flight crew licensing around the world. It must be stated that the FAA, EASA and certainly the UK CAA have not, and never have, adopted the requirements of Annex 1 (crew licensing and medical requirements) as a standard. Each authority has specific rules, to which, EASA Part-FCL and Part-Med is the standard applied in Europe. It must be emphasized that the inclusion of information from Annex 1 in this manual is for information only (to enable you to pass the exam) and must not be relied upon for any matters relating to the issue of, or maintenance of your flight crew licence.

European Aviation Safety Agency (EASA)

4.3 ICAO ANNEX 1

ICAO does not issue any licences. Licences issued by ICAO Contracting States on the basis of Standards and Recommended Practices of Annex 1 - Personnel Licensing, are habitually called ICAO licences. This has led many to believe that there is a specific ICAO or international licence. The fact is that there is not one single international licence issued by ICAO or any other organization. States issue their own licences based on national regulations in conformity with Annex 1 specifications and validate licences issued by other Contracting States on the basis of bilateral or multilateral agreements or the fulfilment of nationally legislated requirements.

International recognition of flight crew licences

The Convention on International Civil Aviation, often called the Chicago Convention, provides for worldwide recognition of flight crew licences issued by any member State of the International Civil Aviation Organization (ICAO) provided that:

- the licence meets or exceeds the ICAO licensing Standards of Annex 1 - Personnel Licensing to the Convention on International Civil Aviation; and
- the licence is used on an aircraft which is registered in the State which has issued or validated the licence.

If the licence is to be used on an aircraft which is not registered in the issuing State, the licence holder must obtain a validation of the licence from the State of Registry or alternatively obtain a new licence issued by the State of Registry.

4.4 Terminology and Abbreviations

Aeroplane - an engine-driven fixed-wing aircraft heavier than air which is supported in flight by the dynamic reaction of the air against its wings.

ATO - Approved Training Organization

CAT - Commercial Air Transport

Category of Aircraft - Classification of aircraft according to specified basic characteristics, e.g. aeroplane, helicopter, glider, free balloon.

Commander - A pilot designated by the operator who is qualified as PIC, who may delegate the responsibility for the conduct of the flight to another qualified pilot.

Competent Authority - an authority designated by the Member State to whom a person applies for the issue of pilot licences or associated ratings or certificates.

Co-pilot - a pilot operating other than the pilot in command, on an aircraft for which more than one pilot is required, but excluding a pilot who is on board the aircraft for the sole purpose of receiving flight instruction for a licence or rating.

Cross-country - a flight between a point of departure and a point of arrival following a pre-planned route, using standard navigation procedures.

Dual Instruction Time - flight time or instrument ground time during which a person is receiving flight instruction from a properly authorized instructor.

Full Flight Simulator (FFS) - a full size replica of a specific type or make, model and series aircraft flight deck including all equipment and computer programmes necessary to represent the aircraft in ground and in flight operations, a visual system providing an out-of-the-deck view and a force cueing motion system.

Flight Time - the total time from the moment an aircraft first moves for the purpose of taking off until the moment it finally comes to rest at the end of the flight.

FSTD - Flight Simulator Training Device. This simulator does not require force cueing motion or a visual system.

Instrument Flight Time - the time during which a pilot is controlling an aircraft in flight solely by reference to instruments.

Instrument Ground Time - the time during which a pilot is receiving instruction in simulated instrument flight, in flight simulation training devices (FSTDs).

IR - Instrument Rating.

Instrument Time - Instrument flight time or instrument ground time.

LAPL(A) - Light Aircraft Pilot Licence (Aeroplanes).

MCC - Multi-crew Co-operation - Single seat pilots must complete a training course in the team skills necessary for the safe operation of complex, multi crew, jet aircraft to be awarded an MCC qualification.

Multi-pilot Aircraft - Aeroplanes which require a flight crew of at least two pilots.

Night - the period between the end of evening civil twilight and the beginning of morning civil twilight or such other period between sunset and sunrise as may be prescribed by the appropriate authority, as defined by a Member State.

Pilot in command (PIC) - the pilot designated as being in command and charged with the safe conduct of the flight.

Pilot in command Under Supervision (PICUS) - a co-pilot performing, under the supervision of the pilot in command, the duties and the functions of a pilot in command.

Proficiency Check - the demonstration of skill to revalidate or renew ratings, and including such oral examination as may be required.

Rating - An authorization entered on or associated with a licence and forming part thereof, stating special conditions, privileges or limitations pertaining to such a licence.

Renewal - the administrative action taken after a rating or certificate has lapsed for the purpose of renewing the privileges of the rating or certificate for a further specified period.

Revalidation - the administrative action taken within the period of validity of a rating or certificate which allows the holder to continue to exercise the privileges of the rating or certificate for a further specified period.

Skill Test - The skill test is to demonstrate that while acting as pilot in command (PIC) of the relevant aircraft type you can competently carry out the procedures and manoeuvres that you have been taught during your training course. The skill test is taken with an examiner.

Solo Flight Time - means flight time during which a student pilot is the sole occupant of an aircraft.

Student Pilot in command (SPIC) - a student pilot acting as pilot in command on a flight with an instructor where the latter will only observe the student pilot and shall not influence or control the flight of the aircraft.

Synthetic Flight Trainer - Any one of the following three types of apparatus in which flight conditions are simulated on the ground:

- **Flight Simulator**, which provides an accurate representation of the flight deck of a particular aircraft type to the extent that the mechanical, electrical, electronic, etc. aircraft systems control functions, the normal environment of flight crew members, and the performance and flight characteristics of that type of aircraft are realistically simulated.
- **Flight and Navigation Procedures Trainer (FNPT)** - means a training device which represents the flight deck or cockpit environment, including the assemblage of equipment and computer programmes necessary to represent an aircraft type or class in flight operations to the extent that the systems appear to function as in an aircraft.
- **Basic Instrument Flight Trainer**, which is equipped with appropriate instruments, and which simulates the flight deck environment of an aircraft in flight in instrument flight conditions.

Touring Motor Glider (TMG) - a specific class of powered sailplane having an integrally mounted, non-retractable engine and non-retractable propeller. It shall be capable of taking off and climbing under its own power according to its flight manual.

Type of Aircraft - Separate EASA Type Rating & Licence Endorsement Lists are published by the Agency, one for Helicopters and one for all other Aircraft. These lists constitute the class and type of aircraft categorizations in accordance with FCL.010 (category of aircraft, class of aeroplane, and type of aircraft).

4.5 Application & Issue of Licences, Ratings & Certificates. Any application for the issue, revalidation or renewal of licences, ratings or certificates shall be submitted to the competent authority in the manner and form approved by that authority.

4.6 A person shall not hold more than one licence per category of aircraft.

4.7 Theoretical Knowledge Examinations

Responsibilities of the applicant

Applicants shall take the entire set of examinations for a licence or rating under the responsibility of one Member State.

Applicants must be recommended by an ATO before sitting the examinations and having attended an approved training course. The recommendation is valid for 12 months. Should the applicant fail to attempt at least one examination paper within this 12 months, further training must take place as determined by the ATO.

Pass Standards

The pass mark for an examination is 75%. There can be no penalty marking.

All examinations for a particular licence or rating must be passed within 18 months counted from the end of the calendar month of the first attempt.

If an applicant fails to pass one of the examination papers within 4 attempts, or has failed to pass all papers within either 6 sittings or the above 18 months, he/she must re-take the complete set of examination papers. Furthermore, he/she must undergo further training at an ATO as determined by that organization.

4.8 General Rules Concerning Licensing

Authority to Act as Flight Crew. A person shall not act as a flight crew member of an aircraft unless a valid licence is held showing compliance with the specifications of Annex 1 and appropriate to the duties to be performed by that person. The licence shall have been issued by the State of Registry of that aircraft or by any other Contracting State and rendered valid by the State of Registry of that aircraft.

Part-FCL versus AMC/GM to Part-FCL

EASA Part-FCL establishes the requirements for the issue of pilot licences, associated ratings and conditions of their validity for use. AMC/GM to Part-FCL is purely interpretive material which is “Acceptable Means of Compliance or Guidance material” with regard to the issue of pilots licensing and is not a requirement.

Competent Authority

The European rules for Part-NCC operations are based on the State of the Operator principle (EASA Air Operations Regulation, Part-NCC applies to non-commercial flights in complex motor-powered aircraft). NCC.GEN.100 specifies the following: “The competent authority shall be the authority designated by the Member State in which the operator has its principal place of business or is residing”.

Here are some examples:

- a. For a European Part-NCC operator with aircraft registered in a Member State, the Competent Authority is the State of the Operator.

b. For a European Part-NCC operator with third-country registered aircraft, the Competent Authority is the State of the Operator. These operators may also have to comply with rules of the third-country State of Registry if this State has not delegated its responsibilities to the European State of the Operator.

c. For a third-country Part-NCC operator having its principal place of business in a third country and performing operations with aircraft registered in a Member State, the Competent Authority is the State of the Operator (the third country SoO). However, these operators may also have to comply with rules of the EU Member State (State of Registry) related to the aircraft if the State of Registry has not delegated its responsibilities to the State of the Operator.

Rendering a Licence Valid. A Contracting State may validate a licence issued by another authority, with the proviso that the period of validity is not to extend beyond the original period of validity of the licence. An EASA licence (and associated ratings etc) issued in accordance with Part-FCL is to be accepted without further formality in any other EASA member state.

Validity

CPL(A) and IR(A) - 36 months from the day of successful completion of the examinations

ATPL(A) - 7 years from the last validity date of an IR entered in the licence.

Practical skills test

Except in the case of applicants undergoing an integrated flying course, a practical skills test for a licence, rating or certificate cannot be undertaken until the applicant has passed the required theoretical examinations.

In any case, the theoretical instruction must always have been completed before any practical skills test can be undertaken.

4.9 Crediting of Flight Time & Theoretical Knowledge

Crediting of flight time

Pilot in command or under instruction.

An applicant for a licence, rating or certificate shall be credited in full with all solo, dual instruction or PIC flight time towards the total flight time required.

A graduate of an Airline Transport Pilot integrated course can be credited with up to 50 hours of student PIC instrument time towards the PIC time required for an ATPL(A), CPL(A) and multi-engine Type or Class Rating. The same applies to a graduate of a CPL/IR integrated course towards a CPL(A) and multi-engine Type or Class Rating.

Higher grade of licence

Flight time as a co-pilot - the holder of a pilot licence, when acting as co-pilot or PICUS, is entitled to be credited with all of the co-pilot time towards the total time required for a higher grade of licence.

Crediting of theoretical knowledge

An applicant having passed the ATPL(A) examinations is credited with the examinations required for an LAPL(A), PPL(A) and CPL(A).

An applicant having passed the CPL(A) examinations is credited with the examinations required for an LAPL(A) and PPL(A).

An applicant having passed the IR theoretical examinations is credited with those examinations required for an IR in another category of aircraft.

4.10 Excise of the Privileges of Licences

The exercise of the privileges granted by a licence shall be dependent upon the validity of the ratings it contains and of the medical certificate.

4.11 Medical Fitness.

The holder of a licence is to hold a medical assessment certificate issued in accordance with the requirements of Annex 1 Chapter 6 (Medical Provisions for Licensing) or in the case of an EASA licence, Part-Med. Holders of licences are not to exercise the privileges of their licences if they are aware of any decrease in medical fitness standard (either physical or mental). Licence holders are not to act in any capacity under their licence whilst under the influence of any psychoactive substance. Licence holders are not to engage in any problematic use (or abuse) of substances. Licence holders should seek the advice of an approved aeromedical examiner (AME) before taking any medication over a prolonged period.

4.12 Obligation to Carry and Present Documents

While excising the privileges of his/her licence a pilot must always carry his/her :

- Licence
- Medical certificate
- Identification document containing his/her photograph

and is obliged, without undue delay, to present his/her flight time record when requested by an authorized representative or a competent authority.

4.13 Recording of Flight Time

All pilots must keep a reliable record of the details of all flights flown in the manner established by the competent authority.

4.14 Language Proficiency.

English language proficiency is graded by EASA as follows:

- Expert - Level 6
- Extended - Level 5
- Operational - Level 4

All pilots must have attained a language proficiency in English to the standard of Operational (level 4) and this must be endorsed in the licence.

Pilots must be re-evaluated every:

- 4 years - if level 4 (Operational) is held
- 6 years - if level 5 (Extended) is held

Should a pilot have attained level 6, re-evaluation is not necessary.

4.15 Recent Experience

A pilot is not to operate an aircraft in commercial air transport or carry passengers:

As PIC or Co-pilot

unless he/she has carried out, in the preceding 90 days, at least 3 take-offs, approaches and landings in an aircraft of the same type or a Full Flight Simulator (FFS) representing that type or class.

As PIC at night

unless he/she has carried out in the preceding 90 days at least 1 take-off, approach and landing at night as a pilot flying in an aircraft of the same type or a Full Flight Simulator (FFS) representing that type or class

or

holds an Instrument Rating.

4.16 Licence Holders Aged 60 or More in Commercial Air Transport (CAT)

Age 60 – 64 A pilot who has attained the age of 60 shall not act as a pilot of an aircraft engaged in CAT except:

- a. as a member of a multi-crew, and
- b. providing that he/she is the only pilot who has attained the age of 60.

Age 65 years A pilot who has attained the age of 65 years shall not act as a pilot of an aircraft engaged in CAT.

Licences

Note - Paragraphs 4.17 & 4.18 are not within the Learning objectives for the CPL(A) and ATPL(A) syllabus, but are related with regard to the licence privileges.

4.17 Light Aircraft Pilot Licence (Aeroplanes) - LAPL(A)

This is, in effect, a leisure licence which limits both the number of passengers allowed to be carried by the pilot and also restricts the MTOM of the aircraft. Applicants must have completed a training course in an ATO.

Privileges and conditions

Minimum age: 17 years.

Privileged to act as PIC on single piston aeroplane-land or a Touring Motor Glider (TMG):

- a. with a MTOM of 2000 kg or less
- b. carrying a maximum of 3 passengers such that there are never more than 4 persons on board the aircraft
- c. without remuneration
- d. in non-commercial operations
- e. The holder may only carry passengers, after the issue of the licence, having completed a further 10 hours flight time as PIC on aeroplanes or TMG

Experience requirements

Applicants must have completed at least 30 hours of flight instruction on aeroplanes or TMGs including at least:

- 15 hours of dual flight instruction
- 6 hours of supervised solo flight time, including at least 3 hours of solo cross-country flight time with at least 1 cross-country flight of at least 150 km (80 NM), during which 1 full stop landing at an aerodrome different from the aerodrome of departure shall be made.

Recency

Holders of an LAPL(A) shall only exercise the privileges of their licence when they have completed, in the last 24 months:

- at least 12 hours of flight time as PIC, including 12 take-offs and landings and
- undertaken refresher training of at least 1 hour of flight time with an instructor.

4.18 Private Pilot Licence (Aeroplanes) - PPL(A)

Privileges and conditions

Minimum age: 17 years.

Privileged to act without remuneration as PIC or co-pilot on aeroplanes or TMGs engaged in non-commercial operations.

However, a holder of a PPL(A) with an instructor or examiner rating may receive remuneration for:

- flight instruction for the LAPL(A) or PPL(A)
- the conduct of skill and proficiency checks for these licences
- the rating and certificates attached to these licences

Theoretical knowledge

Applicants must pass the following examination papers:

Air Law

Human performance

Meteorology

Communications

Principles of flight

Operational procedures

Flight performance and planning

Aircraft general knowledge

Navigation

Experience and crediting

Applicants for a PPL(A) shall have completed at least 45 hours of flight instruction in aeroplanes, 5 of which may have been completed in an FSTD, including at least:

- 25 hours of dual flight instruction
- 10 hours of supervised solo flight time, including at least 5 hours of solo cross-country flight time with at least 1 cross-country flight of at least 270 km (150 NM), during which full stop landings at 2 aerodromes different from the aerodrome of departure shall be made.

Up-grade from an LAPL(A) to a PPL(A)

The holder of an LAPL(A) can up-grade to a PPL(A) but must have completed at least:

- 15 hours of flight time on aeroplanes after the issue of an LAPL(A) of which at least 10 hours shall be completed in a training course at an ATO.
- This training course shall include at least 4 hours of supervised solo time, including at least 2 hours solo cross-country flight time with at least 1 cross-country flight of at least 270 km (150 NM), during which full stop landings at 2 aerodromes different from the aerodrome of departure shall be made.

4.19 Commercial Pilot Licence (Aeroplanes) - CPL(A)

Privileges and conditions

Minimum age: 18 years.

Privileged to:

- a. exercise all the privileges of an LAPL(A) and a PPL(A) licence holder.
- b. act as PIC or co-pilot of any aeroplane engaged in operations other than Commercial Air Transport (CAT).
- c. act as PIC in CAT of any single-pilot aeroplane.
- d. act as a co-pilot in CAT.

Conditions

An applicant for a CPL(A) must have fulfilled the requirements for the class or type rating of the aeroplane used in the skills test.

Training course & skills test

An applicant for a CPL(A) must have completed a theoretical knowledge instruction and flight instruction course at an ATO and have passed a skills test.

Theoretical knowledge

Applicants must pass the following theoretical examination papers:

Air Law

Aircraft General Knowledge - Airframes/Systems/Powerplant

Aircraft General Knowledge - Instrumentation

Mass and Balance

Performance

Flight Planning and Monitoring

Human Performance

Meteorology

General Navigation

Radio Navigation

Operational Procedures

Principles of Flight

Visual Flight Rules (VFR) Communications

CPL(A) Training course & skills test

An applicant for a CPL(A) shall have completed theoretical knowledge and flight instruction at an ATO. Furthermore, the applicant must pass a skills test in accordance to Appendix 4 of EASA Part-FCL. However, special conditions are applicable for a holder of an MPL.

Specific conditions for MPL holders

Before exercising the privileges of a CPL(A), the holder of an MPL shall have completed in an aeroplane:

- 70 hours flight time as PIC or made up of at least 10 hours PIC and the additional flight time as PICUS
- Of these 70 hours, 20 shall be of VFR cross-country made up of at least 10 hours PIC and 10 hours as PICUS. This shall include a VFR cross-country flight, flown as PIC, of at least 540 km (300 NM) during which full stop landings at 2 different aerodromes shall be made.
- Applicants with a valid IR shall be given at least 15 hours dual visual flight instruction at an ATO.
- At least 5 hours of flight instruction shall be carried out in an aeroplane certified for the carriage of at least 4 persons and have a variable pitch propeller and a retractable landing gear at an ATO.
- Pass a CPL(A) skills test.

Types of courses for CPL(A) at an ATO

- CPL/IR integrated course - aeroplanes
- CPL integrated course - aeroplanes
- CPL modular course - aeroplanes

CPL/IR integrated course – aeroplanes

Entry conditions

Applicants may be admitted to training either as ab initio entrant or as a holder of a PPL(A) or PPL(H).

In the case of a PPL(A) or PPL(H) entrant, 50% of the hours flown prior to the course shall be credited, up to a maximum of 40 hours flying experience, or 45 hours if an aeroplane night rating has been obtained, of which up to 20 hours may count towards the requirement for dual instruction flight time.

Flying training

Shall comprise:

A total of 180 hours of which up to 40 hours may be instrument ground time. Within the total of 180 hours, applicants shall complete at least:

- 80 hours dual instruction of which 40 hours may be instrument ground time
- 70 hours as PIC, including VFR flight and instrument flight time which can be flown as SPIC. The instrument flight time as SPIC shall only be counted as PIC flight time up to a maximum of 20 hours
- 50 hours cross-country as PIC including a VFR cross-country flight of at least 540 km (300 NM) in the course of which full stop landings at 2 aerodromes different from the aerodrome of departure shall be made
- 5 hours flight time at night, comprising 3 hours of dual instruction, which shall include at least 1 hour of cross-country navigation and 5 solo full stop landings

- 100 hours of instrument time comprising at least:
 - 20 hours as SPIC and
 - 50 hours of instrument flight instruction, of which up to
 - 25 hours may be instrument ground time in an FNPT I or
 - 40 hours may be instrument ground time in an FNPT II, FTD 2 or FFS, of which up to 10 hours may be conducted in an FNPT I
- 5 hours to be carried out in an aeroplane certified for the carriage of at least 4 persons that has a variable pitch propeller and a retractable landing gear
- Upon completion of the course the applicant must take a CPL(A) skills test and an IR skills test on either a multi-engine or single-engine aeroplane
- Applicants must have carried out an approved MCC course

CPL integrated course and CPL modular course – Aeroplanes

Details of both these courses can be found in EASA Part-FCL Appendix 3

4.20 Multi-crew Pilot Licence - MPL

Outline

The MPL is a radical and innovative licence which – after a slow start – is gaining popularity. EASA Part-FCL lays down the broad outline of the course required and then it is a co-operative and combined effort between the sponsoring Operator of the airline, the ATO and the Authority to create a suitable course to satisfy the requirements of all three organizations. In essence it is a competency based course.

On completion of the course, the applicant must pass a skills test which is taken in the type of aeroplane used on the Advanced phase of the MPL integrated course or in an FFS representing the same type.

Privileges and conditions

Minimum age: 18 years.

Privileged to:

- act as co-pilot in an aeroplane required to be operated with a co-pilot

Theoretical Knowledge

Shall comprise a total of at least 750 hours of instruction for the ATPL(A) knowledge level as well as instructional hours required for the relevant Type Rating.

Flying Training

Shall comprise at least 240 hours, as pilot flying (PF) or pilot not flying (PNF), in actual and simulated flight and following 4 phases of training:

- **Phase 1 – Core flying skills**
Specific basic single-pilot training in an aeroplane
- **Phase 2 – Basic**
Introduction of multi-crew operations and instrument flight

- **Phase 3 – Intermediate**

Application of multi-crew operations to a multi-engine turbine aeroplane certified as a high performance aeroplane

- **Phase 4 – Advanced**

Type Rating training within an airline environment

Flight experience in actual flight must include upset recovery training, night flying, flight solely by reference to instruments, the experience requirements for a Type Rating, and those required to achieve the relevant airmanship. MCC requirements are incorporated into the relevant phases above.

4.21 Airline Transport Pilot Licence (Aeroplanes) - ATPL

Privileges and conditions

Minimum age: 21 years.

Privileged to:

- exercise all the privileges of a holder of an LAPL(A), PPL(A) and CPL(A)
- act as PIC of aeroplanes engaged in commercial air transport

Applicants for the issue of an ATPL(A) must have fulfilled the requirements for the Type Rating of the aircraft used in the skills test.

Types of courses

The course must be completed at an ATO and can be either:

- an integrated course or
- a modular course

Theoretical knowledge

Applicants must pass the following theoretical examination papers:

Air Law

Aircraft General Knowledge - Airframes/Systems/Powerplant

Aircraft General Knowledge - Instrumentation

Mass and Balance

Performance

Flight Planning and Monitoring

Human Performance

Meteorology

General Navigation

Radio Navigation

Operational Procedures

Principles of Flight

VFR Communications

IFR Communications

Prerequisites, experience and crediting

Prerequisites

Applicants for an ATPL(A) must hold:

- an MPL or
- a CPL(A) and a multi-engine IR for aeroplanes. In this case, the applicant must also have received instruction in MCC

Experience

Applicants for an ATPL(A) shall have completed a minimum of 1500 hours of flight time in aeroplanes including at least:

- 500 hours in multi-pilot operations on aeroplanes
- 500 hours as PIC under supervision or
 - 250 hours as PIC or
 - 250 hours, including at least 70 hours as PIC and the remaining as PICUS
 - 200 hours cross-country flight time of which 100 hours shall be as PIC or PICUS
- 75 hours of instrument time of which not more than 30 hours may be instrument ground time and
- 100 hours of night flight as PIC or co-pilot

Note: of the 1500 hours of flight time, up to 100 hours of flight time may have been completed in an FFS and FNPT. Of these 100 hours, only a maximum of 25 hours may be completed in an FNPT.

Crediting

Holders of a pilot licence for other categories of aircraft shall be credited with flight time up to a maximum of:

- For TMG or sailplanes, 30 hours flown as PIC
- For helicopters, 50% of all the flight time requirements specified above

Skills test

Applicants shall pass a skills test to demonstrate the ability to perform, as PIC of a multi-pilot aeroplane, under IFR.

Ratings

4.22 Instrument Rating – Aeroplanes IR(A)

General

Operations under IFR on an aeroplane shall only be conducted by holders of a PPL(A), CPL(A), MPL and ATPL(A) with an IR appropriate to the category of aeroplane or when undergoing skills testing or dual instruction.

Privileges

- The privilege to fly an aeroplane under IFR with a minimum decision height of 200 ft (60 m)
- In the case of a multi-engine IR(A), the above privilege may be extended to decision heights of lower than 200 ft (60 m) as long as the applicant has undergone specific training at an ATO and has passed the necessary skills test

Prerequisites and crediting

Applicants shall hold at least:

- a PPL(A) with a night rating or
- an ATPL(A) in another category of aeroplane or
- a CPL in the appropriate aeroplane category

and

have completed at least 50 hours of cross-country as PIC of aeroplanes of which at least 10 hours shall be in the relevant aeroplane category.

Theoretical knowledge and flight instruction

Course

Applicants must have received a course of both theoretical knowledge and flight instruction at an ATO. The course may be either integrated or modular.

Applicants must sit an examination of theoretical knowledge in the following subjects:

Air Law

Aircraft General Knowledge - Instrumentation

Flight Performance and Monitoring

Human Performance

Meteorology

Radio Navigation

IFR Communications

Skills Test

Applicants must pass a skills test in accordance with Appendix 7 of Part-FCL.

Validity

An IR(A) shall be valid for 1 year.

Revalidation

- an IR(A) shall be revalidated within 3 months immediately preceding the expiry date of the IR(A)
- should an applicant fail the IR proficiency check before the expiry date of the IR(A), he/she may not exercise the IR privileges until he/she has passed the proficiency check
- if the IR(A) has expired, refresher training at an ATO is required before the applicant may take the proficiency check again
- if the IR(A) has not been revalidated or renewed within the preceding 7 years, the holder will be required to pass again the IR theoretical knowledge examination and skill test
- An FNPT II or an FFS may be used for revalidation, but each alternate proficiency check must be performed in an aeroplane

4.23 Class & Type Ratings

Circumstances in which class or type ratings are required

Holders of a pilot licence shall not act in any capacity as pilots of an aircraft unless they have a valid and appropriate class or type rating - except when undergoing skills tests, proficiency checks or receiving flight instruction

Requirements for the issue of class or type ratings

- Theoretical and flight training must take place at an ATO
- The skills test must be passed within 6 months after the commencement of the course. Also within 6 months preceding the application for a class or type rating

Validity

- class or type ratings are generally valid for 1 year
- however, a single-pilot single-engine class rating is valid for 2 years
- if the type or class rating has expired, refresher training at an ATO is required before the applicant may take the proficiency check again

Revalidation for multi-engine class and type ratings

- The proficiency check must be passed within 3 months immediately preceding the expiry date of the rating
- The revalidation of an IR(A) may be combined with a proficiency check for the revalidation of a class or type rating

Experience requirements for the issue of class or type ratings – aeroplanes

Single-pilot multi-engine aeroplanes

- at least 70 hours as PIC on aeroplanes

Multi-pilot aeroplanes

- at least 70 hours of flight experience as PIC on aeroplanes
- hold a multi-engine IR(A)
- have passed the ATPL(A) theoretical examinations
- hold a certificate of satisfactory completion of an MCC course in aeroplanes

4.24 Night Rating – aeroplanes

This rating is to allow PPL(A) holders to fly in VFR conditions at night.

Theoretical and flight instruction must be undergone at an ATO and at least:

- 5 hours of flight time in the appropriate category of aeroplane at night, including at least 3 hours of dual instruction, including 1 hour of cross-country flight of at least 50 km and 5 solo take-offs and 5 solo full-stop landings.

Certificates

4.25 Instructor Certificate – aeroplanes

General

A person shall only carry out:

1. flight instruction in an aeroplane when he/she holds:
 - a pilot licence
 - and
 - an instructor certificate appropriate to the instruction given
2. synthetic flight instruction or MCC instruction when he/she holds an instructor certificate appropriate to the instruction given

Prerequisites and requirements

Minimum age: 18

An instructor must hold the licence, and where relevant, the rating for which the flight instruction is to be given.

He/she is to have:

- completed at least 15 hours of flight as a pilot on the class or type of aeroplane on which instruction is to be given, of which a maximum of 7 hours may be in an FSTD or
- passed an assessment of competence for the relevant category of instructor on that class or type of aeroplane
- the entitlement to act as PIC on the aeroplane during such flight instruction

Training course

The applicant must have undertaken theoretical and flight training at an ATO in accordance to Part-FCL.

Assessment of competency

The applicant for an instructor certificate must pass an assessment of competency to instruct a student pilot to the level required for the issue of the relevant licence, rating or certificate.

Validity

An instructor certificate is valid for 3 years.

Specific requirements for a flight instructor (FI)

Of note are:

- in order to instruct for a CPL, the FI must have completed at least 500 hours of flight time as pilot on that category, including at least 200 of flight instruction
- in order to instruct for an IR, the FI must have:
 - at least 200 hours of flight time under IFR, of which 50 hours may be instrument ground time
 - completed, as a student pilot, the IR training course and passed the assessment of competence for the IRI certificate
 - for multi-engine aeroplanes, met the requirements of the issue of a class rating instructor (CRI)

4.26 Examiner Certificate (Aeroplanes) - FE(A)

General

Holders of an examiner certificate shall:

- hold an equivalent licence, rating or certificate to the ones for which they are authorized to conduct skills tests, proficiency checks or assessments of competence and the privilege to instruct for them
- be qualified to act as PIC on the aeroplane during the skills test, proficiency check or assessment of competence
- undertake a standardization course at an ATO or provided by the competent authority

Validity

An examiner certificate shall be valid for 3 years.

Privileges and conditions

The privileges of an FE(A) are to conduct:

- skills tests for the issue of a PPL(A) and skills tests and proficiency checks for associated single-pilot class and type ratings (except for high performance complex aeroplanes) provided the examiner has completed at least 1000 hours of flight time as a pilot on aeroplanes or TMGs including at least 250 hours of flight instruction
- skills tests for the issue of a CLP(A) and skills tests and proficiency checks for associated single-pilot class and type ratings (except for high performance complex aeroplanes) provided the examiner has completed at least 2000 hours of flight time as a pilot on aeroplanes or TMGs including at least 250 hours of flight instruction
- skills tests and proficiency checks for an LAPL(A), provided the examiner has completed at least 500 hours of flight time as a pilot on aeroplanes or TMGs including at least 100 hours of flight instruction

EASA Part-MED

4.27 Abbreviations & definitions

AeMC	-	Aero-medical centre
AME	-	Aero-medical examiner
CAT	-	Commercial air transport
GMP	-	General medical practitioner
OHMP	-	Occupational health medical practitioner
OML	-	Operational multi-pilot limitation
OPL	-	Operational passenger limitation
OSL	-	Operational safety-pilot limitation

Accredited medical conclusion

The conclusion reached by one or more medical experts acceptable to the licensing authority on the basis of objective and non-discriminatory criteria, for the purpose of the case concerned, in consultation with flight operations or other experts as necessary

Assessment

The conclusion on the medical fitness of a person based on the evaluation of the person's medical history and/or aero-medical examinations as required in this Part and further examinations as necessary, and/or medical tests such as, but not limited to, ECG, blood pressure measurement, blood testing and X-ray

Colour safe

The ability of an applicant to readily distinguish the colours used in air navigation and correctly identify aviation coloured lights

Limitation

A condition placed on the medical certificate, licence or cabin crew medical report that shall be complied with whilst exercising the privileges of the licence or cabin crew attestation

Medical certificates

The following medical certificates at least are required for the different pilot licences:

Student pilot :	shall not fly solo unless a medical certificate is held for the relevant licence
LAPL :	LAPL medical certificate
PPL :	Class 2 medical certificate
CPL :	Class 1 medical certificate
MPL :	Class 1 medical certificate
ATPL :	Class 1 medical certificate

Note

- if a night rating is added to a PPL or LAPL, the licence holder shall be colour safe
- if an IR is added to a PPL, the licence holder shall undertake audiology examinations in accordance to the periodicity and standard required for Class 1 medical certificate holders

Decrease in medical fitness

Licence holders shall not exercise the privileges of their licence and related ratings or certificates at any time when they:

- are aware of any decrease in their medical fitness which might render them unable to safely exercise those privileges
- take or use any prescribed or non-prescribed medication which is likely to interfere with the safe exercise of the privileges of the licence
- receive any medical, surgical or other treatment that is likely to interfere with flight safety

In addition, licence holders shall, without undue delay, seek aero-medical advice when they:

- have undergone a surgical operation or invasive procedure
- have commenced the regular use of any medication
- have suffered any significant personal injury involving incapacity to function as a member of the flight crew
- have been suffering from any significant illness involving incapacity to function as a member of the flight crew
- are pregnant
- have been admitted to hospital or medical clinic
- first require correcting lenses

In these cases:

- holders of Class 1 and Class 2 medical certificates shall seek the advice of an AeMC or AME
- The AeMC or AME shall assess the medical fitness of the licence holder and decide whether they are fit to resume the exercise of their privileges

- holders of LAPL medical certificates shall seek the advice of an AeMC, AME or GMP who signed the medical certificate. The AeMC, AME or GMP shall assess the medical fitness of the licence holder and decide whether they are fit to resume the exercise of their privileges

Initial issue of medical certificates

Class 1 - initial issue by an AeMC

Class 2 - initial issue by an AeMC or an AME

LAPL - initial issue by an AeMC, an AME or, if permitted by national law, a GMP

Revalidation and renewal of medical certificates

Class 1 and 2 by an AeMC or an AME

LAPL - by an AeMC, an AME or, if permitted by national law, a GMP

Validity, revalidation and renewal of medical certificates

Validity

Class 1

- 12 months
- validity reduced to 6 months for holders who:
 - are engaged in single-pilot CAT operations carrying passengers and who have reached the age of 40
 - have reached the age of 60

Class 2

- 60 months until the holder reaches the age of 40. However, should the certificate be issued prior to reaching 40, it can only be valid to the age of 42
- 24 months between the age of 40 and 50. However, should the certificate be issued prior to reaching 50, it can only be valid to the age of 51
- 12 months after the age of 50

LAPL

- 60 months until the holder reaches the age of 40. However, should the certificate be issued prior to reaching 40, it can only be valid to the age of 42
- 24 months after the age of 40

Note: validity is calculated from the date of the medical examination

Revalidation

Examination and/or assessments for the revalidation of a medical certificate may be undertaken up to 45 days prior to the expiry date of the medical certificate.

Should the holder not comply, then a renewal examination and/or assessment shall be required.

Renewal

Class 1 & 2 certificates

If the holder allows the medical certificate to expire for more than 2 years, the AeMC or AME shall only conduct the renewal examination after assessment of the aero-medical records of the applicant.

If the holder allows the medical certificate to expire for more than 5 years, the examination requirements for initial issue shall apply.

Operational limitation codes

Operational multi-pilot limitation (OML) - Class 1 only

When the holder of a CPL, ATPL or MPL does not fully meet the requirements for a Class 1 medical certificate and has been referred to the licensing authority, it shall be assessed whether an OML “**valid only as or with a qualified co-pilot**” is applicable.

The holder then shall only operate an aircraft in multi-pilot operations with a qualified co-pilot, who is not subject to an OML and who has not attained the age of 60.

An OML can only be imposed and removed by the licensing authority.

Operational Safety Pilot Limitation (OSL) - Class 2 and LAPL

The holder with an OSL shall only operate an aircraft if another pilot qualified as PIC is carried on board occupying a seat at the controls and the aircraft is fitted with dual controls.

In the case of a Class 2 certificate, this can be imposed by an AeMC or AME in consultation with the licensing authority.

Operational Passenger Limitation (OPL) - Class 2 and LAPL

The holder with an OPL shall only operate an aircraft without passengers on board.

Questions

- 4
Questions
1. According to EASA Part-FCL class ratings shall be established for single-pilot aeroplanes not requiring a type rating including:
 - a. all touring motor gliders.
 - b. all types of single-pilot, single-engine aeroplanes fitted with a turbojet engine.
 - c. microlights having fixed wings and moveable aerodynamic control surfaces acting in all three dimensions.
 - d. any other type of aeroplane if considered necessary.
 2. Which of the following is the privilege of the holder of a CPL(A)?
 - a. To act as PIC of any aeroplane engaged in operations other than commercial air transportation.
 - b. To act as PIC of any aeroplane engaged in commercial air transportation.
 - c. To act as PIC of any aircraft certificated for single-pilot operation other than commercial air transportation.
 - d. To act as co-pilot of any aircraft engaged in commercial air transport operations.
 3. What age do you need to be to exercise the privileges of a CPL licence?
 - a. 18
 - b. 21
 - c. 16
 - d. 23
 4. When you are over 60 and the holder of an ATPL(A), how often are you required to have a medical examination?
 - a. The 12 month period reduces to 6 months.
 - b. The 24 month period reduces to 12 months.
 - c. The 6 month period reduces to 3 months.
 - d. The 9 month period reduces to 3 months.
 5. You can use simulator hours towards the 1500 hours required for an ATPL. How are simulator hours limited?
 - a. Maximum of 100, not more than 15 in a procedural flight trainer.
 - b. Maximum of 100, not more than 30 in a procedural flight trainer.
 - c. Maximum of 100, not more than 25 in a procedural flight trainer.
 - d. Maximum of 100, not more than 50 in a procedural flight trainer.
 6. What is the night flying hours requirement for an ATPL(A) licence?
 - a. 75 hours PIC.
 - b. 100 hours PIC or co-pilot.
 - c. 100 hours PIC.
 - d. 75 hours PIC or co-pilot.

7. One of the privileges of the holder of a CPL(A) is to:
- act as co-pilot of aircraft in commercial air transport operations.
 - act as PIC of single engine aeroplanes in commercial air transport operations.
 - act as a flying instructor.
 - act as PIC of aeroplanes involved in operations other than commercial air transportation.
8. Included in the requirements for 1500 hours, an ATPL(A) holder must have:
- 500 hours multi-pilot operations in transport, commuter or equivalent category aircraft.
 - 500 hours multi-pilot operations and 250 hours as PIC.
 - 500 hours multi-pilot operations including up to 150 hours flight engineering time.
 - 500 hours multi-pilot operations including 200 hours night time.
9. When are you required to tell the authorities of an illness?
- After the period of 21 days of illness has elapsed.
 - On the 21st day of the illness.
 - After a month.
 - After medical has expired.
10. To obtain a CPL(A), how many hours of cross-country flying are required?
- 15 hrs.
 - 20 hrs.
 - 25 hrs.
 - 35 hrs.
11. What medical is required for the issue of a CPL(A)?
- Class 2.
 - As required by particular state.
 - Class 1.
 - JAR Class A (as from 1 Jan 2001).
12. The holder of a pilot licence when acting as co-pilot under supervision of the PIC and performing the functions and duties of the PIC shall be entitled to be credited:
- with 50% of the flight time towards the total time required for a higher grade of licence.
 - in full, but not more than 300 hrs towards the total time required for a higher grade of licence.
 - the flight time in full towards the total time required for a higher grade of licence.
 - the flight time in full towards the total time required for a higher grade of pilot licence according to the requirements of the licensing authority.
13. For an ATPL(A), how many night hours are required?
- 30
 - 75
 - 100
 - 150

- 14. For an ATPL, how many cross-country hours are required, and how many of these must be as pilot-in-command?**
- a. 200/100
 - b. 200/75
 - c. 150/75
 - d. 250/75
- 15. How long would you have to spend in a clinic or hospital before you would have to inform the authorities?**
- a. 24 hrs or more.
 - b. Not less than 20 days.
 - c. More than 12 hours.
 - d. 12 days or more.
- 16. When you are a newly qualified flying instructor you have to be supervised by a qualified flying instructor. When will the period of supervision cease?**
- a. Once you have passed a competency check.
 - b. When you have completed 100 hours instruction and sent 25 students solo.
 - c. When you have completed 25 hours instruction and sent 100 students solo.
 - d. When you have completed 100 hours solo.
- 17. Between what ages can you exercise the privileges of an ATPL(A) on an unrestricted basis?**
- a. 21 - 60
 - b. 21 - 59
 - c. 18 - 59
 - d. 18 - 60
- 18. How long would a non-EASA licence be valid for if validated for use in an EASA state?**
- a. Not less than 6 months.
 - b. 12 months from the date of validation.
 - c. 12 months providing the licence is still valid in the State of Issue.
 - d. Not more than 3 months.
- 19. Which of the following correctly identifies the cross-country hours requirement for a CPL(A)?**
- a. 100 hours PIC or SPIC.
 - b. 20 hours cross-country as PIC including a cross-country flight not less than 540 km (300 NM) in the course of which full stop landings are made at two different aerodromes.
 - c. 25 hours including at least one flight of 2 hours duration covering at least 300 NM and to include 2 full stop landings.
 - d. 10 hours solo with at least one flight over 300 NM with at least two full stop landings.
- 20. What is the minimum age for a holder of a PPL?**
- a. 16
 - b. 17
 - c. 18
 - d. 21

21. What is the period of validity of an EASA Part-FCL class 2 medical?
- a. 24 months until age 30, then 24 months until 50, then 12 months thereafter.
 - b. 24 months until age 30, then 12 months until 50, then 6 months thereafter.
 - c. 60 months until age 40, then 24 months until 50, then 12 months thereafter.
 - d. 60 months until age 30, then 24 months until 50, then 12 months thereafter.
22. A PPL(A) or Commercial licence holder, before taking his/her Instrument Rating, must have completed hours of cross-country of which.....hours must be in an aeroplane ?
- a. 50 15
 - b. 50 10
 - c. 40 15
 - d. 40 10
23. A PPL(A) holder shall demonstrate competence for an IR(A) in a.....aircraft type with.....?
- a. Amphibian all engines running only
 - b. Seaplane one engine inoperative
 - c. Multi-engine one engine inoperative
 - d. Multi-engine all engines running
24. Of the 1500 hours required experience for an ATPL(A).....hours may be in a simulator but not more than hours may be in a basic instrument trainer or basic procedure trainer.
- a. 100 15
 - b. 100 20
 - c. 100 25
 - d. 75 25
25. Which of the following types of aircraft requires a type rating?
- a. Each type of multi-engine aircraft.
 - b. Each type of single-pilot multi-engine turbine.
 - c. Each type of micro-light with fixed wings and able to move its surfaces in three dimensions.
 - d. Each type of touring motor glider.
26. To have an unrestricted FI(A) rating and to instruct for the issue of a CPL(A) or a PPL(A), you must have a CPL(A) or:
- a. at least 250 hours as a pilot.
 - b. not less than 15 hours in the last 12 months on the relevant type.
 - c. at least 200 hours of flight instruction.
 - d. 200 hours flight time of which not less than 150 hours is PIC.
27. According to EASA Part-FCL, what classes of medical exist?
- a. Class 1 only.
 - b. Classes 1 and 2.
 - c. Classes 1, 2 and 3.
 - d. Classes 1, 2, 3 and 4.

- 28. According to EASA Part-FCL, a single-engine class rating is valid for:**
- a. 2 years.
 - b. 2 years up to the age of 40 then 1 year thereafter.
 - c. 5 years after licence issue.
 - d. 1 year.
- 29. The validity of a multi-engine class rating or a type rating shall be 1 year from:**
- a. date of issue or the date of expiry if revalidated within the validity period.
 - b. date of application received by the authority.
 - c. date of skills test.
 - d. date of medical examination.
- 30. In order to carry out PPL(A) instruction you must:**
- a. hold a PPL(A) with instrument rating.
 - b. have passed the CPL theoretical knowledge exams and hold an FI(A) rating.
 - c. hold a CPL(A)/IR(A).
 - d. hold an ATPL(A).
- 31. For a pilot to hold an ATPL(A), the hours required are:**
- a. 500 PIC, or 300 PIC and 200 as co-pilot acting as PIC under supervision.
 - b. 200 PIC, or 100 PIC and 100 as co-pilot acting as PIC under supervision.
 - c. 250 PIC, or 150 PIC and 100 as co-pilot acting as PIC under supervision.
 - d. 500 hrs as PIC under supervision or 250 hrs, either as PIC, or made up by not less than 70 hrs as PIC and the additional flight time as PIC under supervision.
- 32. A pilot holding a CPL(A) can act as:**
- a. PIC of any aircraft in non-commercial aviation.
 - b. PIC in any single-engine aeroplane engaged in commercial aviation.
 - c. PIC of any single-pilot aeroplane engaged in commercial aviation.
 - d. PIC in any aircraft for which he/she is class/type rated engaged in non-commercial aviation.
- 33. From what date is a medical certificate valid?**
- a. The date of the initial general medical examination.
 - b. The date the certificate is delivered to the pilot.
 - c. The date of licence issue.
 - d. The date of the revalidation of the licence.
- 34. Which of the following annexes of the Chicago Convention contains the minimum specification for a crew member's licence to be recognized by Contracting States?**
- a. Annex 2.
 - b. Annex 3.
 - c. Annex 1.
 - d. Annex 4.

35. For the holder of a commercial pilot's licence for single-pilot fixed-wing and helicopters who has attained the age of 40, the period between medical reports decreases from:
- 12 months to 6 months.
 - 60 months to 24 months.
 - 24 months to 6 months.
 - 24 months to 12 months.
36. An applicant for an ATPL(A) for aircraft shall have at least:
- 100 hours night flying purely as PIC.
 - 75 hours night flying as PIC or as co-pilot.
 - 100 hours night flying as PIC or as co-pilot.
 - 75 hours night flying as PIC.
37. A CPL(A) applicant undergoing an integrated course of flight training shall have completed:
- 150 hours flight time of which 5 hours may be instrument ground time.
 - 150 hours flight time.
 - 200 hours flight time including 10 hours instrument ground time.
 - 200 hours flight time.
38. If an applicant for a CPL(A) wishes to exercise the privileges of the licence at night, flight experience will include:
- 5 hours of night flight including 3 take-offs and 5 landings as PIC.
 - 5 hours of night flight including 5 take-offs and 5 landings as PIC.
 - 5 hours of night flight including 5 take-offs and 5 landings as PIC or co-pilot.
 - 5 hours of night flight including 3 take-offs and 3 landings as PIC or co-pilot.
39. According to EASA Part-FCL, an instrument rating is valid for:
- one year.
 - two years.
 - the period of validity of the licence.
 - indefinitely.
40. When acting as co-pilot of an aeroplane that requires a co-pilot, the pilot shall be entitled to credit not more than:
- 40% of the co-pilot time towards the total flight time required for a higher grade of licence.
 - 60% of the co-pilot time towards the total flight time required for a higher grade of licence.
 - 100 hours of the co-pilot time towards the total flight time required for a higher grade of licence.
 - 100% of the co-pilot time towards the total flight time required for a higher grade of licence.

- 41. An applicant for a CPL(A) shall have completed in aeroplanes, not less than:**
- a. 200 hours of flight time including 70 hours as PIC.
 - b. 150 hours of flight time including 100 hours as PIC.
 - c. 200 hours of flight time or 150 hours if completed during an integrated course of approved training as a pilot of aeroplanes.
 - d. 200 hours of flight time including 80 hours as PIC.
- 42. The holders of pilot licences are required to inform the authority if, through illness, they are unable to undertake those functions to which the licence relates throughout a certain number of days. The number of days is:**
- a. 14
 - b. 21
 - c. 28
 - d. 30
- 43. The cross-country requirement for the issue of a CPL(A) is to include:**
- a. 20 hours cross country with one flight including 2 full stop landings over a total distance of 270 km (150 NM).
 - b. 20 hours cross country with one flight including 2 full stop landings over a total distance of 540 km (300 NM).
 - c. 10 hours cross country with one flight including 2 full stop landings over a total distance of 270 km (150 NM).
 - d. 15 hours cross country with one flight including 2 full stop landings over a total distance of 540 km (300 NM).
- 44. An applicant for a CPL(A) shall hold:**
- a. a current class 3 medical assessment.
 - b. a current class 2 medical assessment.
 - c. a current class 1 medical assessment.
 - d. a current medical assessment to a level prescribed by the authority of the state of licence issue.
- 45. How many synthetic flight trainer hours may be included by an applicant for an ATPL(A) as part of the 1500 hours necessary experience?**
- a. 100 hours of which not more than 15 hours have been completed in a flight procedures trainer or basic instrument trainer.
 - b. 75 hours of which not more than 20 hours have been completed in a flight procedures trainer or basic instrument trainer.
 - c. 100 hours of which not more than 25 hours have been completed in a flight procedures trainer or basic instrument trainer.
 - d. 100 hours of which not more than 20 hours have been completed in a flight procedures trainer or basic instrument trainer.

46. According to EASA Part-FCL, an applicant for an IR(A) shall hold a PPL(A) with a night qualification, or a CPL(A), and have completed at least 50 hours:
- instructional time as student PIC of aeroplanes or helicopters of which at least 10 hours is to be in aeroplanes.
 - cross-country time as PIC of aeroplanes or helicopters of which at least 10 hours is to be in aeroplanes.
 - cross-country time as a pilot of aeroplanes or helicopters of which at least 10 hours is to be in aeroplanes.
 - instructional time as student PIC of aeroplanes.
47. For which of the following are type ratings established?
- Each type of multi-pilot aeroplane.
 - Each type of single-pilot multi-engine aeroplane fitted with turbine engines.
 - Any type of aircraft whenever considered necessary by the authority.
 - All the above answers are correct.
48. According to EASA Part-FCL, establishment of separate type rating for aeroplanes will be assessed on the basis of three criteria. One of these criteria is that the aeroplane has:
- handling characteristics that require the use of more than one crew member.
 - a certificate of airworthiness issued by a non-JAA state.
 - a certificate of airworthiness issued by the manufacturer.
 - handling characteristics that require additional flying or simulator training.
49. Which annex to the Chicago Convention contains minimum specifications for a crew licence to have international validity?
- Annex 3.
 - Annex 4.
 - Annex 1.
 - Annex 2.
50. A type rating is applicable to:
- an aeroplane requiring a certificate of airworthiness.
 - an aeroplane with a certificate of airworthiness issued by the state of licence issue.
 - an aeroplane that requires multi-pilot operation.
 - an aeroplane that requires additional skills training.
51. According to EASA Part-FCL, recognized instructor categories are:
- FI(A); TRI(A); CRI(A); IRI(A) only.
 - FI(A); CRI(A) only.
 - FI(A); TRI(A) only.
 - FI(A); TRI(A); CRI(A); IRI(A); MCCI(A) and SFI(A) only.
52. When a state renders valid a licence issued by another Contracting State, as an alternative to issuance of its own licence, the period of validity shall:
- not extend beyond 15 days after the validity of the licence.
 - not extend beyond the period of validity of the licence.
 - be at the discretion of the validating state.
 - be at the discretion of ICAO.

53. An applicant for an EASA Part-FCL ATPL(A) has to demonstrate the ability to pilot:
- training aircraft.
 - multi-crew aircraft requiring a Flight Engineer.
 - multi-crew aeroplanes under IFR.
 - night flights with passengers on board.
54. A pilot is not to operate an aircraft as PIC or co-pilot in CAT or carry passengers unless he/she has carried out at least:
- 5 take-offs and landings in the preceding 90 days
 - 3 take-offs, approaches and landings in the preceding 90 days
 - 5 take-offs, approaches and landings in the preceding 90 days
 - 5 take-offs, approaches and landings in the preceding 60 days
55. A pilot is not to operate an aircraft as PIC at night in CAT or carry passengers at night unless he/she has carried out at least:
- 1 take-off, approach and landing at night in the preceding 90 days or holds an Instrument Rating
 - 5 take-offs, approaches and landings at night in the preceding 90 days or holds an Instrument Rating
 - 3 take-offs, approaches and landings at night in the preceding 90 days or holds an Instrument Rating
 - 3 take-offs, approaches and landings at night in the preceding 60 days or holds an Instrument Rating

Answers

1	2	3	4	5	6	7	8	9	10	11	12
a	a	a	a	c	b	d	a	a	b	c	c

13	14	15	16	17	18	19	20	21	22	23	24
c	a	c	b	b	c	b	b	c	b	c	c

25	26	27	28	29	30	31	32	33	34	35	36
b	d	b	a	a	b	d	c	a	c	a	c

37	38	39	40	41	42	43	44	45	46	47	48
a	b	a	d	c	b	b	c	c	b	d	a

49	50	51	52	53	54	55
c	c	d	b	c	b	a

Chapter

5

Rules of the Air

History	103
Applicability of the Rules of the Air.....	103
General Rules	105
Visual Flight Rules.....	124
Instrument Flight Rules.....	125
Semi-circular Flight Level Rules and RVSM.....	127
Special VFR.....	128
Distress and Urgency Signals	129
Restricted, Prohibited or Danger Areas	130
Signals for Aerodrome Traffic	131
Marshalling Signals	139
Flight Deck Signals	146
Questions	147
Answers	156

History

5.1 Education. The rules of the air, like the rules of the road, have evolved as aviation has advanced. Initially, aircraft flew without radios (radio hadn't been invented or when it had, there wasn't an aeroplane big enough to carry the equipment!). Simple rules evolved to attempt to reduce the risk of collisions. Remember, in 1920 an aeroplane flying at 80 or 90 kt was travelling at a previously unimagined speed. Visual signals were required at aerodromes to convey information to pilots and procedures evolved to allow orderly flight in the vicinity of aerodromes and to permit visual navigation en route. Between the 1920s and WWII, individual states passed legislation to enforce the rules that had become established in those states. With the expansion of commercial aviation during and after the war, the need for standardization in the rules was evident and this was one topic that was seriously addressed at Chicago in 1944.

Applicability of the Rules of the Air

5.2 Annex 2. Annex 2 of the Chicago Convention details the ICAO Rules of the Air. As mentioned above, the rules were primarily written in the early days for non-radio traffic and some of the requirements may now seem out of date. However, there is still a considerable amount of non-radio traffic in general aviation and those airmen are equally entitled to the protection afforded to commercial air transport, and of course, there is always the possibility of communication failure. The ICAO Rules of the Air apply to aircraft bearing the nationality and registration marks of an ICAO Contracting State, wherever they may be, providing they do not conflict with the rules published by the State having jurisdiction of the territory overflown. The ICAO Council resolved in adopting Annex 2 in April 1948 and Amendment 1 in November 1951, that the ICAO Rules apply without exception over the high seas. (High Seas are defined as the areas of sea outside the territorial limits of any State.) When an aircraft is flying within the airspace of the state of registration, the rules of the air of that state (in the UK as published in CAP 393 - The ANO) are applicable. Indeed, for a UK registered aeroplane, the UK rules apply wherever the aeroplane is flown providing there is no conflict with local rules. Where a UK registered aircraft is flying over a foreign state, the rules of the air of that state apply. Do not confuse Rules with Law! The application of the rules can be summarized thus:

- UK registered aircraft over the UK - UK rules apply
- UK registered aircraft over France - French and UK rules apply (French have priority)
- UK registered aircraft over the high seas - ICAO rules apply without exception

5.3 Applicable Rules. The operation of an aeroplane either in flight or on the movement area of an aerodrome is to be in accordance with the general rules and, when in flight, either:

- The **visual flight rules (VFR)**, if the aircraft is flown in visual meteorological conditions (VMC)
or
- The **instrument flight rules (IFR)**

5.4 IFR or VFR? A pilot may elect to fly in accordance with the Instrument Flight Rules in VMC (he/she may be required to do so by the ATS Authority in certain circumstances). A pilot must fly in accordance with the IFR in IMC. If a pilot elects to fly VFR he/she must do so only where VMC exist.

5.5 Visual Meteorological Conditions. To fly under VFR, the visual meteorological conditions (VMC) must exist. This is defined by altitude (or Flight Level), flight visibility (the forward visibility from the flight deck of an aeroplane in flight), and distance (horizontally and vertically) from cloud, for the relevant classes of airspace. Classes of airspace are discussed fully in Chapter 13 - Airspace but basically, specify what rules are permitted and what type of control (if any) is applied by the Air Traffic Service. It is imperative that you know the VMC.

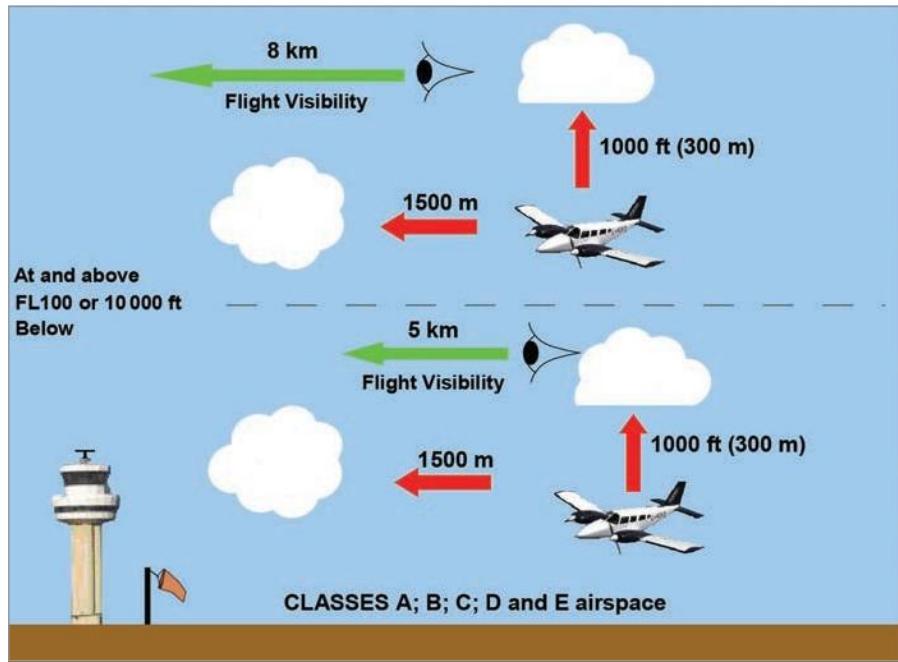


Figure 5.1

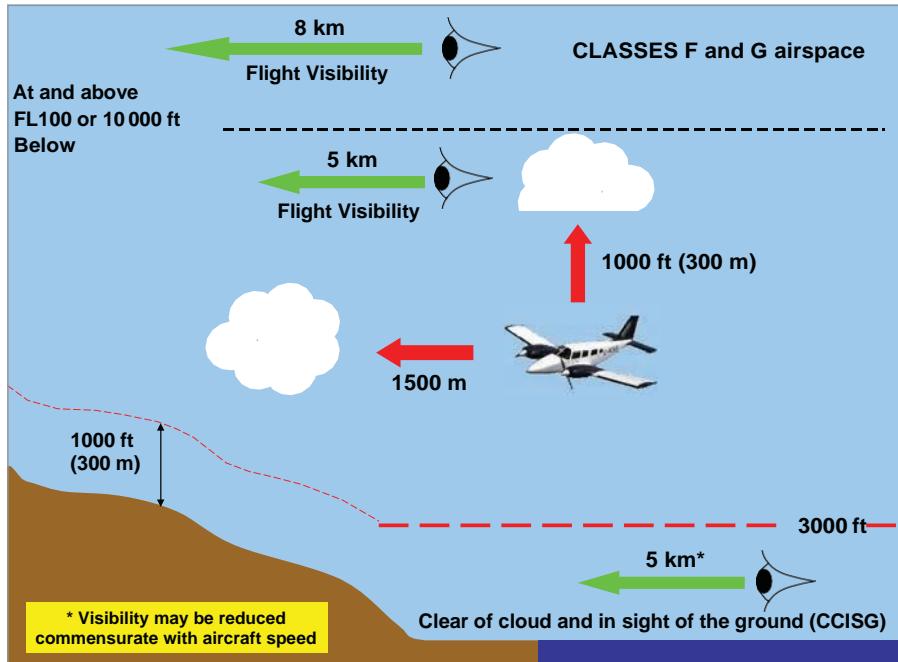


Figure 5.2

5.6 VMC Criteria Classes A, B, C, D and E Airspace. At and above 10 000 ft (FL100) the flight visibility requirement is 8 km with 300 m (1000 ft) vertically, and 1500 m horizontally from cloud. Below 10 000 ft (FL100) the flight visibility requirement is reduced to 5 km.

5.7 VMC Criteria Classes F and G Airspace. At and above 10 000 ft (FL100) the flight visibility requirement is 8 km with 300 m (1000 ft) vertically, and 1500 m horizontally from cloud. Below 10 000 ft (FL100) but above 3000 ft, the flight visibility requirement is reduced to 5 km. Below 3000 ft AMSL and within 1000 ft of the surface (where surface elevation is above 3000 ft) the flight visibility remains 5 km but VMC would exist if the aircraft was clear of cloud and within sight of the surface.

5.8 Pilot-in-command Responsibilities. Definitions:

- **Commander:** A designated pilot amongst the flight crew who is qualified as pilot-in-command who may delegate the conduct of the flight to another qualified pilot.
- **Pilot-in-command (PIC):** A pilot who is responsible for the operation and safety of the aeroplane during flight time.
- **Pilot Flying (PF):** The pilot, who for the time being, is in charge of the controls of the aeroplane.
- **Pilot not Flying (PNF):** The pilot who is assisting the pilot flying in accordance with the multi-crew co-operation concept, when the required flight crew is more than one.

5.9 Responsibilities. Before beginning a flight, the pilot-in-command shall become familiar with all information appropriate to the intended operation. Pre-flight action for flights away from an aerodrome and for all IFR flights, shall include a careful study of available current weather reports and forecasts, taking into consideration fuel requirements and an alternative course of action if the flight cannot be completed as planned. The commander of an aeroplane has the final authority as to the disposition of the aircraft whilst in command.

Note: *The Rules of the Air may only be broken if absolutely necessary in the interests of flight safety.*

5.10 Intoxicating Liquor, Narcotics or Drugs. No person is to pilot an aircraft, or act as a flight crew member of an aircraft, whilst under the influence of intoxicating liquor, any narcotic or drug, by reason of which that person's capacity to act is impaired. ICAO does not lay down any restrictions or maximum blood/alcohol levels for aircrew. However, JAR OPS-1 does. Aircrew are not permitted to exercise the privileges of their licences with a blood/alcohol level exceeding 0.2 promille (20 mg/100 ml) about one quarter of the UK driving limit. ICAO clearly states that no person may act as aircrew if he/she is under the effect of any psychotropic substance. As professional pilots, you are expected to behave in an adult manner commensurate with the responsibility placed on your shoulders concerning the safety of the passengers in your care. This is an onerous duty which, if it is abused, will result in the full force of the law being applied if you are found negligent in that duty.

General Rules

5.11 Minimum Heights. Except when necessary for take-off or landing, or except by permission of the appropriate authority, aircraft shall not be flown over the congested areas of cities, towns or settlements or over an open-air gathering of persons, unless at such a height as will permit, in the event of an emergency arising, a landing to be made without undue hazard to persons or property on the surface. No specific heights are mentioned and this rule should not be confused with the minimum height rules for IFR or VFR.

Note: *The term "aircraft level" is used generally to mean flight level, altitude, or height.*



Figure 5.3 An aircraft must be flown at a height from which, in the event of an emergency, a landing can be made without undue hazard to persons or property on the surface.

5.12 Cruising Levels. For flights at or above the lowest usable flight level or where applicable, above the transition altitude, flights shall be conducted in terms of flight levels. For flights below the lowest usable flight level or where applicable, at or below the transition altitude, flights shall be conducted in terms of altitude.

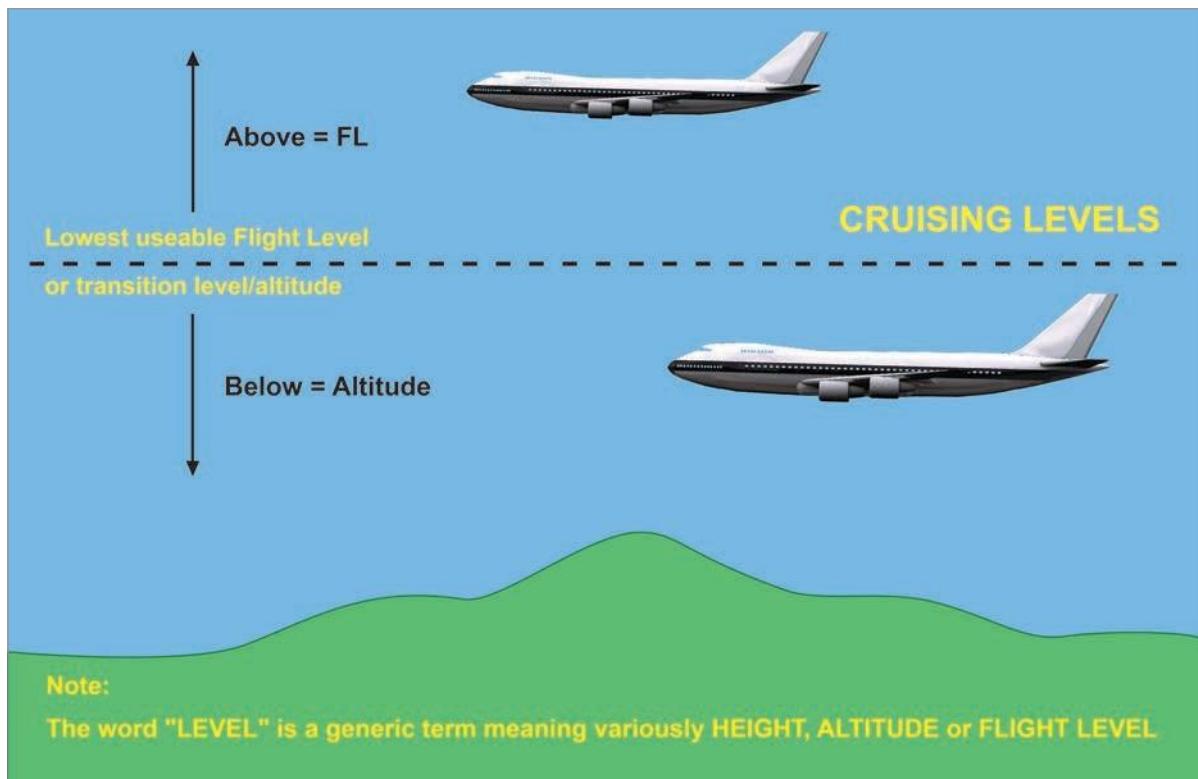


Figure 5.4

5.13 Proximity and Right of Way. An aircraft shall not be operated in such proximity to other aircraft as to create a collision hazard. The aircraft that has the right of way shall maintain its heading and speed, but the PIC is still responsible for avoiding collisions (including ACAS alerts). Aircraft which are obliged to give way are to do so and avoid passing over, under or in front of the other unless it is well clear, and to take into account the effect of wake turbulence.

5.14 Approaching Head On. When two aircraft are approaching head on, and there is a danger of collision, each shall alter course to the right. Neither has right of way.



Figure 5.5

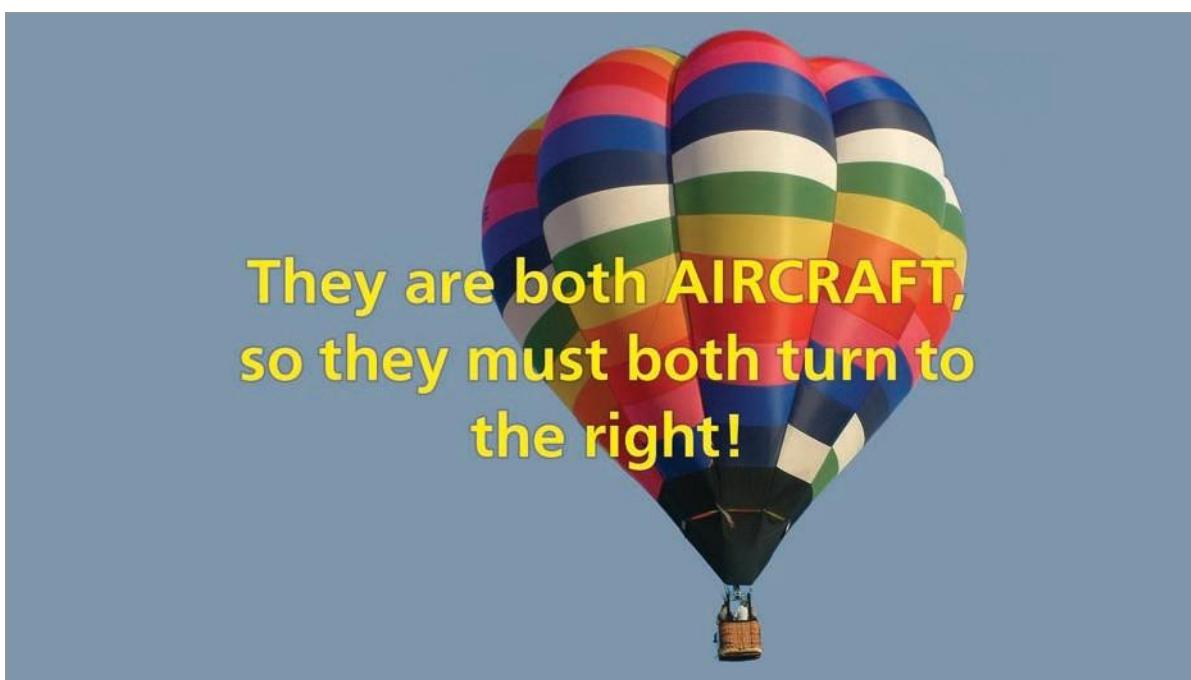


Figure 5.6

5.15 Converging. When two aircraft of the same type (see definition of aircraft) are converging at approximately the same level, the aircraft that has the other on its right shall give way. In order not to fly over, under or pass in front of the other aircraft, the aircraft that is obliged to give way should pass behind the other aircraft. In order to achieve this, the aircraft giving way should turn right. Where the two aircraft are not of the same type, the following order of priority will apply, and again, the method of giving way is to turn to the right:

- Power driven heavier than air aircraft (aeroplanes) shall give way to airships, gliders and balloons
- Power driven lighter than air aircraft (airships) shall give way to gliders and balloons
- Gliders shall give way to balloons
- Power driven aircraft shall give way to aircraft which are seen to be towing other aircraft or objects.

(**Note:** A towing combination is considered to be a single flying machine (not ICAO definition) under the control of the pilot-in-command of the towing aircraft).



Figure 5.7

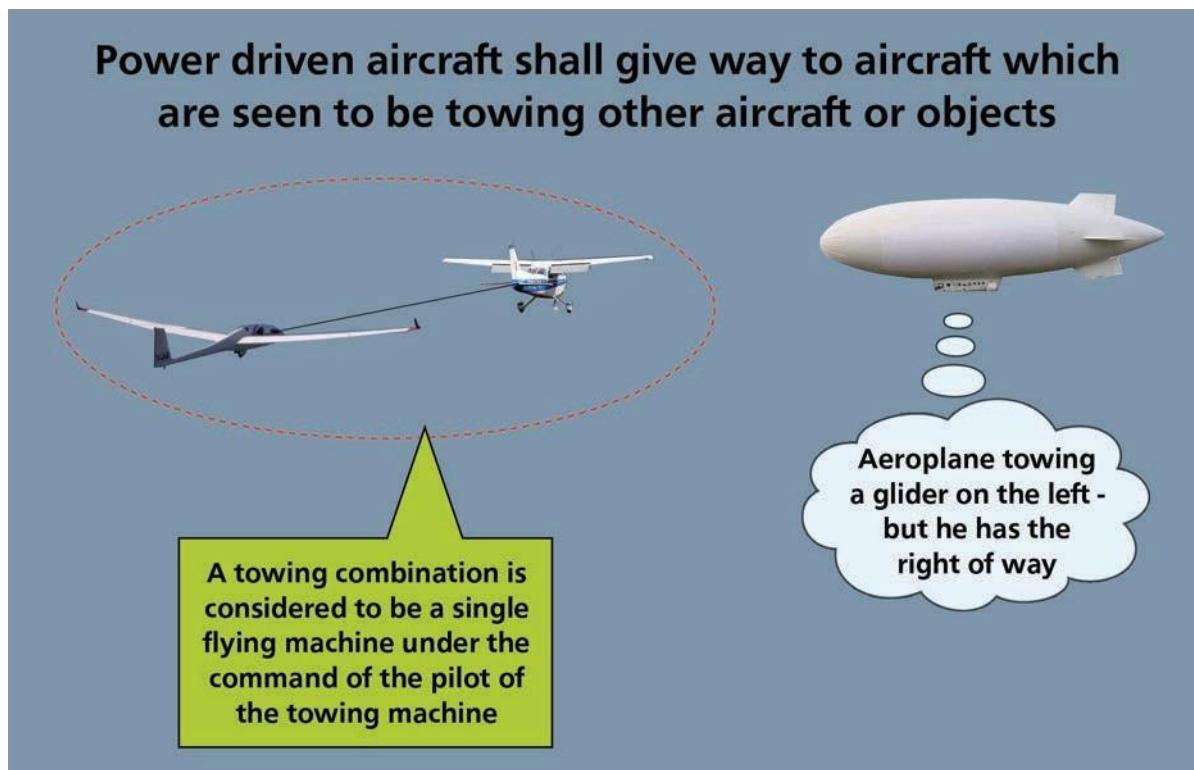


Figure 5.8

5.16 Overtaking. An overtaking aircraft is an aircraft that approaches another from the rear on a line forming an angle of less than 70° with the plane of symmetry of the latter (at night, the approaching aircraft would see the white tail light of the aircraft in front). An aeroplane that is being overtaken has the right of way and the overtaking aircraft whether climbing or descending or in horizontal flight, shall keep out of the way of the other aircraft by altering its heading to the right and to maintain this position with regard to the other aircraft until well clear.

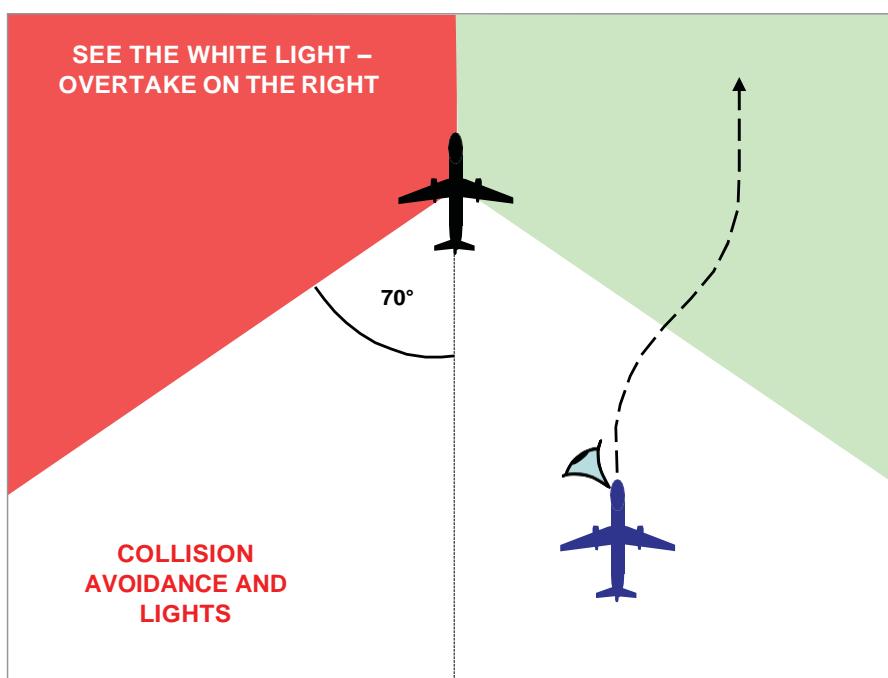


Figure 5.9

5.17 Landing. An aircraft in flight, or operating on the ground (or water), shall give way to aircraft landing or in the final stages of an approach to land (see definition). When two or more heavier than air aircraft are approaching an aerodrome to land, the aircraft at the higher level shall give way to the aircraft at the lower level, but the lower aircraft must not take advantage of this rule to 'cut in' in front of another aircraft. In any event, power driven heavier than air aircraft shall give way to gliders.

5.18 Emergency Landing. An aircraft that is aware that another aircraft is in an emergency and is compelled to land, shall give way to that aircraft.

5.19 Taking Off. An aircraft taxiing on the manoeuvring area shall give way to aircraft taking off or about to take off.

5.20 Stop Bars. An aircraft taxiing on the manoeuvring area shall stop and hold at all lighted stop bars (used in poor visibility) and may only proceed when the lights are switched off.

5.21 Surface Movement of Aircraft. In the case of danger of collision between two aircraft taxiing on the movement area (see definition) of an aerodrome, the following shall apply:

- **Approaching head on.** Both stop or where practicable alter course to the right to keep well clear.
- **Converging.** The one that has the other on its right shall give way. (Stop or turn to pass behind).
- **Overtaking.** The aircraft being overtaken has the right of way. The overtaking aircraft is to keep well clear of the other aircraft.

Note: ICAO (Annex 2) states that any vehicle operating regularly on the manoeuvring area of an aerodrome must be in two-way radio contact with ATC. The UK ANO (Rules of the Air - Rule 37) requires all vehicles and aircraft moving on the manoeuvring area to give way to vehicles towing aircraft.

5.22 Aircraft Lights The systems of displaying navigation lights, anti-collision lights and other lights designed to draw attention to the presence of an aircraft, are covered in Operational Procedures. However, you may be asked questions in the Air Law exam on this subject. The law in this matter is restricted to when you must have the lights fitted and when they must be on.



Figure 5.10

5.23 Lights Displayed by Aircraft. The following lights, required to be shown by aircraft, are to be illuminated from sunset to sunrise (see definition) or during any other period specified by the appropriate authority:

- Anti-collision lights intended to attract attention to the aircraft
- Navigation lights intended to indicate the relative path of the aircraft to an observer. No other lights shall be displayed if they are likely to be mistaken for these lights.

5.24 Sunset to Sunrise (or during any other period required by the appropriate authority):

- All aircraft moving on the movement area of an aerodrome shall display navigation lights intended to indicate the relative path of the aircraft to an observer. No other lights shall be displayed if they are likely to be mistaken for these lights.
- All aircraft on the movement area of an aerodrome are to display lights that indicate the extremities of their structure, unless stationary and otherwise adequately illuminated. (Aircraft parked on the Apron (see definition) will be adequately illuminated because an Apron is required to be lit if it is to be used at night. It is usual to use 'glim' lamps to mark the extremities of aeroplanes parked off the Apron).

5.25 Engines Running. All aircraft on the movement area of an aerodrome are to display lights intended to attract attention to the aircraft. Aeroplanes with engines running are to display lights to indicate that fact. Red anti-collision lights will suffice for this purpose.

Note: *It is usual to indicate that an aeroplane is manned by operating the anti-collision light. This serves to warn all personnel that the engines may be started.*

5.26 Anti-collision Lights. All aircraft in flight which are fitted with anti-collision lights shall display the lights by day as well as by night. (This is in addition to 6.23, bullet point 1 above and is intended to ensure that if anti-collision lights are fitted but are not specifically required by law, then these lights are also to be illuminated by day as well as night.)

5.27 Safety. A pilot is permitted to switch off or reduce the intensity of any flashing lights if they are likely to adversely affect the satisfactory performance of duties, or subject an outside observer to harmful dazzle.

5.28 Simulated IMC. (Definition: Reducing the forward visibility of the Pilot Flying (PF) so that he/she has to rely on instruments for attitude and other flight data). This can be achieved by the use of full or partial flight deck window screens to prevent forward visibility or the use of a visor to 'blinker' the pilot. The most important factor is that simulated IMC can only be carried out in VMC. The requirements therefore represent the steps necessary to comply with VFR whilst the visibility of the PF is impaired and he cannot maintain the lookout required by the law.

- An aircraft shall not be flown under simulated IMC unless:
 - Fully functioning dual controls are fitted, and
 - A qualified pilot (need not be type rated) occupies a control seat to act as safety pilot (PNF).
- The safety pilot must have adequate forward vision and to each side of the aircraft. If not, a competent observer (**requirement:** must know what an aeroplane in flight looks like, be able to report any airborne contact clearly and concisely and be able to use the internal communications system of the aeroplane) in communication with the safety pilot, is to occupy a position in the aircraft from which he/she has a field of vision which adequately supplements that of the safety pilot.

5.29 Flight in the Vicinity of an Aerodrome. (Note: The pilot of an aeroplane is to plan the route to be flown. At all times he/she is to be aware when the aircraft is being flown in the vicinity of an aerodrome). An aeroplane operated on or in the vicinity of an aerodrome, whether or not within an Aerodrome Traffic Zone (see definition) shall:

- Observe other aerodrome traffic for the purpose of avoiding collisions;
- Conform with, or avoid, the pattern of traffic formed by other aircraft in operation;
- Make all turns to the left when approaching for landing and after taking off, unless otherwise instructed (a right hand circuit!);
- Land and take off into wind unless safety, the runway configuration, or air traffic considerations determine that a different direction is preferable.

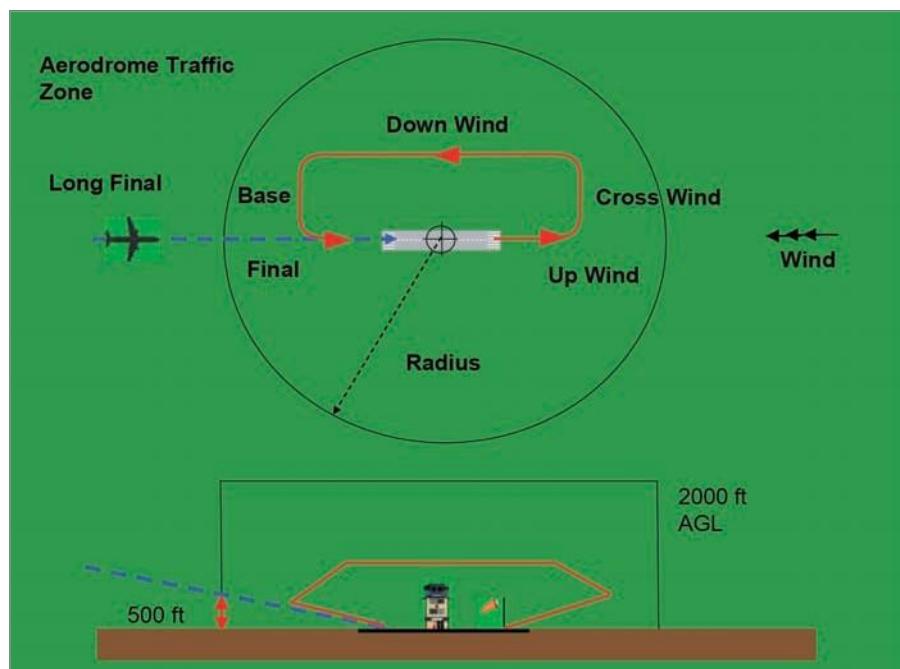


Figure 5.11

5.30 Flight Plans. A flight plan is to be submitted prior to operating:

- Any flight or portion thereof to be provided with an air traffic service (a controlled flight - see definition)
- or
- Any IFR flight within advisory airspace
- or
- Any flight within or into designated areas, or along designated routes, when so required by the appropriate ATS authority to facilitate the provision of flight information, the alerting and search and rescue services
- or
- Any flight within or into designated areas, or along designated routes, when so required by the appropriate ATS authority to facilitate co-ordination with appropriate military units (ADIZ) or with air traffic service units in adjacent states in order to avoid the possible need for interception for the purpose of identification
- or
- Any flight across international borders (not just FIR boundaries).

- A flight plan shall be submitted before departure to an ATS reporting office (flight planning section, ops room, ATC or FIS office) or, during flight, transmitted to the appropriate ATS unit or air-ground control radio station, unless arrangements have been made for the submission of repetitive flight plans.
- Unless otherwise required by the ATS authority, a flight plan for a controlled flight is to be submitted at least 60 minutes before departure (additional rules apply to flights entering an Oceanic Control Area - OCA), or if submitted in flight, at a time that will ensure its receipt by the appropriate ATSU at least 10 minutes before the aircraft is estimated to reach:
 - The intended point of entry into a control area or advisory area; or
 - The point of crossing an airway or advisory route.
- A flight plan is to contain such of the following as are considered relevant by the appropriate ATS (**note:** the following are not FP field numbers):
 - Aircraft identification;
 - Flight rules and type of flight;
 - Number and type of aircraft and wake category;
 - Equipment;
 - Departure aerodrome;
 - Estimated off blocks time (EOBT);
 - Cruising speed(s) (TAS or Mach No.);
 - Cruising level(s);
 - Route to be followed;
 - Destination aerodrome and estimated elapsed time (EET);
 - Alternate aerodrome;
 - Fuel endurance;
 - Total number of persons on board (POB) including dead bodies;
 - Emergency and survival equipment;
 - Other information.
- With the exception of inadvertent deviation, all changes to a flight plan submitted for IFR flight or a VFR flight operated as a controlled flight, are to be reported as soon as practicable to the appropriate air traffic services unit. For other VFR flights, significant changes to a flight plan shall be reported as soon as practicable to the appropriate ATSU.

Note: Information regarding fuel endurance or total number of people on board, if incorrect at time of departure constitutes a significant change and must be reported.

5.31 Repetitive Flight Plan (RPL). A flight plan related to a series of frequently recurring, regularly operated flights with identical basic feature which are submitted by the Operator for retention and repetitive use by ATCU. These flights must be operated on the same day(s) of consecutive weeks and on at least 10 occasions, or every day over a period of at least 10 consecutive days. There must be a high degree of stability in the elements of the flights.

5.32 Closing a Flight Plan/Arrival Report. Unless operator or local procedures apply, a report of arrival is to be made in person, by radio or via data link, as soon as possible after landing to the appropriate ATSU at the arrival aerodrome for any flight, or portion of flight, for which a flight plan has been submitted. On receipt of the arrival report at the ATSU, the flight plan shall be closed. When communications facilities are known to be inadequate and alternative message handling facilities do not exist, a message comparable to an arrival report is to be transmitted by the aircraft. Whenever an arrival report is required, failure to comply with these provisions may cause serious disruption in the air traffic services and incur great expense in carrying out unnecessary SAR operations. An arrival report made by an aircraft is to contain the following:

- Aircraft identification;
- Departure aerodrome;
- Destination aerodrome;
- Arrival aerodrome;
- Time of arrival.

5.33 Delays of Flight Plans. In the event of a delay of 30 minutes in excess of estimated off-block time (EOBT) for a controlled flight or a delay of 1 hour for an uncontrolled flight for which a flight plan has been submitted, the flight plan should be :

- amended
or
- cancelled and a new flight plan submitted

5.34 Time. Co-ordinated Universal Time (UTC) is to be used and is to be expressed in hours and minutes of the 24 hour day beginning at midnight. It is used throughout the world in aviation but you may still find references to either Zulu time or GMT. Where a time check is passed by ATC it is to be to the nearest minute (e.g. 0941 and 20 secs would be 0941; 0941 and 40 secs would be 0942).

5.35 Clearances. In general clearances consist of 5 parts:

- Aircraft identification
- Clearance limit
- Route
- Levels
- Other instructions (time or expiry, departure manoeuvres, communications etc)

Clearances are issued solely for expediting and separating air traffic and are based on known traffic conditions which affect safety in aircraft operations not only to aircraft in the air and on the manoeuvring area but also to vehicular traffic.

5.36 ATC Clearance. An ATC clearance is to be obtained before operating a controlled flight, or a portion of a flight as a controlled flight. The clearance should be requested by the submission of a flight plan to an ATCU. The PIC may request an amended clearance if the issued

clearance is unsatisfactory in which case, an amended clearance will be issued if practicable. It is normal practice for an ATC clearance to be passed to the aircraft prior to departure. At busy aerodromes a discrete clearance delivery frequency (RT call sign 'DELIVERY') is usually established leaving the other tower frequencies free for the purpose intended,. The person reading the clearance to the pilot will, in all probability, not be the ATCO issuing the clearance. Before commencing the reading of the clearance you will be asked if you are "Ready to copy?" Your response when ready, should be "Go ahead". The clearance will be read to you slowly so that you have the opportunity to write it down, and will be terminated with "read back". You are required to read back the clearance exactly as you received it. If your read back is incorrect, the ATCO will read the entire clearance to you again. This will continue until you get it right. There is nothing unprofessional in asking for a repeat or asking for a place name to be spelled. If you do not read it back correctly, at the subsequent board of enquiry into an accident, it will be stated that you did not understand the clearance as read to you, and you will be held responsible. Do not assume that the air traffic controllers are infallible. If you think something is wrong - query it!

5.37 Clearances and route of flight. The route of flight shall be detailed in each clearance when deemed necessary. The following phrases can be used :

"Cleared by flight planned route" meaning any route or portion of a route which is identical to that flight planned.

"Cleared via (designation) departure " meaning a Standard Instrument Departure route (SID) published in the AIP.

"Cleared via (designation) arrival" meaning a Standard Instrument Arrival route (STAR) published in the AIP.

5.38 Adherence to Flight Plan. Flight plans are to be adhered to unless an emergency situation arises which necessitates immediate action by the aircraft. In such a case the ATCU is to be informed as soon as possible. If the average TAS at cruising level between reporting points varies or is expected to vary by +/- 5% of the TAS given in field 7 of the flight plan, the ATCU is to be informed. If an estimate for the next applicable reporting point, FIR boundary or destination aerodrome changes by more than 3 minutes from that already notified, the revised time is to be communicated to the appropriate ATCU.

Note: In Operational Procedures for operations in the MNPSA, the requirement is **3 minutes or more**.

5.39 Inadvertent Changes. Controlled flights are required to operate along the centre line of an airway or route directly between beacons if that is how the route is delineated. If specified, changeover from one VOR beacon to another is to be at the specified changeover point unless otherwise directed. These are normally every 60 NM. Any deviation from these requirements is to be reported to ATC. If a controlled flight inadvertently deviates from its current flight plan, action is to be taken immediately to regain the track as soon as practicable.

5.40 Weather Deterioration below VMC. If a VFR flight is unable to maintain VMC in accordance with the current flight plan clearance:

- An amended clearance may be requested enabling the aircraft to continue in VMC (on another route) to destination or to an alternate aerodrome, or to leave the airspace in which ATC clearance is required. If such an amended clearance cannot be obtained to continue to operate in VMC, the pilot must notify the ATCU of the action being taken to either leave the airspace concerned, or to land at the nearest suitable aerodrome.
- If the flight is being operated in a control zone, request special VFR clearance.
- If the above measures are inappropriate, request an IFR clearance to continue.

5.41 Position Reports. Unless advised to cease position reporting (this usually happens when under radar control), a controlled flight is to make reports at specified positions as soon as possible after reaching the position. The report is to contain:

- The aircraft RTF identification call sign
- The position for the report
- The time the aircraft was over the position (usually the minutes will suffice unless there is a possibility of confusion)
- The level of the aircraft when passing the point
- The next en route reporting position
- ETA for the next specified point
- (According to ICAO) the name of the next ensuing point.

Note: If SSR mode “C” has been verified as accurate, altitude/FL may be omitted from the position report. If a speed has been assigned by ATC, this is to be included in the position report.

This is an example of a full ICAO position report:

“London Airways this is GABCD, Pole Hill at 35, FL170, Dean Cross at 46, Glasgow next”

5.42 Automatic Dependent Surveillance (ADS) Reporting. ADS, which consists of two different services, “ADS Out” and “ADS In”, could replace radar as the primary surveillance method for controlling aircraft worldwide. In the United States, ADS-B is an integral component of the Next Gen national airspace strategy for upgrading and enhancing aviation infrastructure and operations. ADS enhances safety by making an aircraft visible, real time, to air traffic control (ATC) and to other appropriately equipped ADS aircraft with position and velocity data transmitted every second. ADS data can be recorded and downloaded for post-flight analysis. ADS also provides the data infrastructure for inexpensive flight tracking, planning, and dispatch. As a result, during periods of intense activity in controlled airspace, ADS provides the ability for controllers to accurately track aircraft positions without RT position reports. ADS has the ability to be programmed to make position reports at specified locations, time intervals or when specifically requested by the controller. There are 2 ADS variants, ADS-B and ADS-C.

“ADS-B Out” periodically broadcasts information about each aircraft, such as identification, current position, altitude, and velocity, through an onboard transmitter. ADS-B Out provides air traffic controllers with real-time position information that is, in most cases, more accurate than the information available with current radar-based systems. With more accurate information, ATC will be able to position and separate aircraft with improved precision and timing.

5.43 Termination of Control. A controlled flight is to advise the appropriate ATCU as soon as it ceases to be subject to air traffic control services. This will be done automatically if the aircraft lands at a controlled aerodrome (one with a control tower). A pilot may be requested to advise ATC when the aircraft leaves controlled airspace.

5.44 Communications Failure. Aircraft operating in accordance with an ATC clearance, where two way radio communications are required, are to comply with the requirements of ICAO Annex 10 (Telecommunications) Volume 2. This specifies the requirement for air-to-ground communications equipment and the radio frequencies allocated to the aeronautical mobile telecommunications network (SELCAL satisfies the requirement to maintain air-ground voice communications). Where Controller-Pilot Data Link Communications (CPDLC) exists, the requirement for voice communications is required to be maintained.

5.45 Confirmation of Communication Failure. ATC will confirm that an aircraft is subject to a communications failure by requesting it to execute a specific manoeuvre which can be observed by radar or transmit a signal in order to indicate acknowledgement. In any case ATC will transmit blind instructions to the aircraft on frequencies on which the aircraft is believed to be listening.

5.46 At a Controlled Aerodrome. If the communications system of the aeroplane (receiver or transmitter) fails when the aeroplane is flying in the traffic pattern at a controlled aerodrome, a watch shall be kept for instructions issued by visual (light and ground) signals from the control tower, and such signals complied with.

5.47 Separation of aircraft. Once ATC confirms that an aircraft has a communication failure, separation shall be maintained between the aircraft and other traffic based on the presumption that the aircraft will be carrying out the procedures specified below depending on whether the conditions are either VMC or IMC.

5.48 In VMC. If a failure occurs whilst the aircraft is flying in VMC (regardless of flight rules - VFR or IFR), the aircraft is to continue to be flown in VMC, landed at the nearest suitable aerodrome and arrival reported by the most expeditious means to the appropriate ATCU.

5.49 In IMC. If a failure occurs in IMC:

- When being radar vectored proceed in the most direct manner to rejoin the current flight plan route and no later than the next significant point squawking A7600 and taking into consideration the applicable minimum flight altitude.
- If the aircraft is en route and in an area where radar control is provided, the pilot is to squawk A7600 and maintain the current flight plan for a period of 7 minutes and thereafter adjust speed and level in accordance with the filed flight plan.
- If the aircraft is en route outside of an area where radar control is provided, the pilot is to maintain the current flight plan for a period of 20 minutes following the aircraft's failure to report over a compulsory reporting point (at that point the ATCO will know that there is a communication problem), and thereafter adjust level and speed in accordance with the filed flight plan. The 20 minutes is to allow the ATCO time to resolve any potential conflicts that may arise during the transition to the filed flight plan profile.

5.50 Subsequent Actions. After compliance with the above the pilot is to proceed as follows:

- Continue according to the filed flight plan route to the appropriate designated navigation aid serving the destination aerodrome and, when required to ensure compliance with procedure below, hold over this aid until commencement of descent. Then:
- Commence descent from the radio navigation aid as above at, or as close as possible to, the expected approach time (EAT) last received and acknowledged. If no EAT has been received and acknowledged, descend at, or as close as possible to, the ETA resulting from the current flight plan.
- Complete a normal instrument approach procedure as specified for the designated aid; and land, if possible, within 30 minutes after the ETA as above or the last acknowledged EAT, whichever is the later.
- Report to ATC as soon as possible after landing.

5.51 Unlawful Interference. Where an aircraft is the subject of unlawful interference (hijacking etc.), communication with the appropriate ATC authority is to be attempted to notify the authority of this fact together with any significant circumstances and of any intended deviation from the current flight plan, to enable the ATSU to give priority to the aircraft and to minimize conflict with other aircraft. Attachment B to Annex 2 contains guidance notes for use in this situation. Specifically:

- Unless conditions on the aircraft dictate otherwise, the PIC is to attempt to continue flying on the assigned track and at the assigned level at least until able to notify an ATCU or until within coverage of a radar unit.
- If forced to depart from assigned track/level, without being able to notify ATC, the PIC should, if possible:
 - Attempt to broadcast warnings on the VHF emergency frequency (121.500MHz), and use other on-board systems (i.e. SSR - squawk A/7500, data links etc...) if circumstances permit, and then:
 - Proceed in accordance with applicable special procedures for in-flight contingencies established and published in Doc 7030 - Regional SUPPS;
 - If no regional procedures have been established, proceed at a level different from IFR levels by 1000 ft above FL290, or 500 ft below FL290.

5.52 Interception of Civil Aircraft. Each Contracting State has the right to establish procedures for the interception and identification of aircraft flying in the territorial airspace of that State. There could be a number of reasons for interception among which would be an aircraft flying in the State's airspace without authorization or penetration by an aircraft of a notified sensitive/prohibited area. In formulating the policy for interception, recognizing that it is essential for the safety of flight, any visual signals employed during interception by aircraft of a Contracting State, are to be in accordance with Appendix 1 to Annex 2 of the Chicago Convention. The Council has also formulated special recommendations to ensure that the procedures for interception are applied in a uniform manner. The PIC of a civil aircraft, when intercepted is to comply with the standards set out in appendix 2 (sections 2 and 3) to Annex 2, interpreting and responding to visual signals and procedures.

5.53 Carriage of Interception Tables. It is a requirement of national law that aircraft engaged on international flights must carry the interception tables. Clearly, the intent is that in the event of an interception you refer to the tables. You are not expected to learn the content of the tables but you should know what the tables contain. It is suggested that you read the tables to familiarize yourself. These are reproduced at 6.57/6.58 below.

5.54 Procedure. An aircraft which is intercepted by another aircraft shall immediately:

- Follow the instructions given by the intercepting aircraft, interpreting and responding to visual signals in accordance with the tables 6.57 and 6.58.
- Notify, if possible, the appropriate Air Traffic Services Unit.
- Attempt to establish radio communication with the intercepting aircraft or with the appropriate intercept control unit, by making a general call on the emergency frequency 121.500 MHz, giving the identity of the intercepted aircraft and the nature of the flight; and if no contact has been established and if practicable, repeating this call on the emergency frequency 243.000 MHz.
- If equipped with an SSR transponder, select Mode A, Code 7700 and Mode C, unless otherwise instructed by the appropriate Air Traffic Services Unit.

5.55 Contact with Interceptor. If radio contact with the intercepting aircraft is established but communication in a common language is not possible, attempts shall be made to convey essential information and acknowledgement of instructions by using the phrases and pronunciations as described in table 6.55. If any instructions received from any sources conflict with those given by the intercepting aircraft, the intercepted aircraft shall request immediate clarification while continuing to comply with the instructions given by the intercepting aircraft.

5.56 Interception Phraseology

Phrases used by Intercepting Aircraft			Phrases used by Intercepted Aircraft		
Phrase	Meaning		Phrase	Meaning	
Call sign	<u>KOL</u> SA-IN	What is your call sign?	Call sign ²	KOL SA-IN	My call sign is (call sign ²)
Follow	<u>FOL</u> -LO	Follow me	Wilco	<u>VILL</u> -KO	Understood will comply
Descend	<u>DEE</u> -SEND	Descend for landing Landing	Can not	<u>KANN</u> NOTT	Unable to comply
You land	<u>YOU</u> -LAAND	at this aerodrome	Repeat	<u>REE</u> -PEET	Repeat your instruction
Proceed	<u>PRO</u> -SEED	You may proceed	Am lost	<u>AM</u> LOSST	Position unknown
			Mayday	<u>MAYDAY</u>	I am in distress
			Hijack ³	<u>HI</u> -JACK	I have been hijacked
			Land	<u>LA</u> AND	I request to land at (place name)
			Descend	<u>DEE</u> -SEND	I require descent

Table 6.55 - Interception Phraseology

Notes:

1. In the second column, the syllables to be emphasized are underlined.
2. The call sign to be given is that used in the RT communications with ATC corresponding to the aircraft identification on the flight plan
3. Circumstances may not always permit, or make it desirable, to use 'HIJACK'

5.57 Action by ATS in the Event of Interception. As soon as air traffic services learns that an aircraft is being intercepted in its area of responsibility it shall take the following steps:

- a. Attempt to establish communications with the intercepted aircraft via any means available including 121.5 MHz
- b. Inform the pilot of the intercepted aircraft of the interception (if it does not already know!)
- c. Establish communications with the ATSU maintaining communication with the intercepting aircraft and provide it with details of the intercepted aircraft
- d. Relay messages as required between the ATSU of the intercepting aircraft and the intercepted aircraft
- e. In co-ordination with the above ATSU take all necessary steps to ensure the safety of the incepted aircraft
- f. Inform ATS units serving adjacent FIRs if it appears that either aircraft has strayed into any one of them.

If interception has taken place outside its area of responsibility, ATS must :

- a. Inform the ATS unit serving the airspace in which the interception has taken place of the circumstances and any information that will assist in identifying the intercepted aircraft and request it to take the actions itemised in the previous paragraph.
- b. Relay messages as required between the intercepted aircraft and the appropriate ATS unit or the intercepting aircraft.

5.58 Signals by Intercepting Aircraft and Responses by Intercepted Aircraft

INTERCEPTING Aircraft Signals	Meaning	INTERCEPTED Aircraft Responds	Meaning
<p>DAY - Rocking wings from a position slightly above and ahead of, and normally to the left of the intercepted aircraft and, after acknowledgement, a slow level turn, normally to the left, on the desired heading. NIGHT - Same and, in addition, flashing navigational lights at irregular intervals.</p> <p>Note 1: Meteorological conditions or terrain may require the intercepting aircraft to take up a position slightly above and ahead of, and to the right of the intercepted aircraft and to make the subsequent turn to the right.</p> <p>Note 2: If the intercepted aircraft is not able to keep pace with the intercepting aircraft, the latter is expected to fly a series of racetrack patterns and to rock its wings each time it passes the intercepted aircraft</p>	You have been intercepted follow me	<p>AEROPLANES: DAY - Rocking wings and following. NIGHT - Same and, in addition, flashing navigational lights at irregular intervals.</p> <p>HELICOPTERS: DAY or NIGHT - Rocking aircraft, flashing navigational lights at irregular intervals and following.</p> <p>Note: Additional action required to be taken by intercepted aircraft is prescribed in RAC section.</p>	Understood will comply
DAY or NIGHT - An abrupt breakaway manoeuvre from the intercepted aircraft consisting of a climbing turn of 90 degrees or more without crossing the line of flight of the intercepted aircraft.	You may proceed	<p>AEROPLANES: DAY or NIGHT-Rocking wings.</p> <p>HELICOPTERS: DAY or NIGHT- Rocking aircraft</p>	Understood will comply
<p>DAY - Circling aerodrome, lowering landing gear and over flying runway in the direction of landing or, if the intercepted aircraft is a helicopter, over flying the helicopter landing area.</p> <p>NIGHT - Same and, in addition, showing steady landing lights.</p>	Land at this aerodrome	<p>AEROPLANES: DAY - Lowering landing gear, following the intercepting aircraft and, if after over-flying the runway landing is considered safe, proceeding to land.</p> <p>NIGHT - Same and, in addition, showing steady landing lights (if carried).</p> <p>HELICOPTERS: DAY or NIGHT-Following the intercepting aircraft and proceeding to land, showing a steady landing light (if carried)</p>	Understood will comply

5.59 Signals Initiated by Intercepted Aircraft and Responses by Intercepting Aircraft

INTERCEPTED Aircraft Signals	Meaning	INTERCEPTING Aircraft Responds	Meaning
AEROPLANES: DAY -Raising landing gear while passing over landing runway at a height exceeding 300 m (1000 ft) but not exceeding 600 m (2000 ft) above the aerodrome level, and continuing to circle the aerodrome. NIGHT -Flashing landing lights while passing over landing runway at a height exceeding 300 m (1000 ft) but not exceeding 600 m (2000 ft) above the aerodrome level, and continuing to circle the aerodrome. If unable to flash landing lights, flash any other lights available.	Aerodrome you have designated is inadequate	DAY or NIGHT -if it is desired that the intercepted aircraft follow the intercepting aircraft to an alternate aerodrome, the intercepting aircraft raises its landing gear and uses the Series 1 signals prescribed for intercepting aircraft. If it is decided to release the intercepted aircraft, the intercepting aircraft uses the Series 2 signals prescribed for intercepting aircraft.	Understood follow me Understood you may proceed
AEROPLANES: DAY or NIGHT -Regular switching on and off of all available lights but in such a manner as to be distinct from flashing lights.	Cannot comply	DAY or NIGHT - Use Series 2 signals prescribed for intercepting aircraft	Understood
AEROPLANES: DAY or NIGHT -Irregular flashing of all available lights HELICOPTERS: DAY or NIGHT - Irregular flashing of all available lights.	In distress	DAY or NIGHT - Use Series 2 signals prescribed for intercepting aircraft	Understood

Visual Flight Rules

5.60 Visual Meteorological Conditions (VMC). With the exception of special VFR (SVFR - see paragraph 6.77), VFR is only permitted in VMC (see 6.5). If a flight is operated under VFR and the meteorological conditions deteriorate such that it becomes impossible to continue in VMC the pilot must either:

- Land whilst able to maintain flight in VMC; or
- Change the route of the flight to maintain flight in VMC; or
- File an IFR flight plan and continue under IFR; or
- If within a CTR, request a SVFR clearance.

5.61 Take-off/Landing Conditions. Unless authorized by ATC, VFR flights are not to take off or land at an aerodrome in a CTR, or enter the ATZ or traffic pattern:

- When the cloud ceiling (see definition) is less than 450 m (1500 ft) or
- When ground visibility (see definition) is less than 5 km

5.62 Prohibition of VFR flight. Between sunset and sunrise, or during any other period as may be specified by the ATS authority, VFR flights are to be operated in accordance with the conditions required by such authority.

- VFR flights require an ATC clearance to operate:
 - Above FL200.
 - At transonic or supersonic speeds.
- VFR flight is not permitted above FL285 where RVSM is applied.
- Except when taking off and landing (or when specially approved by the authority e.g. air displays etc...), VFR flight is not allowed:
 - Over the congested areas of cities, towns or settlements, or over an open air assembly of persons, at a height less than 300 m (1000 ft) above the highest obstacle within a radius of 600 m from the aircraft.
 - At a height not less than 150 m (500 ft) above the surface (ground or water).

5.63 VFR Flight Levels. In level cruising flight above the transition altitude (normally 3000 ft AGL), VFR flight is to be conducted at a VFR flight level appropriate to the magnetic track of the aircraft in accordance with the semi-circular rule defined in paragraph 6.74. When operating as a controlled VFR flight within controlled airspace (CAS), the FL or altitude will be specified by ATC in the ATC clearance for that flight. VFR flights are to comply with ATC instructions:

- When operating in class B, C or D airspace (in class A, VFR flight is not permitted)
- When forming part of aerodrome traffic at controlled aerodromes, or
- When operating as special VFR flights

5.64 VFR Flight Plan. A VFR flight plan is to be filed before operating a VFR flight as a controlled flight. To indicate that the flight will be operated under VFR, the letter “V” is placed in item 8 of the flight plan form. If a flight is to commence under VFR and at some point en route change to IFR, the letter “Z” is placed in field 8 ($V \rightarrow I = Z$). Where the PIC of a VFR flight wishes to change to IFR:

- If a VFR flight plan was submitted, the PIC is to communicate the necessary changes to be effected to the current flight plan, or
- He/she is to submit an IFR flight plan and obtain a clearance prior to proceeding under IFR when in controlled airspace.

5.65 EET. The time put in field 16 of a VFR flight plan is the time from take-off until overhead the destination aerodrome.

5.66 Communications. Controlled VFR flights and VFR flights into airspace where the ATS authority considers it advisable are to maintain 2-way RTF communication with a controlling or monitoring ATSU and make position reports as necessary. In airspace classified as class E, F or G, VFR flights may operate without two-way communications (non-radio).

Instrument Flight Rules

5.67 IFR. For aircraft to be operated in IMC, (IMC exists when VMC does not!), the following rules are applicable. The rules are collectively known as the Instrument Flight rules (IFR). Annex 1 (Personnel Licensing - 2.1.7) states that where a licence is issued by a contracting state, it shall not permit the holder to act as PIC or co-pilot of an aeroplane under IFR unless the holder also holds a valid instrument rating (IR) appropriate to the aircraft category.

5.68 Aircraft Equipment. Aircraft are to be equipped with suitable instruments and with navigation equipment appropriate to the route to be flown. The necessary equipment is detailed in JAR OPS-1 and is covered in Operational Procedures lectures.

5.69 Minimum Levels. Except when necessary for take-off and landing, or where specially authorized by the appropriate ATS authority, an IFR flight shall be flown at a level which is not below the minimum flight altitude established by the state whose territory is being overflown, or where no such minimum altitude is specified:

- Over high terrain or mountainous areas (not defined further), the minimum level must be at least 600 m (2000 ft) above the highest obstacle located within 8 km (5 NM) of the estimated position of the aircraft
- In areas other than in the above, minimum level is to be 300 m (1000 ft) above the highest obstacle within 8 km (5 NM) of the estimated position of the aircraft.

5.70 IFR Flight Plans. An IFR flight plan is to include the letter I in item 8 of the flight plan form. If the intention is to change from IFR to VFR at some point during the flight the letter Y is to be inserted in item 8 ($I \rightarrow V = Y$).

5.71 Changing from IFR to VFR. Where a pilot elects to change from IFR to VFR and the flight plan was not annotated Y in field 8, the pilot is to notify the ATS authority that flight under IFR is cancelled using the phrase “cancelling my IFR flight” and then the necessary changes to the current flight plan are to be passed. ATC will respond, “IFR cancelled at (time)”. When an IFR flight encounters VMC it shall not cancel IFR unless it is anticipated and intended that the

flight will be continued for ‘a reasonable period’ of time in uninterrupted VMC. In any event, a change of flight rules must only be at the request of the pilot.

5.72 EET. The time put in field 16 of an IFR flight plan is the time from take-off until over the initial approach fix (IAF) for the instrument procedure at the destination aerodrome.

5.73 IFR within Controlled Airspace (CAS). IFR flights within CAS are to comply with instructions issued by the appropriate ATC unit. IFR flights in cruising flight shall be flown at a cruising level, or when authorized to employ cruise climb techniques, between two levels or above a level, selected from:

- The table of cruising levels (see below)
- A modified table of cruising levels, if applicable, for flight above FL410 (see below).

5.74 IFR outside Controlled Airspace (CAS). The following rules apply to IFR flights outside CAS:

- **Cruising Levels.** IFR flights outside CAS are to be flown at cruising level appropriate to the magnetic track of the aircraft (see below).
- **Communications.** IFR flights operating outside CAS but within or into areas or along routes designated by the authority as those where the filing of a flight plan is required, are to establish communication and maintain a continuous listening watch with the ATS unit providing a flight information service (FIS).
- **Position Reports.** An IFR flight outside CAS and required to either submit a flight plan or maintain a listening watch with the unit providing an FIS, is to make position reports. For flights operating off ATS routes (airways) or in a defined operating area, position reports are to be made at intervals of 1 hour after an initial report has been made 30 minutes after leaving CAS or after commencing the controlled flight. Where a position report is meaningless (prolonged controlled flight operations in a confined area) an ‘operations normal’ call is to be made at hourly intervals to prevent unnecessary activation of the alerting service. An example of an ‘operations normal’ call is:

“London Control this is GADRF operations normal at 1020, 2000 ft and below. Will call again at 1120”

Semi-circular Flight Level Rules and RVSM

5.75 Introduction. In order to apply vertical separation inside CAS, ATC will allocate specific FLs to individual aircraft which may, or may not, comply with the semi-circular rule. However, for planning purposes and outside of CAS, pilots should select the required cruising level (IFR or VFR) from the ICAO table of FLs. From the tables, the semi-circular rules can be derived, which permit the selection of FLs in accordance with aircraft magnetic track. Tracks are specified as being either ‘eastbound’ or ‘westbound’. Eastbound tracks are 000°M - 179°M inclusive, and westbound, 180°M - 359°M inclusive. Specific FLs are allocated to VFR and IFR traffic. IFR FLs are whole thousands of feet whereas VFR levels are whole thousands plus 500 ft up to FL285. Eastbound levels are defined as ‘odd’ and westbound as ‘even’ from the first two digits of the FL number. Above 30 000 ft, generally, the vertical separation is doubled and IFR levels are all odd, and VFR levels are even. A special system of FL allocation is applied where reduced vertical separation (RVSM) minima is applied.

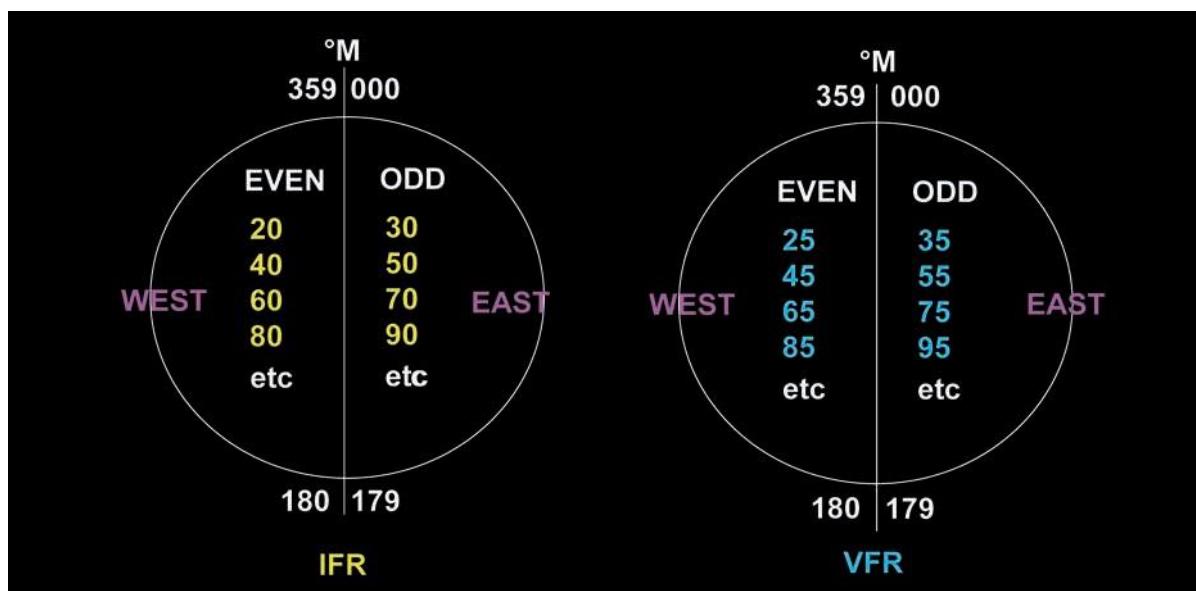


Figure 5.12 IFR and VFR flight levels up to and including FL290

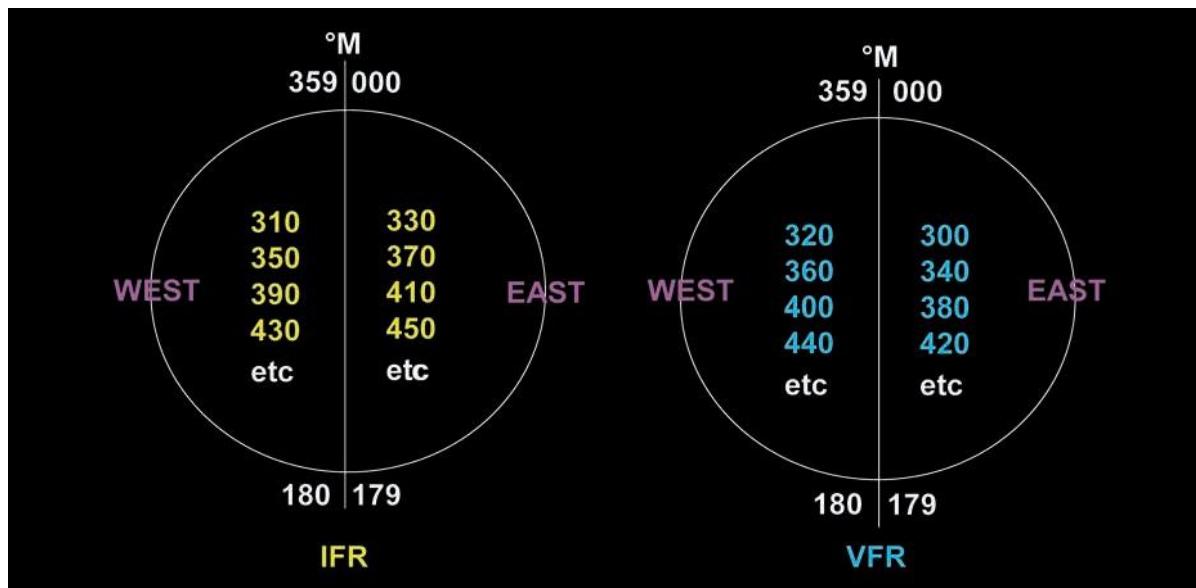


Figure 5.13 IFR and VFR flight levels above FL290

5.76 RVSM. In order to make more FLs available to turbojet traffic in the cruise, a system has been adopted which prohibits VFR flight (thus making VFR levels available to IFR traffic). In order to achieve this, the separation between IFR levels between FL290 and FL410 inclusive is reduced from 2000 ft to 1000 ft. It is a requirement of aircraft using the RVSM system that they be fitted with A/TCAS and be approved by the airspace authority. Above FL410 the altimeter errors are considered too great to continue the 1000 ft separation.

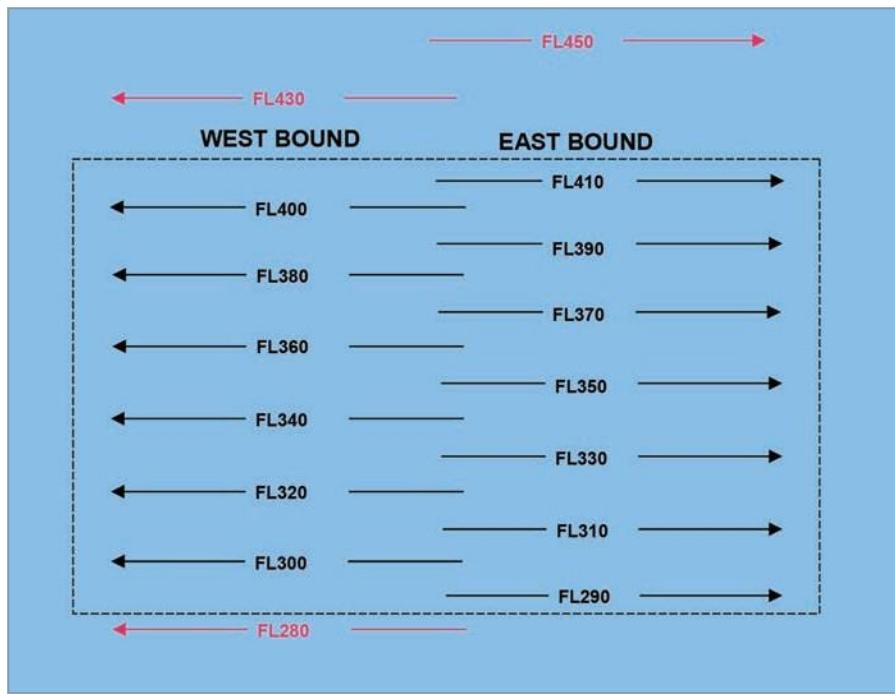


Figure 5.14 Reduced vertical separation minima

Special VFR

5.77 History. With the introduction of airspace restrictions in the late 1960s, military aerodromes close to large international aerodromes, specifically Northolt in proximity to the rapidly expanding Heathrow, found that IFR procedures were mandatory in the new control zones when previously VFR procedures were generally accepted. In order to allow aeroplanes to fly into and out of Northolt (in the then Heathrow Special Rules Zone) a procedure based on a corridor in which visual navigation was required was set up. Providing the pilot could see the ground, he could navigate and provided he remained clear of cloud he could avoid collisions. A system of ‘not quite’ IMC or special VFR was invented. Until the late 1970s this was applied in what was known as the Northolt special VFR corridor. It was expanded to include the general aviation aerodrome at Denham and its advantages for aeroplanes and pilots unable to comply with IFR were obvious. When the classes of airspace (A - G) were introduced, ICAO also adopted the special VFR as a procedure with appropriate international amendments.

5.78 SVFR. SVFR is defined by ICAO as a VFR flight cleared by ATC to operate within a CTR in meteorological conditions below VMC. It is only applicable to flights into, out of, or within a CTR. ICAO requires that the ground visibility within the CTR is not less than 1500 m before a SVFR flight is permitted to enter the CTR to land, take off and depart, cross or operate locally within the CTR. More restrictively, JAR OPS-1 requires 3000 m visibility for a SVFR flight to be commenced.

Distress and Urgency Signals

5.79 Distress: Definition - An aircraft (or vessel) is in grave and imminent danger and requests immediate assistance.

- A distress message is preceded by the word MAYDAY repeated 3 times.
- Visual signals from an aircraft in distress may include
 - A succession of RED pyrotechnics
 - A RED parachute flare

5.80 Urgency. Definition - An aircraft has an urgent message to transmit concerning the safety of a ship, aircraft, vehicle or other property of a person on board or within sight. An urgency message is preceded by the words PAN PAN repeated 3 times.

5.81 Non-emergency Situation. If an aircraft has a communications failure or a malfunction that makes it imperative that the aircraft is landed but the pilot does not require any other assistance, the pilot shall indicate the fact by repeatedly switching the landing lights (or any other light) on and off.

5.82 SSR. Secondary Surveillance Radar is covered in Chapter 12 of this book and in depth in Radio Navigation. There are, however, certain reserved codes (squawks) that have specific meaning, which you are required to know. At all times you should transmit the altimeter function (mode charlie) in addition to the reserved codes. The reserved transponder codes are:

- **Mode A code 7700.** This is the civil emergency code and is used unless a specific identification code has been allocated by a radar controller and the aircraft has been identified.
- **Mode A code 7600.** This is the squawk to indicate radio failure and should be used at all times when a failure occurs regardless of the ATC service being provided.
- **Mode A code 7500.** This code indicates unlawful interference. Its use does not imply that the fact is being generally advertised. Discretion and confidentiality will be preserved by the ATC authority until the pilot mentions the fact by RTF. A pilot may prefer to use the 7700 squawk to indicate the severity of the situation.
- **Mode A code 7000.** This code indicates that the aircraft is operating in an area where a radar service is available from an ATCU but the aircraft is not in receipt of the service. It implies that the aircraft is operating under VFR.
- **Mode A code 2000.** This code is used to indicate that an aircraft is entering an area where a radar service is available and will be requesting that service. Usually used by aircraft entering a domestic FIR from an Oceanic control area.
- **Mode A code 0000.** This code is reserved to indicate that the aircraft transponder is in some manner unserviceable or inaccurate.

Restricted, Prohibited or Danger Areas

5.83 Specification. Each state has the right to restrict or prohibit flight in territorial airspace for reasons of security or safety. Such areas are known as danger areas (indicated by the letter D), restricted areas (indicated by the letter R) or prohibited areas (indicated by the letter P) and are detailed in the AIP. These are designated by a code identifying the area and showing the altitude (usually in 1000s of ft) to which the area extends. Areas may be either permanently active (PERM) or activated by NOTAM. The area designator (for instance - D001) cannot be re-used for a period of not less than 12 months after the closure of the previously designated area. This allows for a full reprint of the 1/2 million topographical charts so that no confusion can exist.

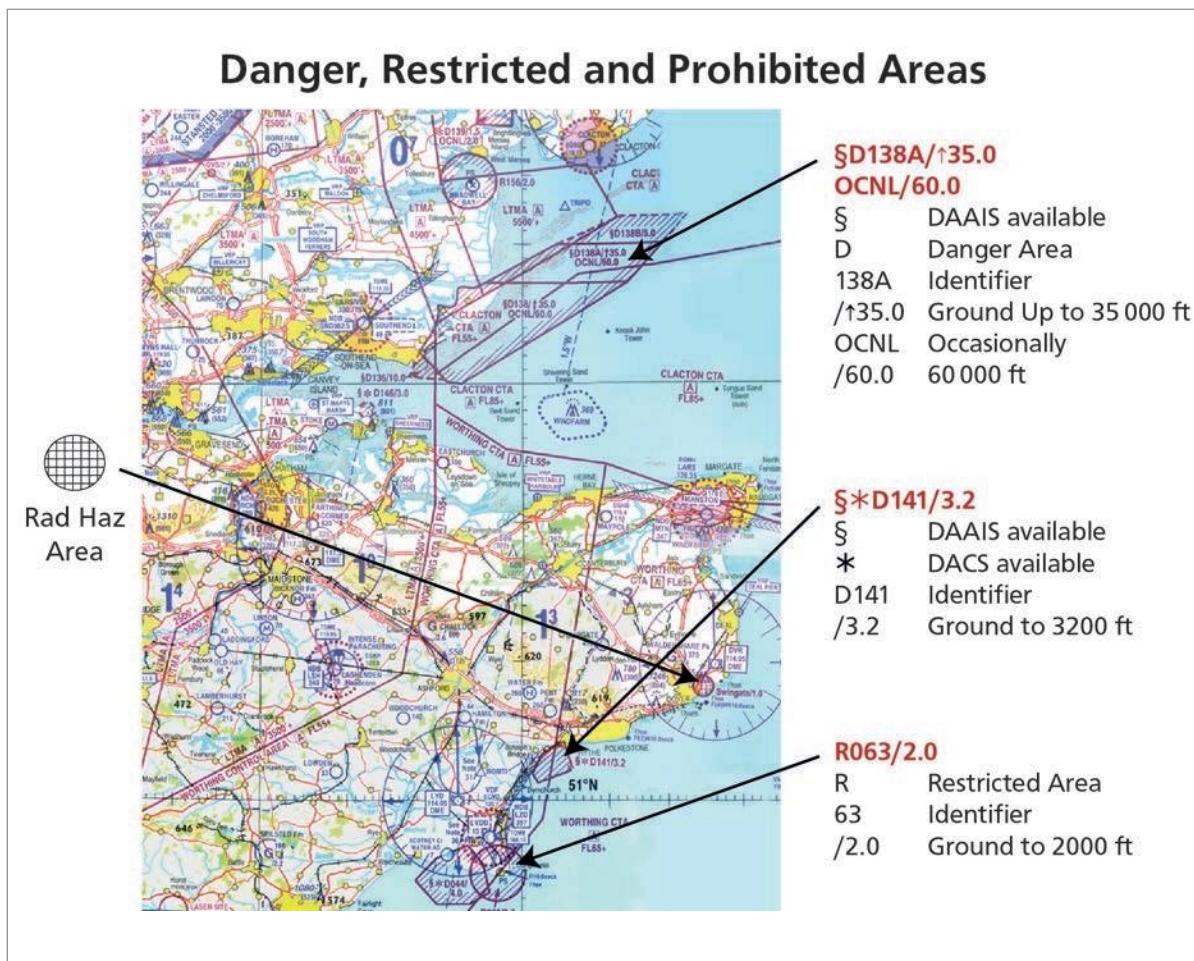


Figure 5.15

5.84 Visual Warning of Incursion. By day and night; a series of projectiles discharged from the ground at intervals of 10 secs, each showing on bursting red and green lights or stars, are used to warn aircraft that they are flying in or about to enter restricted, prohibited or danger areas.



Figure 5.16

Signals for Aerodrome Traffic


5.85 Non-radio Traffic. Non-radio traffic on or in the vicinity of an aerodrome is to keep a good look out for visual signals from ATC. Aeroplanes with radios are also to comply with instructions given visually. The lamp used by ATC to communicate (Aldis lamp) is directional with a narrow beam. If you see a signal light from the tower, you must assume that it is meant for you.

5.86 Visual Signals. The following table gives the light and pyrotechnic signals used from ground to air:

Light	From Aerodrome Control to:	
	Aircraft in Flight	Aircraft on the Ground
Steady Green	Cleared to land	Cleared for take-off
Steady Red	Give way to other aircraft and continue circling	Stop
Green flashes	Return for landing and await landing clearance	Cleared to taxi
Red flashes	Aerodrome unsafe, do not land	Taxi clear of the landing area
White flashes	Land at this aerodrome after receiving clearance to land and then proceed to the apron	Return to the starting point on the aerodrome
Red pyrotechnic (flare)	Notwithstanding any previous instructions, do not land for the time being	

Signal

Steady green.

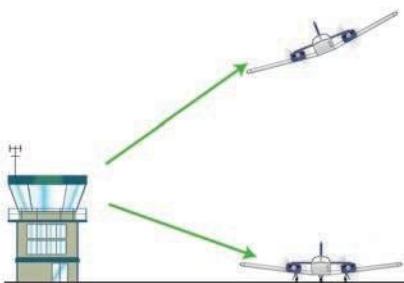
**Meaning**

Cleared to land.

Cleared to take off.

Signal

Steady red.

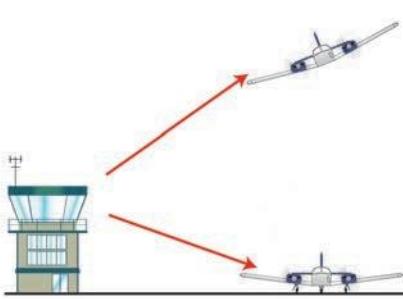
**Meaning**

Give way to other aircraft and continue circling.

Stop.

Signal

Green flashes.

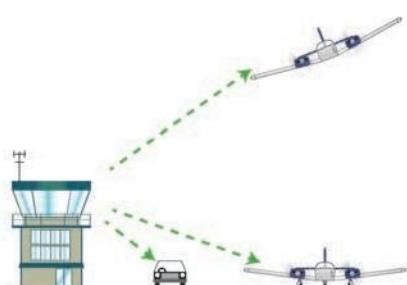
**Meaning**

Return for landing and await landing clearance.

Cleared to taxi.

Signal

Red flashes.

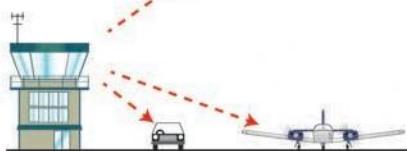**Meaning**

Aerodrome unsafe, do not land.

Taxi clear of the landing area.

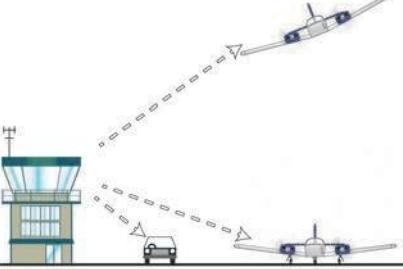
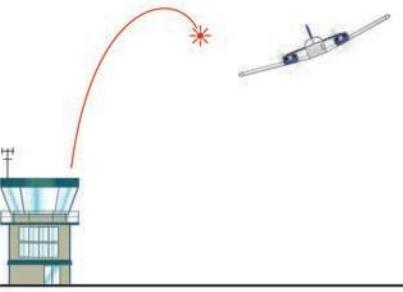
<p>Signal White flashes.</p> 	<p>Meaning Land at this aerodrome after receiving clearance to land and then proceed to the apron.</p>
<p>Signal Red pyrotechnic (flare).</p> 	<p>Meaning Notwithstanding any previous instructions, do not land for the time being.</p>

Figure 5.17


5.87 Acknowledgement by Aircraft. To acknowledge receipt of a signal as per [Figure 5.17](#), an aircraft may make the following:

- When in flight:
 - During the hours of daylight, by rocking the aircraft's wings
 - During the hours of darkness, by flashing on and off twice the aircraft's landing lights or, if not so equipped, by switching on and off the navigation lights twice.
- When on the ground:
 - During the hours of daylight by moving the aircraft's rudder or ailerons;
 - During the hours of darkness by flashing on and off twice the aircraft's landing lights or, if not so equipped, by switching on and off the navigation lights twice.


5.88 Visual Ground Signals. The following signals may be shown on an aerodrome, either in the signal square or at other locations on the apron or movement area. A signal square is usually located in front (aerodrome side) of a control tower (visual control room) and is to be visible from the air anywhere in the vicinity of the aerodrome. The purpose is to convey essential information to pilots unable to communicate by radio. Other signals, applicable to non-radio traffic on the ground are displayed from a signals mast (also in front of the control tower) or by means of indicator boards (information signs) located on or adjacent to the control tower. The absence of a signal square indicates that the aerodrome is not to be used by non-radio traffic. This is the case at Oxford, where due to high traffic density and trainee pilots in the circuit, non-radio traffic is considered hazardous.

Note: The use of any signal by any person shall only have the meaning assigned to it under the rule.


5.89 Signals in the Signals Area. The following signals are displayed on aerodromes to pass information to non-radio aircraft. In the examination, you will be expected to interpret the meaning of a signal from a written description of the sign:

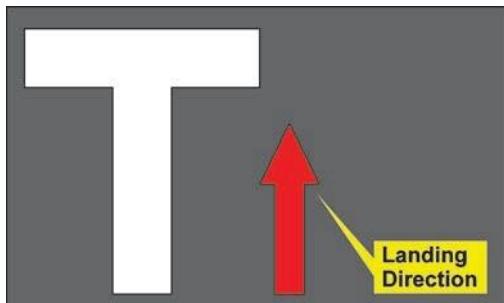


A white "T" signifies that take-offs and landings shall be in the direction of the shaft of the "T" (as indicated by the arrow).

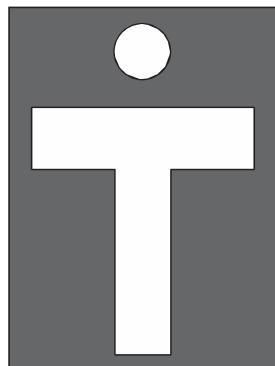


A white disc added to the "T", means that take-off and landing direction do not necessarily coincide.

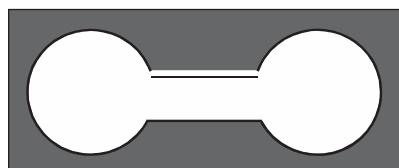

A white dumb-bell indicates that aircraft movement on the ground is confined to paved, metalled or similar hardened surfaces.

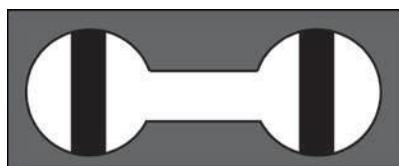

A white dumb-bell with black stripes signifies that take-offs and landings are to be on a runway, but movement on the ground is not confined to pavements.

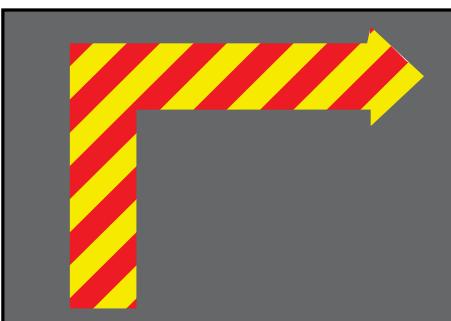


A red and yellow striped arrow signifies that a right hand circuit is in force.



A red panel with a yellow diagonal stripe signifies that the manoeuvring area is poor and pilots must exercise special care.



A red panel with a yellow cross signifies that the aerodrome is unfit for aircraft movements, and landings are prohibited.

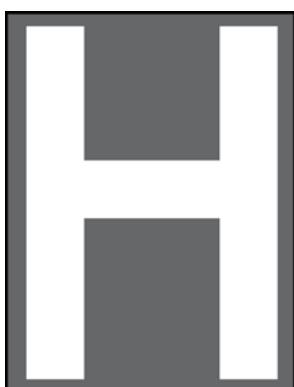

A white "H" signifies that helicopters shall take off and land only within the area designated by the marking.




A red 'L' over a dumb-bell means that light aircraft are permitted to take off and land either on a runway or on the area designated.




A white double cross means that glider flying is in progress.




Two or more white crosses indicate that the section of the runway or taxiway (where they would be yellow crosses) is unfit for aircraft movement. Orange and white boundary markers will delineate the limit of the unusable ground or runway.

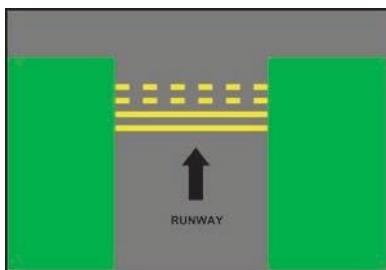


Two yellow broken lines and two continuous lines signify the holding point closest to the runway. Outside of the notified hours for ATC, this is the closest point an aircraft or vehicle can approach to the runway for the purpose of giving way to aircraft landing or taking off. This is a 'pattern A' marking.

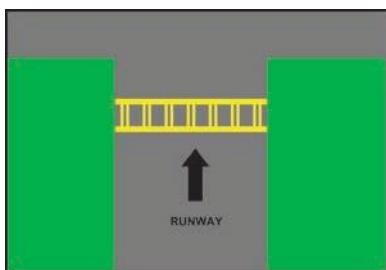

A yellow 'ladder' marking across the taxiway indicates a holding point other than the closest to the runway. Outside ATC hours it can be ignored. This is a 'pattern B' marking.

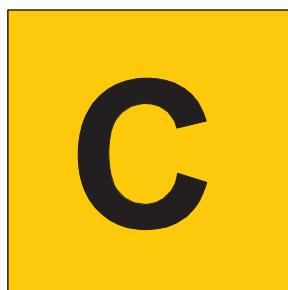


A black letter "C" on a yellow background indicates where a visiting pilot should report on arrival.

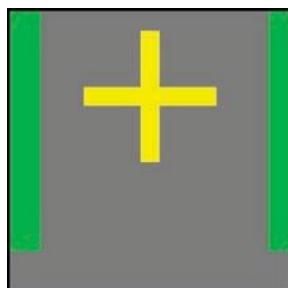


A yellow St George's cross indicates the position on the manoeuvring area where tow ropes and banner can be dropped.


5.90 Signals Mast. The following signals are flown from the signals mast:

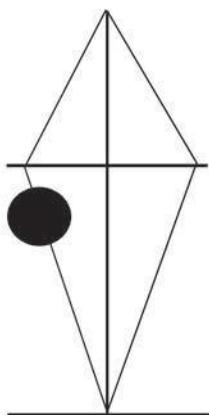

Take-off and landing direction not necessarily the same

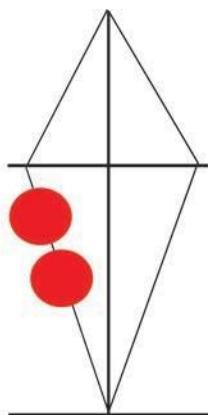

Glider flying in progress

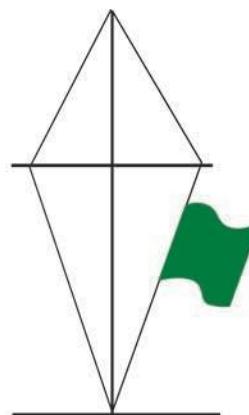


Right hand circuit in force




5.91 QDM Boards. A yellow board with two black numbers on it is situated on the tower, and indicates the runway direction in use (QDM).

5.92 Boundary Markers. Orange and white striped markers indicate the boundary of the manoeuvring area where it is not clearly defined.

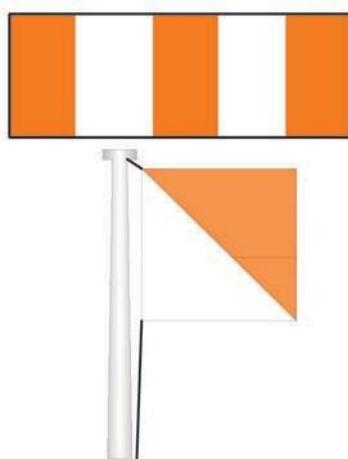

5.93 Wind Sleeve. A wind sleeve (windsock) indicates the wind direction and speed. (Large = 40 kt; medium = 30 kt; small = 20 kt) Max wind speed (i.e. 40 kt) Half wind speed (i.e. 20 kt) Calm

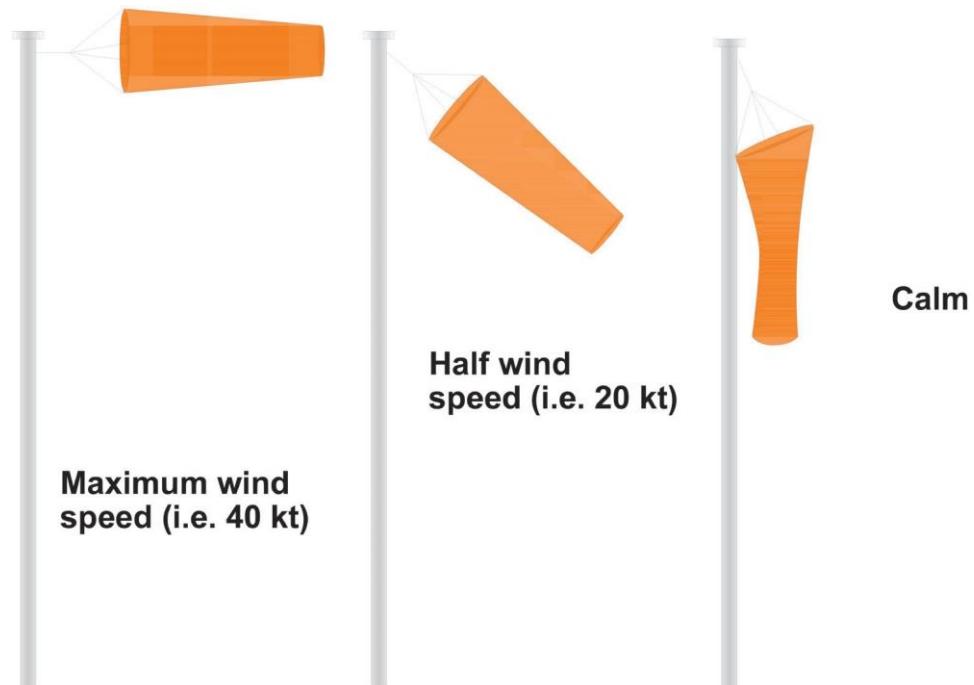




Marshalling Signals

Wingwalker/guide

Raise right hand above head level with wand pointing up; move left-hand wand pointing down toward body.

Note. This signal provides an indication by a person positioned at the aircraft wing tip, to the pilot/ marshaller/ push-back operator, that the aircraft movement on/off a parking position would be unobstructed.

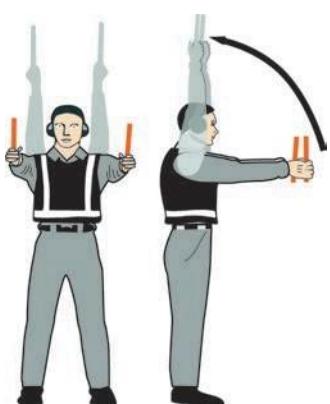


Identify gate

Raise fully extended arms straight above head with wands pointing up.



Proceed to next signalman or as directed by tower/ ground control

Point both arms upward; move and extend arms outward to sides of body and point with wands to direction of next signalman or taxi area.

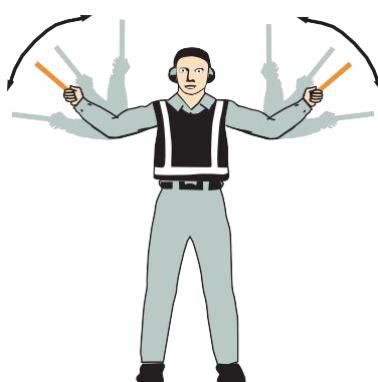

Straight ahead

Bend extended arms at elbows and move wands up and down from chest height to head.

**Turn left (from pilot's point of view)**


With right arm and wand extended at a 90-degree angle to body, make “come ahead” signal with left hand. The rate of signal motion indicates to pilot the rate of aircraft turn.

**Turn right (from pilot's point of view)**

With left arm and wand extended at a 90-degree angle to body, make “come ahead” signal with right hand. The rate of signal motion indicates to pilot the rate of aircraft turn.

**Normal stop**

Fully extend arms and wands at a 90-degree angle to sides and slowly move to above head until wands cross.

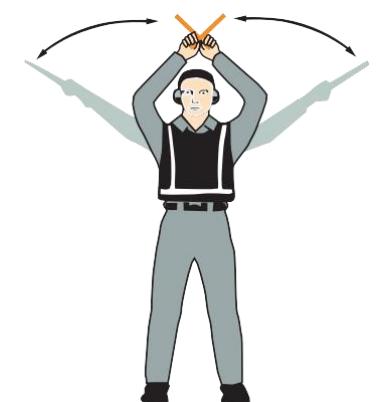**Emergency stop**

Abruptly extend arms and wands to top of head, crossing wands.

**Set brakes**

Raise hand just above shoulder height with open palm. Ensuring eye contact with flight crew, close hand into a fist. Do not move until receipt of “thumbs up” acknowledgement from flight crew.

**Release brakes**


Raise hand just above shoulder height with hand closed in a fist. Ensuring eye contact with flight crew, open palm. Do not move until receipt of “thumbs up” acknowledgement from flight crew.

**Chocks inserted**

With arms and wands fully extended above head, move wands inward in a “jabbing” motion until wands touch. Ensure acknowledgement is received from flight crew.

**Chocks removed**

With arms and wands fully extended above head, move wands outward in a “jabbing” motion. Do not remove chocks until authorized by flight crew.

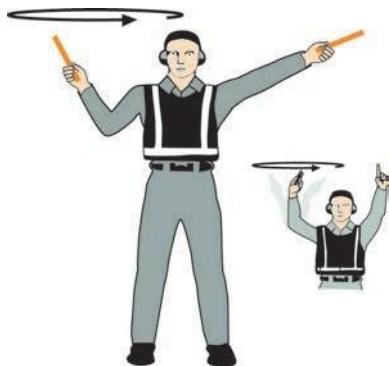**Start engine(s)**


Raise right arm to head level with wand pointing up and start a circular motion with hand; at the same time, with left arm raised above head level, point to engine to be started.

**Cut engines**

Extend arm with wand forward of body at shoulder level; move hand and wand to top of left shoulder and draw wand to top of right shoulder in a slicing motion across throat.

**Slow down**

Move extended arms downwards in a "patting" gesture, moving wands up and down from waist to knees.

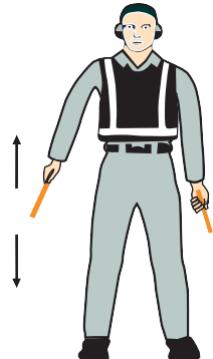**Slow down engine(s) on indicated side**


With arms down and wands toward ground, wave either right or left wand up and down indicating engine(s) on left or right side respectively should be slowed down.

**Turns while backing (for tail to starboard)**

Point left arm with wand down and bring right arm from overhead vertical position to horizontal forward position, repeating right-arm movement.


**Turns while backing (for tail to port)**

Point right arm with wand down and bring left arm from overhead vertical position to horizontal forward position, repeating left-arm movement.

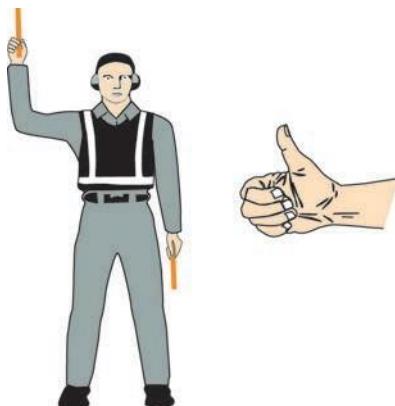**Affirmative/all clear**

Raise right arm to head level with wand pointing up or display hand with "thumbs up"; left arm remains at side by knee.

Note. This signal is also used as a technical/servicing communication signal.

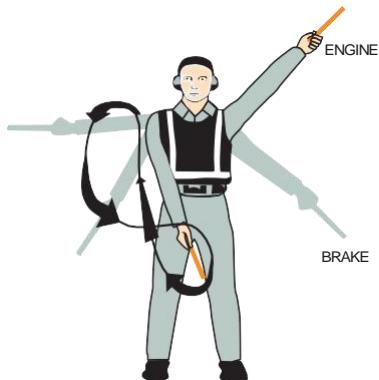**Fire**

Move right-hand wand in a "fanning" motion from shoulder to knee, while at the same time pointing with left-hand wand to area of fire.

**Hold position/stand by**


Fully extend arms and wands downwards at a 45-degree angle to sides. Hold position until aircraft is clear for next manoeuvre.

**Dispatch aircraft**


Perform a standard salute with right hand and/or wand to dispatch the aircraft. Maintain eye contact with flight crew until aircraft has begun to taxi.

**Do not touch controls (technical/servicing communication signal)**

Extend right arm fully above head and close fist or hold wand in horizontal position; left arm remains at side by knee.

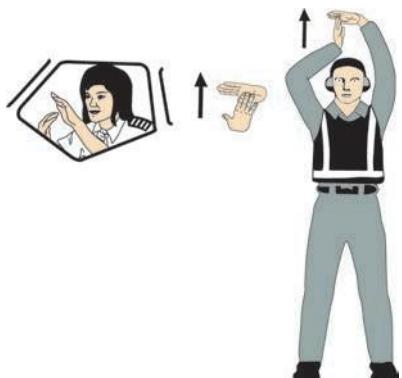**Connect ground power (technical/servicing communication signal)**

Hold arms fully extended above head; open left hand horizontally and move finger tips of right hand into and touch open palm of left hand (forming a "T"). At night, illuminated wands can also be used to form the "T" above head.

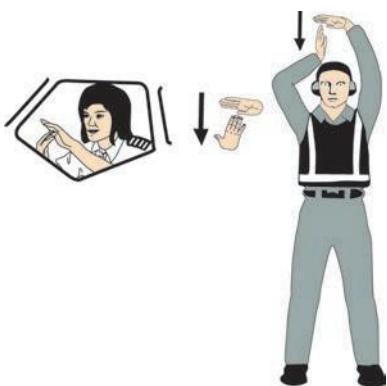

Disconnect power (technical/servicing communication signal)

Hold arms fully extended above head with finger tips of right hand touching open horizontal palm of left hand (forming a “T”); then move right hand away from the left. Do not disconnect power until authorized by flight crew. At night, illuminated wands can also be used to form the “T” above head.



Negative (technical/servicing communication signal)

Hold right arm straight out at 90 degrees from shoulder and point wand down to ground or display hand with “thumbs down”; left hand remains at side by knee.



Establish communication via interphone (technical/servicing communication signal)

Extend both arms at 90 degrees from body and move hands to cup both ears.



Open/close stairs (technical/servicing communication signal)

With right arm at side and left arm raised above head at a 45-degree angle, move right arm in a sweeping motion towards top of left shoulder.

Note. This signal is intended mainly for aircraft with the set of integral stairs at the front.



Flight Deck Signals

Brakes engaged.

Raise arm and hand with fingers extended horizontally in front of face, then clench fist.



Brakes released.

Raise arm with fist clenched horizontally in front of face, then extend fingers.



Insert chocks.

Arms extended palms facing outwards, move hands inwards to cross in front of face.



Ready to start engine indicated.

Raise the number of fingers on one hand indicating the number of the engine to be started. For this purpose the aircraft engines shall be numbered as follows, No. 1 engine shall be the port outer engine, No. 2, the port inner engine, No. 3, the starboard inner engine and No. 4, the starboard outer engine.



Remove chocks.

Hands crossed in front of face, palms facing outwards, move arms outwards.

Questions

1. When, in airspace where VFR is permitted, the PIC of an IFR flight wishes to continue the flight in accordance with VFR until destination:
 1. the pilot must inform the control unit of his intention using the expression "canceling my IFR flight".
 2. the pilot must request and obtain clearance to continue under VFR.
 3. the pilot must communicate the necessary changes to the current flight plan.
 4. the flight plan automatically becomes a VFR flight.
- Which of the following combinations is correct?
 - a. 2 and 3.
 - b. 2 and 4.
 - c. 1 and 3.
 - d. 1 and 4.
2. An aircraft flying in the visual circuit at an aerodrome sees a series of red flashes from the control tower. What does this mean?
 - a. Do not land.
 - b. Do not land because the aerodrome is unusable.
 - c. Give way to other aircraft.
 - d. Return for landing and await clearance to land.
3. An aircraft has flight visibility of 3 km, and is heading 355° T in an area where the variation is 6° west. There is no appreciable wind. Which of the following is the appropriate flight level?
 - a. FL60.
 - b. FL65.
 - c. FL70.
 - d. FL75.
4. An aircraft is converging from the left. Which light will you see first?
 - a. Red.
 - b. Green.
 - c. Blue.
 - d. White.
5. What letter goes in item 8 of a flight plan for a flight starting under IFR then changing to VFR?
 - a. Z
 - b. Y
 - c. I
 - d. V
6. What are the VMC limits for class B airspace?
 - a. 8 km flight visibility, clear of cloud and in sight of the surface.
 - b. 8 km flight visibility, 1000 ft vertically and 1500 m horizontally from cloud.
 - c. 5 km flight visibility, 1000 ft vertically and 1500 m horizontally from cloud.
 - d. The same as class D.

- 7. When is a flight plan required?**
- a. For IFR flight in advisory airspace.
 - b. For all IFR flights.
 - c. For all flights in controlled airspace.
 - d. For all VFR and SVFR flights in controlled airspace.
- 8. Whilst airborne in the vicinity of the aerodrome, you see a flashing green light from the Tower. What does this mean?**
- a. Cleared to land.
 - b. Return for landing and await clearance to land.
 - c. Give way to other landing aircraft.
 - d. Land at this aerodrome after receiving clearance to land and proceed to the apron.
- 9. You see a double white cross in a signal square, what does this mean?**
- a. Glider flying in progress.
 - b. Tow ropes and banners may be dropped.
 - c. Runway unfit for aircraft movement.
 - d. Aerodrome unfit for aircraft movement.
- 10. You are taxiing on the manoeuvring area of an aerodrome and see a flashing green light from the tower. What does it mean?**
- a. Return to start point.
 - b. Clear to taxi.
 - c. Clear to take off.
 - d. Stop.
- 11. You have been intercepted in the airspace of a foreign contracting state. What is the signal for ‘clear to proceed’ from the intercepting aircraft?**
- a. Rocking wings.
 - b. Flashing lights.
 - c. Cut across track.
 - d. Breaking turn up and left.
- 12. Which has priority to land?**
- a. A hospital flight.
 - b. An emergency.
 - c. A military flight.
 - d. A VIP flight.
- 13. What does a double horizontal white cross on an aerodrome indicate?**
- a. Glider flying in progress.
 - b. Runway unfit for use.
 - c. Light aircraft may taxi on the grass.
 - d. Runway to be used for take-off but aircraft may taxi on the grass.

14. Which of these is not a distress frequency?
- 121.5 MHz
 - 2182 kHz
 - 243.0 kHz
 - 2430 kHz
- 4 only.
 - 1 and 2.
 - 2, 3 and 4.
 - 3 and 4.
15. If you are intercepted by another aircraft, what do you set on the SSR transponder?
- A/2000 + C.
 - A/7500 + C.
 - A/7600 + C.
 - A/7700 + C.
16. You are taxiing an aircraft on the ground at an aerodrome and you see a flashing red light from the tower. What does it mean?
- Stop.
 - Taxi clear of the landing area.
 - Give way to approaching aircraft.
 - You are not clear to take off.
17. Aircraft A is a VFR flight operating in a CTR under an ATC clearance. Aircraft B is entering the CTR without clearance. As they converge, which one has the right of way?
- B has right of way regardless of aircraft type and position.
 - A has right of way regardless of aircraft type and position.
 - A has right of way if B is on the right.
 - B has right of way if A is on the left.
18. What minimum ground visibility is required to enable a SVFR flight to take off from an aerodrome in a CTR?
- 1000 m
 - 1500 m
 - 2000 m
 - 3000 m
19. If a pilot wishes to cancel an IFR flight plan and proceed under VFR in VMC, he/she must inform ATC and include the phrase:
- “cancelling my flight plan”.
 - “cancelling my flight”.
 - “cancelling my IFR flight”.
 - “cancelling my IMC flight plan”.

- 20. What signal from a marshaller to a pilot indicates “apply brakes”?**
- a. Waving the arms across the face.
 - b. Drawing the palm across the throat.
 - c. Clenching a raised fist.
 - d. Holding both arms up with palms facing forward.
- 21. ATC has given you the transponder code of A/5320. In case of a radio failure in flight you must squawk:**
- a. A/7600 + Mode C.
 - b. A/0020 + Mode C.
 - c. A/5300 + Mode C.
 - d. A/7620 + Mode C.
- 22. For a controlled flight, a flight plan must be filed before departure at least:**
- a. 60 minutes before off-block time.
 - b. 60 minutes before departure.
 - c. 30 minutes before departure.
 - d. 30 minutes before off-block time.
- 23. Which Mode A code must be used to make sure that your aircraft is recognized as an aircraft in distress?**
- a. Code 7500
 - b. Code 7700
 - c. Code 7000
 - d. Code 7600
- 24. An aircraft which is intercepted by another aircraft must immediately try to contact the intercepting aircraft on the following frequencies:**
- a. 121.5 MHz and/or 243.0 MHz.
 - b. 121.5 MHz and/or 282.8 MHz.
 - c. 121.5 MHz and/or 125.5 MHz.
 - d. 243.0 MHz and/or 125.5 MHz.
- 25. Your aircraft is intercepted by a military aircraft. Instructions given by this aircraft do not comply with ATC instructions. You should:**
- a. select code 7500 A on your transponder.
 - b. ask ATC for different instructions.
 - c. comply with instructions given by the intercepting aircraft.
 - d. comply with ATC instructions.
- 26. A pilot crosses his/her hands in front of the face, palms outwards and then moves the arms outwards. What does this signal indicate?**
- a. Clear to move forward.
 - b. Brakes off.
 - c. Remove chocks.
 - d. Clear to close all engines.

27. A red flare fired at a flying aircraft means:
- do not land, the aerodrome is unfit.
 - notwithstanding any previous instructions, do not land for the time being.
 - return to the aerodrome for landing.
 - give way to another aircraft and continue to circle.
28. In order to avoid confusion, the identification numbers given to each prohibited, restricted and danger area shall not be re-used for a period of:
- at least 12 months after the cancellation of the area referred to.
 - at least 6 months after the cancellation of the area referred to.
 - at least 3 months after the cancellation of the area referred to.
 - at least 2 months after the cancellation of the area referred to.
29. When an aircraft has been subjected to unlawful interference, the pilot may wish to indicate the fact by squawking which SSR code?
- 7500
 - 7700
 - 7600
 - 7000
30. Which of the following procedures would a pilot follow in the event of communications failure whilst under IFR in VMC?
- Return to the aerodrome of departure.
 - Continue the flight whilst maintaining VMC and land as soon as possible.
 - Continue the flight at the assigned level and route and start the approach at the stated ETA.
 - Maintain the assigned level and route and land at the nearest aerodrome that is reporting VMC.
31. If so equipped, when should an aircraft display the anti-collision light?
- Only at night in flight, but not on the ground if being towed.
 - Whilst taxiing but not whilst being towed.
 - Only at night with engines running.
 - At all times on the ground when the engines are running.
32. The 'estimated elapsed time' in field 16 of a flight plan for a VFR flight is the estimated time:
- From which the aircraft first moves under its own power until it finally comes to rest after landing.
 - From brakes release at take-off until landing.
 - At cruising level taking into account temperature and pressure for that day.
 - From take-off until overhead the destination aerodrome.
33. What is the minimum vertical separation between IFR flights flying in the same direction below FL 290?
- 500 ft
 - 1000 ft
 - 2000 ft
 - 4000 ft

- 34. The cruising speed entered in item 15 of a flight plan is:**
- a. TAS.
 - b. TAS or Mach No.
 - c. IAS or TAS.
 - d. TAS at 65% engine power.
- 35. What action is required by the pilot of an aircraft flying in the vicinity of an aerodrome to indicate that the aircraft is experiencing radio failure or another difficulty that requires immediate landing but no other assistance?**
- a. The repeated switching on and off of the landing lights.
 - b. Switching the landing lights on and off three times.
 - c. Switching the landing lights on and off four times.
 - d. Switching the navigation lights on and off three times.
- 36. A position report shall contain the following information in the order listed?**
- a. Aircraft identification, position, time, true airspeed, flight level or altitude, next position and time over.
 - b. Aircraft identification, position, time, flight level or altitude, next position and time over.
 - c. Aircraft identification, position, time, flight level or altitude, next position and time over, ensuing position.
 - d. Aircraft identification, position, flight level or altitude, next position and time over, ensuing position and time over.
- 37. What defines EET for an IFR flight?**
- a. from time of take-off until overhead the IAF.
 - b. from time of take-off until overhead the destination aerodrome.
 - c. from push back until overhead the IAF.
 - d. from push back until overhead the destination aerodrome.
- 38. A DISTRESS message differs from an URGENCY message because:**
- a. there is grave and imminent danger which requires immediate assistance.
 - b. the aeroplane has suffered damage that endangers the ability to fly.
 - c. the aeroplane will not be able to reach a suitable aerodrome.
 - d. the situation concerns the safety of passengers on board or within sight.
- 39. If radio contact with an intercepting aircraft is established but not in a common language, what would the pilot of an intercepted aircraft say, if he/she is unable to comply with the instruction from the interceptor?**
- a. "KAN NOTT KOMPLY"
 - b. "UNN-ABOL TOO KOMPLY"
 - c. "NOTT POSS ABOL"
 - d. "KANN NOTT"
- 40. Which of the following flight has the highest priority to land?**
- a. VIP flight.
 - b. Hospital flight.
 - c. Emergency aircraft.
 - d. Military aircraft.

41. What letter is put in item 8 of a flight plan to indicate that a flight is to begin under IFR and finish under VFR?
- a. Y
 - b. I
 - c. V
 - d. Z
42. A white dumb-bell with black perpendicular bars indicates that:
- a. glider flying is being conducted outside the landing area.
 - b. landing and take-off is restricted to the runways but taxiing is not confined to the pavement areas.
 - c. this aerodrome is using parallel runways.
 - d. taxiing is confined to the taxiways.
43. If an ATC clearance is not suitable, the PIC may:
- a. offer ATC an acceptable alternative.
 - b. request and if practicable accept an amended clearance.
 - c. demand an alternative clearance and ATC must comply.
 - d. decline the clearance on the grounds that it is not in accordance with the filed flight plan.
44. What letter is put in item 8 of a flight plan to indicate that a flight is to begin under VFR and finish under IFR?
- a. Y
 - b. I
 - c. V
 - d. Z
45. Who has final authority as to the disposition of an aircraft during flight time?
- a. The owner.
 - b. The Operator.
 - c. The Commander.
 - d. The ATC controller.
46. The vertical separation minima for IFR flights in CAS applied by ATC above FL290 is:
- a. 500 ft.
 - b. 1000 ft.
 - c. 2000 ft.
 - d. 1000 ft if RVSM is applied otherwise 2000 ft.

- 5
Questions
47. Unless authorized by ATC, a VFR flight is not permitted to take off from an aerodrome within a CTR when:
- cloud ceiling is less than 1000 ft and ground visibility is less than 5 km.
 - cloud ceiling is less than 1500 ft and ground visibility is less than 5 km.
 - cloud ceiling is less than 1000 ft and ground visibility is less than 8 km.
 - cloud ceiling is less than 1500 ft and ground visibility is less than 8 km.
48. An aircraft is flying over the sea between 4500 ft and 9000 ft AMSL and outside CAS. To continue under VFR the meteorological conditions must remain:
- 2000 ft horizontally and 1000 ft vertically from cloud with visibility of 8 km.
 - 1500 m horizontally and 1000 ft vertically from cloud with visibility of 5 km.
 - 1500 m horizontally and 1000 m vertically from cloud with visibility of 5 km.
 - clear of cloud and in sight of the surface, with visibility of 5 km.
49. A change in flight rules from IFR to VFR will only take place:
- when initiated by the PIC.
 - when ordered by ATC.
 - at a point specified by the operator.
 - when the aircraft leaves CAS in VMC.
50. An aircraft is overtaking another aircraft if it is closing to the other aircraft from behind in a sector:
- 50° either side of the longitudinal axis.
 - 60° either side of the longitudinal axis.
 - 70° either side of the longitudinal axis.
 - 80° either side of the longitudinal axis.
51. When may a Repetitive Flight Plan be submitted?
- When flights are operated on the same day(s) of consecutive weeks and on at least 10 occasions or every day over a period of at least 10 consecutive days.
 - When flights are operated on the same day(s) of consecutive weeks and on at least 7 occasions or every day over a period of at least 10 consecutive days.
 - When flights are operated on the same day(s) of consecutive weeks and on at least 10 occasions or every day over a period of at least 7 consecutive days.
 - When flights are operated on the same day(s) of consecutive weeks and on at least 7 occasions or every day over a period of at least 7 consecutive days.

Answers

1	2	3	4	5	6	7	8	9	10	11	12
c	b	c	b	b	d	a	b	a	b	d	b

13	14	15	16	17	18	19	20	21	22	23	24
a	d	d	b	d	b	c	c	a	b	b	a

25	26	27	28	29	30	31	32	33	34	35	36
c	c	b	a	a	b	d	d	c	b	a	c

37	38	39	40	41	42	43	44	45	46	47	48
a	a	d	c	a	b	b	d	c	d	b	b

49	50	51
a	c	a

Chapter

6

Instrument Procedures - Departures

Instrument Procedures	159
PANS OPS	161
Instrument Departure Procedures.....	161
Questions	170
Answers	172

Instrument Procedures

6.1 General Introduction. In order to permit all weather operation (low visibility take-off and landing) procedures must be established to provide track guidance and terrain avoidance for aircraft departing, and track guidance, terrain clearance and where special equipment is used, vertical displacement guidance for aircraft arriving at aerodromes. Low visibility operations (ICAO) are defined as take-off and landing operations with RVR less than 800 m. Remember, the minima for take-off from an aerodrome in a CTR is ground visibility not less than 5 km and cloud ceiling not less than 1500 ft. The criteria for the type of procedure to be employed are defined in terms of RVR and the limit to which a pilot is permitted to descend (DA/H or MDA/H). Clearly, obstacle avoidance during the procedure is of paramount importance. The fundamental assumption is that an instrument procedure (departure or arrival) will only be flown in conditions less than VMC. In this case, arrivals and departures from controlled aerodromes will be flown under IFR and hence subject to ATC. Therefore, prior to commencing any instrument procedure, an ATC clearance must be obtained. Procedures for departure and arrival are published and you are required to have the necessary plates (printed representations of the procedures) available on the flight deck. If you are required by ATC to divert to an aerodrome with which you are not familiar and do not have the plates, ATC will read the procedure, including the loss of communications and missed approach procedures, to you. Initially we will look at instrument departure procedures. The following abbreviations are required knowledge:

6.2 Abbreviations

C/L	Centre line	MSA	Minimum Sector Altitude
DA/H	Decision Altitude/Height	NOZ	Normal Operating Zone
DER	Departure End of Runway	NTZ	No Transgression Zone
DME	Distance Measuring Equipment	OIS	Obstacle Identification Surface
DR	Dead Reckoning	PDG	Procedure Design Gradient
FAF	Final Approach Fix	RTR	Radar Termination Range
FAP	Final Approach Point	SDF	Step Down Fix
FAT	Final Approach Track	SID	Standard Instrument Departure
IAF	Initial Approach Fix	STAR	Standard Arrival Route
IF	Intermediate Fix	TAA	Terminal Approach Altitude
LHA	Lowest Holding Altitude	TP	Turning point
MAPt	Missed Approach Point	VM(C)	Visual Manoeuvring Circling
MDA/H	Minimum Descent Altitude/Height	VM(C)A	Visual Manoeuvring Circling Area

6.3 Obstacle Clearance. It is implied that any procedure developed will not require the aeroplane to fly dangerously close to obstacles at any point during the procedure. Clearance from obstacles can be obtained by lateral clearance and vertical clearance. By requiring a pilot to fly the track accurately (within tolerances accepted) the aircraft can be guided over a surveyed flight path within the bounds of which, all obstacles can be determined and assessed. Obviously, the area surveyed must have finite limits. It is, however, not acceptable for, say, an area 5 NM wide to be surveyed and then permit aircraft to fly within guidance tolerance, 2.5 NM either side of the desired track. The extremities of the surveyed area must gradually permit higher obstacles until at the limit of reasonable expectations of accuracy (guidance tolerance - both equipment and flight technical), the guaranteed clearance is reduced to zero. This assessment is known as creation of MOC (minimum obstacle clearance areas). MOC is discussed later in this chapter. Obstacle clearance could be provided by assessing the highest obstacle to be flown over and by applying a safety margin to the obstacle height. An obstacle clearance altitude or height (OCA/H) can thus be obtained. This is the method of obtaining MSA and with refinements, minimum descent altitude/height (MDA/H) for non-precision procedures. As precision procedures provide height guidance, an obstacle 1000 ft high at 10 NM from the threshold is not as significant as an obstacle 150 ft high 1 NM from the threshold (assuming a 300 ft per mile glide slope). For precision systems, OCA/H is 'range from threshold' dependent. It should therefore be obvious that OCA/H for precision procedures are less than OCA/H for non-precision. It must be stressed that, from an operational point of view, the obstacle clearance applied in the development of each instrument approach procedure is considered to be the minimum required for an acceptable level of safety in operations. If you have your own aeroplane and it is not used for commercial air transport, you may operate to the published OCA/H limits. Operators apply higher criteria resulting in aerodrome operating minima for commercial air transport.

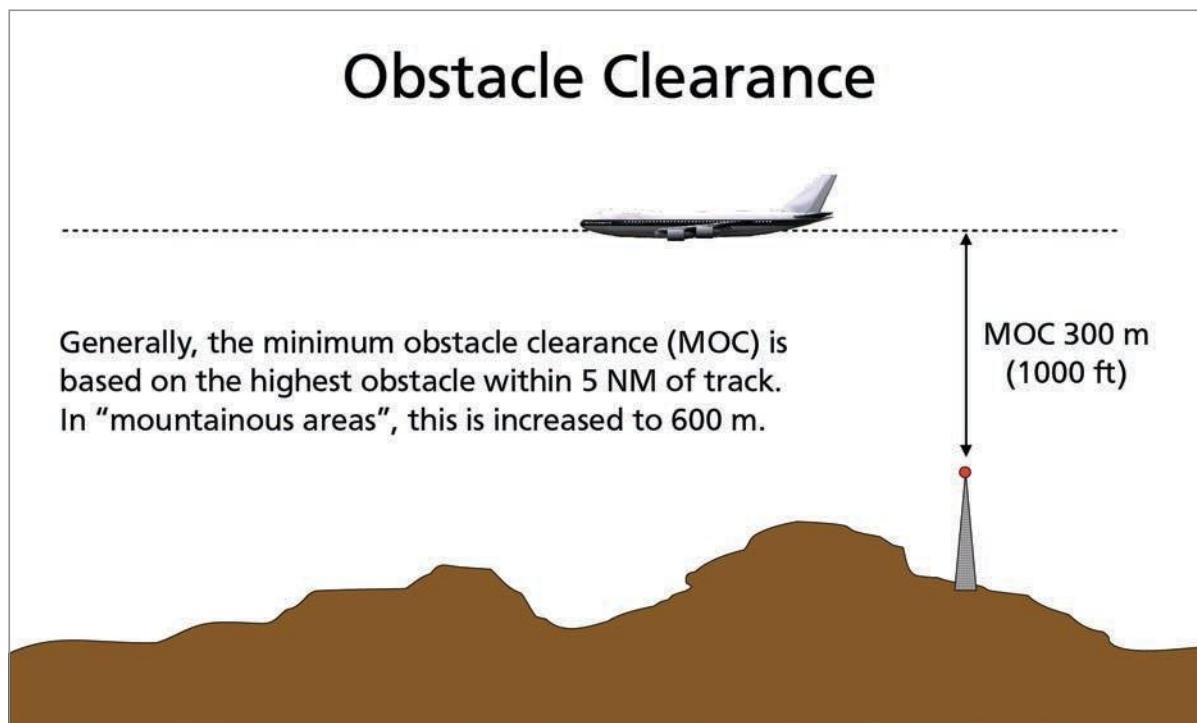


Figure 6.1

Obstacle Clearance

For an instrument procedure, the procedure must keep the aeroplane clear of all obstacles by a minimum vertical interval.

The pilot must fly the aeroplane within the height tolerance specified by the instrument procedure designer.

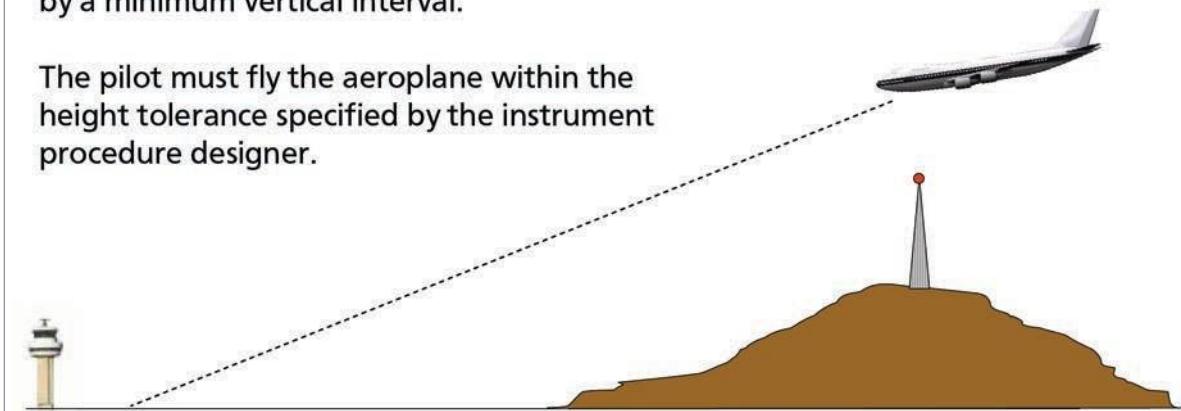


Figure 6.2

PANS OPS

6.4 Document 8168. The ICAO document that specifies the recommendations for instrument procedures is PANS OPS. The term ‘PANS-OPS’ is commonly used to refer to the content of ICAO Doc 8168. The correct title of the document is “Procedures for Air Navigation Services - Aircraft Operations”. The document is printed in two volumes; Vol 1 - Flight Procedures; Vol 2 - Construction of Visual and Instrument Flight Procedures. Volume 1 describes operational procedures recommended for the guidance of flight operations personnel and we shall limit our considerations of instrument procedures to the content of Vol 1. Vol 1 outlines the various parameters on which the criteria of Vol 2 are based. Volume 2 is intended for the guidance of procedures specialists and describes the essential areas and obstacle clearance requirements for the achievement of safe, regular instrument flight operations. Both volumes present coverage of operational practices that are beyond the scope of Standards and Recommended Practices (SARPs) but with respect to which, a measure of international uniformity is desirable. PANS OPS, in expanding the SARPs of Annex 6, considers both departure and arrival procedures and to a lesser extent, en route procedures where obstacle clearance criteria should be taken into consideration.

Instrument Departure Procedures

6.5 General Criteria. These procedures assume that all engines are operating. The design of an instrument departure procedure is, in general, dictated by the terrain surrounding the aerodrome, but may also be required to cater for ATC requirements (adjacent ATS routes, restricted, prohibited or danger areas and the proximity of other aerodromes). These factors in turn influence the type and position of navigation aids required to provide track guidance for the departure route. Airspace restrictions may also affect the position of navigation aids. From the pilot and operator point of view, the use of automatic take-off thrust control systems (ATTCS) and noise abatement procedures will need to be taken into account as well. Where no suitable navigation aid is available to provide specific track guidance, the criteria for omnidirectional (any direction) departures is applied. Wherever possible a straight departure will be specified, which is aligned with the runway. Where a departure route requires a turn of more than 15° to avoid an obstacle, a turning departure is constructed.

6.6 Requirements. Where instrument departures are required, a departure procedure will be established for each runway to be used, and will define the procedure for the various categories of aircraft based on an all engines running PDG of 3.3%, or an increased PDG if required to achieve minimum obstacle clearance. The procedures assume that pilots will compensate for wind effects (known or estimated) when flying departure routes which are expressed as tracks to be made good. If radar vectoring is applied, pilots are required to fly the vector headings and not make allowance for the wind.

6.7 Obstacle Clearance. As already stated, obstacle clearance is a primary safety consideration in instrument departure procedures. Unless otherwise stated a PDG of 3.3% is assumed. The PDG is made up of 2.5% gradient of obstacle identification surfaces or the gradient based on the most critical obstacle penetrating these surfaces (whichever is higher), and 0.8% increasing obstacle clearance. Gradients published will be specified to an altitude/height after which the minimum gradient of 3.3% is considered to exist. The final PDG continues until obstacle clearance is ensured for the next phase of flight (en route, holding or approach). At this point the departure procedure ends and is marked by a significant point. The minimum obstacle clearance equals zero at the departure end of the runway (DER) and thereafter increases by 0.8% of the horizontal distance in the direction of flight, assuming maximum divergence of 15°. In the turn initiation area for a turning departure a minimum obstacle clearance of 90 m (295 ft) is provided. Increased obstacle clearance will be provided in mountainous terrain. If DME is available, additional height/distance information is made available.

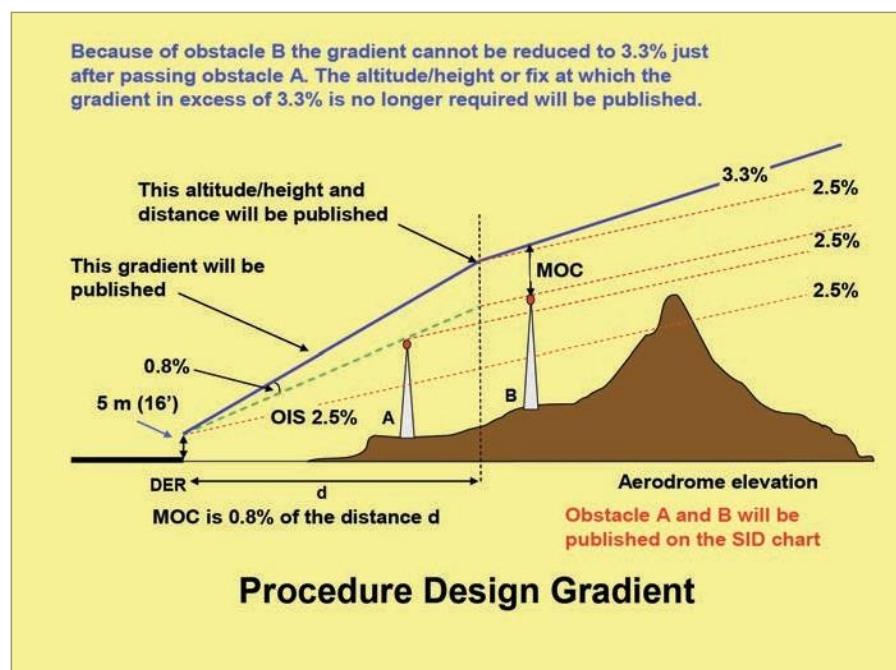


Figure 6.3

6.8 Mountainous Terrain. What defines mountainous terrain is not specified. In deciding if the criteria for mountainous terrain are applicable, the designer takes notice of the prevailing wind conditions. If the average wind speed of 37 kph or more produces significant down draughts, increased obstacle clearance is applied.

6.9 Aircraft Category. It has already been mentioned that the major consideration in planning a departure route is to ensure adequate obstacle clearance. In determining the track over which the aircraft will fly speed is the determining factor. Aircraft are categorized by the

maximum speed that the departure procedure can be flown. Wherever limiting speeds other than those specified in the table are published, they must be complied with to remain within the appropriate areas. If an aeroplane operation requires a higher speed, then an alternative departure procedure must be requested.

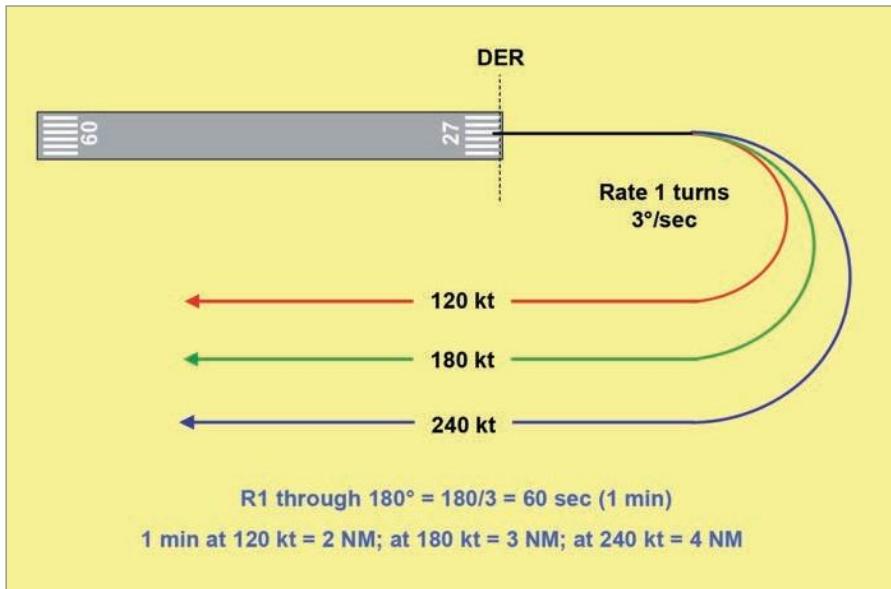


Figure 6.4

6.10 Standard Instrument Departures. There are two basic types of departure route, straight, or turning. Departure routes are based on track guidance acquired within 20 km (10.8 NM) from the end of the runway (DER) for straight departures, and within 10 km (5.4 NM) after completion of turns for turning departures. When flying the route, the pilot is expected to correct for known wind and to remain within the protected airspace.

6.11 Straight Departure. A straight departure is one in which the initial departure track is within 15° of the alignment of the runway. Track guidance may be provided by VOR, NDB or RNAV.

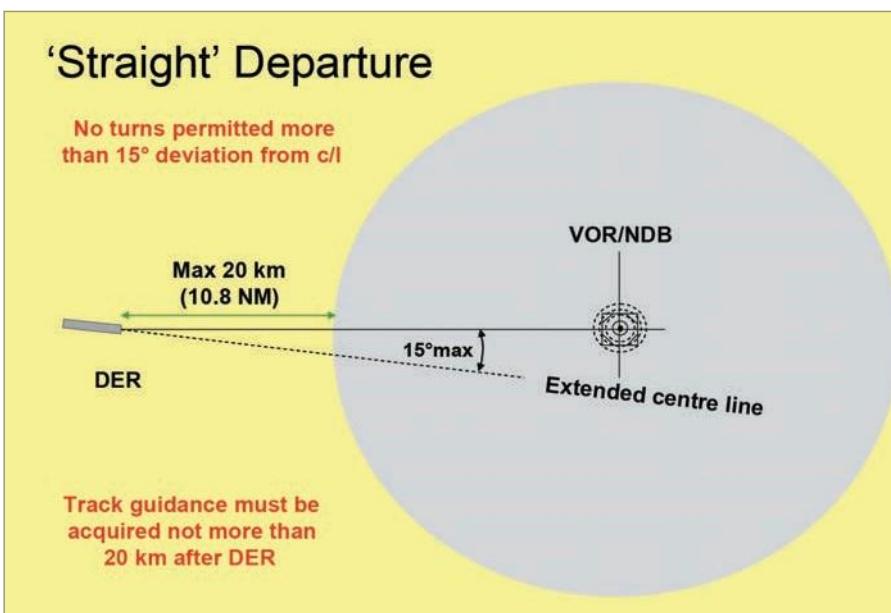


Figure 6.5

6.12 Turning Departure. If the departure track requires a turn of more than 15° , a turning area is constructed and the turn required is commenced upon reaching a specified altitude/height, or at a fix or at a facility (VOR, NDB etc...). Straight flight is assumed until reaching an altitude not less than 120 m (394 ft) above the elevation of the DER.

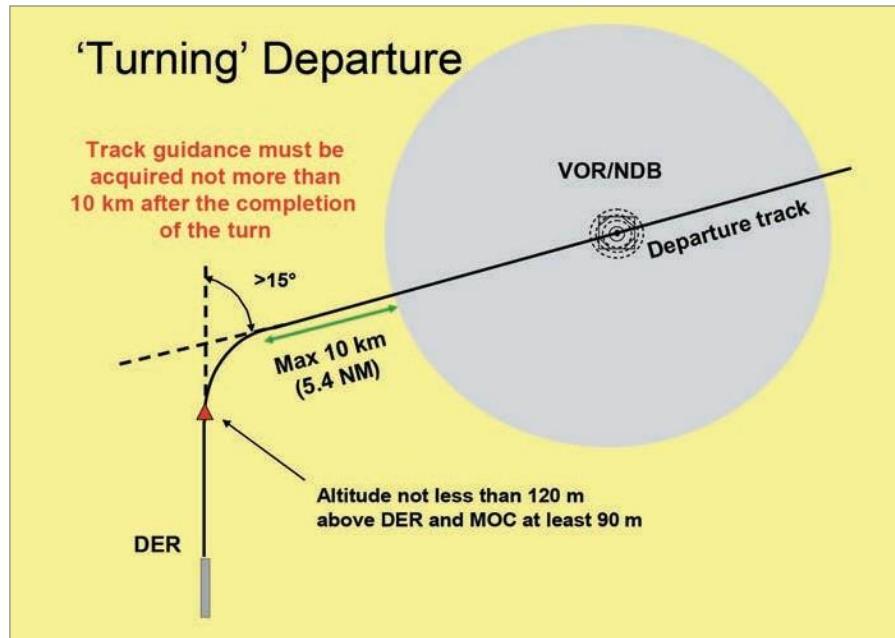


Figure 6.6

Aeroplane Categories for Departure Procedures	
Aeroplane Category	Max Speed km/h (kt)
A	225 (120)
B	305 (165)
C	490 (265)
D	540 (290)
E	560 (300)

Maximum speed for turning departures

Figure 6.7

6.13 Emergencies. It is the responsibility of the operator to establish procedures to cover the case of engine failure or an emergency in flight which occurs after V_1 .

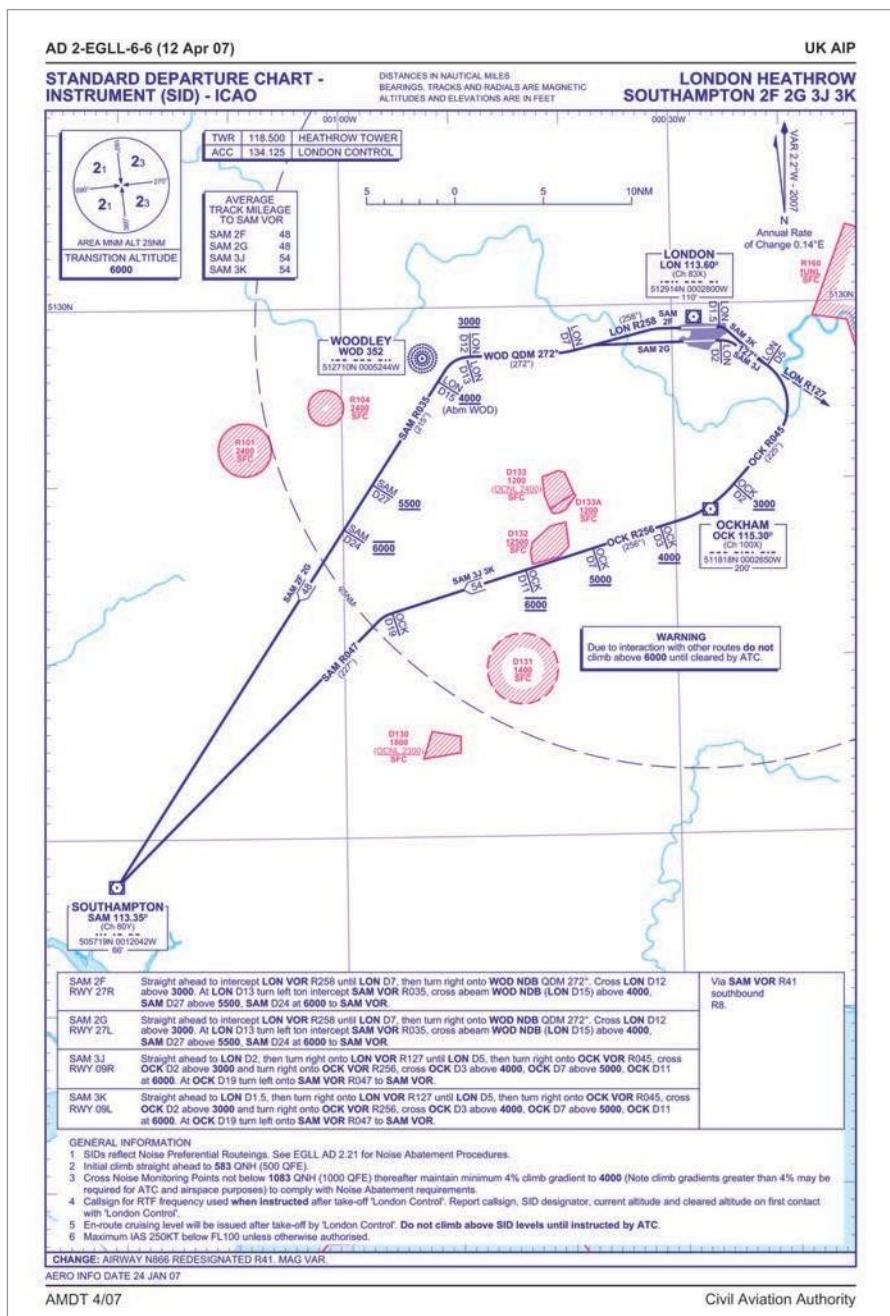


Figure 6.8

6.14 Omni-directional Departures. Where no track guidance is provided in the design of a departure procedure, the omni-directional method is used which basically provides for initial departure tracks to be undefined. In other words, once off the end of the runway and at a safe height, the aircraft can be navigated in any direction required to achieve the initial en route point. It may be that some sectors of the departure area may contain obstacles which preclude departures in that direction, in which case the published procedures will be annotated to show the restricted sectors. The basic procedure is that the aircraft will climb on the extended runway centre line to 120 m (394 ft) above aerodrome elevation before turns can be specified, and at least 90 m (295 ft) of obstacle clearance will be provided before turns greater than 15° can be specified. Turns will not commence within 600 m of the beginning of the runway. Where obstacles do not permit the development of omni-directional procedures, it is necessary to fly a departure route (straight or turning), or ensure that ceiling and visibility will permit obstacles to be avoided by visual means.

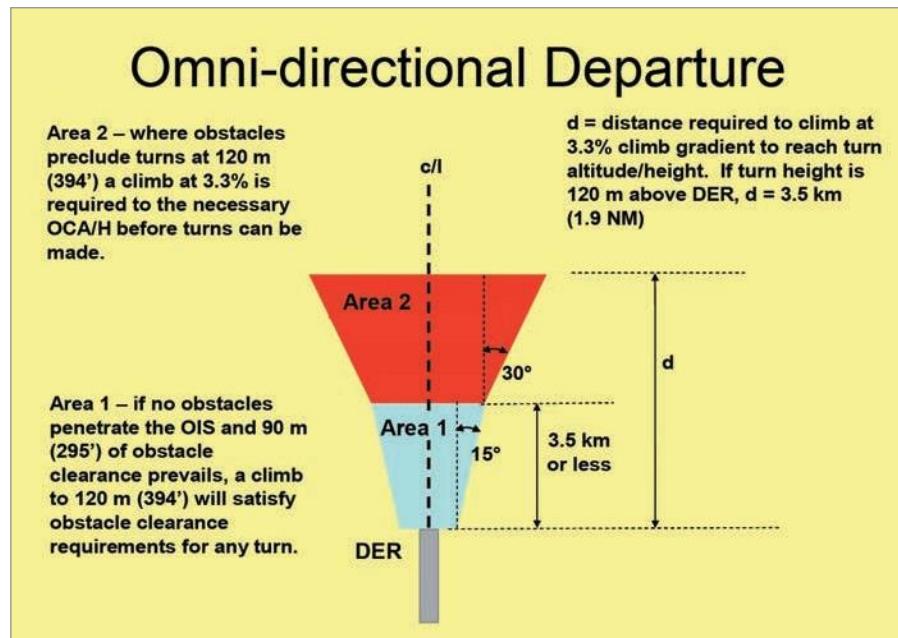


Figure 6.9

6.15 Published Information. Departure routes and SID charts are published in accordance with standards contained in Annex 11 and Annex 4 to the Chicago Convention. Departure routes are labelled as RNAV (area navigation based on VOR/DME or GPS) only when that is the primary means of navigation utilized. For omni-directional departures, the restrictions will be expressed as sectors to be avoided or sectors in which minimum gradients and/or minimum altitudes are specified to enable an aeroplane to safely over fly obstacles. Minimum Sector Altitude (MSA) is also depicted on the plate and gives the lowest safe altitude for a defined sector (based on a navigational facility) to a range of 25 NM from the aerodrome (or facility). Figure 6.10 shows a typical SID plate. This plate details the departures from the runways at Heathrow and specifies that the point of joining the ATS route structure is the Compton VOR (CPT). All SIDs start at DER and end at the point of joining the ATS en route system. Note that each route has a specific designator e.g. CPT3G. In the ATC clearance for IFR flights, departure instructions will include a SID to the first airways point. The ATCO will refer to the SID by its designator. Note the means by which track guidance is applied. In a normal aeroplane fully 'airways fitted' for IFR, the SID can always be complied with as there will be a minimum of two VOR/NAV boxes and one ADF. The Compton SID requires radio navigation using the LON and CPT VORs and the WOD NDB. DME is also specified.

The SID specifies DME distances to or from the facility with radials from VORs or QDMs for NDBs. The SID will also specify altitude restrictions in the form of "Above", or "At", as well as a diagram of the procedure. A narrative is always given in English. At the end of the SID the aircraft should be well placed to continue en route climbing in the airway or under radar control. At any time during the procedure, the pilot may be ordered to comply with radar vectoring requiring abandonment of the SID or abbreviation of the procedure. In such cases the pilot will be told that the aircraft is under radar control.

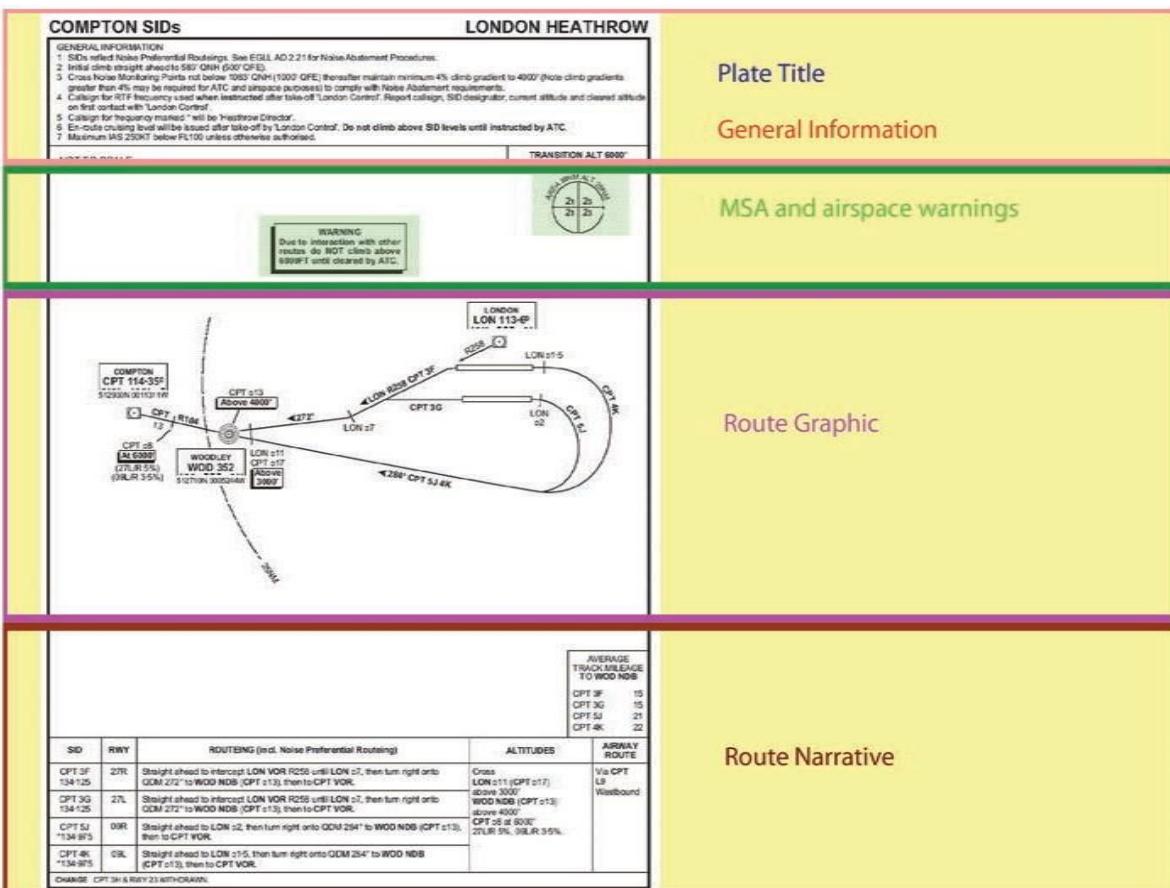


Figure 6.10

6.16 Area Navigation (RNAV) and RNP Based Departure Procedures. The general principles relating to RNAV approach procedures also apply to RNAV departures based on a VOR/DME, DME/DME, basic GNSS and RNP criteria. Most FMS equipped aircraft are capable of following RNAV procedures but procedures may contain constraints on the system used. To use an RNP based procedure, the aircraft RNAV system must be approved for the published RNP and it must be confirmed before flight that the related VOR/DME stations are in fact working! Before flight, the pilot must also verify that the aircraft will be able to meet the RNP requirements for the segments to be flown as well as continue to monitor the system accuracy.

6.17 Turns. There are four kinds of turn that may be specified for an RNAV procedure:

- Turn at a fly-by waypoint;
- Turn at a fly-over waypoint;
- Turn at an altitude/height; and
- Fixed radius turn (generally for RNP based procedures)

6.18 Use of FMS to Follow Conventional Departure Procedures. Where FMS is available, it may be used when flying the conventional departure procedures defined, provided the procedure is monitored using the basic display normally associated with that procedure, and the tolerances for flight using raw data on the basic display are complied with.

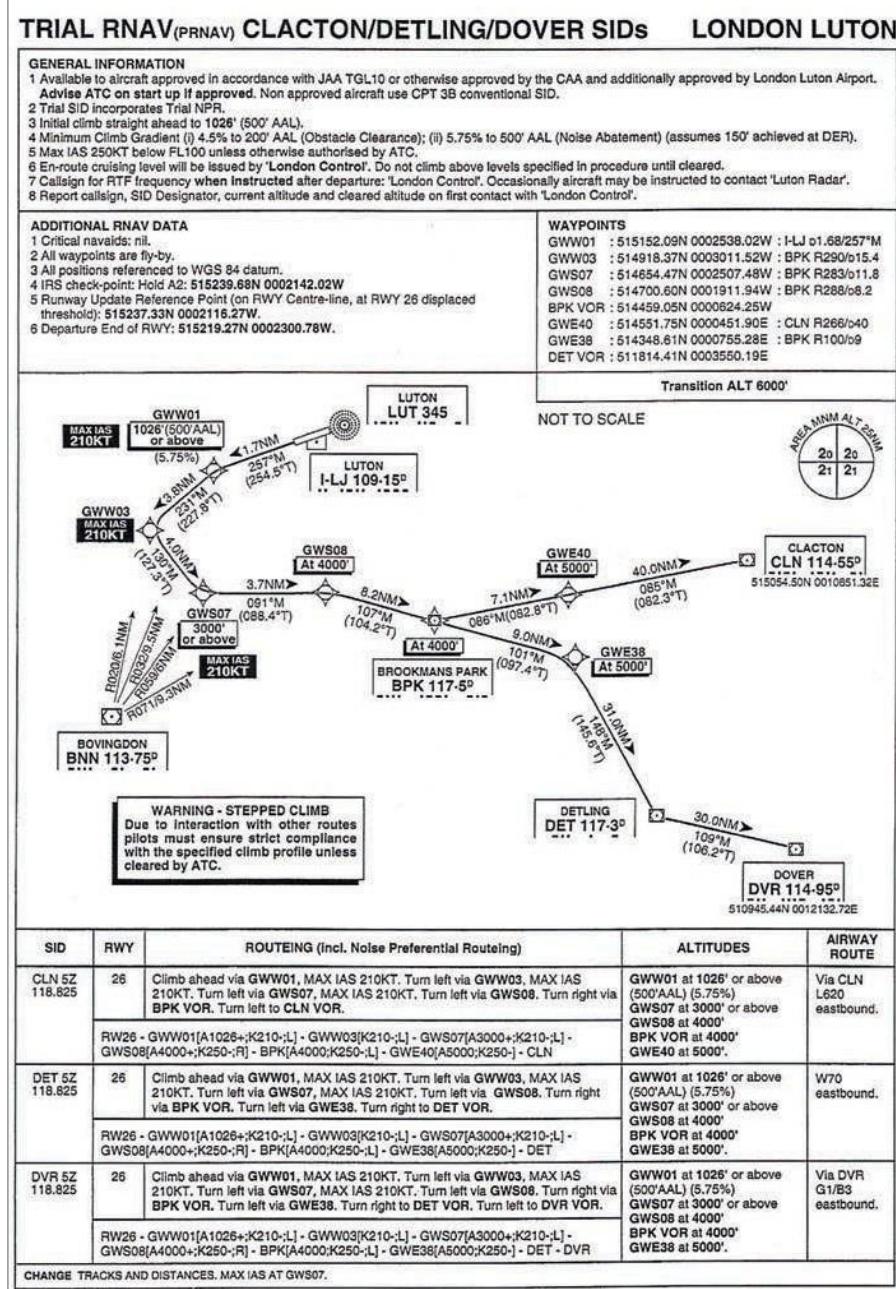


Figure 6.11

Questions

- 6
Questions
1. During a straight departure, the initial track is to be:
 - a. within 5° of runway centre line.
 - b. within 10° of runway centre line.
 - c. within 15° of runway centre line.
 - d. within 25° of runway centre line.
 2. In an instrument departure procedure the minimum obstacle clearance at DER is:
 - a. 0 ft.
 - b. 3.3% gradient.
 - c. 35 ft.
 - d. 0.8% gradient.
 3. Turning departures provide track guidance within what distance of the completion of turns?
 - a. 15 km.
 - b. 20 km.
 - c. 10 km.
 - d. 5 km.
 4. The MSA provides 300 m obstacle clearance within how many miles radius of the navigation facility at the aerodrome?
 - a. 20 NM.
 - b. 30 NM.
 - c. 25 NM.
 - d. 15 NM.
 5. What does the abbreviation DER stand for?
 - a. Distance to end of route.
 - b. Departure end of route.
 - c. Distance to end of runway.
 - d. Departure end of runway.
 6. What does the abbreviation OIS stand for?
 - a. Obstacle identification surface.
 - b. Obstacles in surface.
 - c. Obstacle identification slope.
 - d. Obstruction identification surface.
 7. The MSA which must be established around a navigation facility used in instrument procedures is in general valid within a sector of:
 - a. 15 NM.
 - b. 30 NM.
 - c. 25 NM.
 - d. 10 NM.

8. In a straight departure, what is the alignment of the initial track referenced to the runway centre line?
- Within 45°.
 - Within 12.5°.
 - Within 15°.
 - Within 30°.
9. In general, what is the main factor that dictates the design of an instrument procedure?
- The availability of navigation aids.
 - Airspace restrictions.
 - The terrain surrounding the aerodrome.
 - ATC requirements.
10. When following a SID, the pilot must:
- calculate the track required and request ATC clearance to follow it.
 - fly the heading without wind correction.
 - adjust the track specified to allow for the wind.
 - fly the heading to make good the required track allowing for the wind.
11. For an omni-directional departure, the procedure dictates that the aircraft climbs on the extended centre line to a specified height before turning. What is this height?
- 300 m.
 - 120 m.
 - 150 m.
 - 250 m.
12. If the track on an instrument departure is published, the pilot is expected to:
- correct for the known wind so as to stay within controlled airspace.
 - ask ATC for another heading to steer correcting for wind.
 - ignore the wind and proceed with a heading equal to the track.
 - ask ATC for permission to correct heading for wind.
13. What is the value of PDG?
- 5%
 - 3.3°
 - 3.3%
 - 2.5%

Answers

1	2	3	4	5	6	7	8	9	10	11	12
c	a	c	c	d	a	c	c	c	d	b	a

13
c

Chapter

7

Approach Procedures

Procedure Basics	175
Approach Procedure Design	178
Obstacle Clearance Altitude/Height.....	185
Operating Minima	185
Descent Gradients.....	188
Track Reversal and Racetracks	189
Missed Approach Segment and Procedure.....	193
Published Information	194
RNAV Approach Procedures based on VOR/DME.....	197
Questions	198
Answers	206

Procedure Basics

7.1 Introduction. Whilst in many ways the problems associated with arrivals are similar to those associated with departures, the primary concern of the procedure designer will inevitably be terrain clearance until the pilot is in a position to land the aircraft once in visual contact with the underlying ground. The initial design of an instrument approach procedure is, in general, dictated by the terrain surrounding the aerodrome. It is also affected by the type of operations and the types of aeroplane flying the procedures. These factors in turn, influence the types and positioning of navigation aids in relation to the runway or aerodrome. As we have already seen for departure procedures, airspace restriction may also affect the design of the procedure.

7.2 Responsibility of ATC. Should a pilot report, or it is clear to ATC that the pilot is unfamiliar with an instrument approach procedure, the ATCU is responsible for describing the procedure to the pilot unless the aircraft is cleared for a straight-in approach.


7.3 Speed/Categories of Aircraft. As with departure procedures, aircraft speed is an important consideration. Whist the critical speed is the speed at which the aircraft crosses the threshold of the landing runway (V_{at}) as this will affect the spacing of aircraft on the approach, approach speeds will determine the dimensions of the areas within which manoeuvring may be carried out and hence the OCH calculations. The table below relates speed to the category of the aircraft (A-E).

Aircraft Category	V_{at}	Initial Approach speed range	Final Approach speed range	Max Speed for Visual Circling
A	<91	90/150 (110*)	70/100	100
B	91/120	120/180 (140*)	85/130	135
C	121/140	160/240	115/160	180
D	141/165	185/250	130/185	205
E	166/210	185/250	155/230	240

V_{at} = Speed at threshold based on $1.3 \times V_{S0}$ or $1.23 \times$ stall speed (V_{S1g}) in landing configuration at max certificated landing mass
* Maximum speed for track reversal or racetrack procedures

Figure 7.1 Aircraft categories for approach procedures

7.4 Minimum Sector Altitudes (MSA)/Terminal Arrival Altitudes (TAA). For each aerodrome, MSA/TAA are established to provide at least 300 m (984 ft) obstacle clearance within 25 NM of the navigation aid, IAF or IF associated with the approach procedures for that aerodrome. MSA/TAA is shown on all instrument plates and will be the lowest altitude permitted at the appropriate fix (normally the altitude at which the procedure begins). An arriving aircraft is permitted to descend below MSA only when: the aerodrome and underlying terrain are visible and will remain so, the aircraft is under radar control being radar vectored, or the aircraft is flying a published approach procedure.

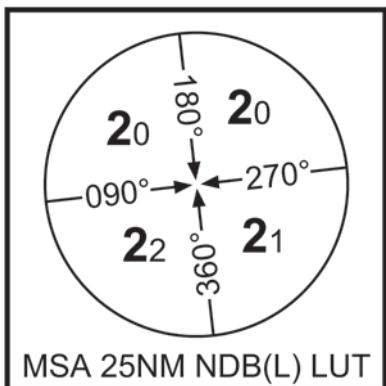

MSA as shown on the ILS/DME plate for London/Luton. The altitude is shown in thousands and hundreds of feet e.g. 22 is 2 200 ft. The segments shown relate to the aircraft track e.g. the NW segment will include all arrival route tracks between 090 and 180 mag terminating at the LUT NDB.

Figure 7.2

7.5 Types of Procedure. Broadly, instrument procedures are defined in terms what guidance is provided. ICAO defines these as:

- Precision Procedures (runway approach) Categories I/II/III
- Non-precision Procedures (aerodrome approach)

7.6 Precision. A precision approach procedure gives accurate track guidance (azimuth) during the final approach segment and information concerning height above the threshold of the runway (elevation). In all cases external equipment is required to provide the necessary data. By flying the required track and glide path within the required accuracy of half scale deflection of the course deviation indicator (CDI), the aircraft is kept within a protected area which ensures terrain clearance (above OCA/H) throughout the procedure. ILS, MLS and Precision Approach Radar (PAR) are examples of equipment that can be used as part of a precision approach system. In the USA GLS (GPS landing systems) are now in use and first indications are that accuracy in the order of +/- 30 cm to the centre line are achievable. In the design of the procedure (azimuth and elevation requirements), obstacle clearance is implicit if the descent path (glide path) is adhered to. Because a precision approach terminates at the touchdown point (or at the commencement of a missed approach) it is often referred to as a runway approach. For a precision approach the pilot is required to calculate the height on the final approach at which he/she must make a decision either to land or go around (fly the missed approach procedure). This is called Decision Altitude/Height (DA/H) and reflects the Operator's declared aerodrome operating minima (covered in Operational Procedures). Guidance on the calculation of DA/H is contained in the Operations Manual. DA/H is defined as the specific altitude (or height) in a precision approach at which a missed approach must be initiated if the required visual reference to continue the approach has not been established. The Operator is also required to specify the required visual criteria in the Operations Manual.

7.7 Glideslope out. Should the glideslope become unserviceable and the pilot lose glide path indications, the approach become a non-precision approach.

7.8 Precision Categories. It must be emphasized that at DA/H, if the approach has been flown correctly, the aircraft will be at the place it should be and must therefore be safe, and further descent along track must also be safe (if the visibility was perfect, the aeroplane would be at the same place and height, and the approach would be continued anyway!). Except where the 'system' (ground equipment and aeroplane equipment) permits 'blind' landing, the latter stage of the final approach will be flown visually (the pilot will need visual reference to complete the landing). In order to accomplish this, a minimum RVR is required and also a visual

means of maintaining the centre line of the runway once on the ground. As technology has advanced, systems, specifically ILS, have become more accurate in track and height guidance. The use of ‘on board’ computer systems (FMS) to interpret received data and to control the aeroplane means that the visual element can be reduced to the minimum. ILS systems are categorized by accuracy of operation. The categories are as follows, but beware; there are anomalies between ICAO and JAR OPS requirements. System Minima is discussed in section 7.31 below. For Air Law, only the ICAO requirements are examinable. The ICAO categories are:

- **Cat I** System Minima 60 m (200 ft); DH \geq 60 m (200 ft), and RVR not less than 550 m or ground visibility not less than 800 m
- **Cat II** System Minima 30 m (100 ft); DH $<$ 60 m (200 ft) but \geq 30 m (100 ft), and RVR not less than 350 m
- **Cat IIIA** No system minima; DH $<$ 30 m (100 ft) or no DH, and RVR not less than 200 m
- **Cat IIIB** No system minima; DH $<$ 15 m (50 ft) or no DH, and RVR less than 200 m but more than 50 m
- **Cat IIIC** No system minima; no DH and no RVR requirements

7.9 Non-precision. Where there is no ground equipment that can provide height (elevation) data to the aircraft, the procedure is defined as non-precision although the track guidance accuracy may be as good as that required for precision. Non-precision procedures can be established where track guidance is provided by VOR or NDB, or by track guidance elements of precision systems i.e. ILS localizer only or PAR in azimuth only. Another type of non-precision system is surveillance radar on a reduced range scale (SRA). Because there is no reference to touchdown for non-precision procedures and the procedures always terminate above touchdown, the procedures are sometimes referred to as aerodrome approach procedures. Indeed, some procedures are specified for approach to the aerodrome, followed by a circling manoeuvre complying with defined visual criteria to land in a direction other than that of the straight-in approach. This is known as Visual Manoeuvring (Circling) and is discussed in detail in Chapter 8.

7.10 Visual Approach. In all cases, once established on final approach, the pilot has the option to continue the approach visually providing, of course, that he/she has the necessary visual criteria specified by the operator. This is not VFR! It is completing the IFR procedure visually. Unless Cat IIIC applies, the pilot will need some form of visual criteria anyway, so if the criterion is obtained at 7 miles from touchdown, what is the difference! However, separation is the responsibility of ATC because there may be aircraft behind and in front of you undertaking instrument approaches.

7.11 Completing the Procedure. Once an instrument procedure has been commenced the pilot must complete the procedure as published unless given contrary instructions by ATC. Even if the final approach is flown visually, the requirements of the procedure must be complied with. An instrument approach ends with either a successful landing or completion of the missed approach procedure. In any event, if the procedure is abandoned after passing the IAF, the missed approach procedure must be flown, starting from the MAPt, with the aircraft climbing to the altitude specified for the missed approach as soon as possible (this will usually be the highest MSA or the lowest altitude specified for commencing the procedure at the IAF).

7.12 Limitations. An instrument approach shall not be continued beyond the outer marker fix, or if no OM is provided the equivalent position, in case of precision approach, or below 300 m (1000 ft) above the aerodrome in case of non-precision approach, unless the reported visibility or controlling RVR is above the specified minimum. If, after passing the outer marker fix, or equivalent position, in case of precision approach, or after descending below 300 m (1000 ft) above the aerodrome in case of non-precision approach, the reported visibility or controlling RVR falls below the specified minimum, the approach may be continued to DA/H or MDA/H. If the required visual criteria are then obtained at DH, the aircraft may be landed.

Approach Procedure Design

7.13 Procedure Requirements. An instrument approach procedure requires the aeroplane to be flown in safe airspace. In order to remain in safe airspace the required track of the aeroplane must be achievable and the altitude limitations which need to be applied must be commensurate with what is trying to be achieved. As the procedure takes the aeroplane closer to the runway/aerodrome and closer to the ground, the safety limitations must be increased not relaxed. Until 3-D satellite navigation technology is widely available and proved reliable, the system of guidance in azimuth and elevation will rely on ground based equipment which has inherent errors. Providing the error tolerances are known and the design of the procedure detailing the flight path to be flown takes the error tolerances into account, the procedure will be usable. It does of course require the pilot (or the auto-pilot) to be able to fly the aeroplane to the required basic accuracy to keep the aeroplane in the airspace specified. The procedure will define tracks to be made good, therefore the pilot must make allowance for the wind. An instrument approach procedure has five separate segments, each of which has a specific purpose. Each of the five segments begins and ends at a designated fix. It is, however, possible for segments to begin at specified points if no fix is available. For instance, the final approach segment of a precision approach may begin at the point of intersection of the intermediate flight altitude and the glide path.

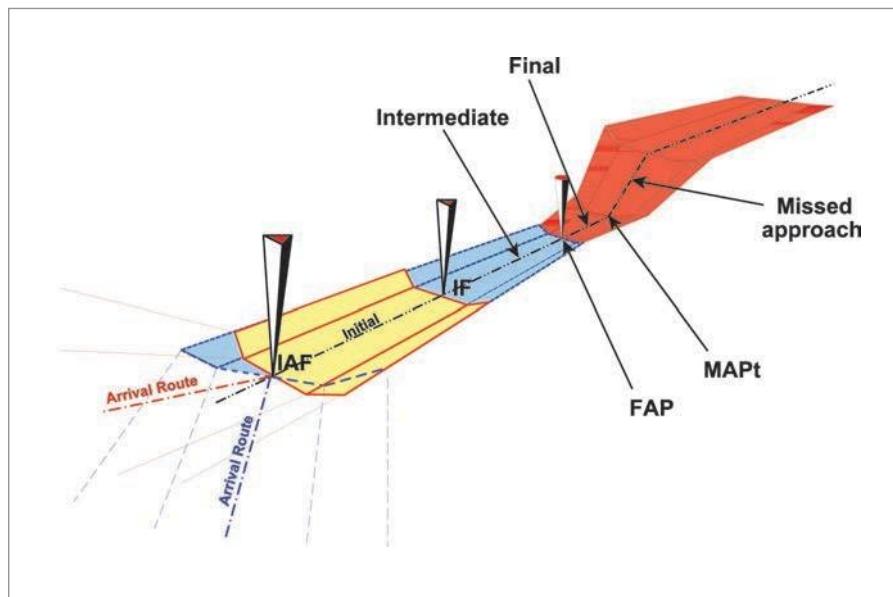


Figure 7.3 Procedure segments

7.14 Procedure Segments. An approach procedure consists of five parts or segments. These are:

- The Arrival Segment or Route (see 8.20 below)
- The Initial Segment (see 8.21 below)
- The Intermediate Segment (see 8.22 below)
- The Final Segment (see 8.23 below)
- The Missed Approach Segment and Procedure (see 8.47 below)

7.15 Straight-in Approach. Wherever possible a straight-in approach will be specified in which each segment is aligned with the extended runway centre line. However, a non-precision approach may specify the final approach track converging to the runway heading at an angle of 30° or less. In all cases, the procedures depict still air tracks and pilots are required to make allowance for the wind to make good the specified track. If terrain or other restrictions preclude a straight-in approach, a circling approach will be specified. In addition, an aircraft may be offered an omni-directional or sector arrival by ATC when appropriate and taking into consideration the MSA (Minimum Safety Altitude). The definition of being established on an NDB is to be within 5° either side of the final approach track.

7.16 Physical Characteristics of Segments. The vertical cross section of each segment is divided into primary and secondary MOC areas. Full obstacle clearance is applied over the primary area, reducing to zero at the outer edges of the secondary areas.

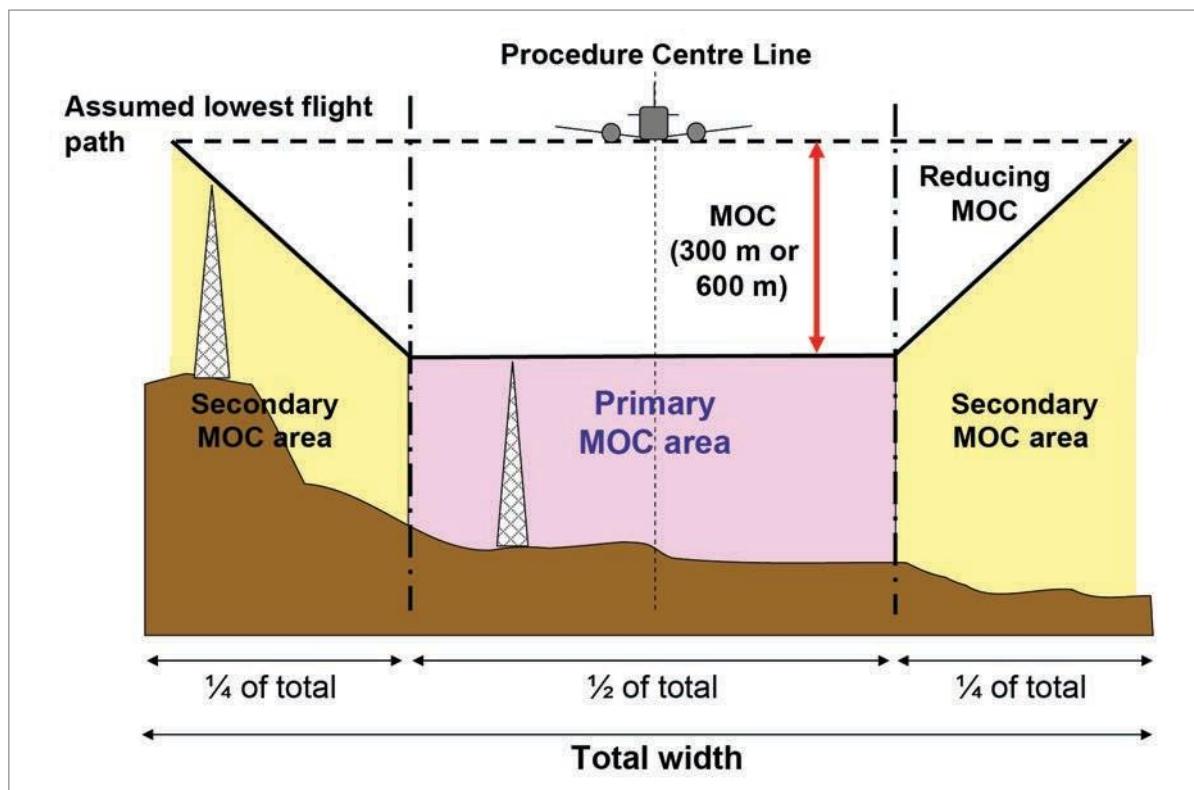


Figure 7.4 Characteristics of segments

7.17 Fixes and Fix Accuracy. The fixes used in instrument procedures are generally based on data from radio navigation aids e.g. VOR. The fix may be an ‘on top’ to a beacon or a point defined by a DME range on a specified radial (way point). In any event, the accuracy of the fix is of paramount importance because the width of the MOC area will be based upon this. For ‘on top’ fixes the type of aid is a limiting factor. For instance, a VOR is designed to give accurate track guidance but is quite poor in giving an ‘on top’ indication due to the size of the ‘cone of confusion’ over the beacon. An NDB, on the other hand, gives a better ‘on top’ but the track guidance is worse! Where an accurate ‘on top’ is required, e.g. the outer marker of a CAT 1 ILS, a 75 MHz (or ‘Z’ or ‘fan’ marker) is used which is designed specifically for that purpose. Where a fix is specified using information from two separate systems e.g. VOR radial and DME range, the inaccuracies of each system must be aggregated to define a fix tolerance area. In determining the accuracy of fixes the following bearing error is assumed:

- VOR $\pm 4.5^\circ$
- ILS Localizer $\pm 1.4^\circ$
- NDB $\pm 10.3^\circ$

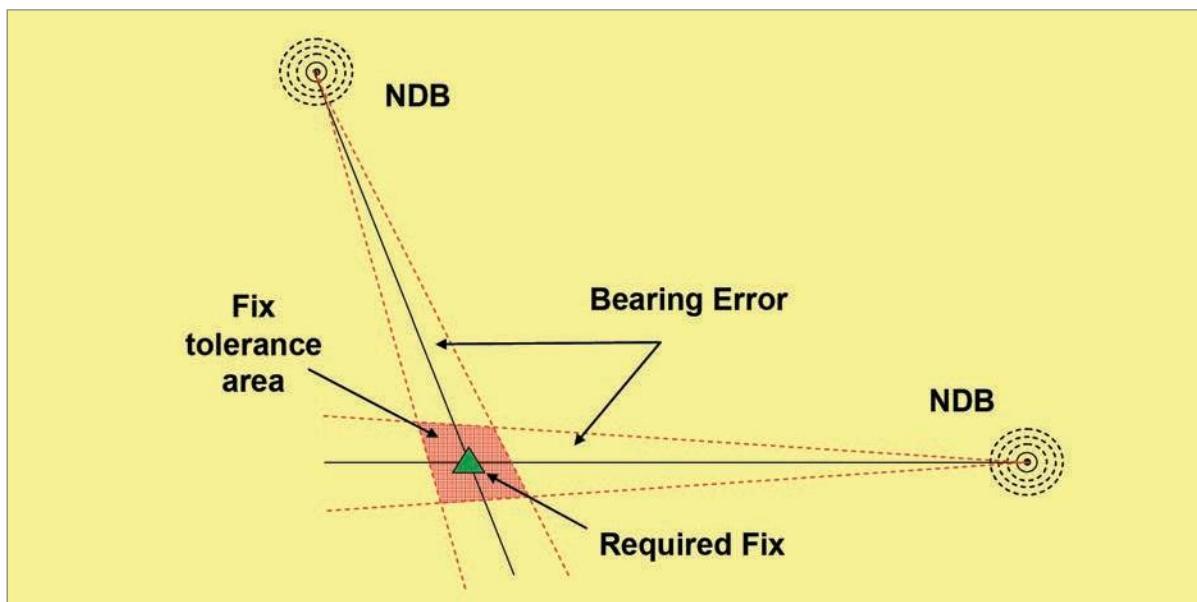


Figure 7.5

7.18 Track Guidance Accuracy. The width of the MOC area is also dependent upon the accuracy of the track guidance provided by the navigation aids used. The track accuracy for the various aids is defined as follows:

- VOR $\pm 5.2^\circ$
- ILS Localizer $\pm 2.4^\circ$
- NDB $\pm 6.9^\circ$

7.19 Fix Tolerances for other navigation aids.

- Terminal Area Surveillance Radar (TAR) : Within 20 NM = ± 1.5 km (0.8 NM)
- En route Surveillance Radar (RSR) : Within 40 NM = ± 3.1 kms (1.7 NM)
- DME : ± 0.46 km (0.25 NM) + 1.25 per cent of the distance to the antenna

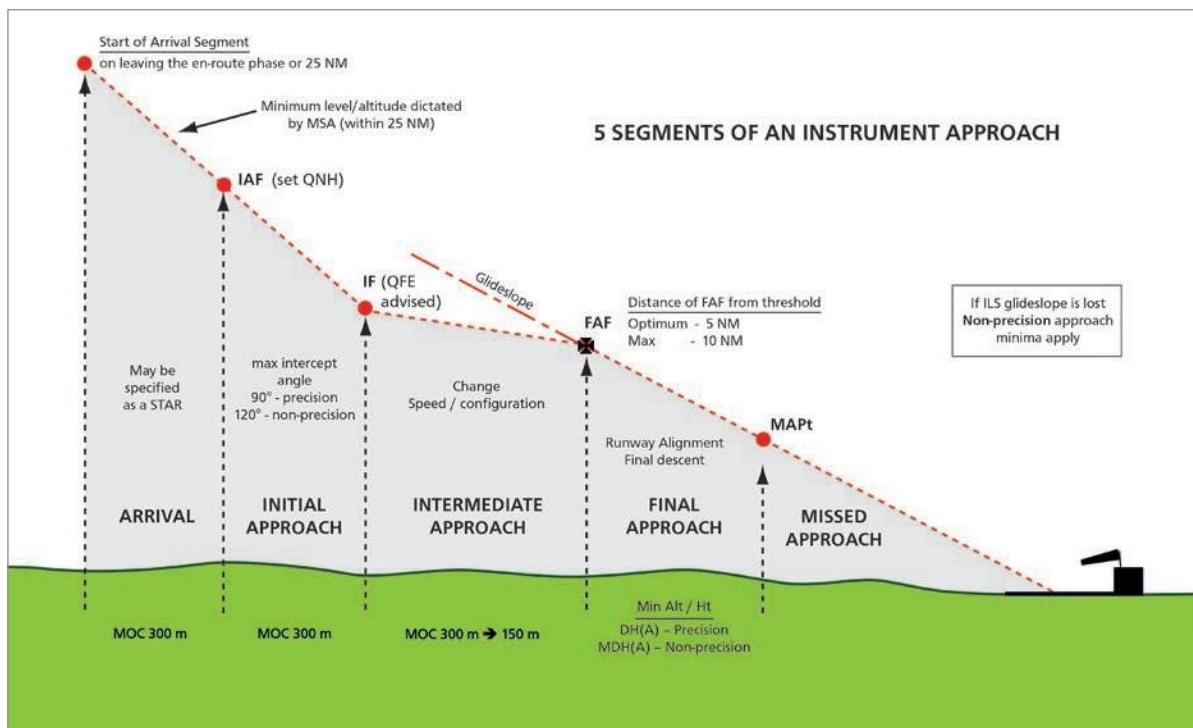


Figure 7.6

7.20 Arrival Route/Segment. The arrival segment begins at the point the aircraft departs from the en route airways system to begin the instrument arrival. This will normally be a radio navigation facility. If this is 25 NM or more from the aerodrome, a standard arrival route (STAR) will be specified. The STAR plate below shows the arrival routes for London Heathrow from the northwest (via the Ockham (OCK) VOR). If the distance is less than 25 NM then the aircraft will route directly from the point of leaving the airway to the facility serving as the IAF for the procedure. In either case, the en route MOC is applied and the altitude specified for the aircraft to be over the IAF is not below the highest MSA for the aerodrome. It is usual for aircraft to be radar vectored from a convenient point, to the final approach track.

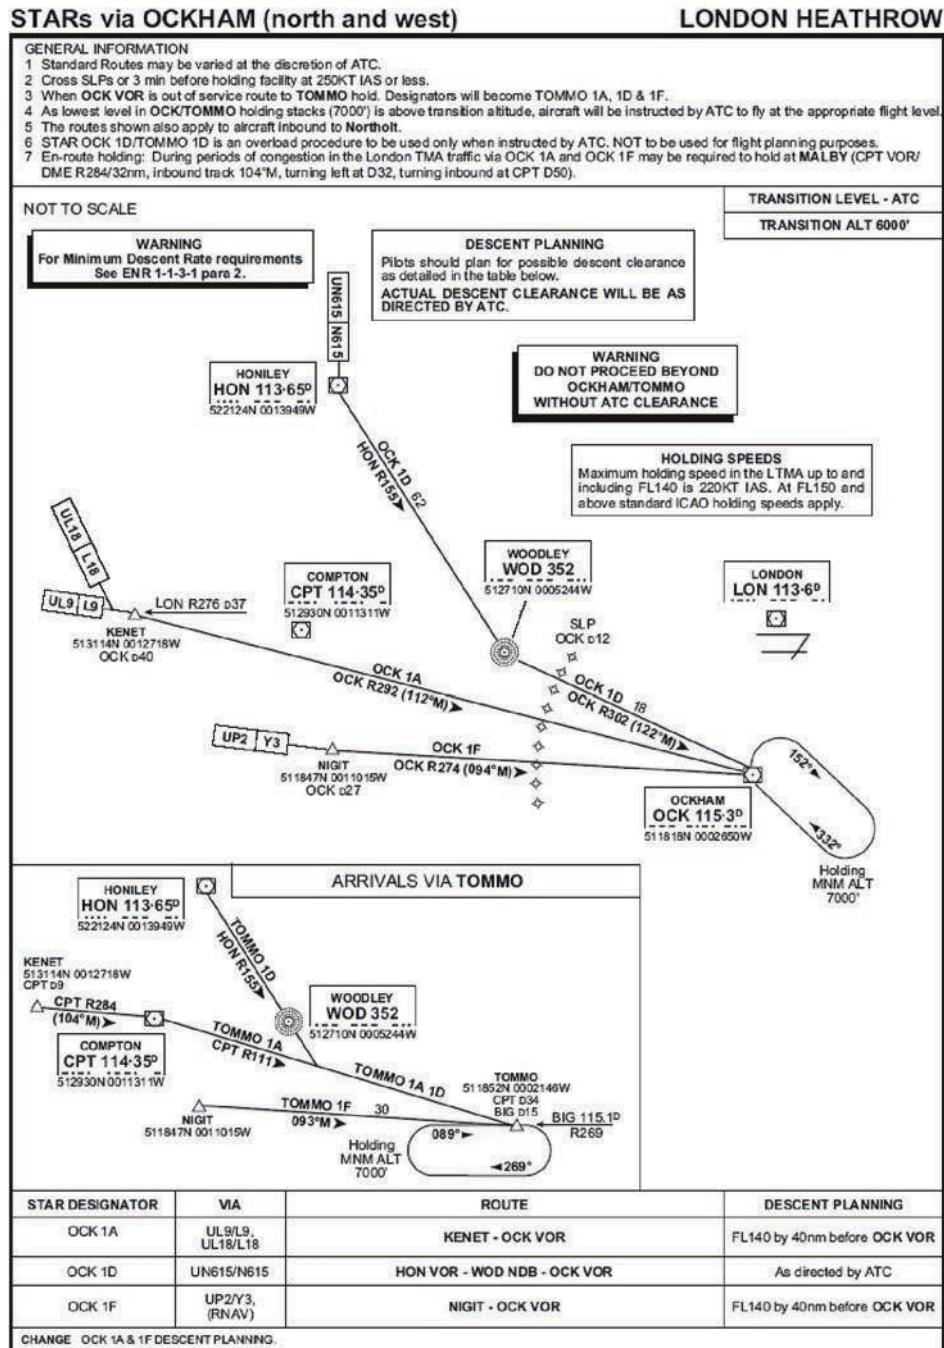


Figure 7

7.21 Initial Segment. In the initial segment, the aircraft is directed to a point at which the intermediate segment can be intercepted. It starts at the IAF and ends at the IF. Aircraft speed and configuration will depend upon distance from the aerodrome and any need for descent. MOC in the initial segment is 300 m (984 ft). Track guidance is normally provided with a maximum intercept angle to the IF of 90° for a precision approach and 120° for a non-precision approach. If track guidance to the IF is not available, a DR segment may be specified. For the DR segment, the interception angle to the intermediate segment track must be no greater than 45°, and the length of the DR track, no more than 10 NM. Where a straight-in approach is not feasible or there is no suitable remote IAF or IF, a track reversal, racetrack or holding pattern is required.

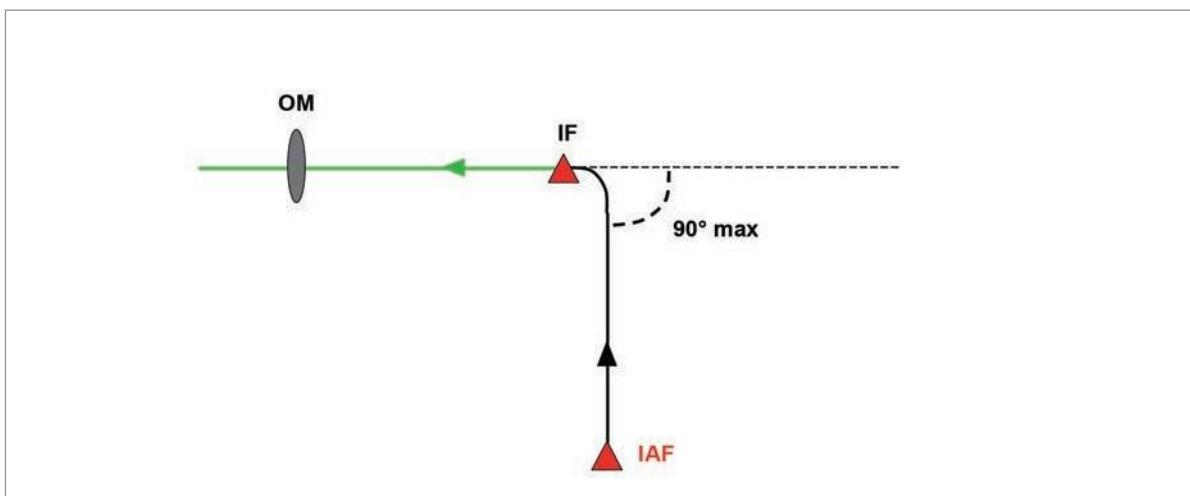


Figure 7.8 IAF to IF (precision approach)

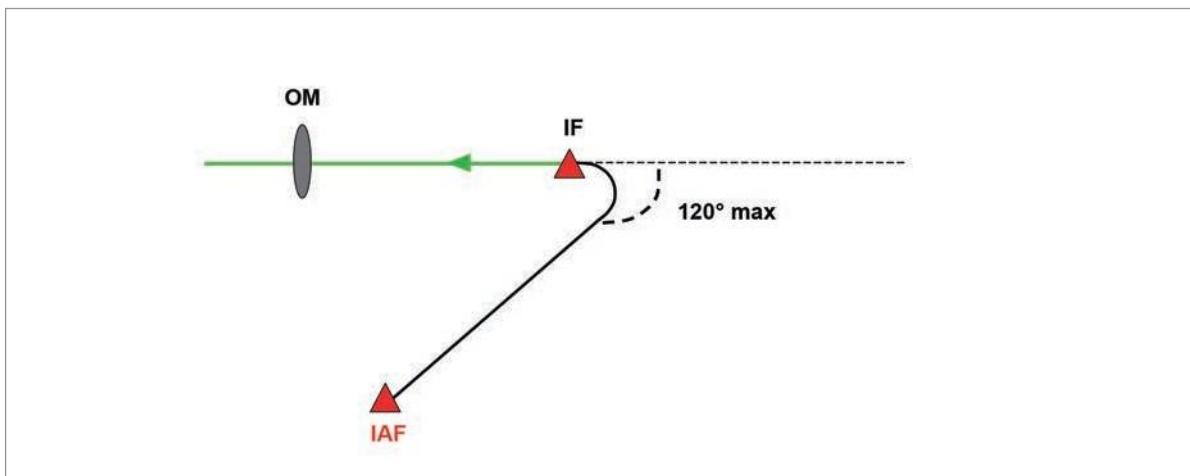


Figure 7.9 IAF to IF (non-precision approach)

7.22 Intermediate Segment. This is the segment in which the aircraft speed and configuration is adjusted to prepare for the final approach. Descent in this segment is kept to a minimum. It starts at the IF and ends at the FAF. If no FAF exists, it ends when the aircraft is established on the final inbound track. The MOC in the intermediate segment reduces from 300 m at the IF to 150 m at the end of the segment.

7.23 Final Segment. The beginning of the final segment depends upon the type of approach and the availability of a suitable FAF. In this segment, the aircraft is finally configured, alignment with the runway takes place and descent for landing is commenced.

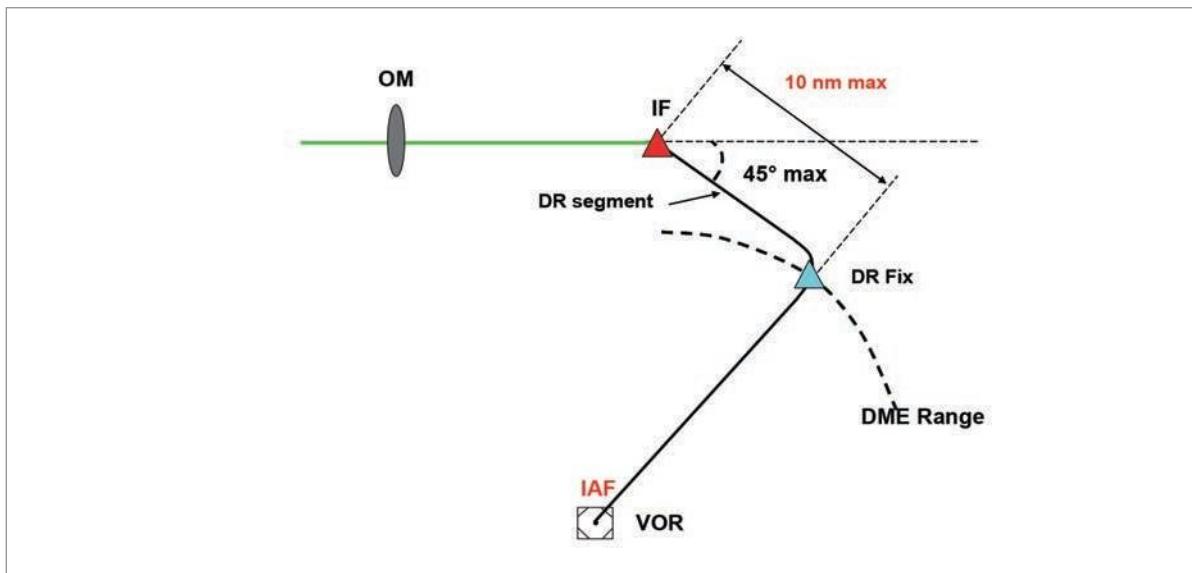


Figure 7.10 IAF to IF (DR segment)

7.24 Non-precision with FAF. For a non-precision procedure with a FAF, the final segment starts at the FAF and ends at the MAPt. The FAF will be positioned on the final approach track at a distance from the threshold of the landing runway that permits aircraft configuration for final approach/landing and descent from the intermediate altitude to the MDA/H. MOC is incorporated in the calculation of MDA/H. The optimum distance of the FAF from the threshold is 5 NM and the maximum is 10 NM. The required descent gradient should be 300 ft/NM (approx 3°). A step-down fix may be incorporated for obstacle clearance purposes in which case, two OCA/H values will be published.

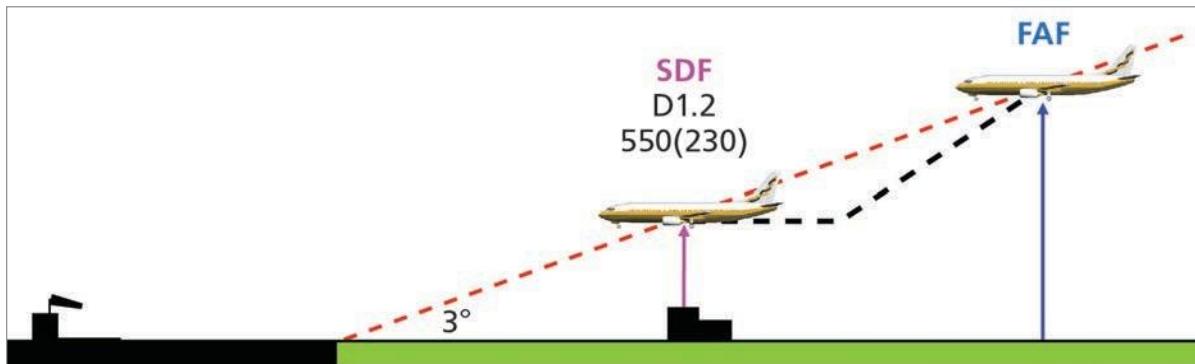


Figure 7.11 Step-down fix

7.25 Non-precision without FAF. This situation will normally occur at an aerodrome where there is only one facility on or near the aerodrome that is used as both the IAF and the MAPt. In this case it is unlikely that the final approach track will be aligned with the runway centre line and therefore descent to MDA/H will be made when the aircraft is established inbound on the final approach track.

7.26 Precision Approach. For ILS/MLS the final segment begins at the Final Approach Point (FAP). This is defined as the point in space on localizer centre line (or the specified MLS azimuth) where the intermediate approach altitude intercepts the nominal glide path. This can occur at heights between 300 m (1000 ft) and 900 m (3000 ft) which in the case of a 3° (300 ft/NM) glide path, will be between 3 NM and 10 NM from touchdown. MOC is included in the calculation for DA/H but requires the pilot to fly the aircraft with no more than half scale

deflection of the CDI. At some point during the final segment, a fix will be specified where glide path information can be verified.

7.27 Constant Approach Slope (Stabilized Approach). Primarily for the avoidance of wake turbulence separation but also for economy and noise abatement, a procedure known as stabilized approach has been developed. The procedure requires the aircraft to depart from the IAF and descend at a constant rate throughout the procedure. Wake turbulence separation (see Chapter 15) is only applicable between approaching aircraft where the second aircraft is at the same altitude as, or within 1000 ft below, the preceding aircraft. So, by ensuring that the subsequent aircraft is always above the preceding aircraft there is no requirement for wake turbulence separation. Control of the rate of descent is achieved by aircraft attitude negating the need for power changes thus reducing noise. Also, by setting a constant power, economy in fuel usage is achieved.

7.28 Missed Approach. In the event that the necessary visual criteria is not obtained at DA/H or MDA/H the final part of an instrument procedure permits a return to the IAF for another attempt or to establish the aircraft on a departure profile to go to another (alternate) aerodrome.

Obstacle Clearance Altitude/Height

7.29 Obstacle Clearance Altitude/Height (OCA/H). During the development stage of the design of a procedure, the OCA/H is determined by the authority of the state through survey. This will be the altitude/height at or above which an aircraft must be flown to avoid the dominant obstacle. It will consist of the height of the obstacle plus the minimum obstacle clearance (MOC) allowance. This information will be published on the instrument procedure plate and is aircraft category dependent. OCA/H is the lowest that MDA/H can be.

7.30 DA/H for Precision Approach Procedure. This is defined as the lowest altitude or height at which a missed approach must be initiated to ensure compliance with the appropriate obstacle clearance criteria. The reference datum for a precision approach is always the threshold of the landing runway.

7.31 OCA/H for Non-precision Approach. This is defined as the lowest altitude or height below which the aircraft cannot descend without infringing the appropriate obstacle clearance criteria. For non-precision procedures the reference datum is the aerodrome elevation or the elevation of the relevant runway threshold (if the threshold is more than 2 m (7 ft) below the aerodrome elevation).

7.32 OCA/H for Visual Manoeuvre (Circling) (VM(C)). This is defined as the lowest altitude or height above the aerodrome elevation, below which the aircraft cannot descend without infringing the appropriate obstacle clearance criteria. It is based on the highest obstacle in the VM(C) area with respect to the aerodrome elevation.

Operating Minima

7.33 Operating Minima. In accordance with Annex 6 and JAR-OPS 1, the operator is required to ensure that the aerodrome minima are specified for all aerodromes used in the operation. Part of this ensures that in all cases, DA/H or MDA/H is calculated taking into account the OCA/H published and the upper margin. The upper margin is specified by the operator and may be zero in which case DA/H or MDA/H would be the same as OCA/H. It takes into account data that is variable in nature i.e. the crew qualification, the OAT, anomalies in the configuration of the instrument system, the type, performance and handling characteristics of

the aeroplane, the dimensions and characteristics of the runway, the visual and non-visual aids, the obstacles on the approach, missed approach areas and climb-out areas, aircraft equipment and the means used to measure and report the meteorological conditions.

7.34 System Minima. To ensure that the minima are realistic and give sufficient ‘buffer’ to allow for anomalies, for each method of conducting an instrument approach, a minimum height above the datum is specified below which an approach is not permitted to continue without the necessary visual reference. This height is known as system minima and overrides a lower DH or MDH. For instance, the system minimum for a CAT 1 ILS is 200 ft. If OCH plus the upper margin for a CAT 1 ILS approach is calculated at 170 ft, then system minimum would prevail and DH would be 200 ft. If on the other hand, DH is calculated at 230 ft then, as this is higher than system minimum, DH remains 230 ft. For Air Law, the student is only required to know the system minima for ILS CATs I/II/III. Note that for CAT III, DH can be zero; therefore system minimum for CAT III must also be zero.

Category	System minimum
CAT I	60 m (200 ft)
CAT II	30 m (100 ft)
CAT III	Not applicable

Figure 7.12 ICAO system minima for ILS

7.35 Calculation of DA/H. The diagrammatic representation of the method of calculation of DA/H is shown below.

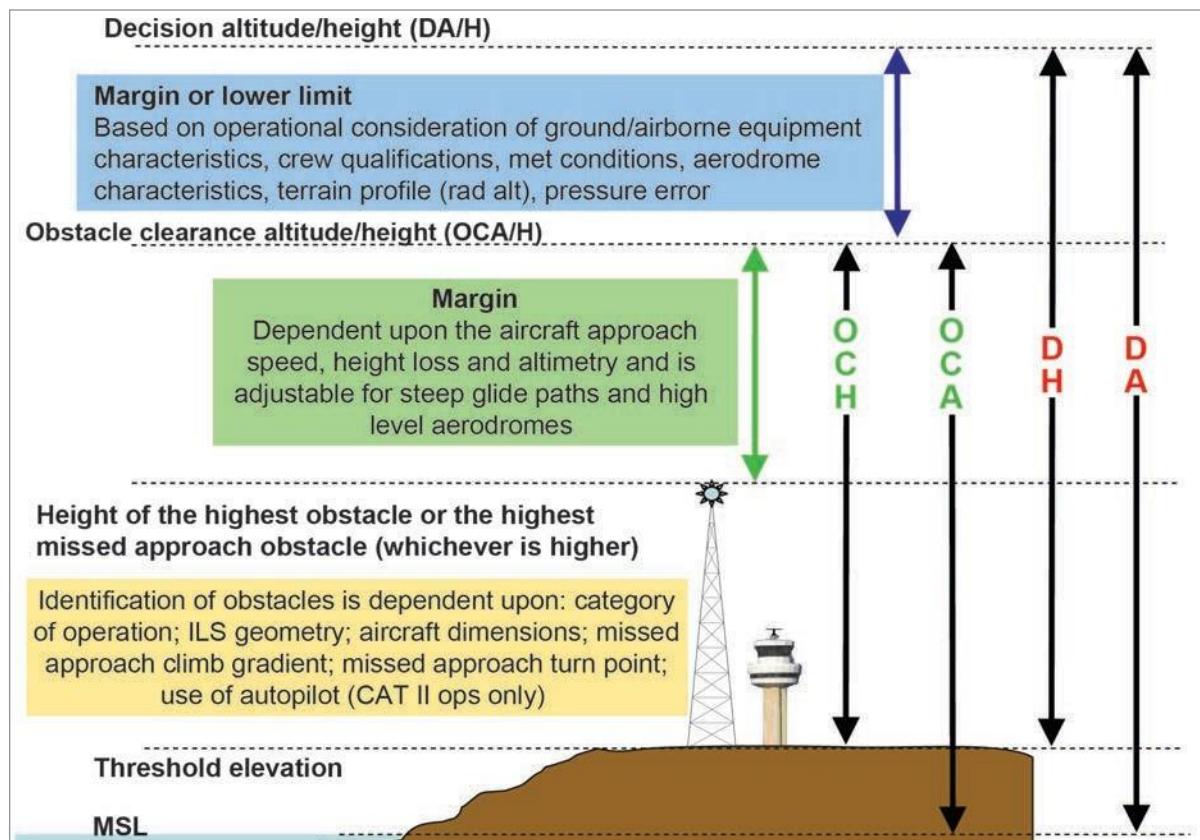


Figure 7.13 Method of determining DA/H for precision approaches

7.36 Specific Data for ILS/MLS. In determining the criteria for DA/H for ILS/MLS other data needs to be taken into account and requirements specified. Wing span and the vertical distance between the wheels and the glide path (GP) aerial limitations are specified as follows:

Aircraft category	Wing Span (m)	Vertical distance between the wheels and the GP aerial
H	30	3 metres
A, B	60	6 metres
C, D	65	7 metres
D _L	80	8 metres

Figure 7.14

Note: Category D_L has been included to cater for the A380. Category H refers to Helicopters.

Other criteria for ILS include:

- CAT I is flown with pressure altimeter
- CAT II is flown with radio altimeter and flight director
- Missed approach climb gradient is 2.5%
- Glide path angle is 2.5° minimum and 3.5° maximum. CAT II/III requires 3°

7.37 Calculation of MDA/H. The diagrammatic representation of the method of calculation of MDA/H is shown below.

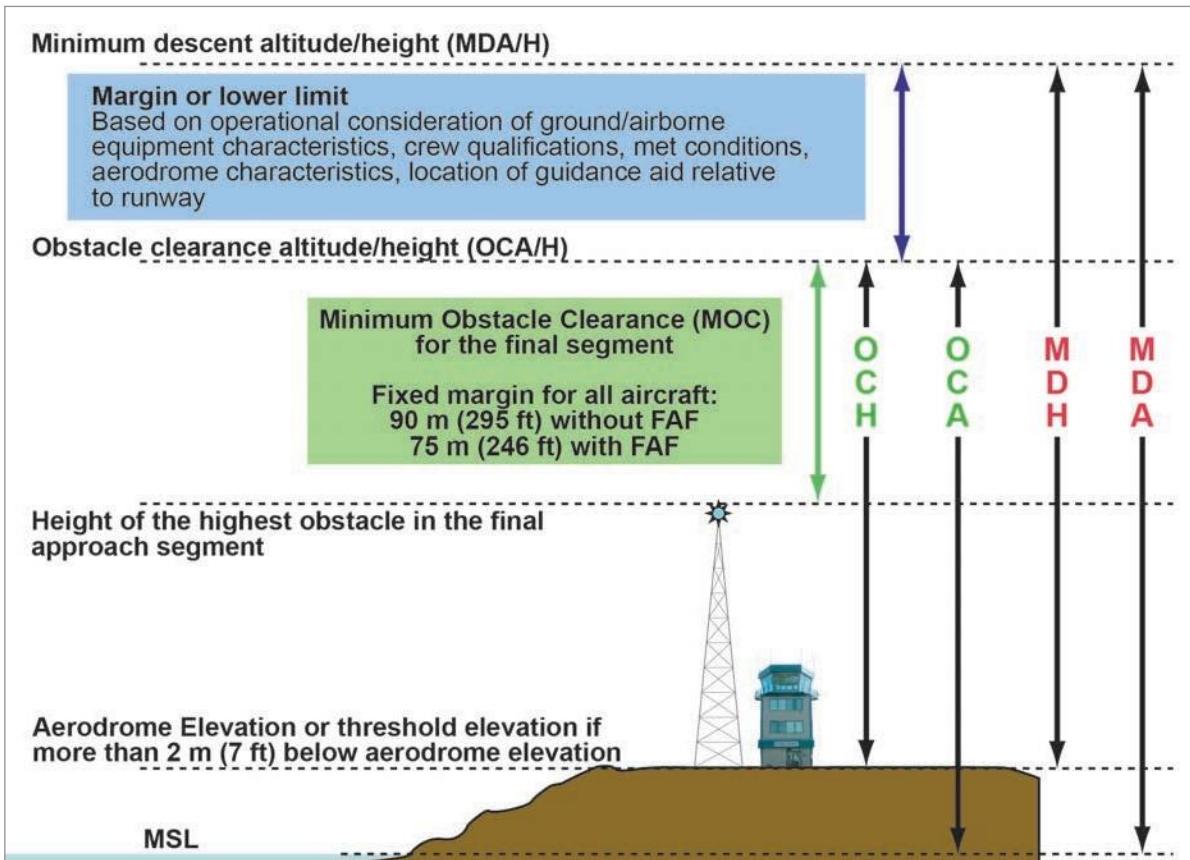


Figure 7.15 Method of determining MDA/MDH for non-precision approaches

7.38 Calculation of MDA/H for VM(C). The diagrammatic representation of the method of calculation of DA/H is shown below.

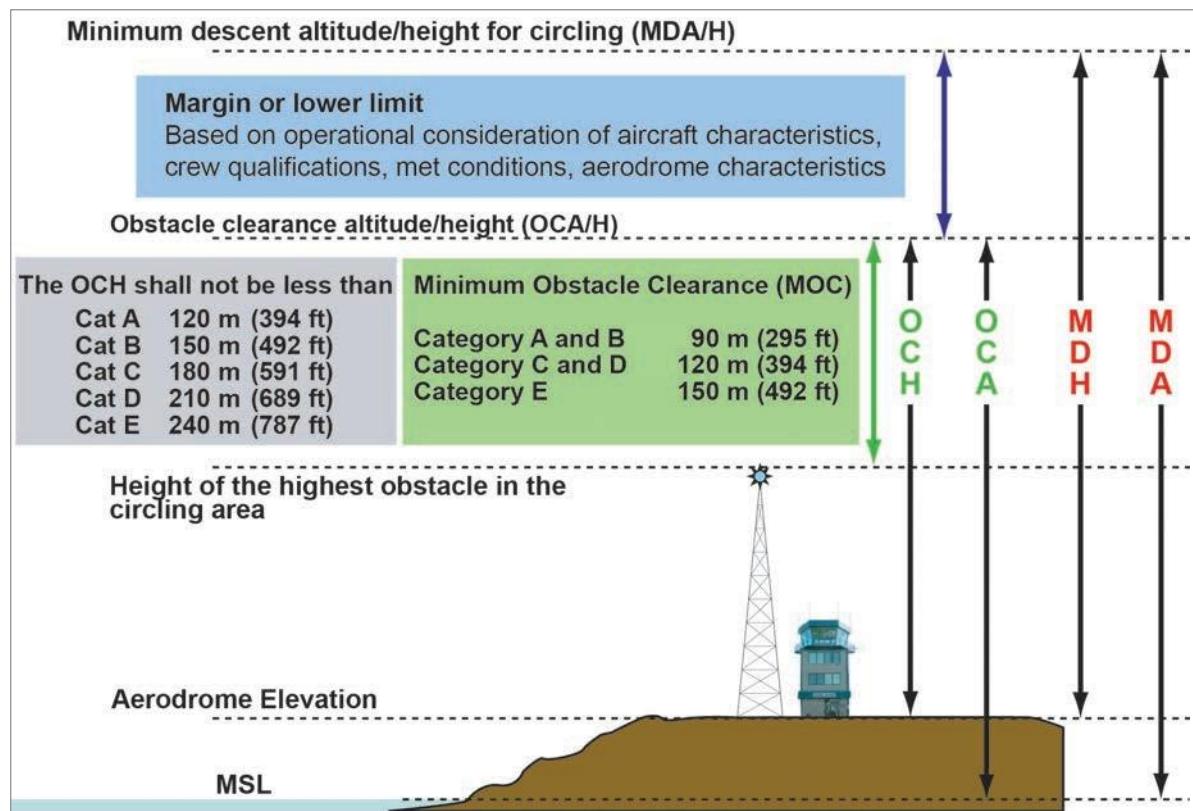


Figure 7.16 Method of determining MDA/MDH for circling approaches

Descent Gradients

7.39 Descent Gradient. The design of procedures must allow adequate space for descent from the published height crossing the facility, to the runway threshold. This is achieved by establishing a maximum allowable descent gradient for each segment of the procedure with the most critical being the final segment where threshold speed (or the ability to decelerate to it) will be a function of gradient. The optimum descent gradient in the final approach should not exceed 5.2% (50 m/km; approx 300 ft/NM) which is equivalent to a 3° glide path. Where a steeper gradient is necessary the maximum permissible is 6.5% (65 m/km (400 ft/NM) which is equivalent to a 3.8° glide path). In the case of a precision approach the operationally preferred glide path angle is 3° and this is mandatory for CAT II/III. An ILS GP in excess of 3° is used only where an alternative means of satisfying obstacle clearance requirements is impractical.

7.40 High Rate Descents. Gradients over 6.5% may result in descent rates exceeding the recommended maximum rate of descent for some aircraft. Pilots flying such approaches should be aware of this before starting the approach. High rate descents are not permitted as a means of avoiding noise abatement procedures. Where GPs greater than 6.5% are established (e.g. 9.5% / 5.5° at London City), the authority of the state in which the aerodrome is situated must give specific approval; the operator must be approved to carry out high rate descents; specially approved aircraft must be used and pilots specially trained.

Track Reversal and Racetracks

7.41 Requirement. If a straight-in approach is not possible (or feasible), a procedure may be established using a facility on the aerodrome that serves both as the IAF and the MAPt. In this case, some form of track reversal procedure will be required in which the aircraft is flown outbound from the facility on a defined track, and then turned to fly inbound back towards the facility. This may be a procedure turn or a base turn.

7.42 Procedure Turn. A procedure turn is defined as a turn from outbound to inbound in which the tracks flown are reciprocal. There are two types:

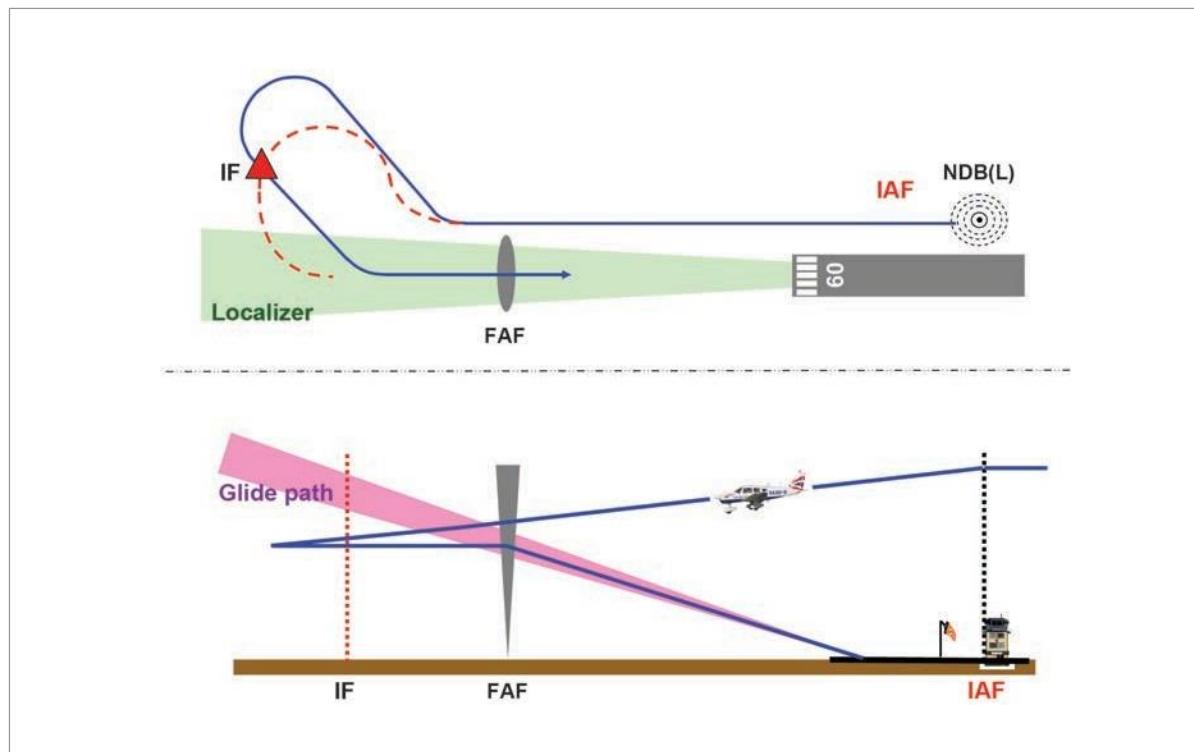


Figure 7.17 Track reversal - procedure turn

7.43 45°/180° Procedure Turn. This requires track guidance to a point (timed or DME) where a 45° turn is made followed by a straight leg of either 1 minute (category A or B aircraft) or 1 minute and 15 seconds (category C, D and E). At the end of the timed leg a rate 1 turn is made through 180° to bring the aircraft into a position to intercept the reciprocal of the outbound track at an interception angle of 45°.

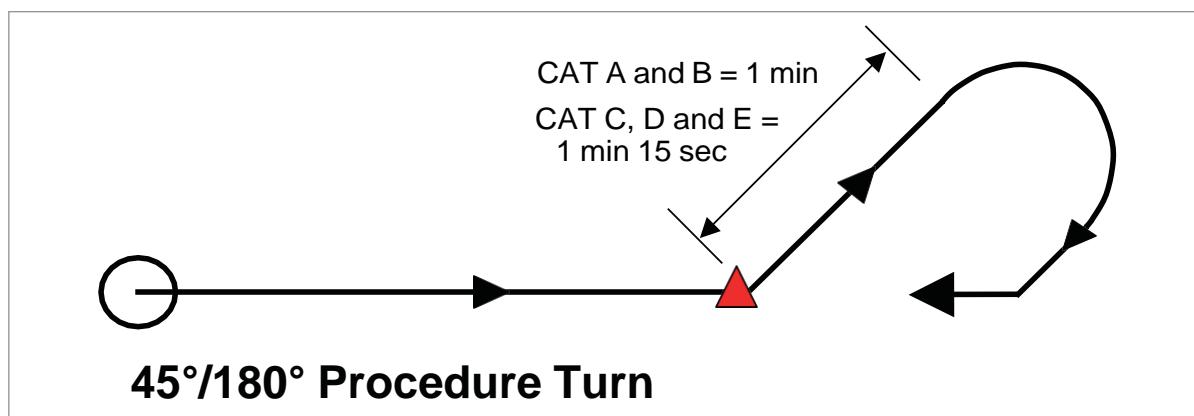


Figure 7.18 45°/180° - procedure turn

7.44 80°/260° Procedure Turn. This requires track guidance to a point (timed or DME) where an 80° rate 1 turn is made followed immediately by an opposite direction 260° rate 1 turn. In still air, this should bring the aircraft on to the reciprocal of the outbound track. Also in still air, the procedure should take exactly 2 minutes.

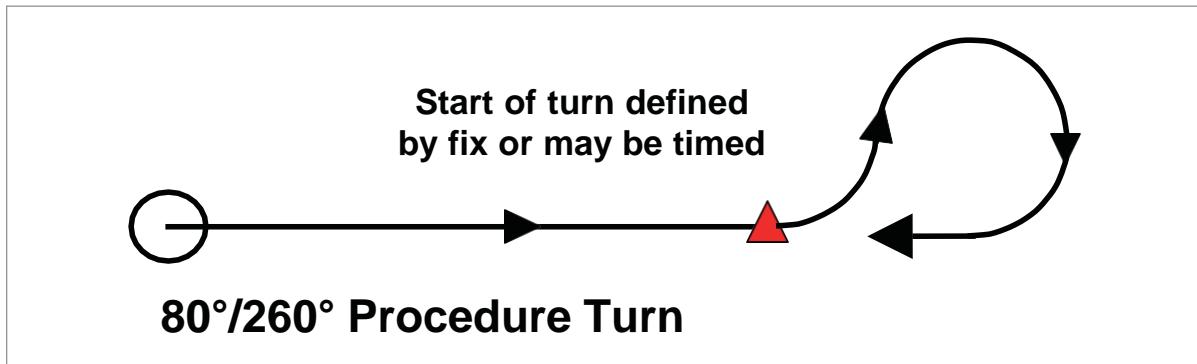


Figure 7.19 80°/260° - procedure turn

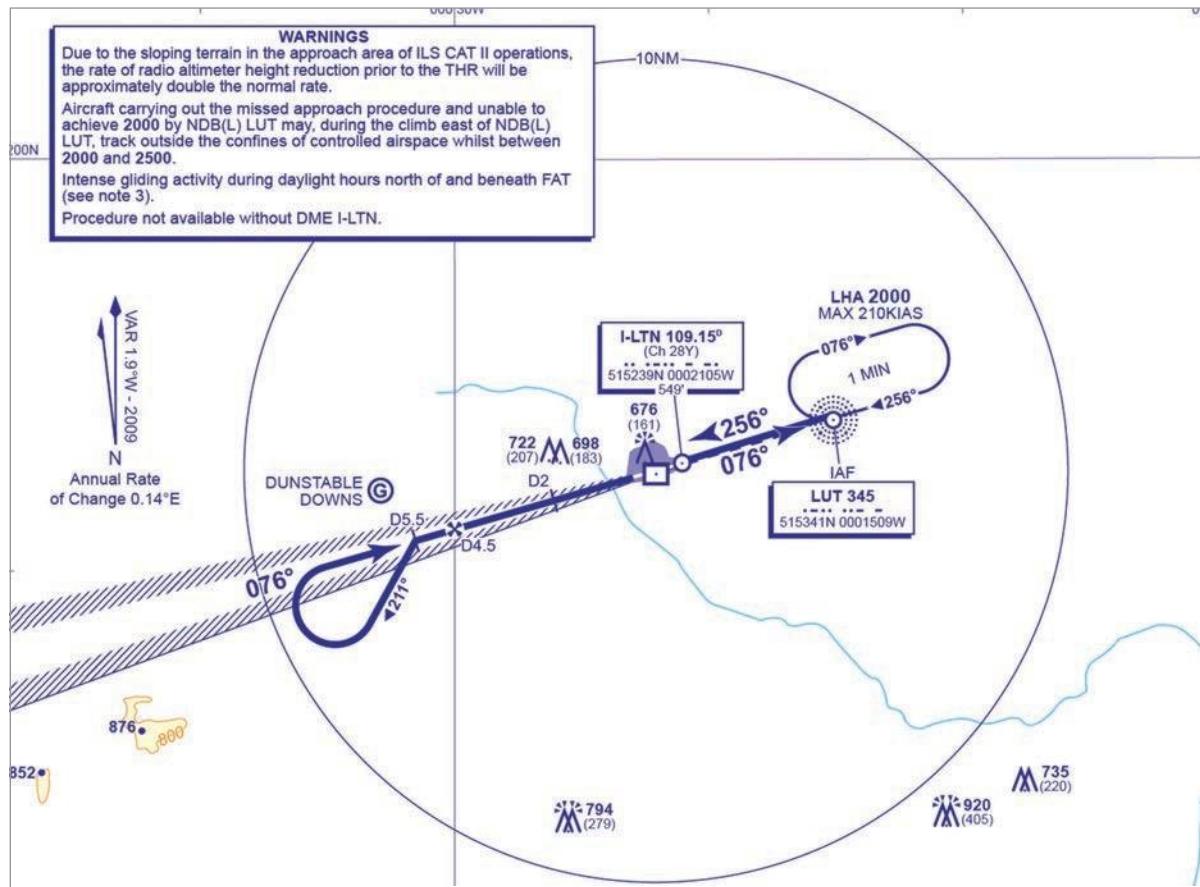


Figure 7.20 Procedure turn shown on an approach plate

7.45 Base Turn. Where accurate outbound track guidance can be provided by an NDB or VOR, a base turn can be specified where the inbound track is not the reciprocal of the outbound track. The specified outbound track is followed to a predetermined point at which a rate 1 turn is made so that the aircraft rolls out on the required inbound track.

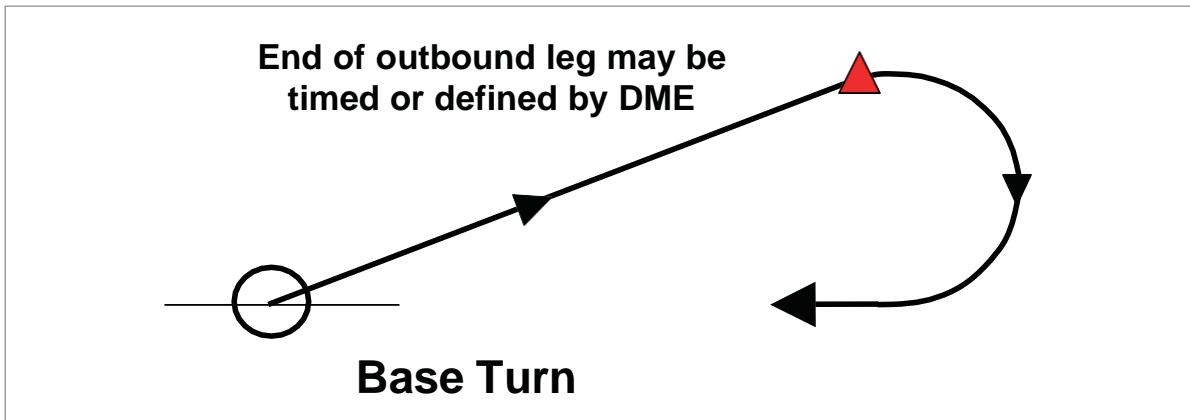


Figure 7.21 Base turn



Figure 7.22 Base turn shown on an approach plate

7.46 Racetrack Procedure. A racetrack consists of a turn from the inbound track through 180° at the facility or a fix after which, the outbound leg is flown to a point defined by time or a fix at which another turn through 180° is made to bring the aircraft back on to the inbound track. It is used where aircraft are required to enter a holding pattern prior to commencing the instrument procedure, and where the orientation of the holding pattern does not permit either a procedure turn or a base turn to be used. It will normally be specified as an ‘alternate procedure’ and specific instructions will be included on the plate.

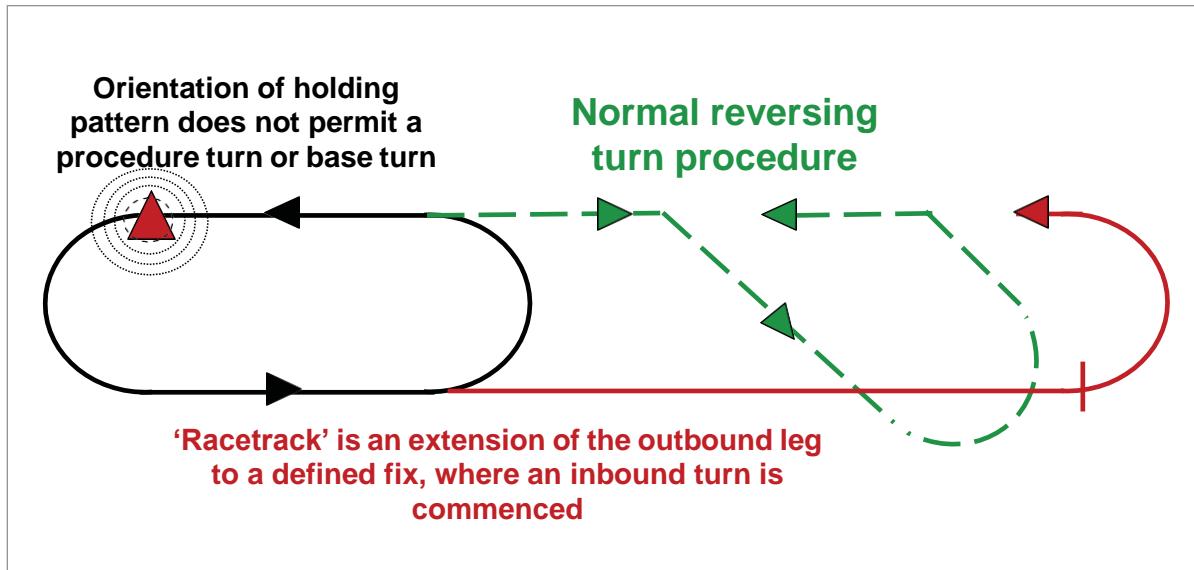


Figure 7.23 Racetrack procedure

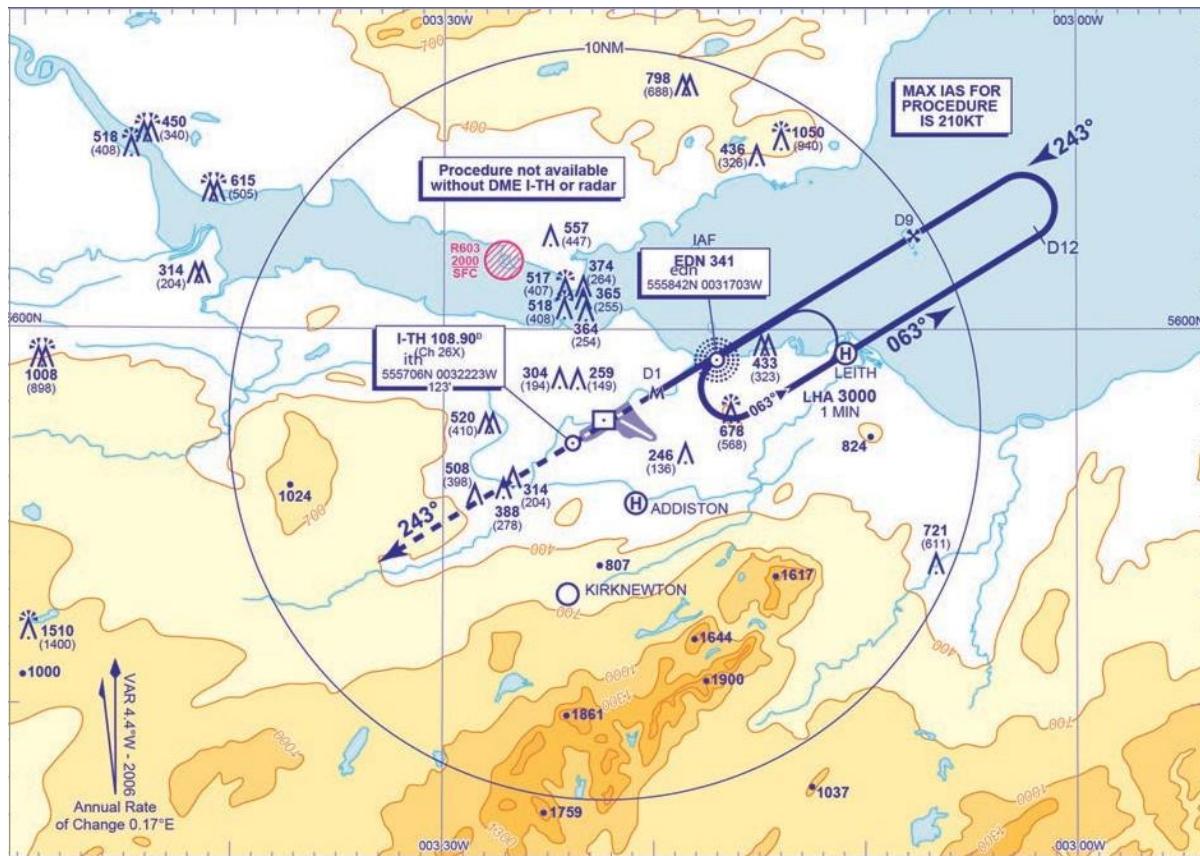


Figure 7.24 Racetrack shown on an approach plate

Missed Approach Segment and Procedure

7.47 The Procedure. If the necessary visual criteria are not obtained at decision altitude/height (DA/H) or minimum descent altitude/height (MDA/H), or at any time during the instrument approach procedure that the pilot is unable to continue the approach, the instrument procedure requires the pilot to fly a missed approach. This procedure is always detailed on the instrument plate together with the loss of RTF procedure. The published information will always include a climb to at least MSA and as soon as the pilot elects to fly the missed approach procedure, a climb to that altitude should be initiated. If the aircraft is already at that altitude, it should be maintained. The climb gradient for the procedure is normally 2.5%. A missed approach procedure consists of three phases:

- Initial missed approach
- Intermediate missed approach
- Final approach

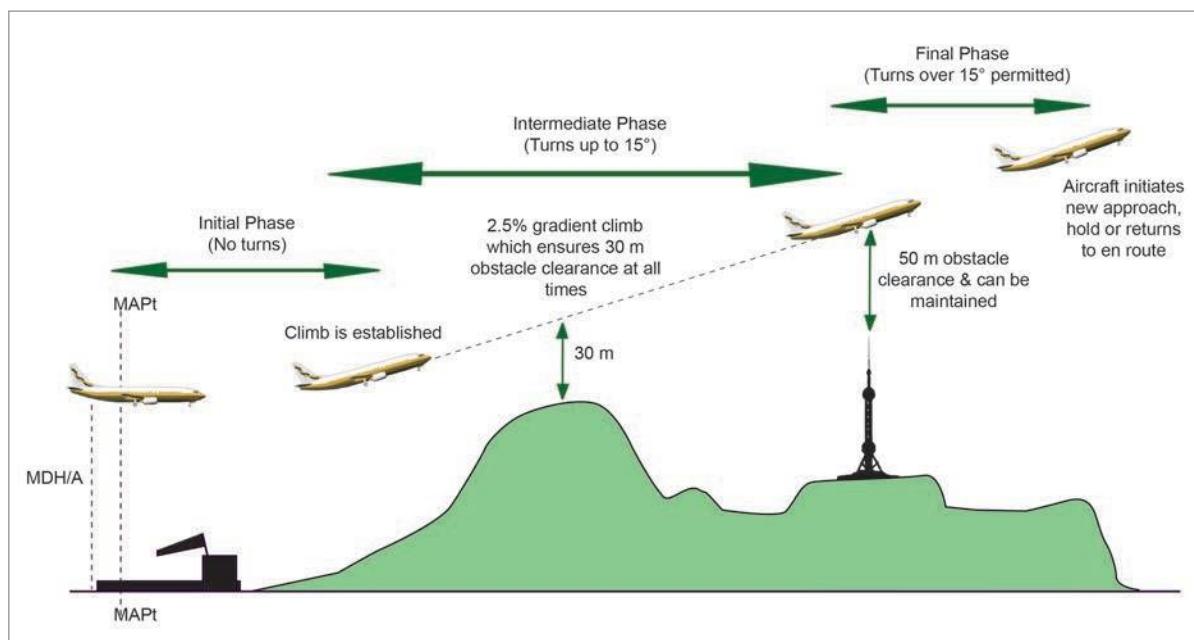


Figure 7.25 Three phases of the missed approach

7.48 Initiating the Procedure (The Initial Phase). The initial missed approach begins at the missed approach point (MAPt) and ends where the climb is established. The manoeuvre in this phase necessitates the attention of the pilot on establishing the climb and the changes in aeroplane configuration to get the aircraft away from the ground with increasing altitude. For this reason, guidance equipment cannot normally be fully utilized during these manoeuvres and therefore no turns are specified in this phase. The missed approach is assumed to be initiated not lower than the DA/H in a precision approach, or at a specified point in non-precision approach procedure, not lower than the MDA/H. When the MAPt is defined by reference to a navigational facility or a fix (for instance the middle marker), the distance from the FAF to the MAPt is normally published as well, and may be used for timing to the MAPt. In all cases where timing is not to be used, the procedure is to be annotated “timing not authorized for defining the MAPt”. The MAPt may be defined in a procedure as:

- The point of intersection of the glide path with the applicable DA/H
- A navigational facility
- A fix
- A specified distance from the FAF.

7.49 Navigation. If, upon reaching the MAPt, the required visual reference is not established, the procedure requires that a missed approach be initiated at once in order for protection from obstacles to be maintained. It is expected that the pilot will fly the missed approach as published. In the event that a missed approach is initiated prior to arriving at the MAPt, it is expected that the pilot will proceed to the MAPt and then follow the missed approach procedure in order to remain within the protected airspace. This does not preclude flying over the MAPt at an altitude/height higher than that required by the procedure.

7.50 Intermediate Phase. This is the phase in which the climb is continued, normally straight ahead but turns up to 15° (within the straight departure criteria) are permitted. The MOC in this segment is 30 m and the segment extends to the first point where 50 m (164 ft) obstacle clearance is obtained and can be maintained. The climb gradient in this sector is 2.5% paralleling the OIS.


7.51 Final Phase. The final phase begins at the point where 50 m (164 ft) obstacle clearance is first obtained and can be maintained. It extends to the point where a new approach, holding or a return to en route flight is initiated. Full turns may be prescribed in this phase.

Published Information

7.52 Terminal Approach Plates. Information concerning instrument arrivals is published on Terminal Arrival Plates (usually referred to just as ‘plates’). The plates shown here are the UK CAA plates for the London Luton self positioned ILS for runway 08. The design of the plate meets the requirement of ICAO Annex 4. Commercially produced plates are available (Jeppesen; Aerad etc...) and some operators produce their own. An ICAO plate will not show aerodrome operating minima as this is the responsibility of the operator to determine, not the state.

UK AIP

(10 Jun 04) AD 2-EGGW-8-1

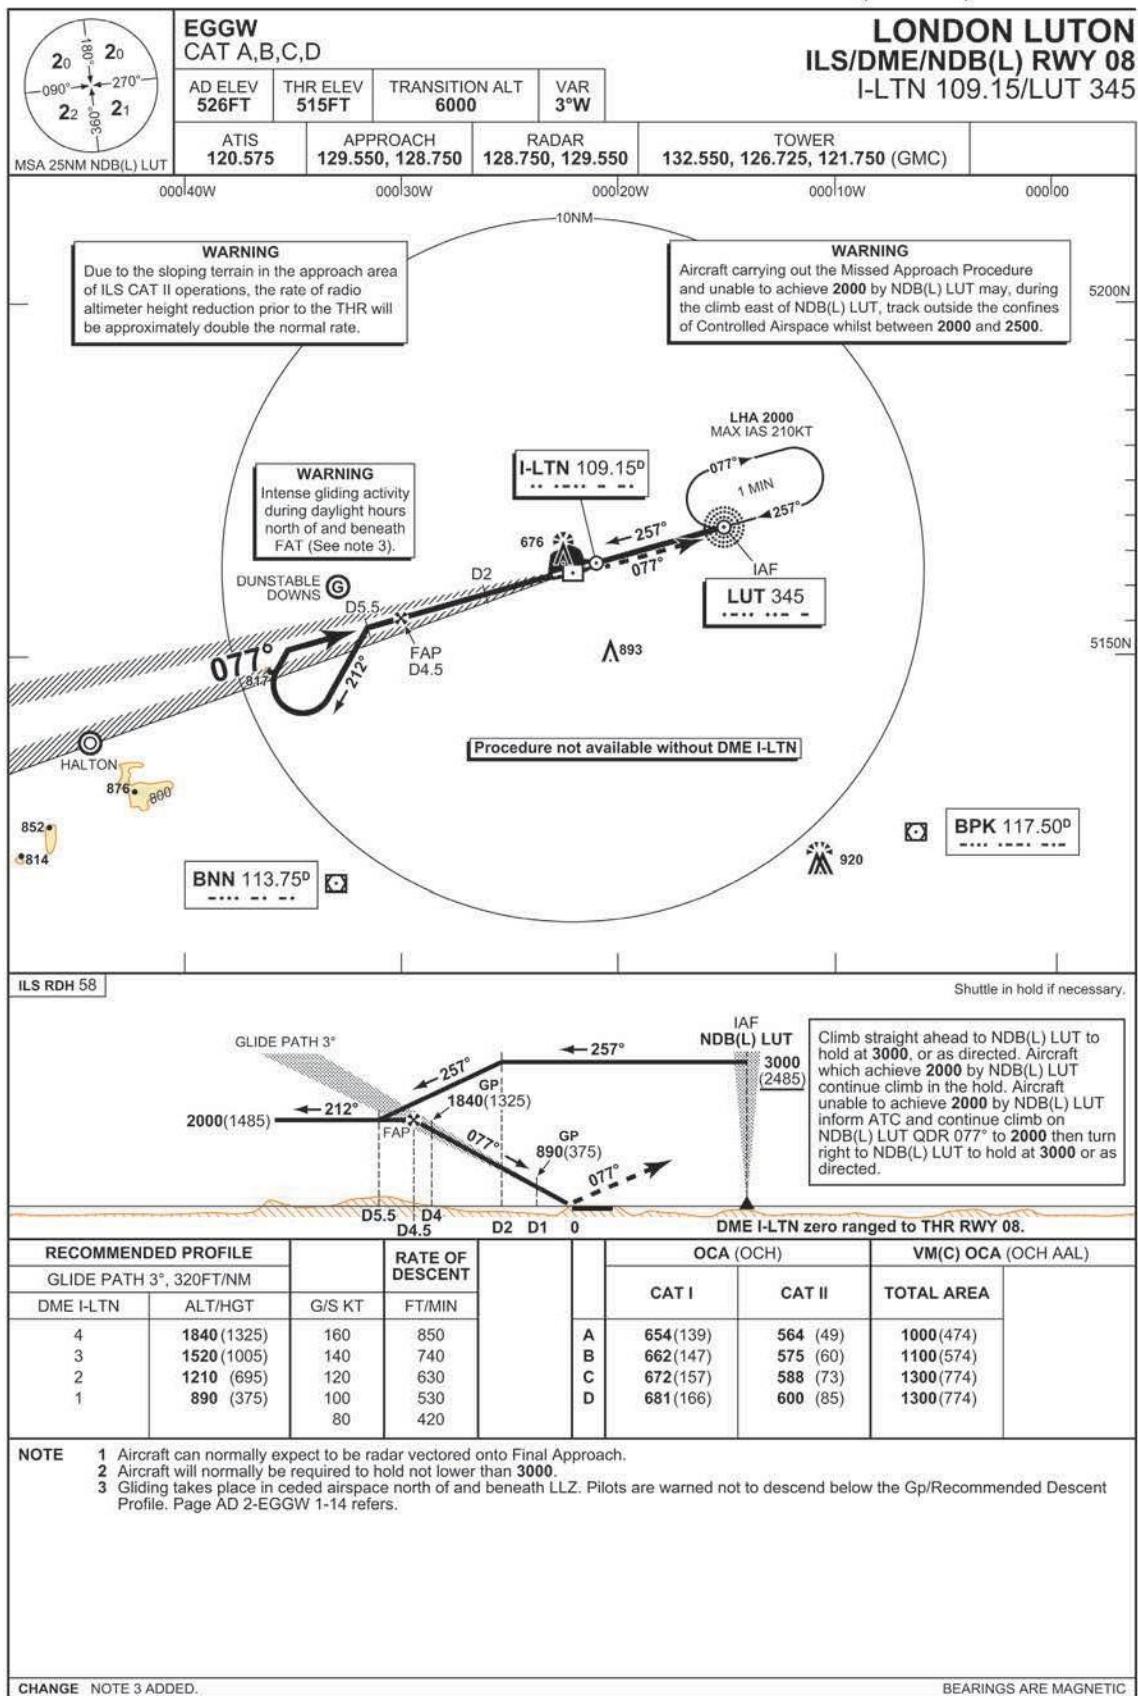

Civil Aviation Authority

AMDT 6/04

Figure 7.26

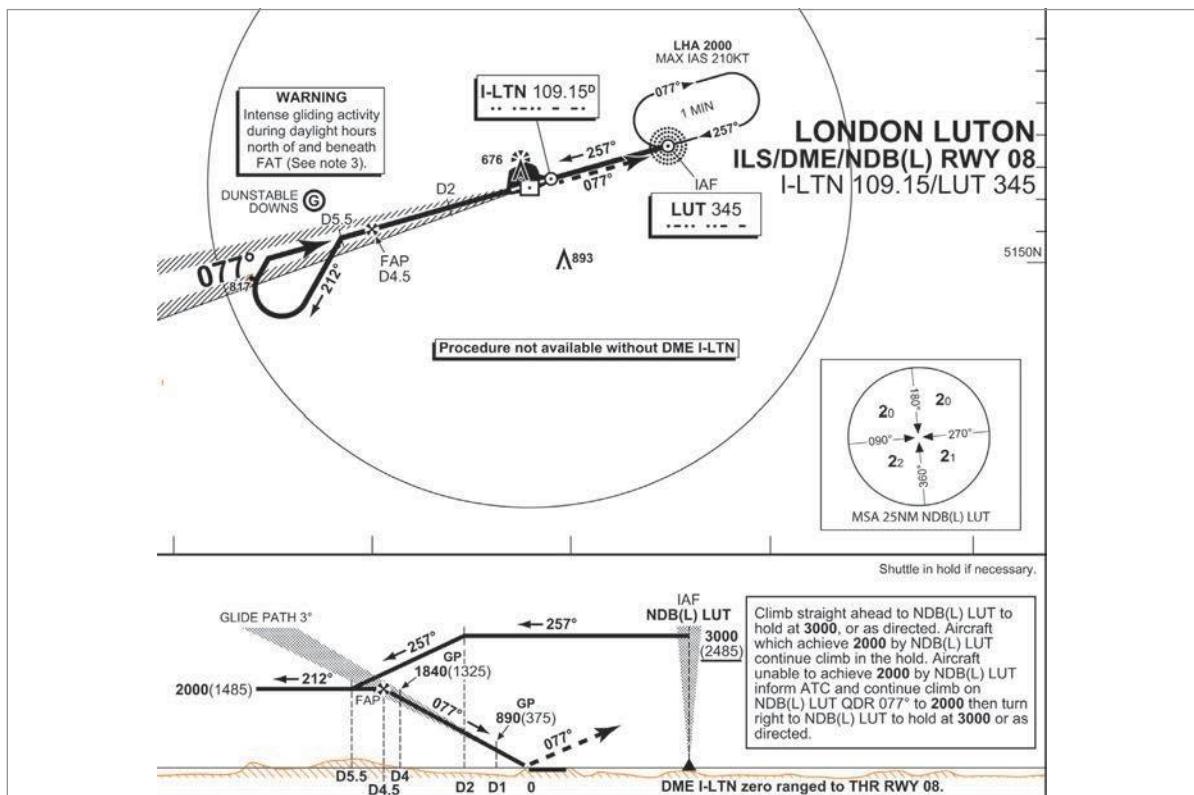


Figure 7.27

	Obstacle Clearance Altitude/Height		OCA/H for visual manoeuvre (circling)
	CAT I	CAT II	VM(C) OCA (OCH AAL)
A	654(139)	564 (49)	1000(474)
B	662(147)	575 (60)	1100(574)
C	672(157)	588 (73)	1300(774)
D	681(166)	600 (85)	1300(774)

Note: This is not 'aid' dependent. It is an aerodrome characteristic

RECOMMENDED PROFILE		RATE OF DESCENT	
GLIDE PATH 3°. 320 FT/NM			
DME I-LTN	ALT/HGT	G/S KT	FT/MIN
4	1840 (1325)	160	850
3	1520 (1005)	140	740
2	1210 (695)	120	630
1	890 (375)	100	530
		80	420

Note: For information and cross reference only

Figure 7.28

RNAV Approach Procedures based on VOR/DME

7.53 Basic Assumption. RNAV procedures based on VOR/DME are non-precision procedures. It is assumed that the reference facility is composed of a VOR and co-located DME equipment. Aircraft equipped with RNAV systems approved by the authority of the State of the Operator may use these systems to carry out VOR/DME RNAV approaches providing that before starting a flight it is ensured that:

- The RNAV equipment is serviceable;
- The pilot has current knowledge how to operate the equipment so as to achieve the optimum level of accuracy; and
- The published VOR/DME facility upon which the procedure is based is serviceable.

8.54 Data Insertion Errors. The procedures require a computer to handle the data and this has to be programmed with current promulgated data. This is inserted by the operator or the crew and the system has no method of checking for input errors. Therefore, the computed positional information presented ('outputted') to the crew may well contain errors induced into the system.

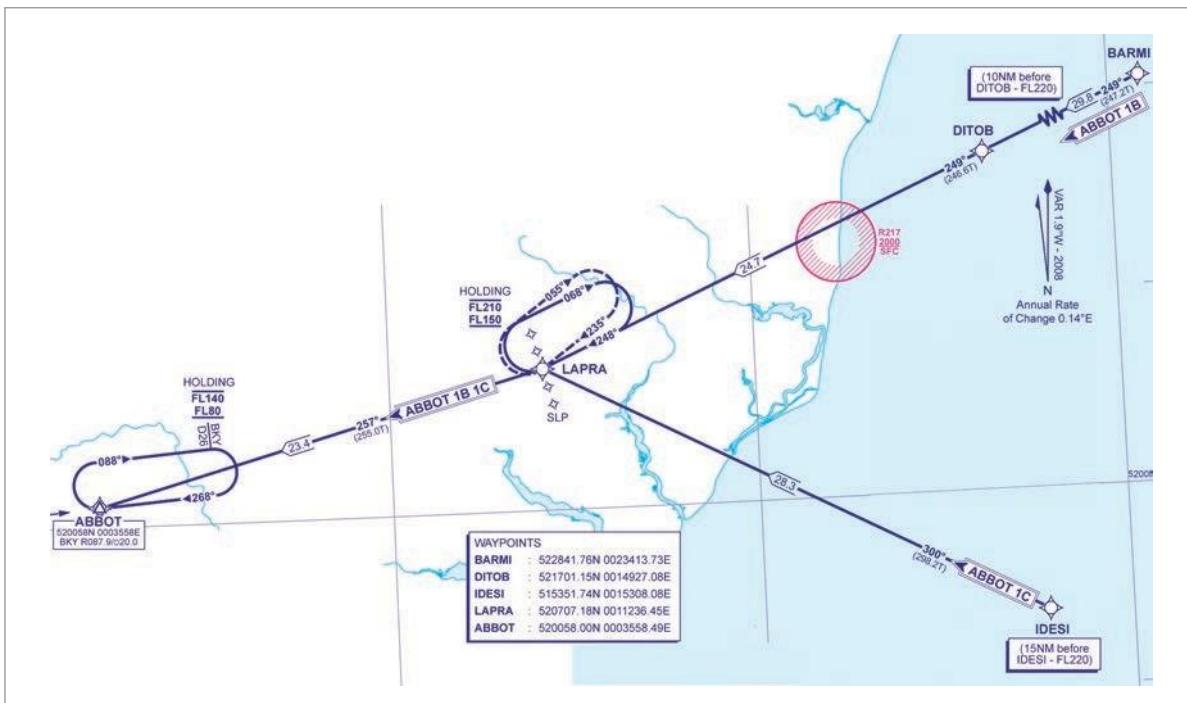


Figure 7.29

8.55 Accuracy. The factors affecting accuracy of the VOR/DME RNAV system are:

- Ground station tolerance
- Airborne receiving system tolerance
- Flight technical tolerance
- System computational tolerance
- Distance from the reference facility

The equipment may be used when carrying out conventional (non-RNAV) instrument procedures providing the procedure is monitored using the basic display normally associated with that procedure, and the tolerances for using raw data on the basic display are complied with.

Questions

1. **What radius from a terminal VOR is MSA provided?**
- 25 NM.
 - 10 NM.
 - 15 NM.
 - 15 km.
2. **What is the climb gradient required during the intermediate segment of a missed approach?**
- 5.5%.
 - 2.5%.
 - 0.8%.
 - 3.3%.
3. **A precision approach procedure is defined as:**
- an approach using bearing, elevation and distance information.
 - an approach with a crew of at least 2 pilots trained for such operations.
 - an instrument approach procedure utilizing azimuth and glide path information provided by an ILS or a PAR.
 - an approach using bearing, elevation and, optionally, distance information.
4. **The MOC in the primary area of the intermediate approach segment:**
- is not more than 150 m.
 - reduces from 300 m to 150 m.
 - is equal to or greater than 300 m.
 - is 500 m in mountainous terrain.
5. **What is the optimum distance of the FAF from the threshold?**
- 1 NM.
 - 5 NM.
 - 10 NM.
 - 15 NM.
6. **For a straight-in non-precision approach, the MDA/H will be not less than:**
- OCA/H.
 - 200 ft.
 - 350 ft.
 - 400 ft.
7. **What is the maximum interception angle which is allowed to the intermediate approach segment from the initial approach segment for a non-precision approach?**
- 30°.
 - 45°.
 - 120°.
 - 15°.

8. An instrument approach is made up of a number of segments. How many of them are there?
- 4
 - 5
 - 3
 - 6
9. On a precision approach, where does the final approach segment start?
- DH
 - FAF
 - FAP
 - MAPt
10. On an instrument approach, part of the procedure enables the aircraft to return inbound from outbound with tracks flown being reciprocal. This is called:
- base turn.
 - procedure turn.
 - reverse procedure.
 - racetrack.
11. Which categories of aircraft fly the 45° leg of a procedure turn for 1 minute?
- A, B and C.
 - A only.
 - A and B.
 - C, D and E.
12. On an instrument approach, what is the maximum permissible descent gradient in the final approach?
- 3°.
 - 5%.
 - 6.5%.
 - 4.5°.
13. For the intermediate section of a missed approach, what is the minimum obstacle clearance?
- 30 m.
 - 100 m.
 - 50 m.
 - 120 m.
14. During an initial approach, what is the turn between the outbound track and the inbound track where the tracks flown are not reciprocal?
- Reverse turn.
 - Race track.
 - Procedure turn.
 - Base turn.

- 7
Questions
- 15. What are the Cat II ILS criteria for instrument runways?**
- a. RVR \geq 350 m DH not below 100 ft.
 - b. RVR \geq 200 m DH not below 100 ft.
 - c. RVR \geq 200 m DH not below 200 ft.
 - d. RVR \geq 300 m DH not below 200 ft.
- 16. When is OCH for an ILS approach complied with?**
- a. Not more than $\frac{1}{2}$ scale glide path and full scale localizer deflection.
 - b. Not more than $\frac{1}{2}$ scale localizer deflection.
 - c. Not more than $\frac{1}{2}$ scale glide path and localizer deflection.
 - d. Not more than full scale glide path and $\frac{1}{2}$ scale localizer deflection.
- 17. What is the MOC for the intermediate missed approach segment?**
- a. 30 m.
 - b. 50 m.
 - c. 120 m.
 - d. 300 m.
- 18. In which stage of an instrument approach do you align with the runway?**
- a. Initial segment.
 - b. Final segment.
 - c. Arrival segment.
 - d. Intermediate segment.
- 19. What are ICAO defined instrument approaches?**
- a. Non-precision and CAT I/II/III precision.
 - b. Precision in general.
 - c. Precision CAT I/II/III.
 - d. Instrument precision and CAT II/III.
- 20. Within what angle of the extended centre line of a runway is a non-precision approach considered to be straight-in?**
- a. 10° .
 - b. 15° .
 - c. 30° .
 - d. 40° .
- 21. What is the name of the phase of an instrument approach in which the aircraft is aligned with the runway and descent commenced?**
- a. Final.
 - b. Initial.
 - c. Intermediate.
 - d. Arrival.

22. At what point does the intermediate phase of a missed approach end?
- a. When 30 metres obstacle clearance is attained and can be maintained.
 - b. When 50 metres obstacle clearance is attained and can be maintained.
 - c. When 75 metres obstacle clearance is attained and can be maintained.
 - d. When 90 metres obstacle clearance is attained and can be maintained.
23. The 45° leg of a 45°/180° procedure turn for a Cat C aircraft is:
- a. 1 min.
 - b. 1 min 15 seconds.
 - c. 1 min 30 seconds.
 - d. continued until interception of the glide slope.
24. Is it permitted to fly over the Missed Approach Point at an altitude higher than MDA?
- a. Yes.
 - b. Never.
 - c. Sometimes.
 - d. It depends on the flight conditions.
25. For an instrument approach, the missed approach gradient is:
- a. 3%.
 - b. 3.3%.
 - c. 5%.
 - d. 2.5%.
26. On a precision approach (ILS), the OCH(A) is based among other standard conditions, on the vertical limits between the flight path of the wheels and the glide path antenna. For a Category C aircraft this should not be more than:
- a. 6 m.
 - b. 7 m.
 - c. 3 m.
 - d. 12 m.
27. What is the turn from outbound to inbound called where the tracks flown are not reciprocal?
- a. Base turn.
 - b. Procedure turn.
 - c. Reversal procedure.
 - d. Racetrack procedure.
28. When following an instrument procedure, the pilot must:
- a. calculate the track required and request ATC clearance to follow it.
 - b. fly the heading without wind correction.
 - c. adjust the track specified to allow for the wind.
 - d. fly the heading to make good the required track allowing for the wind.

- 29. Where does the initial phase of a missed approach procedure end?**
- a. From where a new instrument approach can be commenced.
 - b. Where 50 ft obstacle clearance is obtained and can be maintained.
 - c. Where a climb is established.
 - d. At the missed approach point.
- 30. Who determines OCA/H?**
- a. The operator.
 - b. The flight operations department.
 - c. The authority of the State.
 - d. The Commander.
- 31. What does an approach plate not include?**
- a. OCH.
 - b. ILS/DME frequencies.
 - c. Obstacles infringing the OIS.
 - d. Aerodrome operating minima for the use of the aerodrome as an alternate aerodrome, if higher than normal.
- 32. The V_{at} for a Category B aircraft is:**
- a. up to 91 kt.
 - b. 90 to 121 kt inclusive.
 - c. 141 to 165 kt inclusive.
 - d. 91 to 120 kt inclusive.
- 33. OCH clearance on ILS is given, provided the accuracy flown on the localizer is within:**
- a. $\frac{1}{4}$ scale deflection.
 - b. $1\frac{1}{2}$ scale deflection.
 - c. 1 scale deflection.
 - d. $\frac{1}{2}$ scale deflection.
- 34. Where does the initial sector of a missed approach procedure end?**
- a. When a height of 50 m has been achieved and maintained.
 - b. When established in the climb.
 - c. At the missed approach point.
 - d. When en route either to the hold or departure.
- 35. When using a DR segment to take up an ILS instrument approach, what is the maximum length of the track that may be used to intercept the localizer?**
- a. 10 NM.
 - b. 5 NM.
 - c. 10 minutes.
 - d. 5 minutes.

36. The obstacle clearance surfaces for an ILS assume a pilot localizer accuracy of:
- ¼ scale.
 - ½ scale.
 - 1 scale.
 - 1 ½ scale.
37. The abbreviation OCH means:
- obstacle clearance height.
 - obstruction/collision height.
 - obstruction clearance height.
 - obstacle confirmation height.
38. What is the descent gradient in the final segment for an ILS CAT II approach?
- Between 2.5° and 3.5°.
 - 3%.
 - 3°.
 - Up to 400 ft/NM.
39. What are the 5 segments of an instrument approach?
- Initial; Intermediate; Descent; Final; Landing.
 - Arrival; Initial; Intermediate; Final; Missed Approach.
 - Initial; Intermediate; Final; Landing; Missed Approach.
 - Arrival; Initial; Intermediate; Final; Landing.
40. The minimum sector altitude gives an obstacle clearance of 300 metres within a certain radius from the navigation aid on which the instrument procedure is based. This radius is:
- 15 NM (28 km).
 - 30 NM (55 km).
 - 25 NM (46 km).
 - 20 NM (37 km).
41. What is the minimum ground visibility for a CAT I ILS approach?
- 800 m.
 - 550 m.
 - 50 m.
 - 550 ft.
42. Where does the initial approach segment begin in an instrument approach procedure?
- At the IF.
 - At the IAF.
 - At the FAF.
 - At the final en route fix.

- 7
Questions
43. Under which circumstances may an aircraft on a “straight-in” VOR approach continue below MDA/H?
- When it seems possible to land.
 - When the aircraft is in contact with the ground but does not have the runway in sight.
 - When the aircraft has the necessary visual criteria specified by the operator.
 - When the tower is visible.
44. What is the obstacle clearance in the primary area of the intermediate approach segment while on the instrument approach?
- 300 m (984 ft).
 - 450 m (1476 ft).
 - 300 m (984 ft) reducing to 150 m (492 ft).
 - 600 m (1968 ft).
45. What is the MOC in the primary area of the initial segment of an approach?
- At least 150 m.
 - At least 300 m.
 - 300 m.
 - 150 m.
46. When can an aircraft descend below MSA?
- The airfield and underlying terrain are visible and will remain so.
 - The aircraft is being radar vectored.
 - The underlying terrain is visible and remains so.
 - The aircraft is following an approach procedure.
- 1, 2 and 4 only.
 - 1, 3 and 4 only.
 - 2, 3 and 4 only.
 - 1, 2, 3 and 4.

Answers

1	2	3	4	5	6	7	8	9	10	11	12
a	b	c	b	b	a	c	b	c	b	c	c

13	14	15	16	17	18	19	20	21	22	23	24
a	d	a	c	a	b	a	c	a	b	b	a

25	26	27	28	29	30	31	32	33	34	35	36
d	b	a	d	c	c	d	d	d	b	a	b

37	38	39	40	41	42	43	44	45	46
a	c	b	c	a	b	c	c	c	d

Chapter

8

Circling Approach

Circling Approach.....	209
Questions	212
Answers	214

Circling Approach

8.1 General. Visual Manoeuvring (Circling) (VM(C)) is the term used to describe the visual phase of flight, after completing an instrument approach, to bring the aircraft into position for landing on a runway not suitably located for a straight-in approach. Any instrument procedure (precision or non-precision) may be used but the descent in the final segment will be to MDA/H for VM(C) as defined and calculated in 7.38. The procedure is defined as non-precision only, despite the type of approach.

8.2 Visual Flight Manoeuvre. A circling approach is a visual flight manoeuvre keeping the runway in sight. Each circling situation is different because of variables such as runway layout, final approach track, wind and meteorological conditions. Therefore there can be no single procedure that will cater for every situation. After initial visual contact, the basic assumption is that the runway environment (the runway markings, lights or approach lighting etc...) will be kept in sight while at MDA/H for circling.

8.3 The Visual Manoeuvring (Circling) Area. VM(C) is only permitted in the VM(C) area. This is determined for each category of aircraft by drawing arcs related to aircraft manoeuvring speed centred on each runway threshold and joining those arcs with tangential lines. The radius of the arcs is related to:

- Aircraft category
- Speed (for each category)
- Wind speed (assumed as 25 kt throughout the turn)
- Bank angle (20° or rate 1 whichever requires less bank)

8.4 Prohibited Sector. The area may be sectored and VM(C) may be precluded from a particular sector where unrealistic MDA/H for VM(C) would otherwise exist. In this case, the published information will specify the sector and the restriction.

Visual Manoeuvring (Circling) Area

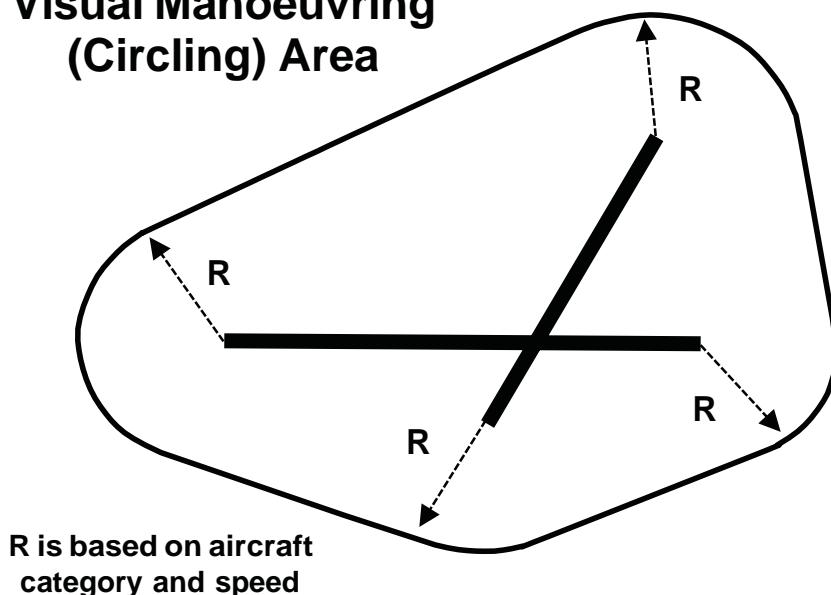


Figure 8.1

8.5 Missed Approach While Circling. If visual reference is lost while circling to land from an instrument procedure, the missed approach specified for the instrument approach runway must be followed. It is expected that the pilot will make a climbing turn towards the landing runway and when overhead the aerodrome, the pilot will establish the aircraft climbing on the specified missed approach track.

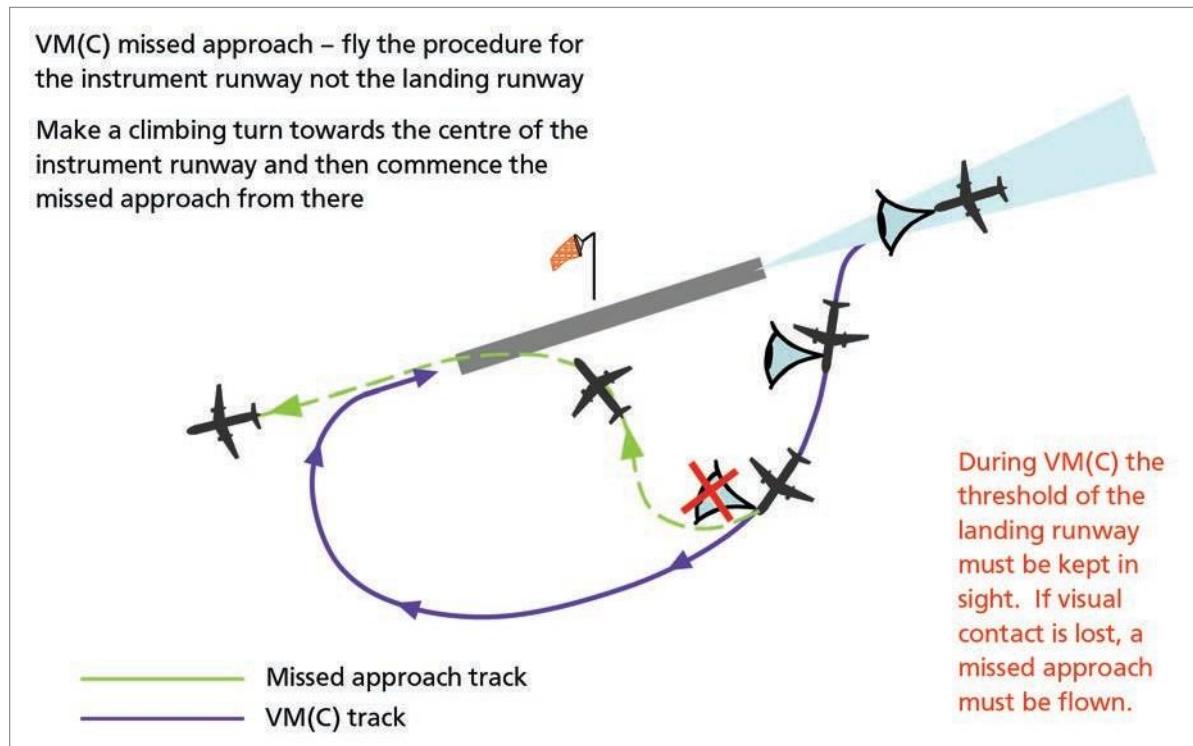


Figure 8.2

8.6 OCA/H for Visual Manoeuvring (Circling). The table below shows the OCA/H for visual manoeuvring (circling) and the minimum visibility for the procedure. Beware, these are the ICAO data and are different from the JAR-OPS data which is required learning for Operational Procedures.

Aircraft Category	Obstacle Clearance m (ft)	Lowest OCH above aerodrome elevation m (ft)	Minimum visibility km (NM)
A	90 (295)	120 (394)	1.9 (1.0)
B	90 (295)	150 (492)	2.8 (1.5)
C	120 (394)	180 (591)	3.7 (2.0)
D	120 (394)	210 (689)	4.6 (2.5)
E	150 (492)	240 (787)	6.5 (3.5)

Figure 8.3 OCA/H for visual manoeuvring (Circling)

Questions

- 8
Questions
1. During Visual Manoeuvring (Circling) what is the maximum airspeed for a Cat B aircraft?
 - a. 120 kt.
 - b. 125 kt.
 - c. 150 kt.
 - d. 135 kt.
 2. When the VM(C) area has been established the obstacle clearance altitude /height (OCA/H) is determined for:
 - a. all categories of aircraft, and it is the same for all of them.
 - b. each category of aircraft and it may be different for each of them.
 - c. only for categories A and B aircraft.
 - d. only for categories C, D and E aircraft.
 3. It is permissible to eliminate from consideration a particular sector where a prominent obstacle exists in the visual manoeuvring (circling) area outside the final approach and missed approach areas. When this option is exercised, the published procedure:
 - a. prohibits a circling approach to the affected runway.
 - b. prohibits circling within the sector in which the obstacle exists.
 - c. permits circling only in VMC.
 - d. recommends that circling is not carried out in the affected sector.
 4. A circling approach is:
 - a. a flight manoeuvre performed only under radar vectoring.
 - b. a flight manoeuvre where visual contact with the underlying terrain is maintained.
 - c. a visual manoeuvre keeping the runway in sight.
 - d. a visual manoeuvre only conducted in IMC.
 5. The term used to describe the visual phase of flight after completing an instrument approach, to bring an aircraft into position for landing on a runway which is not suitably located for a straight-in approach, is called:
 - a. a contact approach.
 - b. the aerodrome traffic pattern.
 - c. visual manoeuvring (circling).
 - d. a visual approach.
 6. If visual reference is lost while circling to land from an instrument approach, it is expected that the pilot will make a climbing turn towards the:
 - a. instrument runway.
 - b. MAPt.
 - c. FAF.
 - d. final missed approach track.

7. If contact is lost with the runway on the downwind leg of a circling manoeuvre, what actions should be taken?
- a. Turn towards the inner marker for the runway in use, maintaining circling altitude.
 - b. Initiate a missed approach.
 - c. Turn 90° towards the runway and wait for visual contact to be re-established.
 - d. If you other visual cues, continue the approach.
8. Visual circling for a category B aircraft is to be conducted in visibility not less than:
- a. 1500 m.
 - b. 1600 m.
 - c. 2800 m.
 - d. 5000 m.

Answers

1	2	3	4	5	6	7	8
d	b	b	c	c	a	b	c

Chapter

9

Holding Procedures

Holding Procedures	217
Entry Sectors.....	219
ATC Considerations	221
Obstacle Clearance	222
Questions	224
Answers	226

Holding Procedures

9.1 Introduction. Holding is the equivalent to temporary parking areas for aeroplanes. Clearly (unless you are flying a rotorcraft) you cannot stop, but you can remain (hold) in the vicinity of a radio navigation facility for as long as is required (fuel permitting!). Providing you can fly the aeroplane accurately and navigate with reference to a radio navigation aid (VOR, NDB) or a fix position, holding is a feasible option for losing time. Indeed, in bad weather or at times of peak traffic flow, you will be lucky to get a ‘straight-in’ approach. All instrument arrivals start from a holding pattern established at the IAF. In a holding pattern, aircraft are ‘stacked’ up, one on top of another with the necessary vertical separation applied (1000 ft). As the bottom aircraft departs the holding pattern to fly the approach procedure, the others above are ‘shuttled’ (descended in the stack) to a lower level one at a time.

9.2 Deviation Warning. It must be noted that deviations from the in-flight procedures for holding incur the risk of excursions beyond the perimeters of holding areas established in accordance with the provisions of PANS OPS. The procedures described in PANS OPS relate to right turn holding patterns. For left turn holding patterns, the corresponding entry and holding procedures are symmetrical with respect to the inbound holding track.

9.3 Shape and Terminology. The shape of holding patterns and the associated terminology are shown below. A standard holding pattern has starboard (right) turns. If port turns are required, the approach plate will be annotated to indicate the fact. A left hand pattern is a mirror image of the standard pattern.

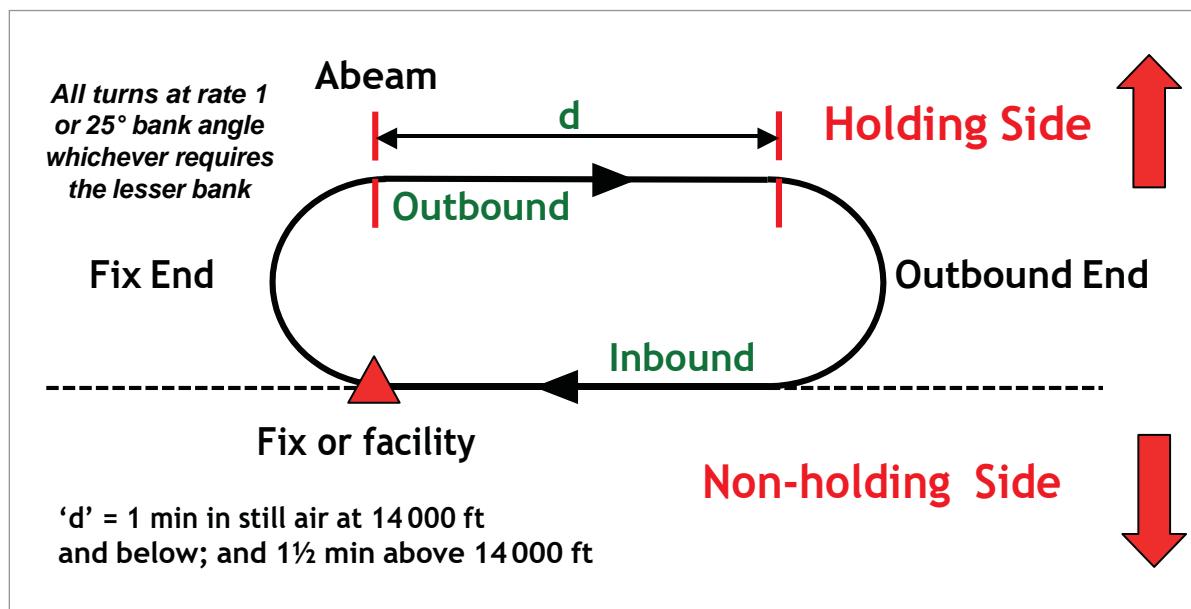


Figure 9.1 Holding pattern terminology

9.4 Flying the Pattern. In flying the holding pattern described, all turns are to be made at an angle of bank of 25° or at a rate of 3° per second (rate 1), whichever requires the lesser bank. All the procedures depict tracks and pilots should attempt to maintain the track by making allowance for known wind by applying corrections both to heading and timing during entry and while flying the holding pattern. Outbound timings begin over or abeam the fix whichever occurs later. If the abeam position cannot be determined, start the timing when the turn to outbound is completed. The outbound track should be flown for 1 minute at 14 000 ft and below and 1½ minutes above 14 000 ft. If the outbound leg is based on a DME distance, the outbound leg terminates as soon as the limiting DME distance is attained. If, for any reason, a pilot is unable to conform to procedures for normal conditions, ATC should be informed as soon as possible. Holding patterns are to be flown at speeds given in the table below.

Levels ¹	Normal Conditions	Turbulence Conditions
up to 4250 m (14 000 ft) inclusive	425 km/h (230 kt) ² 315 km/h (170 kt) ⁴	520 km/h (280 kt) ³ 315 km/h (170 kt) ⁴
above 4250 m (14 000 ft) to 6100 m (20 000 ft) inclusive	445 km/h (240 kt) ⁵	520 km/h (280 kt) or Mach 0.8, whichever is less ³
above 6100 m (20 000 ft) to 10 350 m (34 000 ft) inclusive	490 km/h (265 kt) ⁵	
above 10 350 m (34 000 ft)	Mach 0.83	Mach 0.83

Notes:

- 1 The levels tabulated represent altitudes or corresponding flight levels depending upon the altimeter setting in use.
- 2 When the holding procedure is followed by the initial segment of an instrument approach procedure promulgated at a speed higher than 425 km/h (230 kt), the holding should also be promulgated at this higher speed wherever possible
- 3 The speed of 520 km/h (280 kt) (Mach 0.8) reserved for turbulence conditions shall be used for holding only after prior clearance with ATC, unless the relevant publications indicate that the holding area can accommodate aircraft at these flight holding speeds
- 4 For holdings limited to CAT A and B aircraft only.
- 5 Wherever possible, 520 km/h (280 kt) should be used for holding procedures associated with airway route structures.

Figure 9.2 Holding speeds

Entry Sectors

9.5 Introduction. There are three methods of joining a holding pattern based on the heading of the aircraft as it approaches the holding fix. Based upon this heading, three sectors are defined with specific procedures appropriate to each. Between each sector there is a 5° ‘flexibility’ area either side of the defining heading within which the pilot has the choice of applicable joining procedure. The three sectors are illustrated below. For ease of definition the entry procedures below relate to a standard (right hand) pattern.

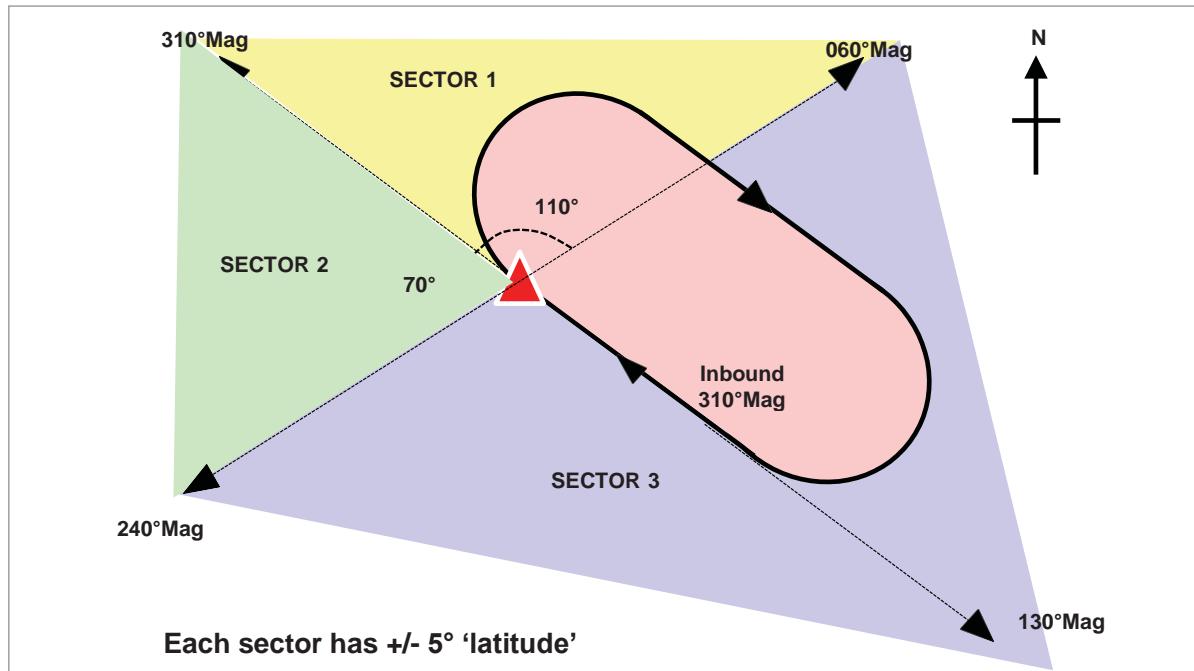


Figure 9.3

9.6 Sector 1 (Parallel Entry) Procedure. Having reached the fix, the aircraft is turned left onto an outbound heading to make good a track reciprocal to the stated inbound holding track. This is maintained for the appropriate period of time relating to the altitude of the aircraft, and then the aircraft is turned left to return to the fix. On the second time over the fix, the aircraft is turned right to follow the holding pattern.

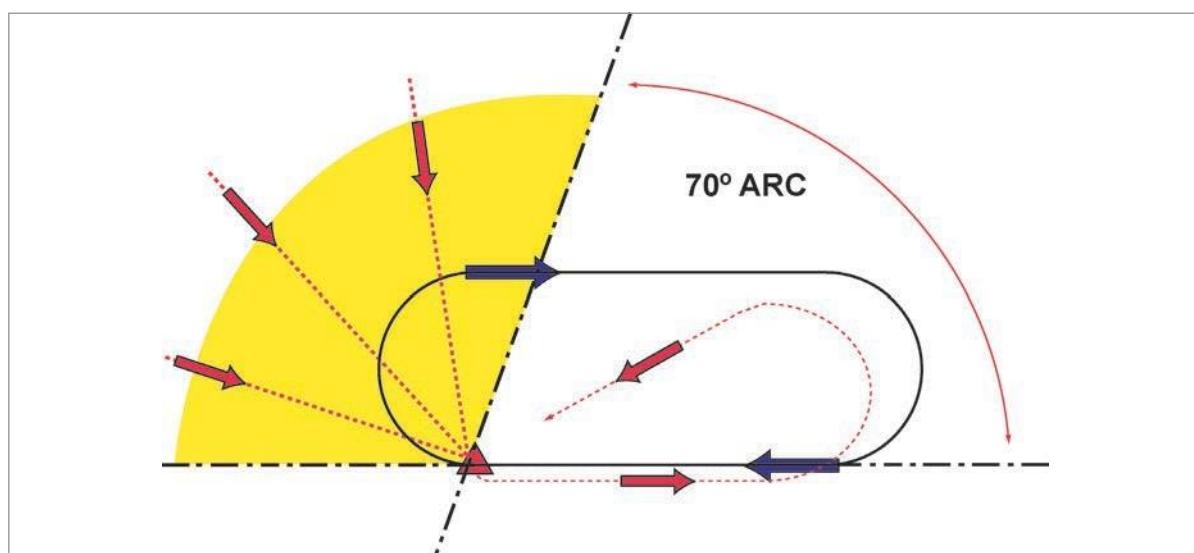


Figure 9.4

9.7 Sector 2 (Offset Entry) Procedure. Having reached the fix, the aircraft is turned onto the heading to make good the track diverging 30° left of the reciprocal of the inbound holding track. This is maintained for the appropriate period of time relating to the altitude of the aircraft, and then the aircraft is turned right onto the holding track to return to the fix. On the second time over the fix, the aircraft is turned right to follow the holding pattern.

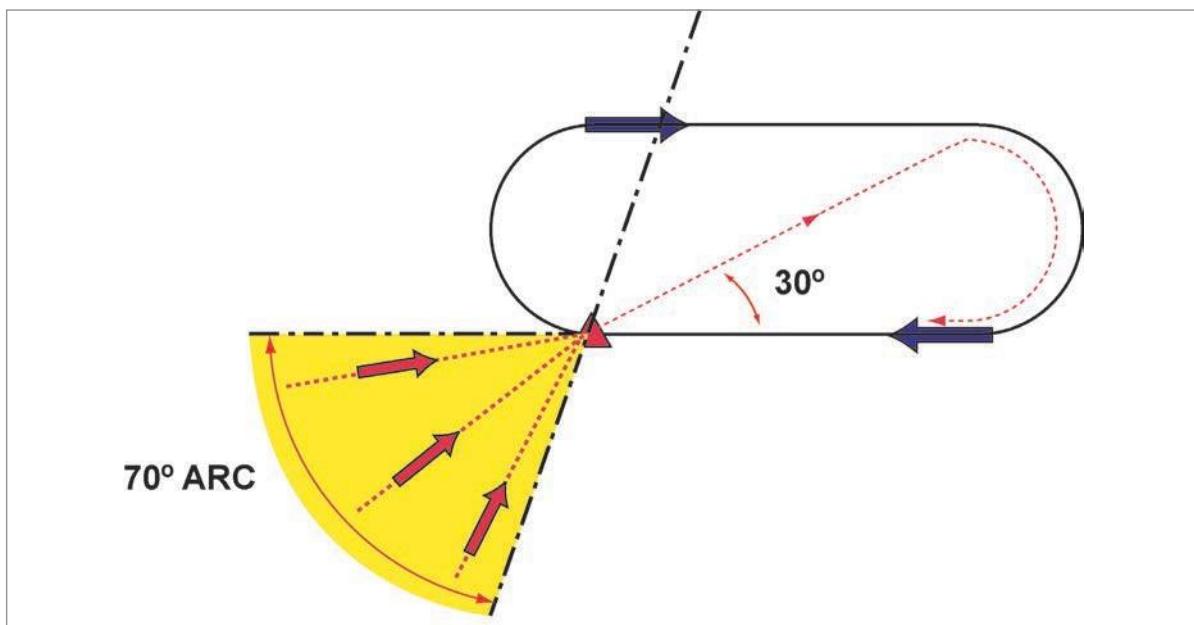


Figure 9.5

9.8 Sector 3 (Direct Entry) Procedure. Having reached the fix, the aircraft is turned right to follow the holding pattern.

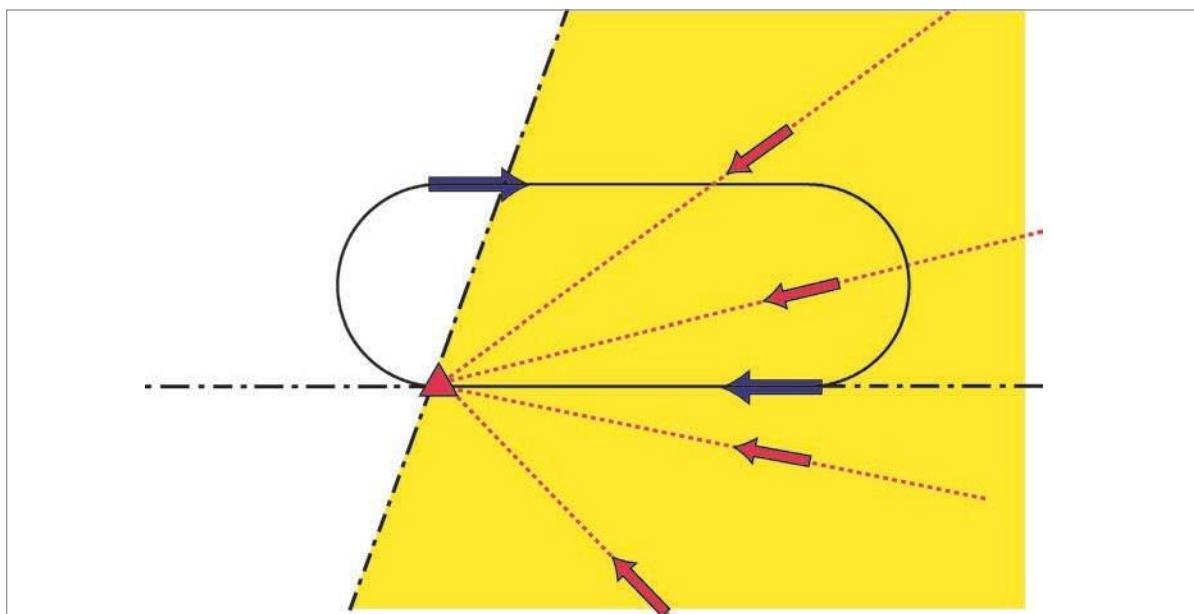


Figure 9.6

ATC Considerations

9.9 Clearance to Join. As the holding pattern will be in controlled airspace and used for controlled flights, ATC (usually the approach controller) will pass an ATC clearance to the pilot with instructions to take up the holding pattern. The clearance will specify the location of the hold to be used, details of the holding pattern (unless routinely published), the holding level and any special requirements.

"G-CD hold at OX FL50 expected approach time 1020"

"Hold OX FL50 1020 G-CD"

Followed by:

"Oxford Approach G-CD is established in the hold at FL50"

The pilot is required to ensure that the aircraft is level at the holding level at least 5 NM before reaching the holding fix. The clearance will be acknowledged and the ATCO will not expect to hear from the pilot again until the aircraft has completed the joining procedure and is established in the holding pattern.

9.10 Descending in the Hold. When the level below is vacant, the ATCO will re-clear the pilot to the lower level. The pilot will acknowledge the clearance and immediately commence descent.

Note: Shuttle is a climbing or descending manoeuvre in a holding pattern.

"G-CD shuttle in the hold to FL40"

"Leaving FL50 descending to FL40 G-CD"

Followed by:

"G-CD level FL40"

9.11 Departing the Hold. At the appropriate time, the ATCO will instruct the pilot to commence the instrument procedure. It is usual to leave a holding pattern at the fix, but where radar is used the Approach Radar controller may vector the aircraft from any position in the holding pattern. Typically a clearance would be as follows:

"G-CD advise when ready to commence the procedure"

"Ready to commence the procedure G-CD"

"G-CD set the Oxford QNH 1003, clear NDB/DME approach runway 01, report turning inbound at 2000 ft"

"1003 set clear NDB/DME runway 01 wilco G-CD"

Under certain circumstances (timed approaches) the ATCO will clear the aircraft to depart the holding pattern at a specific time to commence the procedure. In this case, the pilot should adjust the holding pattern leg lengths to depart the pattern from overhead the holding fix as close as possible to the stated clearance time.

Obstacle Clearance

9.12 Holding Area. The instrument procedure designer will ensure that the MOC (300 m or 600 m in mountainous terrain), is applied throughout the holding area. This will include the holding pattern and any necessary adjacent airspace that would be used during a joining procedure. The size of the holding area will depend upon the nature of the pattern, the type of aircraft using the hold, adjacent airspace requirements and maximum holding altitude. Surrounding the holding area a buffer zone, 5 NM wide, is established within which decreasing MOC is applied from full MOC at the boundary with the holding area, to zero at the extremity.

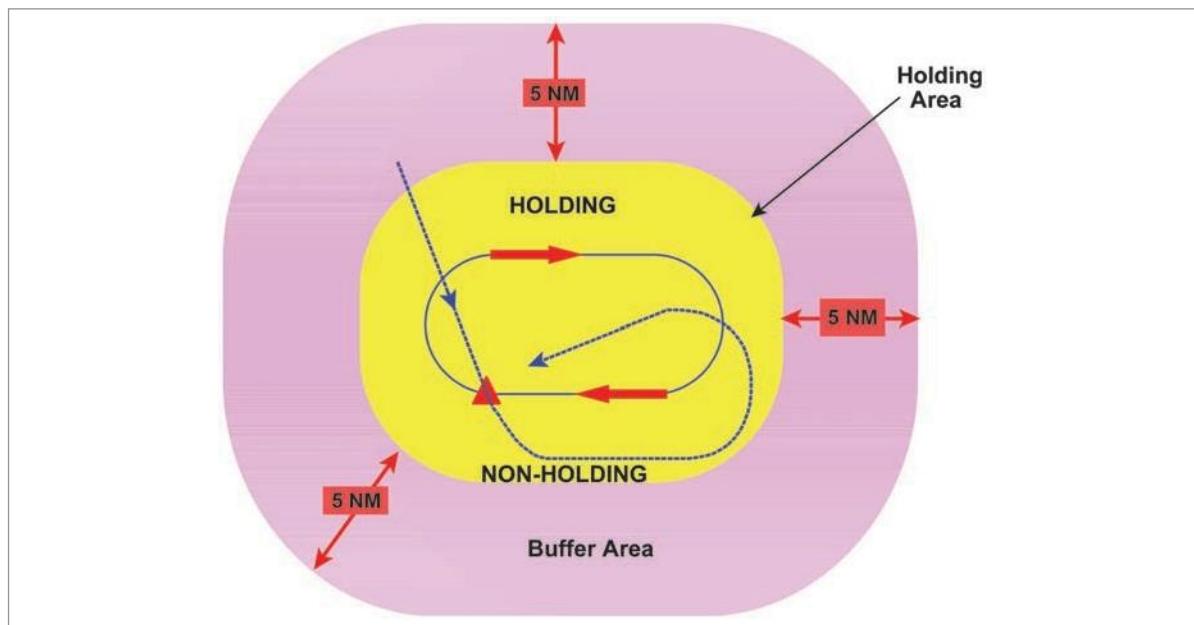


Figure 9.7

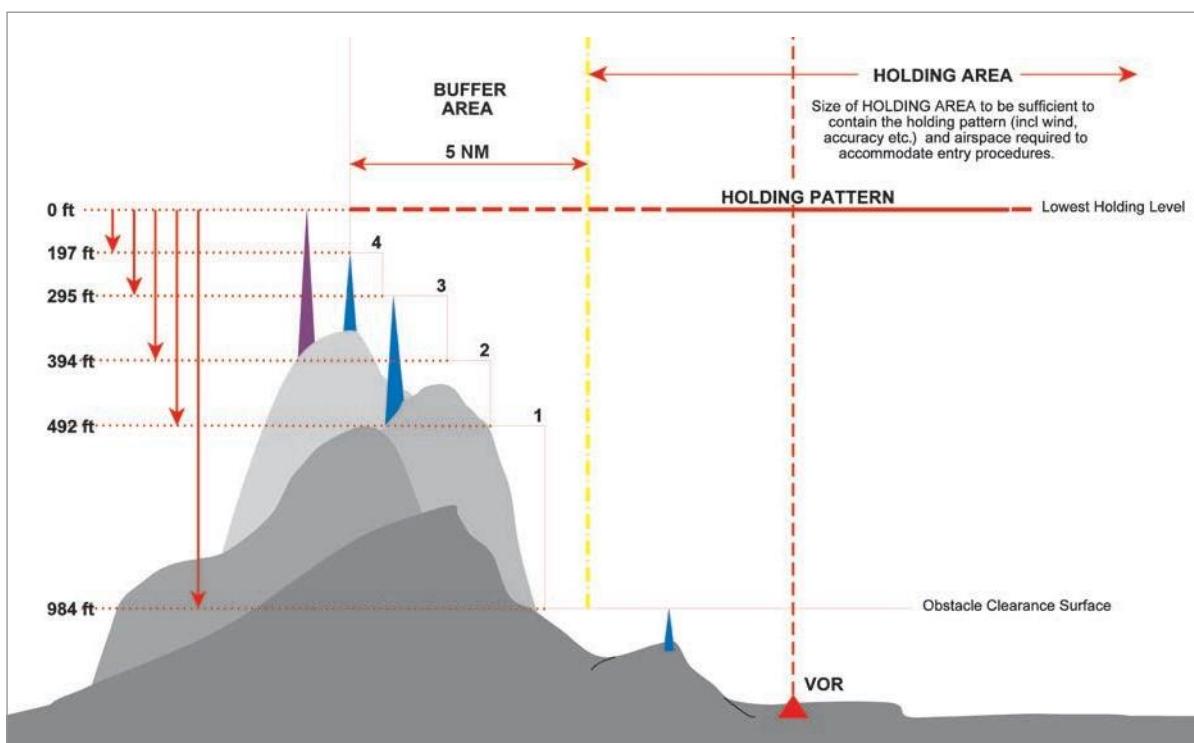


Figure 9.8

Questions

- 6
Questions
1. A procedure to alter level in a holding pattern is known as:
 - a. shuttle.
 - b. procedure turn.
 - c. base turn.
 - d. racetrack.
 2. Unless otherwise published or informed by ATC, after entering a holding pattern all turns are made:
 - a. to the left.
 - b. to the left then right.
 - c. to the right.
 - d. procedure turn right then left.
 3. In a holding pattern turns are to be made at a:
 - a. rate of turn = $3^\circ/\text{sec}$.
 - b. rate of turn = $3^\circ/\text{sec}$ or 20° bank angle whichever is less.
 - c. rate of turn = $3^\circ/\text{sec}$ or 25° bank angle whichever is less.
 - d. 25° bank angle.
 4. What is the longest time you can fly the 30° offset leg of a joining procedure?
 - a. $1\frac{1}{2}$ minutes.
 - b. $2\frac{1}{2}$ minutes.
 - c. 3 minutes.
 - d. 30 seconds.
 5. You are cleared to join a hold at 6000 ft. At what distance prior to reaching the holding fix must you be established at 6000 ft?
 - a. 5 minutes flying time
 - b. 5 NM
 - c. 10 minutes flying time
 - d. 10 NM

Answers

1	2	3	4	5
a	c	c	a	b

Chapter

10

Altimeter Setting Procedure

Altimeter Setting Procedures	229
Basic Concepts	229
Altimeter Setting Objectives	229
Transition	231
Phases of Flight	233
Questions	235
Answers	238

Altimeter Setting Procedures

Basic Concepts

10.1 Introduction. In order to ensure separation and to make sure that when flying an instrument procedure the aircraft is actually at or above the procedure design minimum altitude, it is essential that the aircraft altimeter subscale is correctly set to the appropriate reference pressure. History is littered with accidents caused by incorrect altimeter setting and despite the best intentions of the Air Traffic Controllers, the basic responsibility remains with the pilot to ensure that whatever he/she does with an aircraft, it must be safe.

10.2 Terrain Avoidance. During instrument departure or arrival procedures the aircraft must be flown according to the published flight profile. Until the aircraft is at or above a ‘safe in all cases’ altitude, the altimeter must be referenced to mean sea level so that the pilot knows exactly how high the aircraft is. All obstacles shown on approach and departure plates are referenced to sea level and likewise, all altitudes required by the procedures are also referenced to sea level. As sea level pressure (QNH) varies geographically and the terrain avoidance problem is geographic in nature, the reference setting must be a local QNH.

10.3 Lowest Useable Flight Level. This is the flight level that corresponds to or is immediately above the established minimum flight altitude.

10.4 ATC Separation. Once above the ‘safe in all cases’ altitude, the problem ceases to be terrain avoidance and becomes avoidance of other air traffic. In this case it essential that all aircraft have at least one altimeter referenced to the same subscale setting so that a standard separation can be applied regardless of the sea level pressure. According to ICAO ISA the average barometric pressure is 1013.25 hPa and this (when rounded down to 1013 hPa) is defined as the Standard Pressure Setting (SPS).

Altimeter Setting Objectives

10.5 Objectives. The two main objectives of altimeter setting procedures are to:

- Provide adequate terrain clearance during all phases of flight especially departure and arrival.
- Provide adequate vertical separation between aircraft

10.6 Altimeter Subscale Settings. There are three altimeter subscale settings that can be applied at any aerodrome. These are:

10.7 QNH. This is the observed barometric pressure at an aerodrome adjusted in accordance with the ISA pressure lapse rate to indicate the pressure that would be observed if the observation was carried out at sea level. If QNH is set on the altimeter subscale, the altimeter would read aerodrome elevation at touchdown.

10.8 QFE. This is the observed barometric pressure at an aerodrome which, if set on the altimeter subscale, would result in the altimeter reading zero at touchdown.

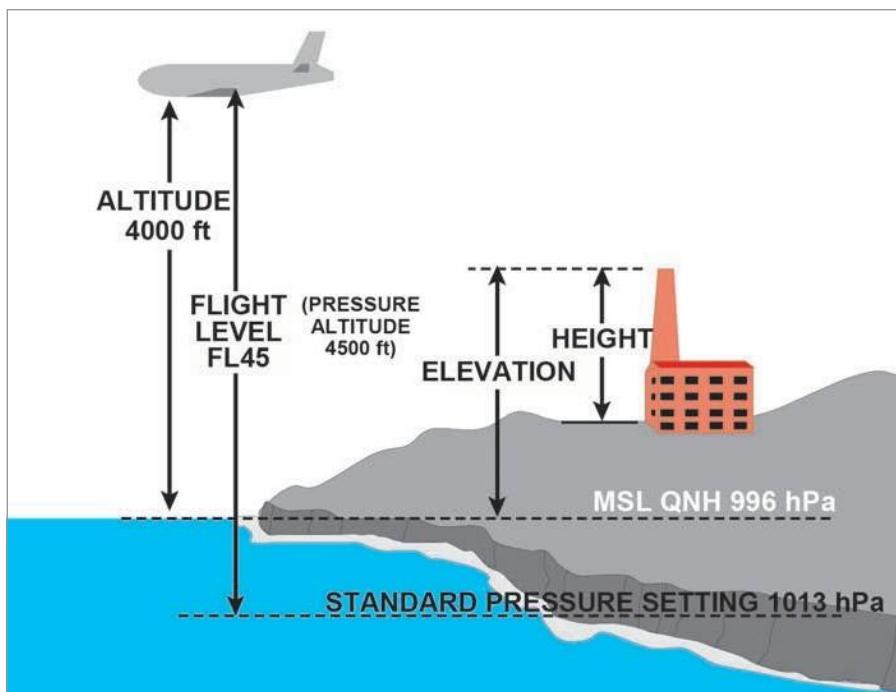


Figure 10.1

10.9 QNE. A situation can occur where the QNH is below the lowest altimeter subscale setting. For instance, if the altimeter subscale will not read below 940 hPa and the QNH is 935 hPa it would appear that the altimeter is useless. If, however, the altimeter subscale is set to a standard setting (e.g. 1013 hPa) then it would be possible to calculate what the altimeter would read at touchdown where the QNH is 930 hPa and the altimeter subscale is set to 1013 hPa using the ICAO ISA. Assume that the aerodrome elevation is 100 ft AMSL. On touchdown the altimeter will read:

$$1013 - 930 = 83 \text{ (amount of pressure wound on)}$$

$$83 \times 27 \text{ ft (ISA interval)} = 2241 \text{ ft} + 100 \text{ ft} = 2341 \text{ ft.}$$

In this case, 2341 ft is the QNE. A pilot would be instructed by the ATCO:

“G-CD set 1013 land with QNE 2340”

There is a popular misconception amongst pilots that QNE is 1013 hPa. When used as a reference as opposed to a QNH, 1013 hPa is defined as the standard pressure setting (SPS). Therefore QNE is what the altimeter will read at touchdown with SPS set.

Transition

10.10 Definition. After take-off, the altimeter setting will be changed from QNH to SPS at some point. Likewise in the descent to land, the altimeter will be set to QNH from SPS at some point. The process that allows this to be done safely and at a logical point is called transition. This requires the altitude (or FL) at which this is done to be specified. The altitude above the aerodrome for change from QNH to SPS is called the **transition altitude**, and from SPS to QNH is the transition level. When flying below the transition altitude, the aircraft is flown at altitudes determined with reference to sea level pressure (QNH) and the vertical position is expressed in terms of altitude. Above the transition altitude, the vertical position is expressed in terms of flight levels. During a climb upon reaching the transition altitude, SPS is set and the climb continued to the desired flight level. In the descent, upon reaching the transition level, the QNH is then set and descent continued to the desired altitude. An exception to the above is when, on descent, the pilot is passed the QNH whilst still above the transition level in which case the pilot would refer to vertical position as an altitude.

10.11 Flight Levels. A flight level (FL) is defined as the vertical displacement of the aircraft above a constant level of barometric pressure related to 1013 hPa. Flight Level Zero (FL0) is located at the atmospheric pressure level of 1013 hPa. Subsequent flight levels are separated by a pressure interval corresponding to 500 ft in standard atmosphere. Flight levels are numbered as follows:

FL30; FL35; FL40; FL45 etc.... and FL100; FL105; FL110 etc....

10.12 Transition Altitude. This is the altitude (with QNH set) above the aerodrome at which the altimeter subscale is reset to SPS and vertical position above that is then reported as a flight level. The transition altitude is specified for every aerodrome by the Authority of the State in which the aerodrome is located. The transition altitude shall be as low as possible but normally not less than 3000 ft. Transition altitudes are published in the AIP and shown on charts and instrument plates. A state may specify a general transition altitude (as in the USA, 18 000 ft).

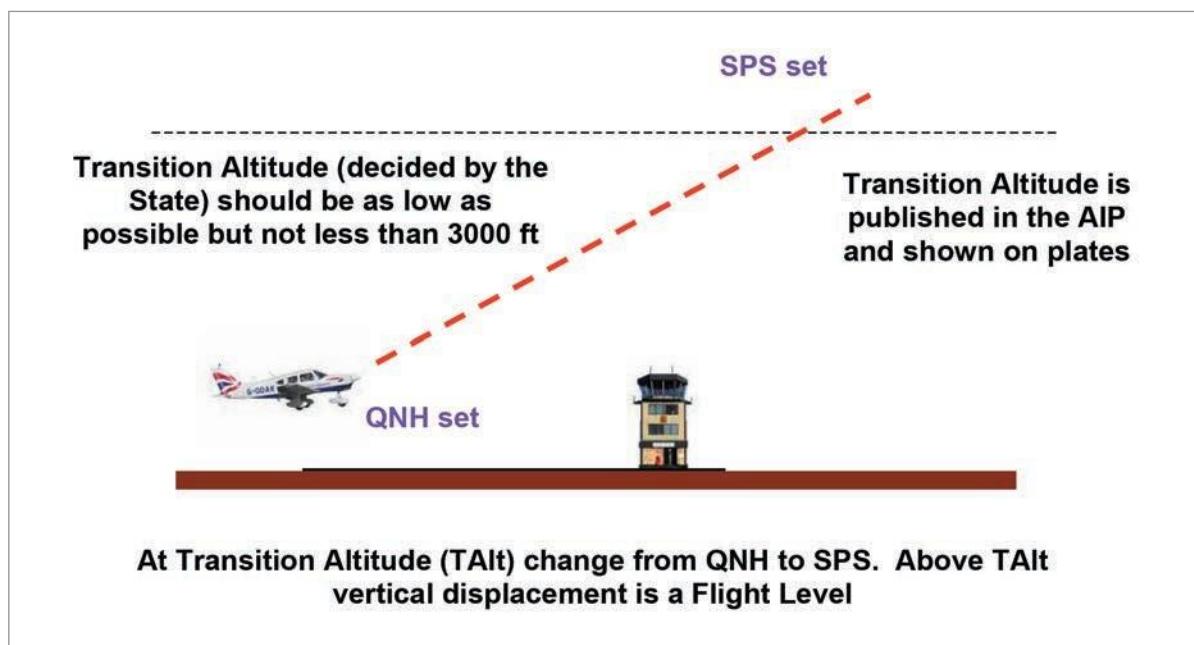


Figure 10.2 Transition altitude

10.13 Transition Level. The transition level is the flight level at which the altimeter is reset to the aerodrome QNH and subsequent flight is reported with reference to altitude. The transition level changes with the QNH. It is calculated by the Approach Controller at regular intervals and also when QNH changes. It is defined as the first available flight level above the transition altitude. This will be a ‘rounding up’ from what the altimeter is reading at the transition level with SPS set. Calculation of transition level is not required by the learning objectives.

The flight crew shall be provided with the transition level :

- prior to reaching the level during the descent
- in the approach clearance
- when requested by the pilot

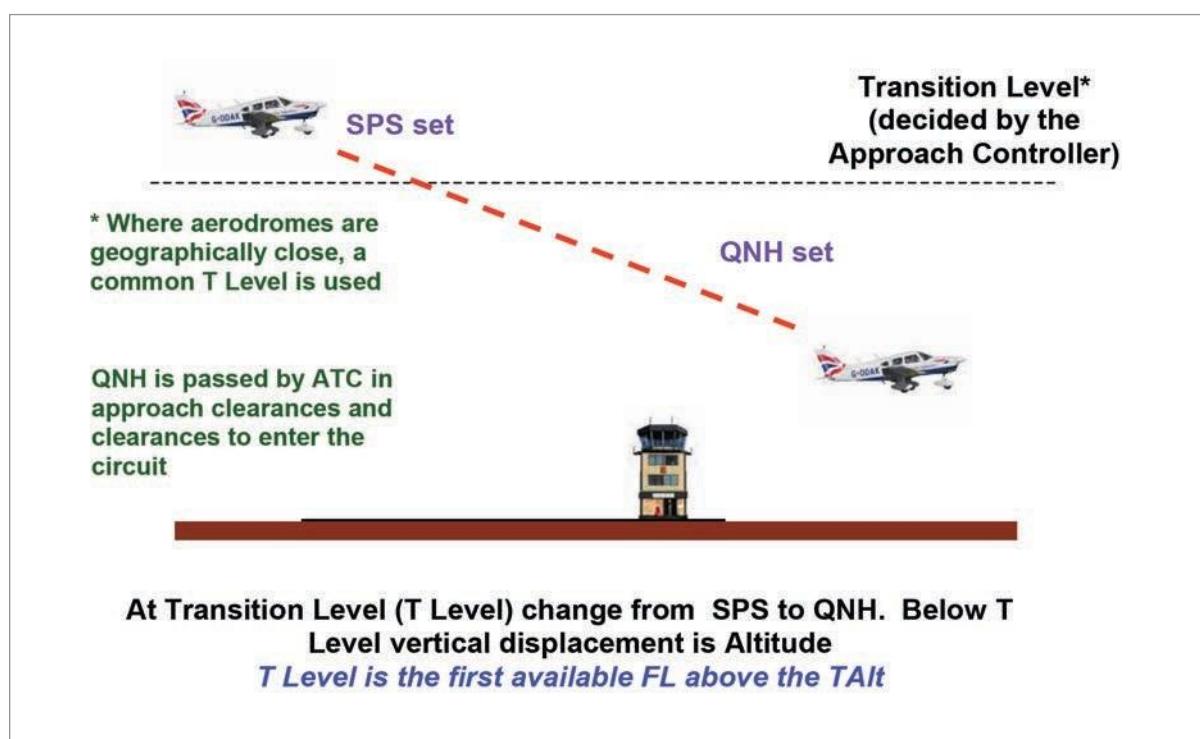


Figure 10.3 Transition level

10.14 Transition Layer. This is the airspace between the transition altitude with SPS set and the transition level. It is usually insignificant but some states require a minimum depth to the transition layer. When ascending through the transition layer (with SPS set) vertical position is reported as a flight level and when descending through the layer with QNH set, as an altitude.

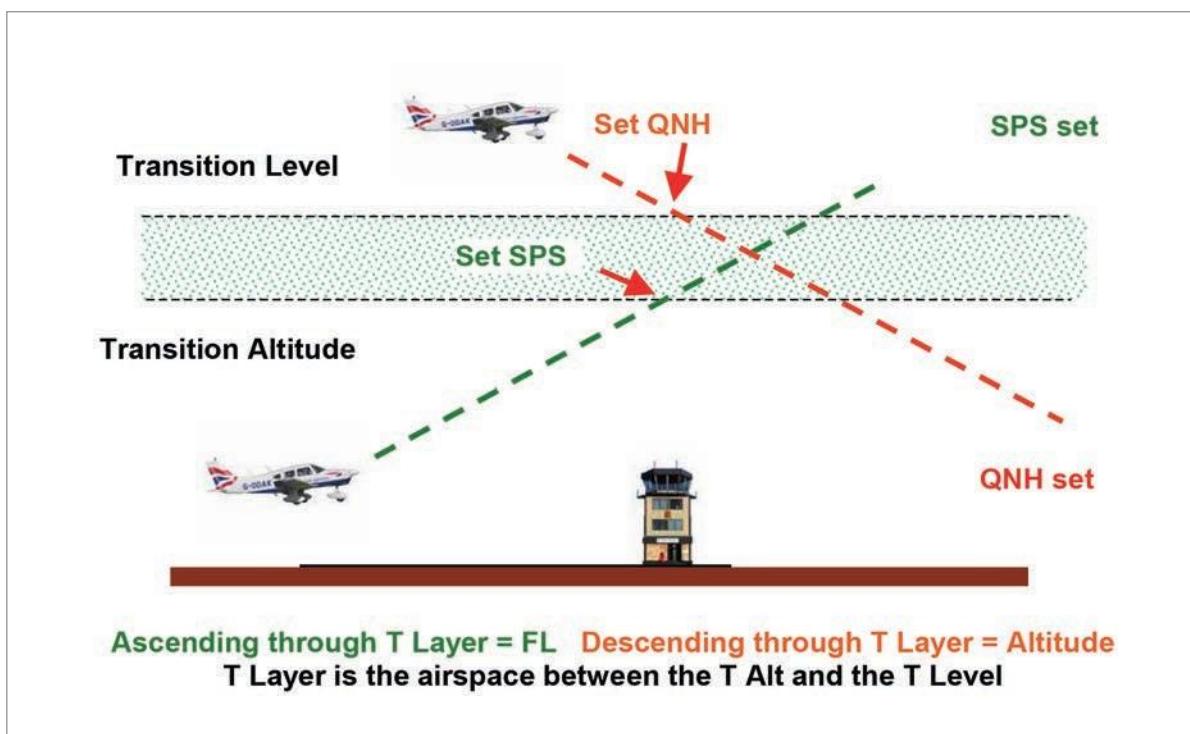


Figure 10.4 Transition layer

Phases of Flight

10.15 What Should be Set? The QNH should be passed to an aircraft in the taxi clearance prior to take-off. When flying en route below the transition altitude, the vertical position of the aircraft is reported as altitude (QNH set). When outside of the ‘vicinity’ of the departure aerodrome, QNH from another (closer) aerodrome will be required and set. In the UK we have a system of regional pressure settings (RPS) which cover this case without reference to en route aerodrome QNH. In the USA when flying cross-country, the pilot will need to contact ATC at ‘local’ aerodromes and update the altimeter setting regularly. This will allow determination of terrain clearance with an acceptable degree of accuracy. When en route and above the transition altitude, the aircraft level is reported as a flight level. When approaching an aerodrome to land, the QNH will be passed to aircraft in clearances to enter the traffic circuit. Normally, vertical position is reported as a flight level until reaching the transition level in the descent, however, after an approach clearance has been issued, reference should then be made in terms of altitude with the QNH set. This is intended to apply primarily to turbine aircraft for which an uninterrupted descent from high altitude is desirable.

10.16 Use of QFE. If a pilot decides to remain in the aerodrome traffic circuit (the visual circuit) throughout the flight, then the altimeter may be set to QFE.

10.17 Pilot/Operator Procedures. Pilots and operators are required to plan the route and, complying with the rules of a state and the general flight rules, are to select an appropriate IFR or VFR flight level for the flight. In selecting flight levels for a flight, those selected:

- Should ensure adequate terrain clearance at all points along the route;
- Should satisfy ATC requirements
and
- Should be compatible with the table of cruising levels in Chap. 6

The serviceability and accuracy of the altimeter should be confirmed prior to the commencement of a flight. With knowledge of the aerodrome elevation in the case of QNH, the altimeter should be set to either QNH or QFE. The instrument should then be vibrated (avoiding tapping the glass) to ensure that the instrument has reacted to the mechanical adjustment of setting the subscale. A serviceable altimeter will indicate:

- The height of the altimeter above the reference point (QFE)
or
- The elevation of the position of the aeroplane plus the height of the altimeter above the ground (QNH);

10.18 Altimeter Accuracy. Altimeters are to be checked for correct operation within the following tolerances:

- Plus or minus 60 ft (20 m) for a test range between 0 - 30 000 ft
or
- Plus or minus 80 ft (28 m) for a test range between 0 - 50 000 ft

10.19 Approach and Landing. Before commencing an approach to an aerodrome, the pilot is to obtain the transition level. Before descending below the transition level, the latest QNH for the aerodrome is to be obtained. (This does not preclude a pilot using QFE for terrain clearance purposes during the final approach to a runway.) ATC may clear an aircraft to be operated using QNH when above the transition level if so required for the purpose of descent in accordance with a prescribed procedure (i.e. not for level flight). When an aircraft which has been given clearance as number one to land is using QFE to complete the approach, OCH is to be established with reference to height above the aerodrome datum for that portion of the flight. On approach plates all vertical displacement is shown as both AMSL and AGL in the following form: 2000 (1485) with the AMSL figure in bold type and the AGL figure in parenthesis. This is a standard format and is used in all publications.

10.20 Minimum Flight Altitudes. Minimum flight altitudes are determined and promulgated by the State for each ATS route and Control Area (CTA) over its territory. They are published in the national Aeronautical Information Publication (AIP).

Questions

1. **What should be the minimum transition altitude?**
 - a. 3000 ft.
 - b. 1000 ft.
 - c. 1500 ft.
 - d. 2000 ft.
2. **Determination of the Transition Level is the responsibility of:**
 - a. the Authority of the State.
 - b. the ATC Authority.
 - c. Approach Control office or the aerodrome Control Tower.
 - d. Area Control.
3. **What is the transition level?**
 - a. The first available flight level above the transition altitude.
 - b. The highest flight level available below the transition altitude.
 - c. The top of the ATZ.
 - d. The level at which 1013 is set.
4. **When during the approach should the reported aerodrome altimeter setting be set?**
 - a. When passing 3000 ft AMSL or 1000 ft AGL.
 - b. When passing the transition level.
 - c. When passing the transition altitude.
 - d. Within the transition layer.
5. **The vertical position of an aircraft at or below the transition altitude will be reported as:**
 - a. flight level.
 - b. whatever the pilot chooses.
 - c. altitude.
 - d. height.
6. **In the vicinity of an aerodrome that is going to be used by the aircraft, the vertical position of the aircraft shall be expressed as:**
 - a. flight level at or below the transition level.
 - b. flight level at or below the transition altitude.
 - c. altitude above sea level at or below the transition altitude.
 - d. altitude above sea level at or above the transition altitude.
7. **The pilot of a departing aircraft flying under IFR shall change the altimeter setting from QNH to SPS when passing:**
 - a. transition level.
 - b. when specified by ATC.
 - c. transition altitude.
 - d. transition layer.

8. Transition from altitude to flight level, and vice-versa, is done:
- at transition level during the climbs and at transition altitude in the descent.
 - only at transition altitude.
 - only at transition level.
 - at transition altitude during the climbs and at transition level in the descent.
9. During flight through the transition layer the vertical position of the aircraft should be reported as:
- altitude above mean sea level during the climb.
 - flight level during descent.
 - either altitude above mean sea level or flight level during the climb.
 - altitude above mean sea level during descent.
10. Whilst flying through the transition layer the vertical position of the aircraft should be reported as:
- altitude.
 - height.
 - flight level.
 - it depends upon what is set on the altimeter.

Answers

1	2	3	4	5	6	7	8	9	10
a	c	a	b	c	c	c	d	d	d

Chapter

11

Parallel or Near-parallel Runway Operation

Simultaneous Operation on Parallel or Near-parallel Runways.....	241
Modes of Operation	241
Safety	246
Runway Spacing	247
Questions	250
Answers	252

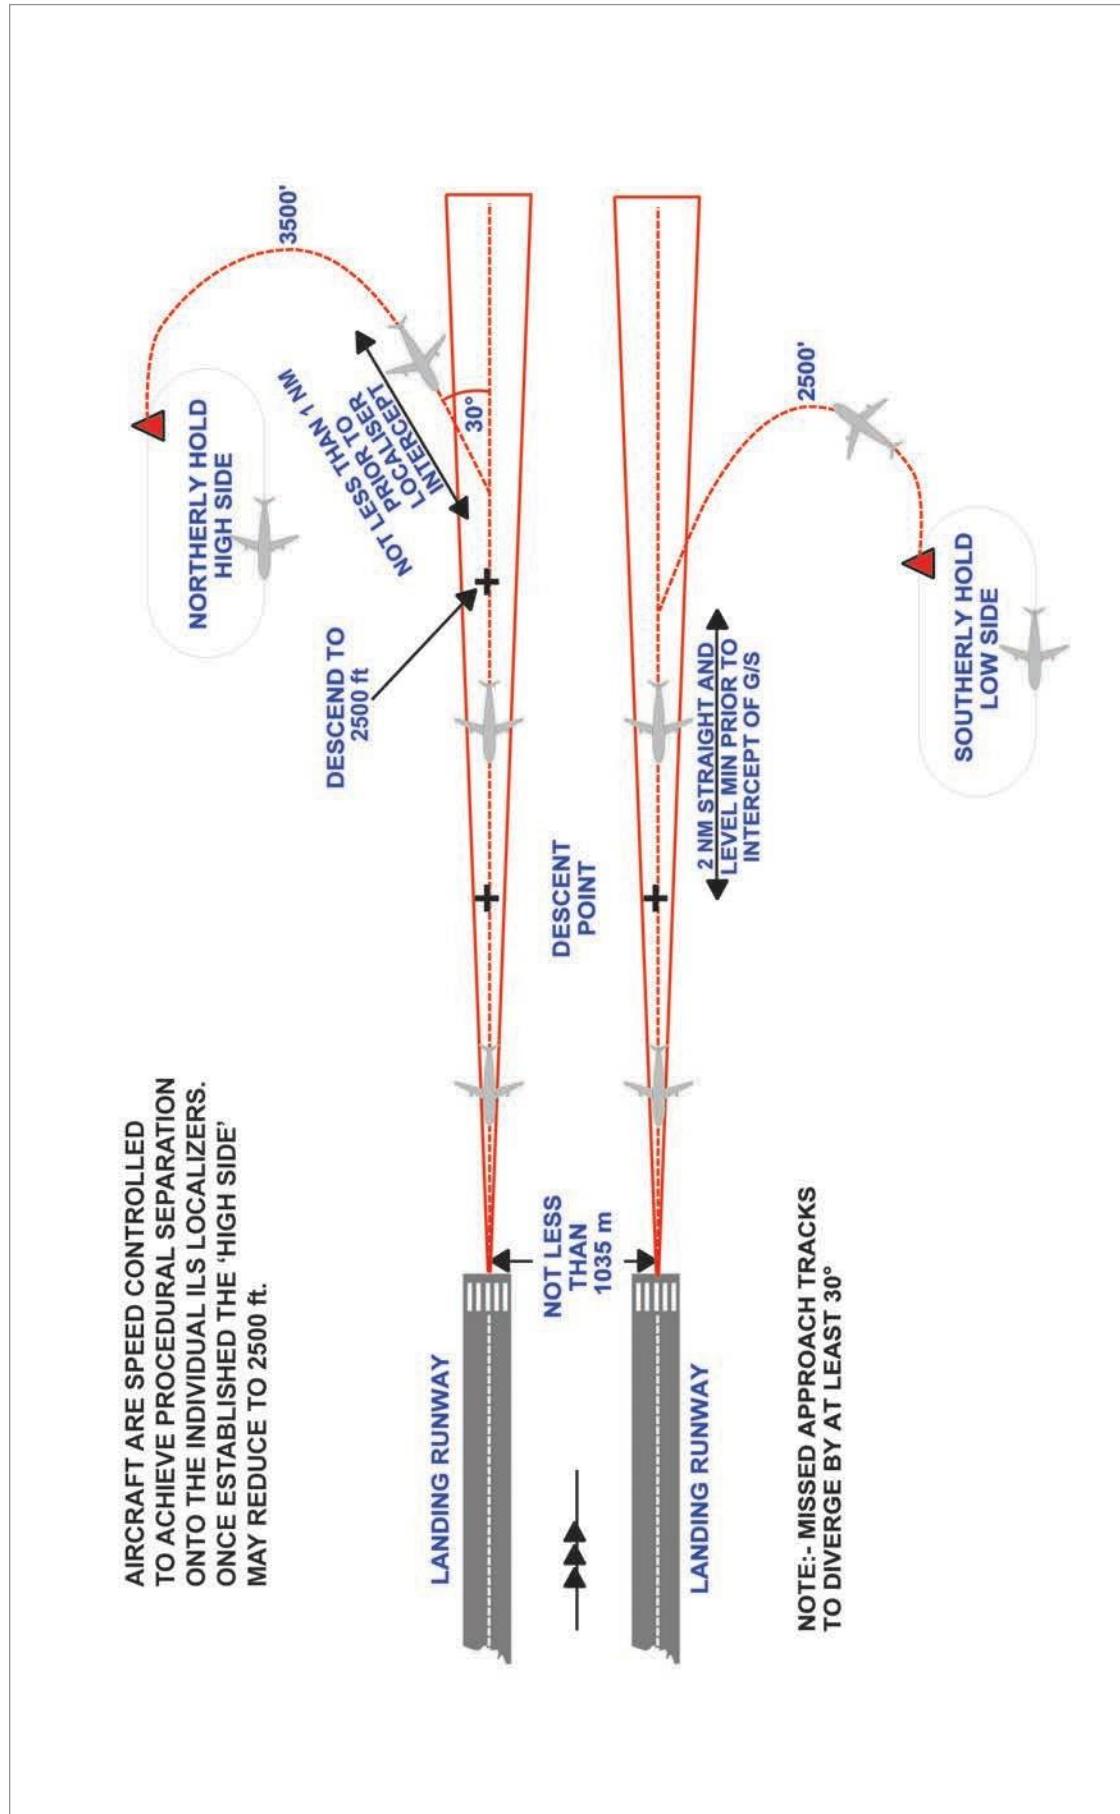


Figure 11.1 Mode 1 - Independent parallel approaches

Simultaneous Operation on Parallel or Near-parallel Runways

Modes of Operation

11.1 Introduction. The need to increase capacity at aerodromes handling IFR traffic in IMC can be met by the use of parallel or near-parallel runways. An aerodrome already having dual/parallel precision approach (ILS or MLS) runways could increase its capacity if these runways could be safely operated simultaneously and independently in IMC. There is increasing pressure on major aerodromes, like Stansted, to build a second (parallel) runway and virtually all new aerodrome constructions (e.g. Chek Lap - Hong Kong) are constructed with parallel runway configurations. It is also not uncommon for the runway arrangement to include three or even four parallel (or near parallel) runways and for all of them to be in operation together. In this section the discussion will be biased towards pure parallel runway arrangements, but the procedures are the same or similar for all other arrangements. There are a variety of modes of operation associated with parallel or near-parallel runways. All parallel runway operations require the provision and use of radar.

11.2 Simultaneous Parallel Instrument Approaches. There are two basic modes of operation possible:

11.3 Mode 1: Independent Parallel Approaches: Approaches are made to parallel runways where radar separation minima between aircraft using adjacent ILS and/or MLS are not applied. Regardless of the weather conditions, all approaches are to be radar monitored with radar controllers specifically detailed for that duty only. Dedicated discrete RTF frequencies are allocated to the radar controllers. Only straight-in approaches are permitted with parallel runway operation. Track reversal procedures are not permitted.

11.4 Separation. Each pair of parallel approaches will have a ‘high’ side and a ‘low’ side to provide vertical separation until aircraft are established inbound on the respective ILS localizer course. The high side will be 300 m (1000 ft) above the low side. Before vertical separation can be reduced below 300 m (1000 ft), both aircraft on a simultaneous parallel approach must be established on the ILS localizer centre line or MLS final approach track. Once the 300 m (1000 ft) separation is reduced, the radar controller will issue instructions if the aircraft deviates significantly from the localizer course.

11.5 Mode 2: Dependent Parallel Approaches: Approaches are made to parallel runways where radar separation minima between aircraft using adjacent ILS and/or MLS are applied. Regardless of the weather conditions, all approaches are to be radar monitored with radar controllers specifically detailed for that duty only. Dedicated discrete RTF frequencies are allocated to the radar controllers. Only straight-in approaches are permitted with parallel runway operation. Track reversal procedures are not permitted. During vectoring to intercept the localizer the maximum interception angle permitted is 30° and a minimum of 1 NM straight and level flight is required before localizer intercept. Vectoring is also to ensure that the localizer track is intercepted and flown for at least 2 NM before glide path intercept. Until the aircraft is established on the localizer, the normal minimum radar separation of 5 NM shall apply. Aircraft carrying out parallel operations must be equipped with full ILS/MLS.


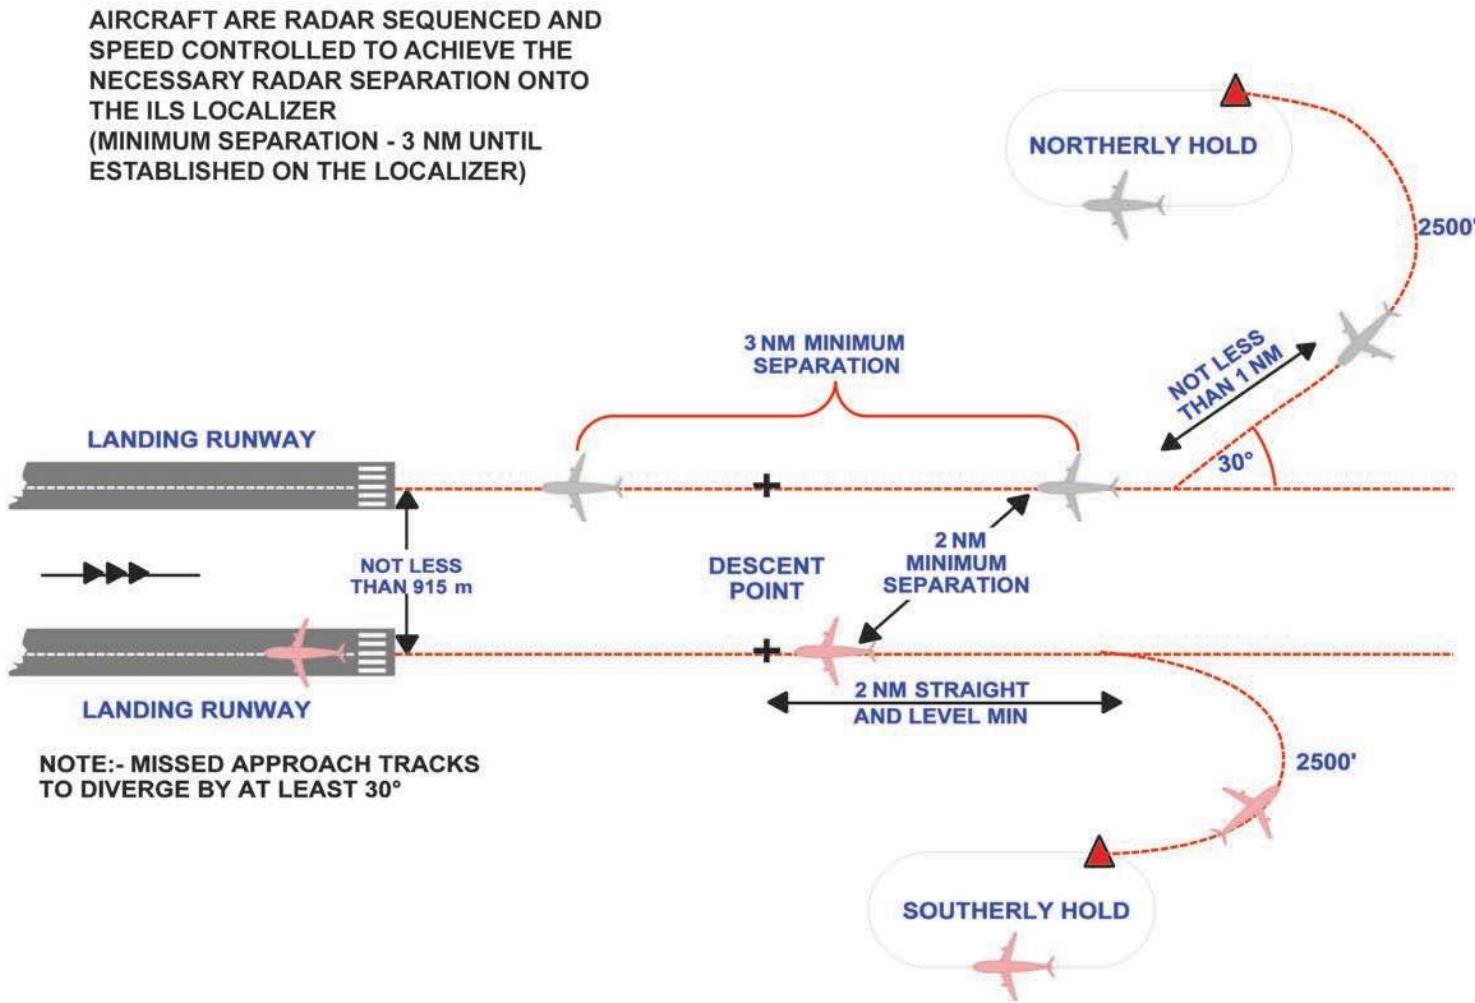


Figure 11.2 Mode 2 - Dependent parallel approaches

11.6 Mode 3: Simultaneous Instrument Departures. This operation is known as Mode 3 Independent Parallel Departures. It involves simultaneous departures for aircraft departing in the same direction from parallel runways. All departing traffic must be identified by radar at a distance of not more than 1 NM from DER. All departure tracks must diverge by a minimum of 15° immediately after take-off.

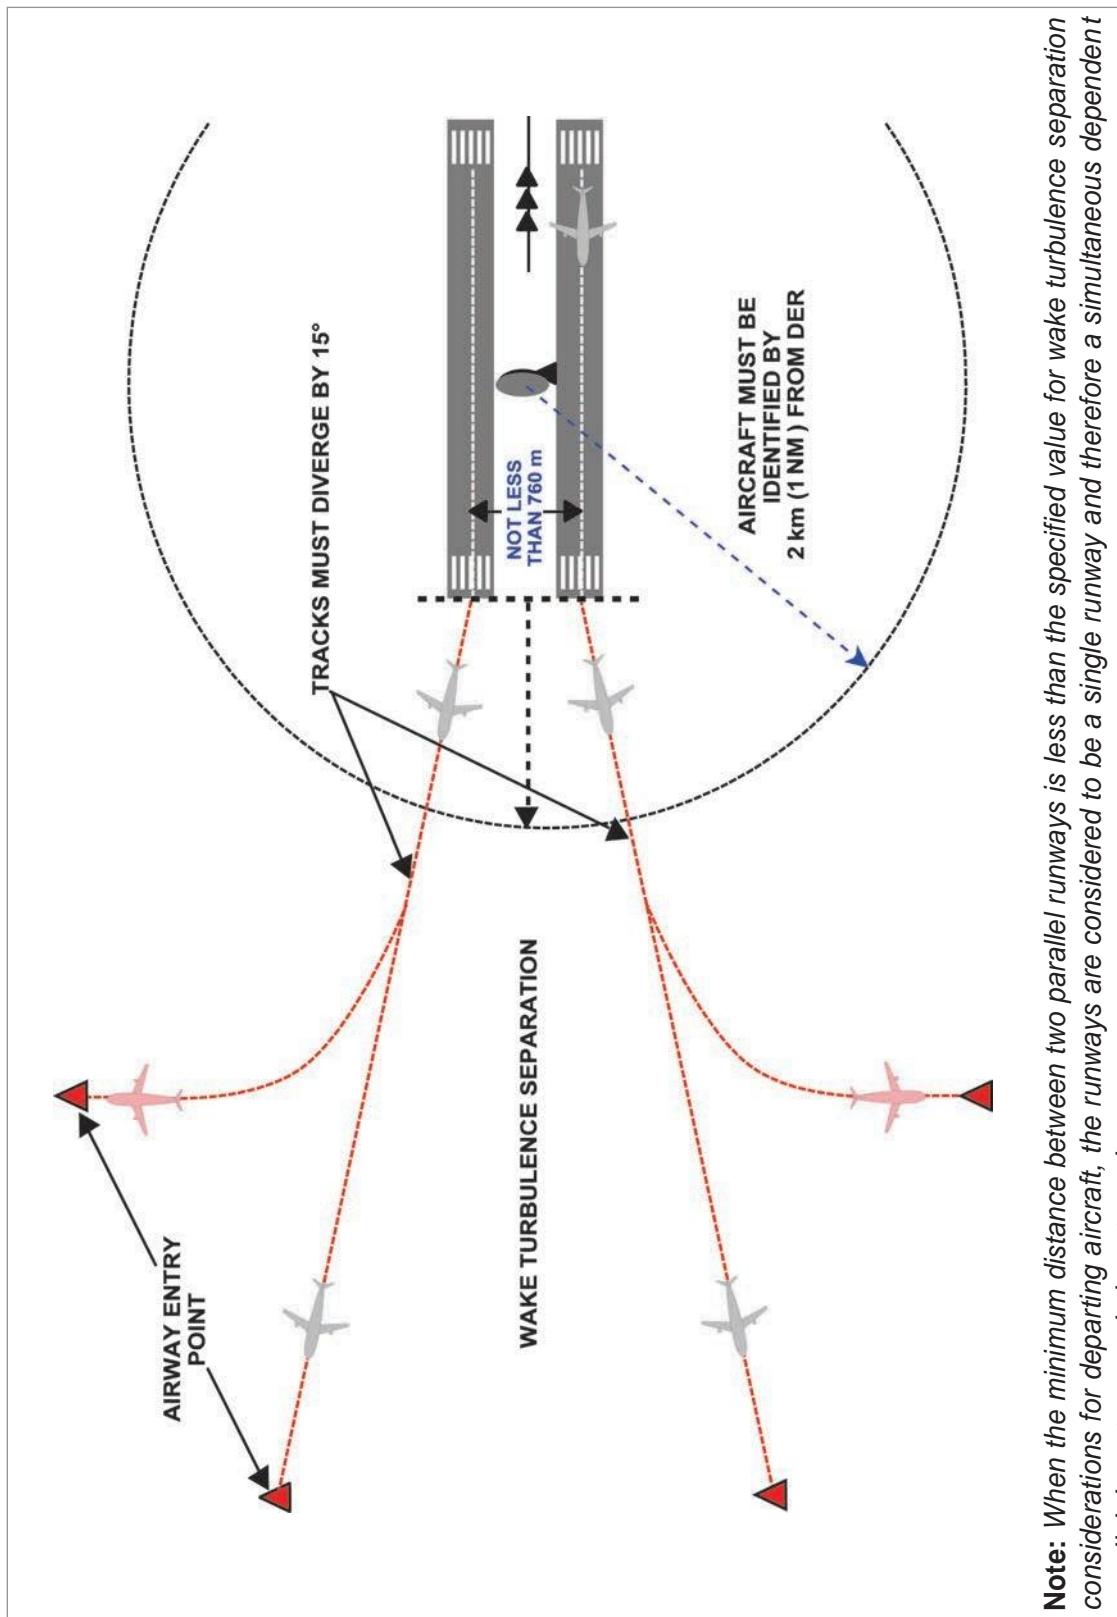

Note: When the minimum distance between two parallel runways is less than the specified value for wake turbulence separation considerations for departing aircraft, the runways are considered to be a single runway and therefore a simultaneous dependent parallel departure mode is not used.

Figure 11.3 Mode 3 - Simultaneous instrument departures

11.7 Mode 4: Segregated Departures/Arrivals: This operation is known as Mode 4 Segregated Parallel Operations. In this mode, one runway is used exclusively for approaches and the other runway is used exclusively for departures. This is the mode of operation at London Heathrow.

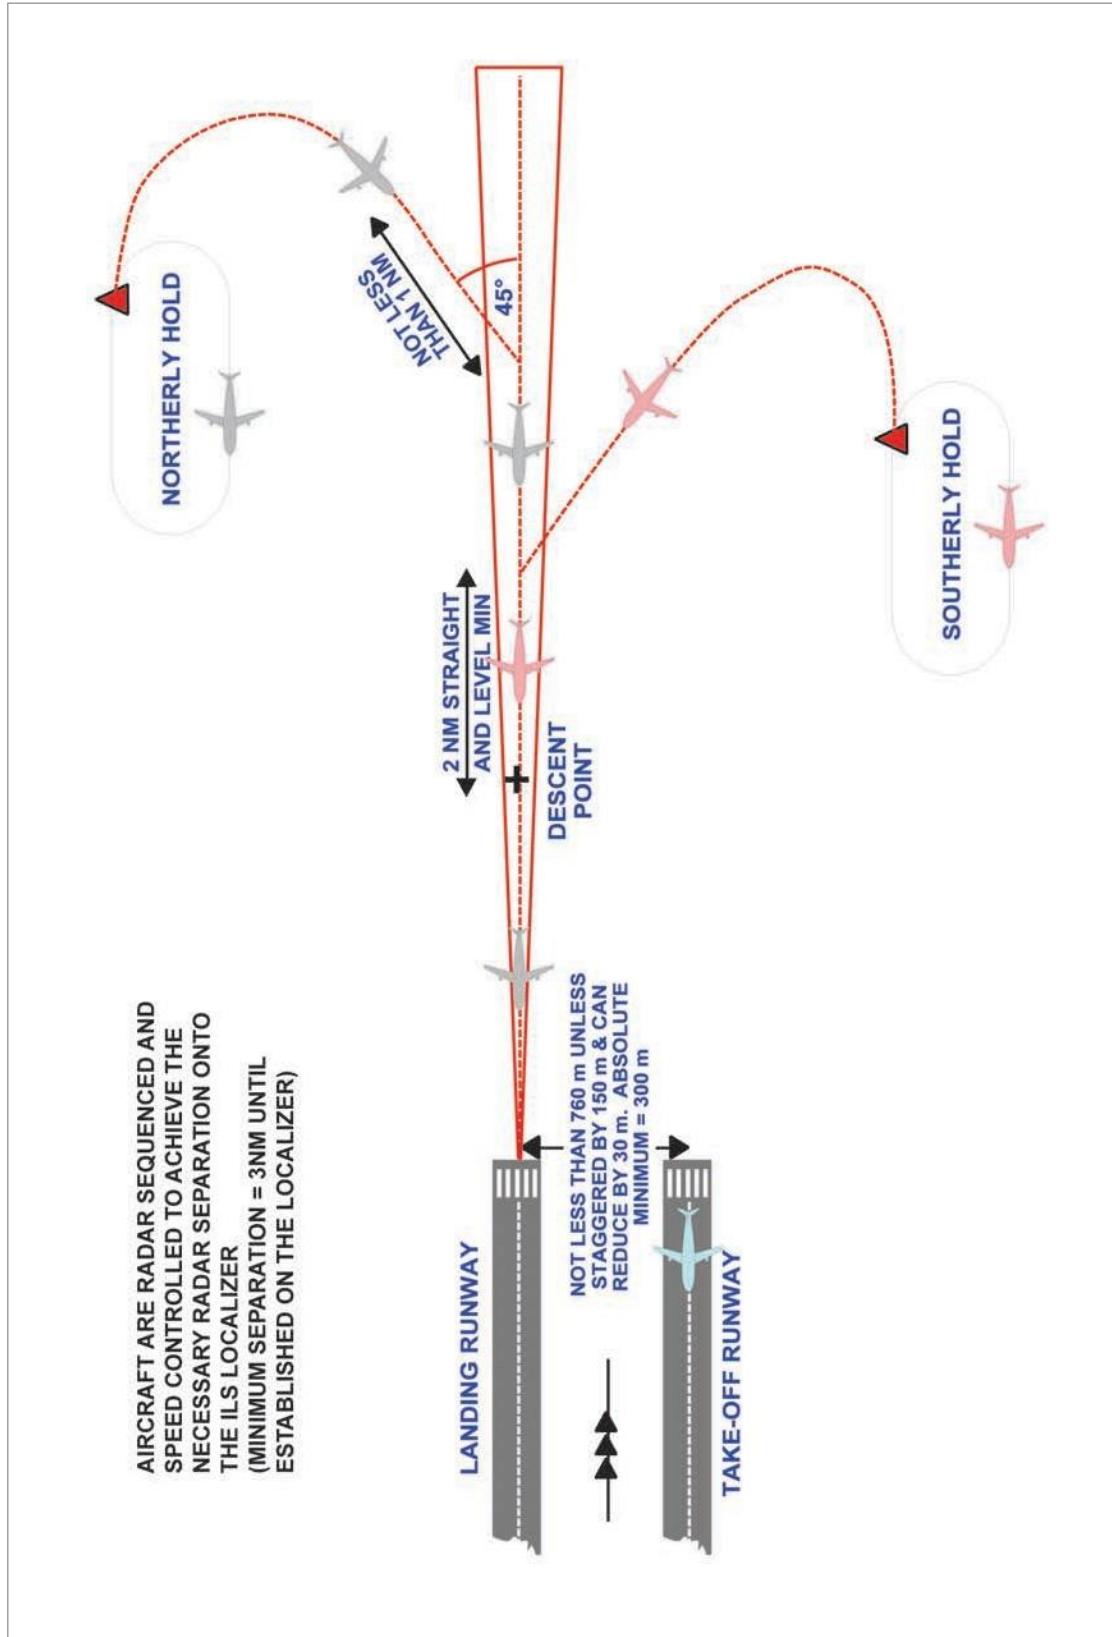


Figure 11.4: Mode 4 - Segregated departures/arrivals

11.8 Semi-mixed Operations. In essence, the option for the use of parallel runways is totally flexible and a situation may exist where one runway is used exclusively for departures, while the other runway accepts a mixture of departures and approaches, or vice versa. There may also be simultaneous parallel approaches with departures interspersed on both runways. In effect, semi-mixed operations may be permutations of the four basic modes (above). Most North American major aerodromes operate some kind of semi-mixed operations.

Safety

11.9 Aircraft equipment. All aircraft carrying out parallel runway operations must be equipped with full ILS/MLS

11.10 Radar Monitoring. For all parallel runway operations, radar surveillance (or in some cases, control) must be provided regardless of the weather conditions. Without radar, parallel runway operations are suspended and single runway operations resumed.

11.11 Approach Operations. Due to the real estate limitations of aerodromes, it is inevitable that the spacing between parallel runways will not be sufficient to permit normal ATC separation standards to be applied. However, whatever is implemented must be safe and provide separation immediately something goes wrong. Normally, ATC separation is provided either vertically or horizontally and is usually based on the accuracy of navigation of the aircraft. If the accuracy of navigation can be improved then the separation standard can be reduced, in other words, separation can be traded off against accuracy of navigation. For parallel approach operations, vertical and horizontal separation standards are overruled once the aircraft concerned are established on the localizer centre line. Mode 1 is described as independent and implies that what happens on one runway is totally independent of what is happening on the other. Mode 2 (dependent) does roughly the same but with the addition of radar separation longitudinally and laterally of approaching aircraft, making what happens on one runway dependent upon what is happening on the other. Effectively for both modes, there are two arrival aerodromes albeit very close together.

11.12 Normal Operating Zone (NOZ). This is applicable to Mode 1 operations and is airspace of defined dimensions extending either side of an ILS localizer course (or an MLS final approach track centre line) within which an aircraft operating normally on the ILS would be positioned. Remember - the protected zone is encompassed by half scale deviation of the CDI and is the required accuracy of ILS navigation. Only the inner half of the NOZ is taken into account in independent parallel approaches.

11.13 No Transgression Zone (NTZ). In the context of Mode 1 independent parallel approaches, this is a corridor of airspace of defined dimensions located centrally between the two extended runway centre lines. Penetration of the NTZ by an aircraft requires controller intervention immediately to manoeuvre a threatened aircraft on the adjacent approach, out of the way. Normally this would require a turn away from the other aircraft and an immediate climb to MSA (or as per the Missed Approach Procedure). Once the threatened aircraft is safe, the controller will attempt to assist the other aircraft regain the approach or carry out the missed approach procedure. It is a requirement that the NTZ must be at least 610 m wide.

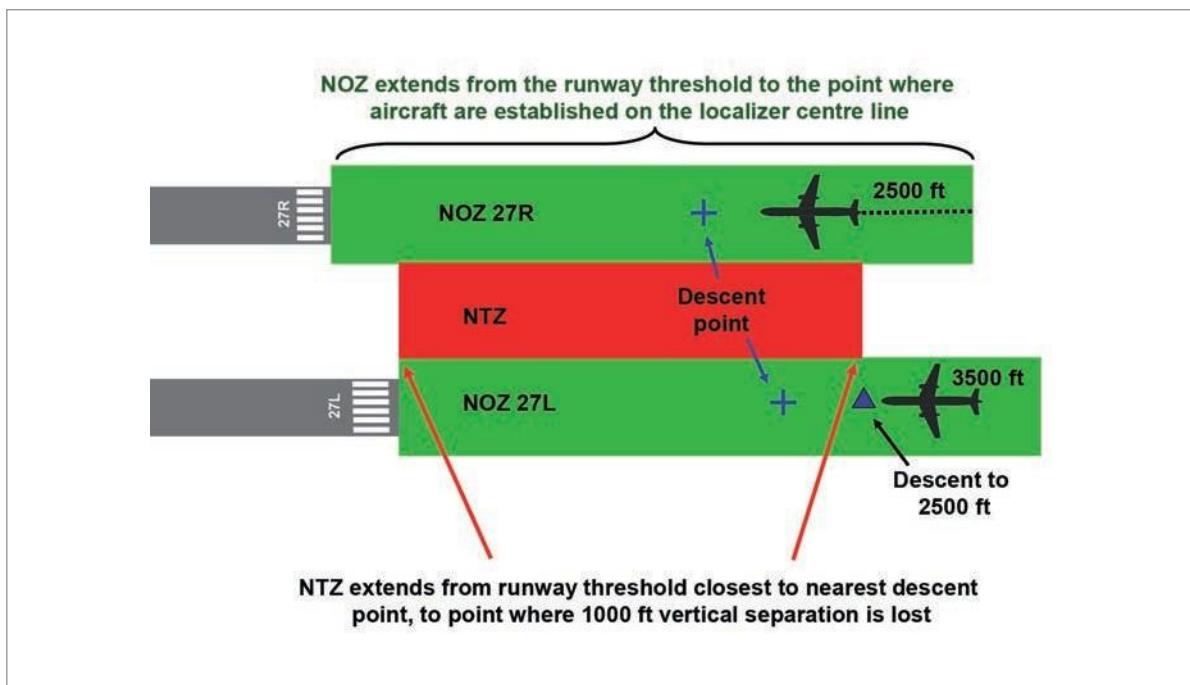


Figure 11.5 No transgression zone

11.14 Missed Approach. Simultaneous parallel operations require the missed approach track and departure tracks to diverge by a minimum of 30° . When turns are prescribed to establish divergence, pilots are to commence turns as soon as practicable.

Runway Spacing

11.15 Minimum Spacing of Parallel Runways. The worst case is where the runway thresholds (or the normal rotation points) are adjacent. This means that two approaching aircraft for instance, will always be at the same altitude when at the same distance from touchdown. If, however, the thresholds are ‘staggered’ then a degree of vertical separation is introduced (likewise for departing aircraft). This situation permits closer spacing of runways (30 m reduction or increment for every 150 m of overlap) as is the case for the runway at Manchester. The diagram below illustrates the requirements for spacing of parallel runways. The student should know that the minimum spacing for Mode 1 operations is 1035 m, for Mode 2 it is 915 m and for Modes 3 and 4 it is 760 m.

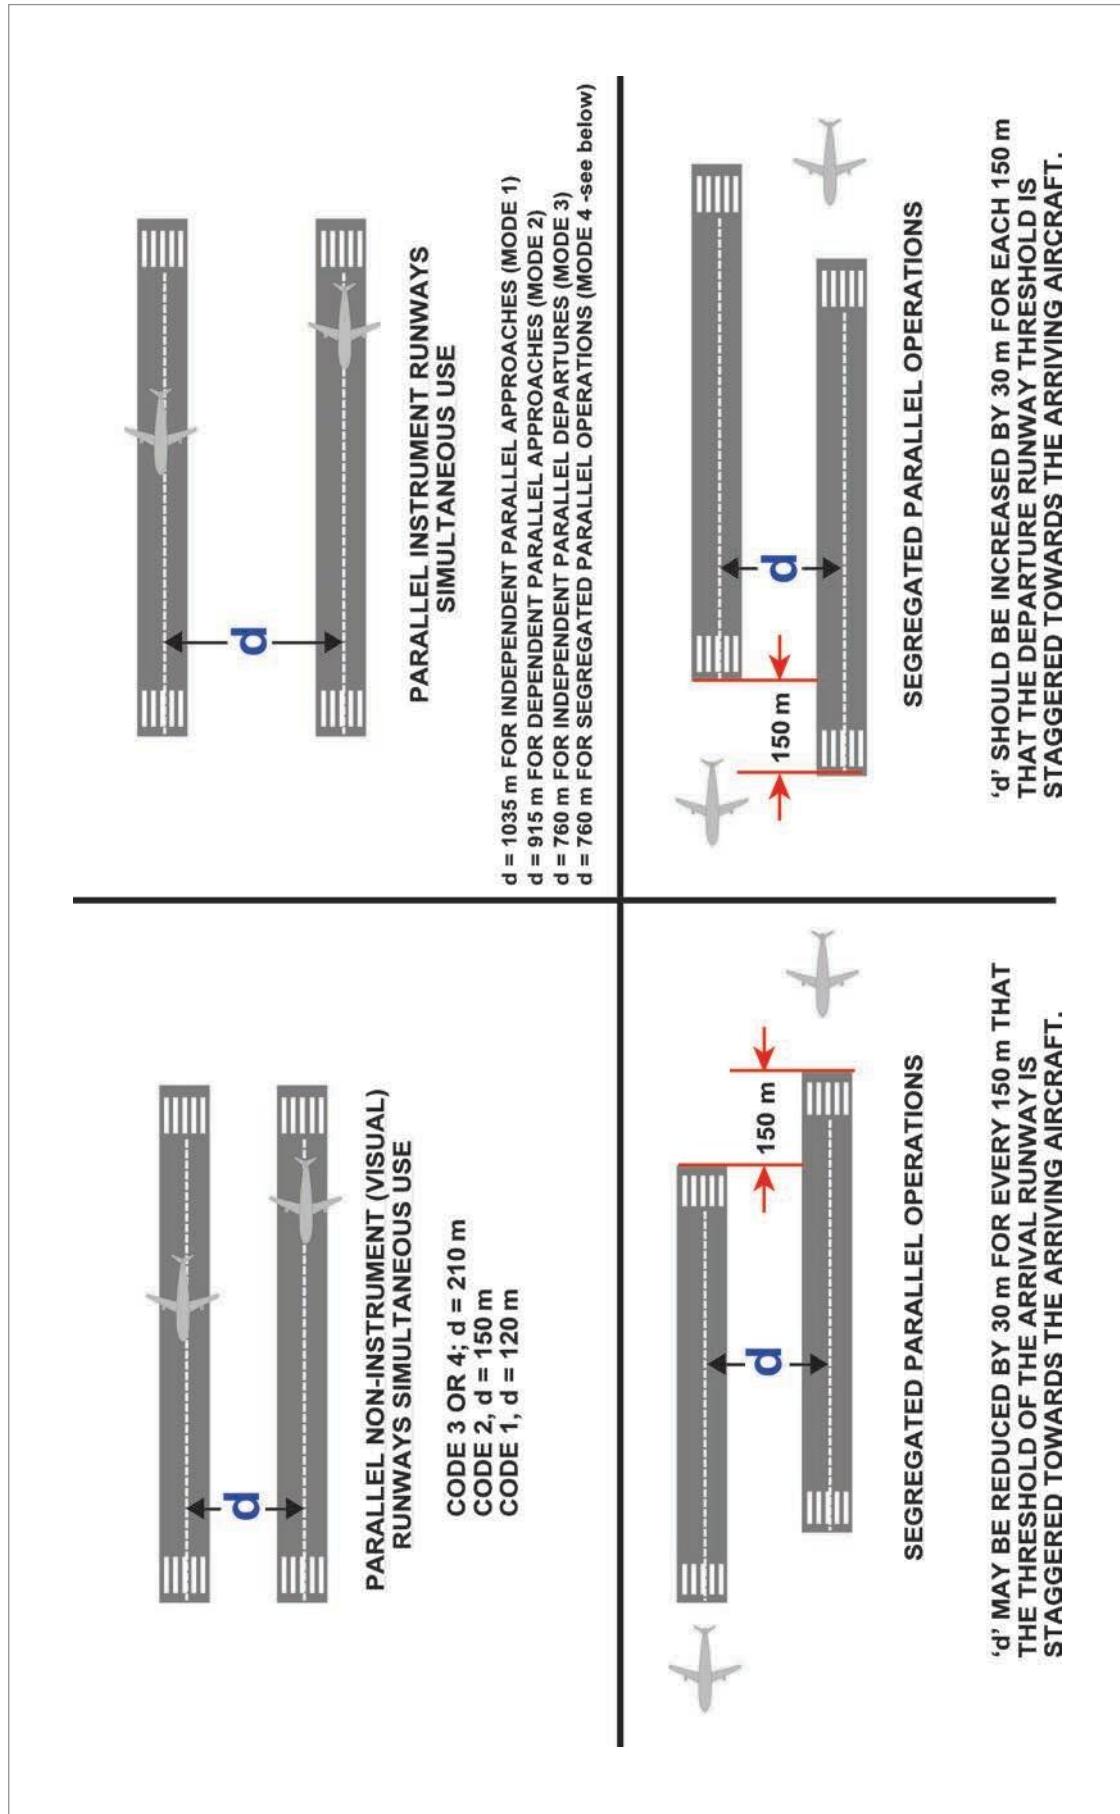


Figure 11.6

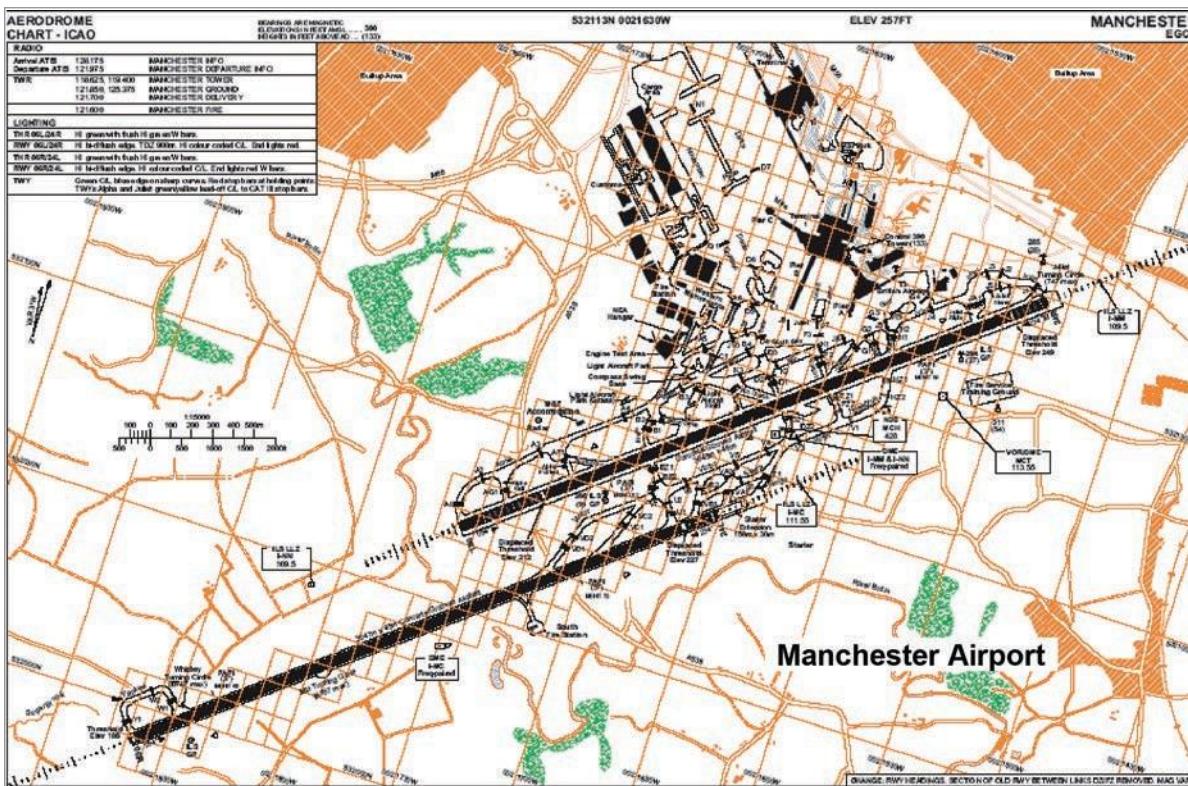


Figure 11.7

11.16 Wake Turbulence Considerations. The full implications of wake turbulence are covered in other subjects and later in these notes under the umbrella of ATC we will discuss wake turbulence separation. However, the use of parallel runways introduces problems concerning wake turbulence from aircraft using adjacent runways and this is a major limitation to the flexibility that parallel runway ops facilitate. Effectively, if the spacing between runways is less than 760 m or the flight paths of departing or arriving traffic cross at the same altitude (or within 1000 ft below the higher level) then wake turbulence separation must be applied.

Questions

1. Independent parallel approaches may be conducted to parallel runways provided that:
 - a. the missed approach track for one approach diverges by at least 20° from the missed approach track of the adjacent approach.
 - b. the missed approach track for one approach diverges by at least 25° from the missed approach track of the adjacent approach.
 - c. the missed approach track for one approach diverges by at least 45° from the missed approach track of the adjacent approach.
 - d. the missed approach track for one approach diverges by at least 30° from the missed approach track of the adjacent approach.
2. Dependent parallel approaches may be conducted to parallel runways provided that the missed approach track for one approach diverges by:
 - a. at least 45° from the missed approach track of the adjacent approach.
 - b. at least 25° from the missed approach track of the adjacent approach.
 - c. at least 15° from the missed approach track of the adjacent approach.
 - d. at least 30° from the missed approach track of the adjacent approach.
3. When independent parallel approaches are being conducted to parallel runways and vectoring to intercept the ILS localizer course, the vector shall be such as to enable the aircraft to be established on the ILS localizer course in level flight for:
 - a. at least 1.5 NM prior to intercepting the ILS glide path.
 - b. at least 2.5 NM prior to intercepting the ILS glide path.
 - c. at least 2.0 NM prior to intercepting the ILS glide path.
 - d. at least 3.0 NM prior to intercepting the ILS glide path.
4. For parallel runways the missed approach tracks must diverge by:
 - a. 15° .
 - b. 30° .
 - c. 45° .
 - d. 25° .
5. Where independent parallel runway operations are in progress, what is the maximum permitted interception angle to intercept the localizer?
 - a. 20° .
 - b. 25° .
 - c. 30° .
 - d. 45° .
6. The minimum distance between parallel runway centre lines for Simultaneous Independent Parallel Approaches (Mode 1) is:
 - a. 915 m.
 - b. 760 m.
 - c. 300 m.
 - d. 1035 m.

7. A minimum vertical separation shall be provided until aircraft are established inbound on the ILS localizer course and/or MLS final approach track. This minimum is, when independent parallel approaches are being conducted:
- 300 m.
 - 200 m.
 - 150 m.
 - 100 m.
8. A minimum radar separation shall be provided until aircraft are established inbound on the ILS localizer course and/or MLS final approach track. This minimum is, when independent parallel approaches are being conducted:
- 3 NM.
 - 5 NM.
 - 2 NM.
 - 2.5 NM.
9. Independent parallel approaches may be conducted to parallel runways provided that a no transgression zone (NTZ) of at least:
- 710 m is established between extended runway centre lines and as is depicted on the radar display.
 - 510 m is established between extended runway centre lines and as is depicted on the radar display.
 - 610 m is established between extended runway centre lines and as is depicted on the radar display.
 - 810 m is established between extended runway centre lines and as is depicted on the radar display.

Answers

1	2	3	4	5	6	7	8	9
d	d	c	b	c	d	a	a	c

Chapter

12

SSR and ACAS

SSR and ACAS.....	255
Secondary Surveillance Radar (SSR)	255
Airborne Collision Avoidance System (ACAS)	257
Questions	259
Answers	262

SSR and ACAS

Secondary Surveillance Radar (SSR)

12.1 Background. The technical requirements of the EASA Theoretical Knowledge syllabus for SSR, is covered in 062 Radio Navigation. However, the operation of SSR in the ATC environment is within the remit of Air Law. In the chapters of these notes concerning ATC, the use of radar will be discussed and it will be implied that where required, the radar derived information will be enhanced by the use of SSR. The modern SSR systems have been developed from the equipment used in WWII as a means of identifying ‘friend’ from ‘foe’ (IFF). The basic system was rather crude effectively giving the ground station a response from the aircraft indicating that the aircraft was fitted with the then highly secret equipment. As only ‘friendly’ aircraft had the equipment the radar operator could easily distinguish a friendly aircraft radar response from an enemy response. The airborne equipment was given the code name ‘parrot’ which explains some of the rather peculiar phraseology associated with the operation of a modern SSR system. Current SSR systems enable individual aircraft to be identified on a flight by flight basis with the additional facilities to pass data via the SSR system, indicate aircraft altitude and, using the redundant capacity of the SSR system, provide effective collision avoidance enhancement.

12.2 Carriage of Transponders. The airborne equipment is called a transponder (because it **transmits** a **response** to an interrogation). PANS OPS requires that where a serviceable transponder is carried in an aircraft, unless ATC instructs otherwise, it will be used at all times. Individual states may specify certain conditions where the carriage and operation of a transponder is mandatory. In either case, the operation of the equipment will be regardless of the provision of an ATC service.

12.3 Mode of Operation. The output codes of the SSR system consist of groups of 4 numbers in the range 0 - 7. The ground station (the interrogator) transmits a coded signal that prompts the aircraft transponder to reply. The overall SSR system has several different ‘modes’ of operation. The response will be mode Alpha with addition of mode Charlie. In addition, the military have other modes of operation of SSR which overlap with civilian usage. In order to correctly indicate the required response code, the mode as well as code should always be specified. The pilot is to respond with the mode and code. Typically a radar controller will request the mode and code as follows:

“G-CD, squawk Alpha two one six one”

The response to this by the pilot will be (mode and code):

“Squawking Alpha two one six one G-CD”

12.4 Squawk Ident. The transponder has a facility to enable the radar controller to automatically identify the specific radar contact using SSR other than by reliance on the specific code transmission. This facility may be activated by selection of the ‘Ident’ feature on the transponder controller in response to a request to “squawk Ident.” Pilots are not to squawk Ident except on instruction from the radar controller.

12.5 Special Codes. Because the airborne equipment can transmit any of 4096 individual coded responses, certain individual responses have been allocated specific meanings. The following special codes indicate:

- Emergency A/7700
- Radio failure A/7600
- Unlawful interference A/7500

Note : Should an aircraft have been radar identified by a transponder code and subsequently experience an emergency, the pilot should stick to the identified squawk.

In addition, the following reserved codes have the specific meanings:

- A/7000 Conspicuity. This is set when the aircraft is in an area where radar is used to provide ATS, but the pilot is not in receipt of a service (VFR outside CAS).
- A/2000 In the absence of any ATC direction or regional air navigation agreement (or when outside of a radar control/service area). This code is set when eastbound in the NAT region.
- A/0000 Unserviceable transponder. Set as directed by ATC.

12.6 Altitude Reporting Function (Mode Charlie). Mode Charlie encodes and transmits the aircraft altitude with reference to SPS (1013 hPa). Whenever the transponder is operating, mode Charlie should also be selected. At some point during the initial communications with ATC, the pilot will be requested to “say aircraft level for Charlie.” The pilot should report the aircraft level information accurate to the nearest full 100 ft. From this, the ATCO will determine the accuracy of mode Charlie data. If the mode Charlie data is within +/-300 ft of the stated level, mode Charlie is deemed to be accurate.

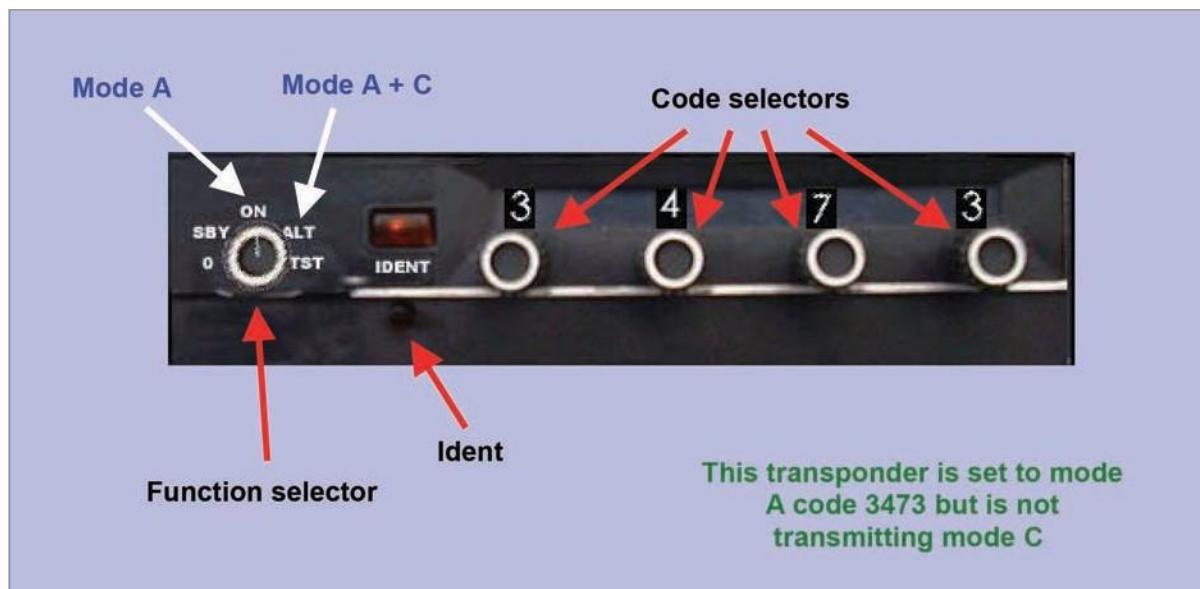


Figure 12.1

12.7 Transponder Failure. The failure of a transponder in the air will adversely affect the quality of the ATC service provided. Whilst every effort will be made to permit the flight to continue to the destination in accordance with the filed FP, it may be that ATC clearances may be restricted. If a transponder fails before departure and it cannot be rectified, the pilot is to:

- Inform ATS as soon as possible, preferably before the submission of the FP.
- Put 'N' in item 10 for the FP form.
- Comply with the published procedures for seeking exemption from the requirements for the mandatory carriage of a transponder.
- *If required by the ATS authority*, proceed directly to the nearest suitable aerodrome where the transponder can be repaired.

12.8 Code Selection. The preferred method of selecting/changing a code is to first set the option switch to standby (STBY) and then select the new code. On completion, reset the option switch to ON or ALT. Modern SSR installations have two controllers (designated A and B) with a switch that selects either the A controller or the B controller. In this case, the new code would be set on the controller not in use and the switch then set to that controller.

Airborne Collision Avoidance System (ACAS)

12.9 Background. The technical details of ACAS are covered in detail in 022 03 Warning and Recording. However, the response to the alerts generated by ACAS is a matter for consideration in Air Law. Basically, the system uses the redundant capacity of the SSR system to determine the proximity of another aircraft which is operating its SSR transponder. In areas where RVSM is applied, the use of ACAS is mandatory and operators are required to ensure compliance with the requirement.

12.10 Use of ACAS. ACAS is to be used by pilots in the avoidance of potential collisions, the enhancement of situational awareness, and the active search for (and visual acquisition of) conflicting traffic. It must be understood by pilots that the use of and the exploitation of ACAS alerts and the procedures applicable, do not relieve the pilot of the basic responsibility for the safety of the aeroplane. In all cases, the pilot will be expected to exercise his/her best judgment and full authority in choosing the best course of action to be taken.

12.11 Response to ACAS Alerts. ACAS generated alerts consist of Traffic Advisories (TAs) and Resolution Advisories (RAs). A TA is intended to alert the pilot to the possibility of an RA being generated. As such, pilots are not to manoeuvre the aircraft in response to a TA only. If an RA is generated, the pilot is to respond immediately unless in doing so the safety of the aeroplane would be jeopardized. In any case, stall warning, wind shear and GPWS alerts will have priority over ACAS. Pilots must be aware that visually acquired traffic may not be the cause of an RA and visual perception of an encounter may be misleading especially at night.

12.12 Conflict. Should there be a conflict of Resolution Advisories between the aircraft, pilots must follow the RA and the equipment should offer a Reversal Advisory.

12.13 ATC. As soon as would be permitted by the workload of the flight deck crew, ATC should be notified of the RA and the direction of any deviation from the current flight plan. Once the conflict is resolved, the aircraft should be promptly returned to the requirements of the current FP and again, ATC informed. Under some circumstance, it is possible that ATC issues instructions that are unknowingly contrary to ACAS RAs. It is vitally important that ATC is notified when an ATC instruction or clearance is not being followed because it conflicts with an ACAS RA.

12.14 Disregarding RAs. RAs may be disregarded only when the pilot visually identifies the potentially conflicting traffic and decides no deviation from the current flight path is needed. Nevertheless ATC must be informed in these circumstances.

12.15 Determination of Aircraft Level using Mode C. ICAO defines the standards for level determination using Mode C (altitude reporting function) as generally +/- 300 ft. However, most contracting states employ a higher standard, +/- 200 ft. The specific ICAO standards are:

- Level occupancy: Mode C indicates the allocated level +/- 300 ft
- Maintaining a level: Mode C indicates the allocated level +/- 300 ft
- Vacating a level: Mode C indicates that the aircraft is more than 300 ft from the previously allocated level
- Passing a level: Mode C indicates that the aircraft is within 300 ft of a specified level in the climb or descent
- Reaching a level: Mode C indicates that the aircraft is within 300 ft of the allocated level at the completion of a climb or descent

Questions

- 1. When acknowledging mode/code setting instructions, pilots shall:**
 - a. read back only the code to be set.
 - b. read back the mode and the code to be set.
 - c. use only the word ROGER.
 - d. use only the word WILCO.
- 2. The pilot of an aircraft losing two-way communications shall set the SSR transponder to Mode Alpha code:**
 - a. 7700
 - b. 7600
 - c. 2000
 - d. 7500
- 3. When the SSR transponder appears to be unserviceable and repair is not possible before departure, then:**
 - a. the aircraft would be permitted to depart to the nearest aerodrome where repair can be carried out.
 - b. the pilot must indicate the failure on the flight plan after which ATC will endeavour to provide for the flight to be continued.
 - c. the flight can only continue in the most direct manner.
 - d. the pilot will not be permitted to commence the flight.
- 4. What Mode A code shall be used to provide recognition of an aircraft emergency?**
 - a. Code 7500
 - b. Code 7600
 - c. Code 7000
 - d. Code 7700
- 5. Which of the following correctly lists special purpose codes that are used in conjunction with SSR?**
 - a. Distress 7700; Unlawful Interference 7600; Communications failure 7500
 - b. Distress 7500; Unlawful Interference 7700; Communications failure 7600
 - c. Distress 7600; Unlawful Interference 7500; Communications failure 7700
 - d. Distress 7700; Unlawful Interference 7500; Communications failure 7600
- 6. When an aircraft carries a serviceable transponder, the pilot is to operate the transponder:**
 - a. only when the aircraft is flying within the airspace where SSR is used for ATC purposes.
 - b. only when the aircraft is flying in CAS.
 - c. only when direct by ATC.
 - d. at all times during flight regardless of whether or not the aircraft is within or outside airspace where SSR is used for ATC purposes.

7. What is the transponder code for radio failure?
 - a. Mode A code 7500
 - b. Mode B code 7600
 - c. Mode A code 7700
 - d. Mode A code 7600

8. Which of the following is not a valid SSR mode A squawk?
 - a. A5555
 - b. A5678
 - c. A2345
 - d. A7777

Answers

1	2	3	4	5	6	7	8
b	b	b	d	d	d	d	b

Chapter

13

Airspace

Introduction.....	265
Control Areas and Zones.....	267
Classes of Airspace	268
Required Navigation Performance (RNP).....	270
Airways and ATS Routes	270
Questions	272
Answers	278

Introduction

13.1 Division of Airspace. All the airspace within a state must be contained within one or more Flight Information Regions (FIR). This is the basic unit of airspace within which the most basic form of Air Traffic Service, a Flight Information Service, is available. The alerting service is also available in an FIR. It is usual to give each FIR a name i.e. the London FIR, which geographically identifies the location of the FIR and its associated Area Control Centre (ACC) within which the Flight Information Centre is located. Where a State strictly enforces its sovereignty, the boundaries of that State's FIR(s) usually coincide with the national borders of the state. It is not unusual (in Europe, for instance) for FIR boundaries to be 'convenient' (i.e. following Lat/Long or median lines) rather than to follow often convoluted national borders. As well as FIRs, the airspace of a state will be divided into Control Areas (CTAs) and Control Zones (CTRs) and may include restricted, prohibited and danger areas. CTAs can exist in the form of corridors linking other CTAs; these are known as airways. The airspace in the vicinity of an aerodrome is known as an Aerodrome Traffic Zone (ATZ).



Figure 13.1

13.2 Upper Information Regions (UIRs). Where a state applies a division of airspace vertically, the upper portion of the airspace is defined as an Upper Information Region UIR. Such a division facilitates the application of different rules and separation standards to those of the underlying airspace. The basic assumption is that traffic using the UIR will be essentially in transit en route, whereas lower traffic will be arriving or departing and therefore manoeuvring. In Europe the division between the FIR and UIR is at FL195 whereas in the USA it is at FL180. The lower boundary of a UIR will always be a VFR FL.

13.3 Open FIR. Airspace within an FIR that is not defined as a CTA, CTR or other 'restricted' airspace is known as the open FIR. Within the open FIR the only air traffic services offered are a Flight Information Service and the Alerting Service.

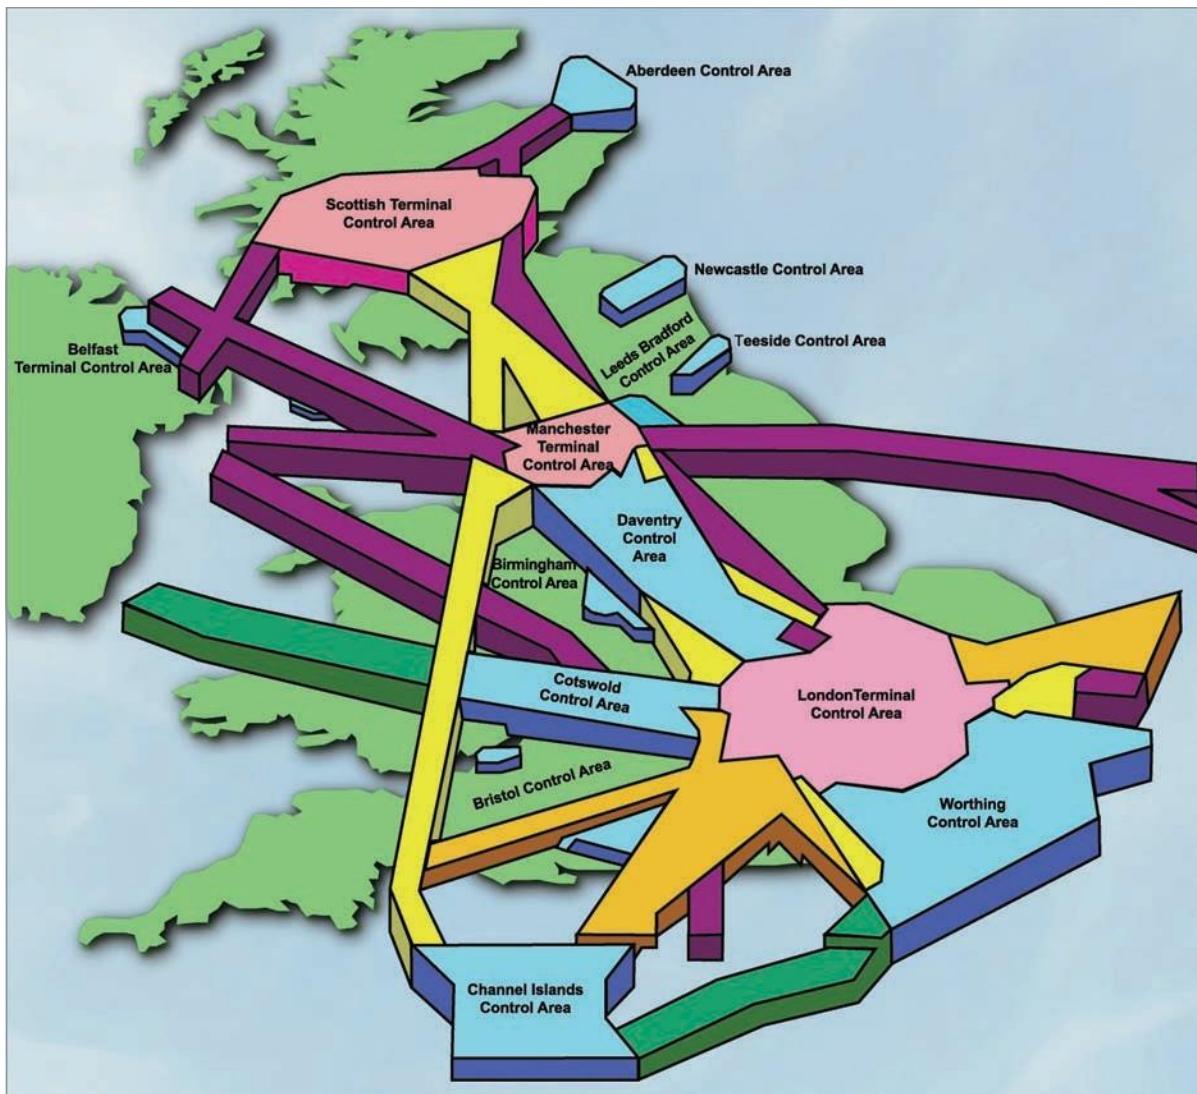


Figure 13.2

13.4 Oceanic Control Areas (OCAs). Over large areas of the world's Oceans e.g. the North Atlantic, traffic control has special problems (i.e. relatively poor navigation and of necessity HF communications requiring the use of radio operators). To solve the problems, or at least to make them manageable, the airspace above FL55 over the Oceans is designated as OCAs where strict rules are enforced and special navigation procedures are applied.


13.5 Prohibited, Restricted and Danger Areas. All Prohibited, Restricted and Danger Areas within a state are contained in the FIR(s) of that state and subject to notification of activity and change in status by NOTAM (see definition). Each area will be assigned an individual designator consisting of the country identifier, the letter P, R or D followed by a number in the range 001 - 999. For example in the UK a danger off the north coast of Cornwall is designated EG D001. EG is the ICAO identifier for the UK; D means a danger area and 001 is the unique number for that area.

Control Areas and Zones

13.6 CTAs and CTRs. Air Traffic Control is only provided inside what is known as controlled airspace (CAS). It is generally accepted that the upper limit of CAS is defined as FL660. CAS comprises CTAs and CTRs. The primary function of CTAs/CTRs is to facilitate ATC to IFR traffic.

13.7 CTAs. A CTA is airspace within which ATC is provided to controlled flights (see definition) which are ‘en route’ (i.e. not in the departure or approach phases of a flight). The service provided in a CTA is Area Control and is discussed in detail in Chapter 16. CTAs are usually established in the vicinity of major aerodromes and at the confluence of airways. As already mentioned, the linking corridors of airspace (airways) are also CTAs. CTAs are defined to exist from a level above ground level (AGL) to an altitude or FL. Where the limit of a CTA is defined as a FL, it will be a VFR FL. The lowest level of a CTA must be at least 200 m (700 ft) AGL. The airspace within a CTA may be sub-divided to allow different types of operation to exist. The upper portion of a CTA will be predominantly for traffic that is in transit whilst the lower levels will be dedicated to aircraft entering the ‘manoeuvring’ airspace from above or leaving it. The lower part of the CTA will be used to route aircraft arriving to the individual IAFs for instrument approaches, and to separate departing aircraft from one aerodrome from arriving traffic to another.

13.8 CTRs. CTRs are established in the vicinity of aerodromes to provide ATC to arriving and departing controlled traffic. Within a CTR the ATC service is provided by Approach controllers and is mandatory. A CTR may serve more than one aerodrome. Because a CTR is a zone, the base of any zone is defined as ground level or MSL. Where the upper limit is defined as a FL it would always be a VFR FL. A CTR should be big enough to encompass the airspace required to provide the service and will usually extend at least 5 NM from the aerodrome reference position in the direction from which approaches are made. If established within the lateral limits of a CTA, the CTR must extend upwards to the lower limit of the CTA.

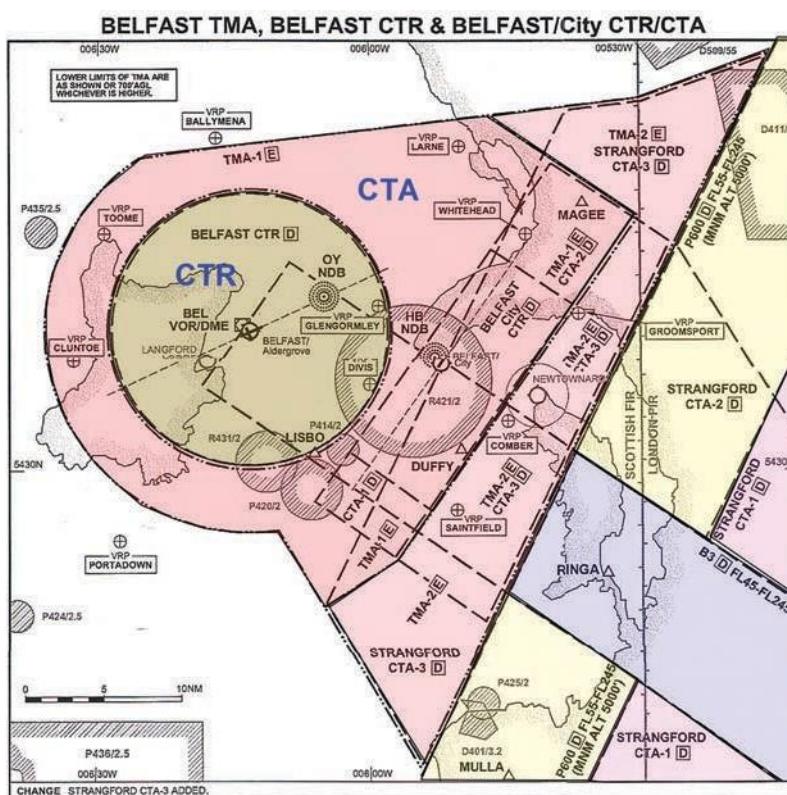

Airway P600

Airway B3

Figure 13.3

13.9 Upper Control Areas. Where a CTA extends above FL195, the rules applicable may be those pertaining to the lower airspace.

13.10 Control Units. The provision of ATC to flights in CAS is the responsibility of the air traffic control units (ATCUs) within the designated airspace. Area Control Centres provide ATC within CTAs and Approach Control Units and Aerodrome Control Towers provide the service required in CTRs.

Classes of Airspace

13.11 Introduction. In 1980, ICAO introduced a uniform system of classification of airspace to replace the disparate systems of airspace reservations throughout the world. The ICAO system classifies airspace in 7 categories from A to G each class dependent upon the rules applicable, the ATC service provided, separation standards applicable and the utilization of the airspace.

13.12 Controlled Airspace (CAS). Classes A - E are classified as controlled airspace within which air traffic control is provided to controlled flights. In these classes, IFR flights are always controlled flights. In classes A and B all permitted flights are controlled whereas in classes C and D, ATC is provided to VFR traffic only when conflicting with IFR traffic. CAS is defined as CTAs (including airways) and CTRs. ICAO states that class E airspace cannot be used as a CTR.

13.13 Advisory Airspace. Class F airspace is defined as advisory airspace in which advisory ATC is provided to IFR traffic which requests the service (participating traffic). All IFR traffic flying in class F airspace is required to file a FP but no ATC clearance will be issued. The service is limited to the provision of advice and information and only participating flights are separated. Class F airspace is considered to be temporary, established during a trial period whilst it is determined if a full ATC service is applicable.

13.14 SVFR. All classes of airspace which support the establishment of a CTR permit flight under SVFR. SVFR is covered in detail in chapter 5 - Rules of the Air.

13.15 Non-radio. Classes E - G permit VFR traffic to fly without VHF 2-way RTF communications. In areas where the ATC authority consider that the provision of the alerting service is essential (over remote areas or over expansive areas of sea), routes may be established along which (at the appropriate altitude) 2-way RTF communications will be available and traffic will be advised to maintain radio contact with an air traffic services unit.

13.16 Speed Limit. A speed limit of 250 kt IAS is applied to VFR traffic in class C and all traffic in classes D - G. The limit is applicable to traffic flying below 10 000 ft (FL100) only.

13.17 Flight Information Service (FIS). In classes C - G, a Flight Information Service is available to aircraft that either request the service, or are otherwise known to ATC. This service provides collision alerts but leaves it to the pilot to take the necessary (as per the rules of the air) avoiding action. Information considered necessary relating to collision avoidance is known as traffic information. In classes A and B airspace, FIS is available but is of a lesser priority to the provision of ATC. Where the provision of traffic information is considered to be of the same priority as ATC, the traffic concerned is known as 'essential traffic,' and the information relating to such traffic is called 'essential traffic information.'

13.18 Airspace Summary. The table below summarizes the requirements and restrictions of the 7 classes of airspace.

CLASSES OF AIRSPACE

Class	Rules	Service	Clearance	Separation	FIS	Speed Limit (NOTE 1)	Radio Watch	CTR SVFR	Use
A	IFR	ATC	YES	ALL		NO	YES		CTA: CTR AIRWAYS; ROUTES
B	IFR	ATC	YES	ALL		NO	YES		CTA: CTR AIRWAYS; ROUTES
C	IFR	ATC	YES		IFR-IFR IFR-VFR VFR-IFR	NO	YES		CTA: CTR (AIRWAYS) (NOTE 5)
D	IFR	ATC (NOTE 4)	YES		IFR-IFR VFR-IFR VFR-VFR	YES	YES		CTA: CTR (AIRWAYS) (NOTE 5)
E	IFR	ATC	YES		IFR-IFR VFR-VFR	YES	NO (NOTE 2)		CTA: (AIRWAYS) (NOTE 5)
F	IFR	ADV ATC	NO		IFR-IFR (NOTE 3)	ALL	YES	NO	ADVISORY ROUTES
G	IFR	FIS	NO	NONE		ALL	YES	NO	OPEN FIR; FIS ROUTES

Note 1: General Speed Limit is 250 kts IAS enforced below FL100 (10000ft)
 Note 2: Separation as far as is practical
 Note 3: Service to participating IFR traffic only (non participating IFR to file FP and maintain 2-way comms)
 Note 4: Radar information/advice may be provided to augment FIS in CAS
 Note 5: An airway will adopt the classification of the surrounding airspace when it passes through a CTA

Figure 13.4

Required Navigation Performance (RNP)

13.19 Definition. RNP is a numerical representation of the navigational accuracy required within ATS airspace of a State, and is prescribed on the basis of regional air navigation agreements (RANs). It is based on a 95% containment factor, implying that an aeroplane will be within the required RNP for a period of not less than 95% of the time the aircraft is within the airspace concerned. Alternatively, it can be implied that not less than 95% of the aircraft flying in a given airspace will be navigated within the stated RNP factor. The state is responsible for specifying the RNP value for its airspace.

13.20 Theory. The RNP factor relates to navigational accuracy relating to the aircraft plotted position in nautical miles. For instance, RNP4 implies that the aircraft will be within 4 NM of the plotted position for 95% of the time the aircraft is within the airspace concerned. The applicable RNP factors are: RNP1; RNP4; RNP10; RNP12.6; RNP20. All ATS airspace is classified for RNP. Where VOR/DME is used for airways or RNAV navigation, the RNP specified is RNP5. Within the classification of RNP however, RNP5 does not exist. It was envisaged that VOR/DME would cease to be used for RNAV by the year 2005 and be replaced by more accurate systems offering at least RNP4. This has proved not to be the case and VOR/DME at RNP5 will continue for the foreseeable future. The use of radar permits RNP1 whereas GPS theoretically offers a relative value of RNP0.3. The value of RNP12.6 is derived from the historical accuracy of multiple IRS used for transatlantic navigation.

13.21 Application. A good example of how RNP is used is the track spacing used for the NAT tracks in the MNPSA of the North Atlantic Oceanic regions. The airspace is classified as RNP20 therefore the aircraft flying the routes will be within 20 NM of the plotted position for not less than 95% of the flight time. This means that the airspace reserved to a NAT track must be 20 NM either side of the specified route. The additional safety ‘buffer’ will be equal to the RNP so the track spacing will be $20 + 20 + 20 = 60$ NM.

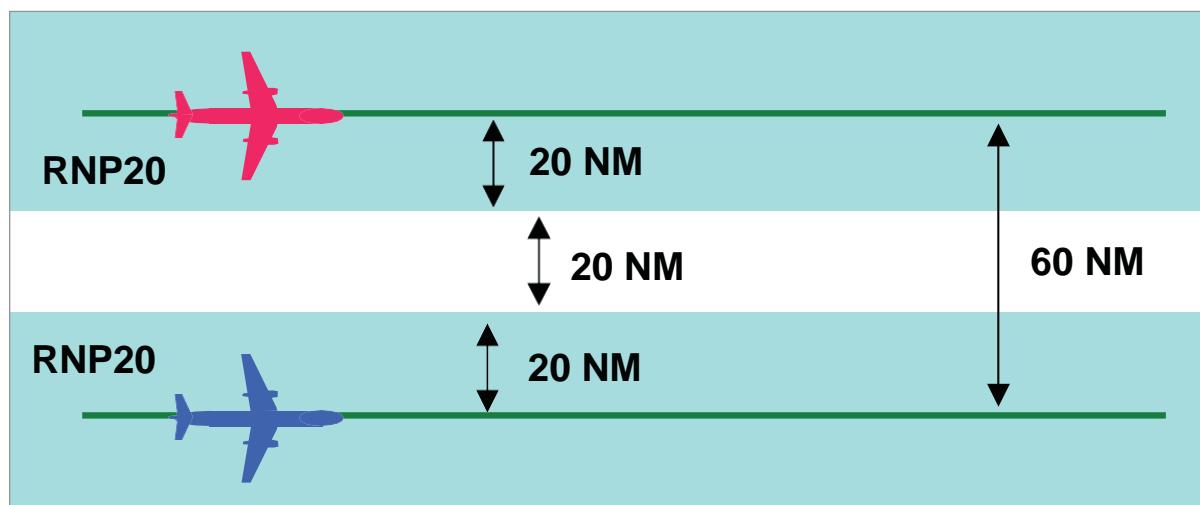


Figure 13.5

Airways and ATS Routes

13.22 Establishment. The corridors linking CTAs are called airways. These have evolved by a process of demand as has the road structure in the UK. The airways carry the en route traffic and are therefore primarily concerned with traffic in the cruise rather than manoeuvring traffic. The ATC problem is relatively simple and involves separating traffic heading in opposite

directions, and the allocation of FLs to same direction traffic. Whilst the upper limit of an airway may be defined as the lower limit of the UIR, the lower limit will be dictated by airspace restrictions, terrain avoidance considerations and the needs of other air users (e.g. the military).

Historically, airways served the purpose of linking CTAs with CAS, but in the modern environment of increasing traffic density, airways create as many problems as they solve. They create choke points, reduce flexibility, create delays, increase transit times and reduce fuel efficiency. With the use of smaller aeroplanes and many regional airports the use of airways is declining and a considerable amount of traffic (especially in the UK) now flies off-route making use of military radar facilities. Under the 'open skies' policy in Europe and the 'gate-to-gate' operations philosophy encouraged by Eurocontrol, the use of airways will continue to decline effectively making all airspace above about 6000 ft CAS.

13.23 Designation. Historically, airways are 'beacon hopping' routes (from VOR to VOR). During the 70s and 80s advances were made in area navigation (RNAV) techniques and RNAV airways using waypoints based on VOR/DME information, were established. Whilst beacon hopping routes (non-RNAV routes) still exist, nearly all the airways introduced in the latter part of the 20th century were RNAV routes. Routes are also classified as being regional (routes which exist between states in one ICAO region) or non-regional (routes which do not extend beyond the borders of a state). The options are therefore:

- Regional non RNAV routes
- Regional RNAV routes
- Non-regional non RNAV routes
- Non-regional RNAV routes

13.24 Other ATS Routes. Other ATS routes also include SIDs, STARs and low level helicopter routes. All these are given specific designators which can be referred to in ATC communications and in FPs.

13.25 Route Designators. Airways are given a 'designator' which defines the type of airway, gives it a unique number and provides additional information about the type of route. The specific route designator indicates what type of route is defined and, in addition, a unique number (1 - 999).

A prefix can be added from the following list:

- U = Upper air route
- S = Supersonic transport route
- K = Helicopter low level route

Additionally suffixes may be applied from the list:

- F = Advisory route (Class F airspace)
- G = FIS route (Class G airspace)
- Y = RNP1 route at and above FL200 where turns between 30° and 90° are to be made within the allowable RNP tolerance of a tangential arc defined by a radius of 22.5 NM.
- Z = RNP1 route at and below FL190 where turns between 30° and 90° are to be made within the allowable RNP tolerance of a tangential arc defined by a radius of 15 NM

Questions

1. What is the speed restriction in class B airspace under FL100 (10 000 ft) in both VFR and IFR?
 - a. 250 kt IAS.
 - b. 200 kt IAS.
 - c. 260 kt TAS.
 - d. Not applicable.
2. In what class of airspace are all aircraft separated from one another and VFR is permitted?
 - a. D
 - b. E
 - c. A
 - d. B
3. What are the VMC limits for class B airspace?
 - a. Clear of cloud and in sight of the surface.
 - b. 8 km flight visibility, 1000 ft vertically and 1500 m horizontally from cloud.
 - c. 5 km flight visibility, 1000 ft vertically and 1500 m horizontally from cloud.
 - d. The same as class D.
4. A control zone extends laterally from the centre of an aerodrome or aerodromes in the direction of approaching aircraft for at least:
 - a. 7 NM.
 - b. 5 NM.
 - c. 15 NM.
 - d. 20 NM.
5. What is the speed limit below 10 000 ft in Class E airspace?
 - a. 250 kt TAS.
 - b. 250 kt IAS.
 - c. Not applicable.
 - d. 200 kt IAS.
6. FIS is provided to aircraft concerning collision hazards in the following classes of airspace:
 - a. C, D, E, F and G.
 - b. F and G only.
 - c. F.
 - d. A, B, C, D, E, F and G.
7. For VFR flight in class E airspace:
 - a. ATC clearance and two way radio are required.
 - b. two-way radio not required.
 - c. ATC clearance and/or two way radio are required.
 - d. ATC clearance is required.

8. Danger, Prohibited and Restricted areas must be designated by:
- country identifier, followed by P/D/R, followed by a number.
 - country identifier followed by P/D/R.
 - P/D/R followed by the identifier.
 - country identifier followed by numbers.
9. In which class or classes of airspace would VFR traffic be separated from other VFR traffic?
- B
 - B; C; D; E
 - B; C
 - B; C; D
10. What is the primary function of a CTR and a CTA?
- The controlling of all traffic close to an aerodrome.
 - The controlling of all traffic in Class F airspace.
 - The controlling of all traffic in Class F & G airspace.
 - The controlling of IFR traffic.
11. What is the speed limit for VFR traffic in class C airspace below 10 000 ft?
- not applicable.
 - 250 kt TAS.
 - 250 kt IAS.
 - 270 kt IAS.
12. What type of airspace extends from the surface to a specified upper limit?
- Control area.
 - Air Traffic Zone.
 - Control zone.
 - TMA.
13. What class of airspace can you get an advisory service for IFR traffic and an FIS for VFR traffic?
- A
 - D
 - C
 - F
14. The lowest height of the base of a CTA above ground or water is:
- 300 m.
 - 150 m.
 - 200 m.
 - 500 m.
15. In which class or classes of airspace is IFR separated from IFR and all other traffic gets FIS?
- A
 - B
 - D
 - D and E.

16. The lower boundary of an UIR must be:
- an IFR flight level.
 - a VFR flight level.
 - is not specified.
 - at any flight level.
17. What is the upper limit of a CTA?
- 2000 ft.
 - 3000 ft.
 - 5000 ft.
 - A VFR Flight Level.
18. What is the maximum speed permitted in class B airspace?
- Not applicable.
 - 260 kt IAS.
 - 250 kt IAS.
 - 250 kt only below FL100 (10 000 ft).
19. What class of airspace permits both IFR and VFR, and IFR participating traffic receives advisory ATC for separation?
- F
 - E
 - G
 - D
20. In which airspace(s) can you fly VFR without a radio?
- E & G.
 - D.
 - E, D.
 - C, D, E.
21. In which class of airspace is IFR and VFR permitted, IFR is separated from all traffic, VFR separated from IFR and VFR receives traffic information about other VFR traffic?
- A
 - B
 - C
 - D
22. In class C airspace, what flights are separated?
- All flights.
 - IFR from all flights; VFR from VFR.
 - IFR from IFR; VFR from IFR and VFR from VFR.
 - IFR from IFR; IFR from VFR; VFR from IFR.

23. What service is provided to IFR/VFR traffic in class E airspace?
- ATC to IFR and VFR.
 - ATC to IFR; FIS to VFR.
 - ATC to IFR and radio equipped VFR; FIS to non radio VFR.
 - ATC to IFR; Advisory ATC to IFR in VMC; FIS to VFR.
24. A Control Zone has to exist to at least:
- 5 NM from the centre of the airfield or airfields concerned in the direction from where approaches can be made.
 - 20 NM from the centre of the airfield or airfields concerned in the direction from where approaches can be made.
 - 15 NM from the centre of the airfield or airfields concerned in the direction from where approaches can be made.
 - 10 NM from the centre of the airfield or airfields concerned in the direction from where approaches can be made.
25. Whenever flying below 3050 m (10 000 ft) AMSL in Class C Airspace the speed restriction for IFR is:
- 240 kt IAS.
 - 250 kt TAS.
 - not applicable.
 - 250 kt IAS.
26. Airspace, in which IFR and VFR flights are permitted and in which IFR flights are separated from other IFR flights and receive traffic information concerning VFR flights, and VFR flights receive traffic information concerning all other flights, is classified as:
- C
 - B
 - A
 - D
27. What is the speed limit (IAS) in airspace E?
- 250 kt for IFR and VFR, below FL100.
 - 250 kt for IFR only, below FL195.
 - 250 kt for IFR and VFR, at all altitudes.
 - 250 kt for IFR only, below FL100.
28. Controlled airspace, in which IFR and VFR flights are allowed and where all flights are separated from each other by ATC, is classified as:
- A
 - D
 - B
 - E

29. Flight information service provided to flights shall include the provision of information concerning collision hazards to aircraft operating in airspace classes:
- A to G (inclusive).
 - C to G (inclusive).
 - F and G.
 - A to E (inclusive).
30. Which of the following is true concerning the rules and regulations in the UIR compared with the airspace below?
- The same rules apply if the airspace is of the same class.
 - They are agreed by the Air Navigation Meeting.
 - They are identical to the airspace below.
 - They do not have to be the same as those in the airspace below.
31. A Flight Information Service shall be provided to all aircraft which are likely to be affected by the information which are:
- provided with ATC or otherwise known to the relevant ATS unit.
 - provided with Air Traffic Control only.
 - known to the relevant ATS units only.
 - known to the relevant ATS unit or have filed a flight plan.
32. Who is responsible for designating the RNP for an airway?
- The State.
 - The State + ICAO.
 - ICAO.
 - ATC.
33. RNP4 is a containment value meaning that a percentage of aircraft operating along a particular route would be within 4 NM of the centre line all the time. What is that percentage?
- 98%.
 - 93%.
 - 95%.
 - 90%.
34. RNP (Required Navigation Performance) is prescribed:
- by states but not on the basis of Regional Air Navigation agreements (RANs).
 - by ICAO on the basis of RANs and applied by the state.
 - by RANs.
 - by states based on RANs.
35. An RNP1 route designated with suffix Z indicates that for the route at or below FL190 and all turns shall be made within the allowable RNP tolerance of a tangential arc between the straight leg segments with a radius of:
- 10 NM for turns between 30° and 90°.
 - 15 NM for turns between 30° and 90°.
 - 22.5 NM for turns between 30° and 90°.
 - 30 NM for turns between 30° and 90°.

36. An RNP1 route designated with suffix Y indicates that for the route at or above FL200 and all turns shall be made within the allowable RNP tolerance of a tangential arc between the straight leg segments with a radius of:

- a. 10 NM for turns between 30° and 90°.
- b. 15 NM for turns between 30° and 90°.
- c. 22.5 NM for turns between 30° and 90°.
- d. 30 NM for turns between 30° and 90°.

37. Who organizes the RNP specification for airspace?

- a. The State in which the airspace is located.
- b. ICAO.
- c. The State + ICAO.
- d. States who agree what the RNP should be.

Answers

1	2	3	4	5	6	7	8	9	10	11	12
d	d	d	b	b	a	b	a	a	d	c	c

13	14	15	16	17	18	19	20	21	22	23	24
d	c	d	b	d	a	a	a	c	d	b	a

25	26	27	28	29	30	31	32	33	34	35	36
c	d	a	c	b	d	a	a	c	d	b	c

37
a

Chapter

14

Air Traffic Services

Introduction.....	281
Air Traffic Control.....	282
ATC Clearances	282
Control of Persons and Vehicles at Aerodromes	284
The Flight Information Service	285
The Alerting Service	287
Procedures	288
Questions	290
Answers	296

Introduction

14.1 The Air Traffic Services (ATS). Annex 11 to the Chicago Convention lays down the SARPs for the establishment of an Air Traffic Control services in each of the contracting states. Each state is required to establish an authoritative body responsible for setting up and regulating the operation of the ATS of the state. In the UK the body responsible is the UK CAA and the operating organization is National Air Traffic Services (NATS).

14.2 Document 4444. Because the SARPs of Annex 11 are (by necessity) insufficiently detailed, PANS ATM (Air Traffic Management) (Document 4444) is published by ICAO as the definitive reference for the establishment and management of an ATS. PANS ATM is mainly directed to ATS personnel; however, flight crews should be familiar with the content of the sections relating to ATM; ATS and separation; ADS and CPDLC; ATIRs and RPL.

14.3 Objectives. The objectives of an ATS are to:

- Prevent collisions between aircraft;
- Prevent collisions between aircraft on the manoeuvring area and obstructions thereon;
- Expedite and maintain an orderly flow of air traffic;
- Provide advice and information useful for the safe and efficient conduct of flights;
- Notify appropriate organizations regarding aircraft in need of SAR aid, and assist such organizations as required.

14.4 ATS Divisions. ATS comprises three divisions:

- Air Traffic Control Service
- Flight Information Service
- Alerting Service

14.5 ATC Service. The ATC Service is divided into three sub-divisions:

- **Area Control Service.** The provision of ATC for controlled flights within CTAs and en route in FIRs and UIRs.
- **Approach Control Service.** The provision of ATC for controlled flights associated with arrival and departure. Usually provided within CTRs.
- **Aerodrome Control Service.** The provision of ATC to aerodrome traffic at controlled aerodromes.

14.6 The Need for ATS. An ATS is set up in consideration of the following:

- The types of traffic involved
- The density of traffic
- The meteorological conditions
- Other relevant factors (e.g. mountainous terrain, extensive sea areas, limited navigational facilities etc...)

14.7 ACAS. The carriage of ACAS by aircraft in a given area will not be taken into consideration when determining the level of service required to be established.

Air Traffic Control

14.8 Applicability. Air Traffic Control (ATC) is the service provided to controlled flights inside controlled airspace or to aerodrome traffic at controlled aerodromes. ATC is always provided to IFR traffic inside CAS whereas ATC is only provided to VFR flights in classes B, C and D. Additionally, all SVFR flights are provided with ATC.

14.9 ATS Units. ATS units comprise Air Traffic Control Units (ATCUs) and Flight Information Centres (FICs). The ATS unit providing ATC are ATCUs and those providing flight information are FICs. The ATCU providing area control (ATC to en route traffic) is known as an Area Control Centre (ACC). It is usual to prefix the unit with a geographical name e.g. London ACC. Within a CTR the unit providing approach control is the approach control office usually located in a control tower at an aerodrome. Combined approach control offices exist where approach control for multiple aerodromes/CTRs is provided e.g. London Terminal Control Centre (LTCC) which provides approach control for Heathrow, Gatwick, Stansted, Luton, London City, Biggin Hill and Northolt. Aerodrome Control is provided by an aerodrome control tower. Within an FIR, the provision of FIS and the Alerting service may be from the same ATSU.

14.10 Ground Control. The ground movement of aircraft and vehicles is the responsibility of the aerodrome controller. However, the provision of services to aircraft moving on the manoeuvring area of an aerodrome and on the apron may be delegated to a ground movements controller usually to limit the aerodrome RTF to flight safety messages concerning the take-off and landing of aircraft. At major aerodromes, the movement of aeroplanes and vehicular traffic on the apron may be delegated to an Apron Management Service. In this case, ATC would commence once the aircraft moves onto the taxi-way and will cease when the pilot takes instructions from a marshaller.

14.11 Time in ATC. ATC units throughout the world are required to report time in hours, minutes and seconds with time referenced to co-ordinated universal time (UTC). This uses the 24 hour clock. UTC has been previously known as ‘Zulu’ time or Greenwich Mean Time. 1200UTC would be the time at which the sun is directly overhead the Greenwich meridian (0° E/W). The use of one standard time reference (rather than local time) makes the handling of flight plans simple and facilitates co-ordination of ATC clearances.

14.12 Time Accuracy. ATSU clocks and timing devices are to be checked to ensure that the times indicated are within +/- 30 seconds of UTC at all times. Time checks round up or down to the nearest minute.

ATC Clearances

14.13 Definition. An ATC clearance is authorization for an aircraft to proceed under conditions specified by an ATCU.

14.14 Purpose. Clearances are issued solely for expediting and separating air traffic and are based on known traffic conditions. This includes traffic moving on the ground at an airport as well as airborne traffic. If a clearance given to a pilot is unsuitable (or impossible to comply with), an alternative clearance may be requested. If possible, such a clearance will be offered but the pilot must understand that alternative clearances may result in delays being incurred. A clearance must be issued early enough so that there is sufficient time for the clearance to be complied with.

14.15 Basic Responsibility. When flying in accordance with an ATC clearance, the pilot is not relieved of the basic responsibility for ensuring the safety of the aircraft, including terrain avoidance, and that of other air users. Likewise, the Rules of the Air apply to any flight proceeding in accordance with an ATC clearance. When an aircraft is under radar vectoring, the radar controller will issue clearances such that the required obstacle clearance will exist at all times.

14.16 Application. The practical application of ATC clearances is to provide a method whereby ATC gives instructions to aircraft to facilitate separation. In general, within CAS, IFR flights are always separated from other IFR flights. In classes B and C, IFR is separated from VFR and in class B, VFR is separated from other VFR. Within a CTR it is normal practice to separate SVFR flights.

14.17 Contents of a Clearance. Clearances are to contain positive and concise data and shall be phrased in a standard manner. An ATC clearance should include:

- The aircraft identification as shown on the FP;
- Any clearance limit;
- The route of the flight;
- Level allocated for the flight (or for the initial/current part of the flight);
- Any other necessary instructions or information, such as SIDs, STARs, communications or clearance expiry time;
- Transition level in approach clearances if so prescribed or when requested by the pilot;
- QNH (except when it is known that the aircraft has already received the information): when first cleared to an altitude below the transition level; in approach clearances; in clearances to enter the traffic circuit; in taxi clearances for departing aircraft.

In order to expedite the delivery and reading back of clearances, standard phraseology may be used such as "**cleared via flight planned route to**" or "**cleared via Midhurst departure 2G**" or "**cleared via Ockham 1D arrival**". In such cases the pilot will be required to refer to the reference document or procedure plate.

14.18 Clearance Co-ordination. The responsibility for issuing a route clearance for a flight rests with the ACC of the FIR in which the flight originates. Ideally, before issuing a clearance, an ATCU would co-ordinate (agree) a clearance with all the other ACCs en route. In practice this is not feasible especially for long intercontinental flights. In this case, the ACC would issue a clearance limited to the initial FIR or where the flight time in the originating FIR is short (e.g. flights originating from Heathrow entering the Paris FIR), it would be essential to co-ordinate with at least the next FIR to be entered. Where it has not been possible to co-ordinate the clearance for the entire route, the aeroplane would be given clearances on a rolling (downstream) basis from FIR to FIR. Under certain circumstance it may not be possible for the current ACC to obtain a downstream clearance from the subsequent FIR in which case, the aircraft may be requested to originate communications with the downstream FIR and obtain a clearance prior to entering the airspace of that FIR.

14.19 Clearance Read-back. Flight crews are required to ‘read back’ to the air traffic controller, safety related parts of ATC clearances and instructions which are communicated by voice. The following items must always be read back:

- ATC route clearances
- Clearance relating to the use of runways (i.e. land, take off, cross, enter and back-track, hold short of)
- Runway in use; altimeter settings; SSR codes; level instructions; heading and speed instructions; transition levels

14.20 Air Traffic Flow Management (ATFM). Using modern data processing systems and prior flight planning, especially using repetitive flight plans (RPLs), it is now possible to predict traffic loading in each sector of the route structure of the airspace within an FIR. Where this exceeds that which can normally be accommodated, the ATFM unit in the ACC will advise flight crews and operators that delays are likely or that restrictions may be applied. Such information is disseminated generally so that operators can see that any disruption is incurred equitably. In practice, predictable delays are handled by delaying the take-off of an aeroplane such that the delay is absorbed on the ground rather than in the terminal phase of a flight. Clearly, this has economic, environmental and safety advantages and is the most obvious practical advantage of ATFM.

Control of Persons and Vehicles at Aerodromes

14.21 Rules of the Air. The movement of persons or vehicles including towed aircraft on the manoeuvring area of an aerodrome is to be controlled by the aerodrome control tower as necessary to avoid hazards to them or to aircraft landing, taxiing or taking off.

14.22 Low Visibility Procedures. When Low Visibility Operations are in force (ground visibility below 800 m) persons and vehicles operating on the manoeuvring area will be kept to a minimum. Special procedures will be implemented to safeguard the ILS/MLS sensitive areas when CAT II and CAT III precision instrument operations are in progress (ground visibility less than 550 m).

14.23 Emergency Vehicles. Emergency vehicles proceeding to the scene of an accident or incident will have priority over all other surface movement traffic.

14.24 Vehicles on the Manoeuvring Area. The following rules cover the movement of vehicles on the manoeuvring area of an aerodrome:

- Vehicles and vehicles towing aircraft are to give way to aircraft that are landing, taxiing or taking off.
- Vehicles are to give way to vehicles towing aircraft.
- Vehicles will give way to other vehicles in accordance with ATS unit instructions.
- Notwithstanding the above, vehicles and vehicles towing aircraft are to comply with instructions issued by the aerodrome control tower.

The Flight Information Service

14.25 Introduction. As already stated, the basic unit of airspace within a state is the Flight Information Region (FIR). In theory, an FIR can exist without CAS, in which case the only services provided to air traffic would be a flight information service (FIS) and the alerting service. Even where ATC is provided inside CAS, FIS will be provided although at a lower priority to ATC. The provision of any service relies on a regular flow of information and the provision of FIS relies heavily on the Aeronautical Information Service (AIS) established by each state in accordance with Annex 15. AIS is covered in Chapter 17 of these notes.

14.26 FISOs. Outside of CAS and at uncontrolled aerodromes, flight information is provided by Flight Information Service Officers (FISOs) operating from a Flight Information Centre (FIC). Where a FIS is provided the name of the office providing the service will be suffixed ‘information.’ FISOs are licensed to provide the service but are not permitted to offer any service that can be described as ATC. The only exception to this is the provision of ATC to aircraft taxiing on the ground at a controlled aerodrome but this is strictly limited to movements prior to entering the runway for take-off. The FIS provided in the London FIR is by ‘London Information’ in three geographic sectors on dedicated VHF frequencies.

14.27 Operation. Flight Information is provided to all air traffic that is likely to be affected by the information. Specifically:

- Aircraft which are provided with an ATC service;
- Aircraft which are otherwise known to the relevant ATS units.

The information provided by the FIS is to include:

- SIGMET and AIRMET (see definition below);
- Volcanic eruption activity;
- Release of radioactive or toxic material into the atmosphere;
- Information concerning change of serviceability of radio navigation aids;
- Information concerning change of conditions concerning aerodromes;
- Information concerning unmanned free balloons;
- Other information considered pertinent to safety.

Additionally, information is to be provided concerning:

- Weather conditions reported or forecast at departure, destination or alternate aerodromes;
- Collision hazards to aircraft operating in classes C, D, E, F and G airspace;
- For flights over sea areas (when requested by pilots), details of surface vessels.

Apart from the delivery of FIS on discrete VHF frequencies, the majority of ‘routine’ FIS is broadcast by the Operational Flight Information Service (OFIS).

14.28 AIRMET. According to Annex 11, AIRMET is defined as:

‘Information concerning the occurrence or expected occurrence of specified en route weather phenomena which may affect the safety of low-level aircraft operations and which was not already included in the forecast issued for low-level flights in the FIR concerned or sub-area thereof.’

14.29 SIGMET. According to Annex 11, AIRMET is defined as:

'Information issued by a meteorological watch office concerning the occurrence or expected occurrence of specified en route weather phenomena which may affect the safety of aircraft operations.'

14.30 OFIS. OFIS is broadcast in three specific areas:

- HF OFIS
- VHF OFIS
- ATIS

Both HF OFIS and VHF OFIS broadcast VOLMET (METAR, SIGMET and TAF) information for specific aerodromes (or groups of aerodromes) in accordance with a schedule. The table below shows the VHF OFIS Volmet coverage in the London, Scottish and Shannon FIRs.

Location	Frequency	Airports covered
London Main	135.375	Amsterdam, Brussels, Dublin, Glasgow, London LGW, London LHR, London STN, Manchester, Paris CDG
London North	126.6	Blackpool, East Midlands, Leeds Bradford, Liverpool, London LGW, Manchester, Newcastle, Isle of Man, Teeside
London South	128.6	Birmingham, Bournemouth, Bristol, Cardiff, Jersey, Luton, Norwich, Southampton, Southend
Scottish	125.725	Aberdeen, Belfast BFS, Edinburgh, Glasgow, Inverness, London LHR, Prestwick, Stornoway, Sumburgh
Dublin	127.0	Dublin, Shannon, Cork, Belfast BFS, Glasgow, Prestwick, Manchester, London LHR, London LGW

Figure 14.1 Volmet broadcasts

HF OFIS Volmet is broadcast by the Oceanic Control Centres (e.g. Shanwick) and covers the aerodromes used by transiting traffic.

14.31 ATIS. Automatic Terminal Information Service broadcasts (ATIS) consist of two types of broadcast: Voice ATIS and Data ATIS. The preparation and dissemination of ATIS is the responsibility of ATS.

14.32 Voice ATIS. This is provided at aerodromes where there is a requirement to reduce voice channel communications. ATIS broadcasts comprise:

- One broadcast serving arriving aircraft; or
- One broadcast serving departing aircraft; or
- One broadcast serving both arriving and departing aircraft; or
- Two broadcasts serving arriving or departing aircraft where one broadcast would be exceptionally long.

14.33 Transmission. Voice ATIS is usually transmitted on a discrete VHF frequency (displayed on all aerodrome plates). It may be transmitted on the voice channel of a relevant VOR (e.g. departure ATIS on the VOR used as the primary VOR for a SID; or arrival ATIS on the VOR that serves as the IAF for a procedure). ATIS is never transmitted on the voice channel of ILS. Voice ATIS is continuous and repetitive.

14.34 ATIS Information. ATIS information normally relates to a single aerodrome and the broadcast should not last longer than 30 seconds. It is updated immediately any significant change occurs. ATS is responsible for making sure that the service is available and up to date. Each sequence of ATIS broadcasts will have a specific sequential broadcast designator letter. On initial contact with ATC, aircraft are to acknowledge receipt of the relevant ATIS with reference to the current information designator.

"Oxford Tower G-ABCD bay 27, information Charlie, QNH 1003 request start"

14.35 Cloud Information. The ATIS broadcast will only include cloud cover when the cloud base is below 5000 ft or the highest MSA (whichever is higher), or when cumulonimbus cloud is present.

14.36 Acknowledgment of a Non-current ATIS. Should an aircraft acknowledge an ATIS that is no longer current, any element of information that needs up-dating shall be transmitted to the aircraft by the ATCU without delay.

The Alerting Service

14.37 Introduction. Within an FIR, the provision of service to aircraft requesting assistance or indicating that they may require assistance is the responsibility of the Alerting Service of ATS. This service is provided by any ATS unit (ACC, ATCU, FIC etc...) regardless of the type of service normally offered. The Alerting Service is the link between the aircraft needing assistance, and the services that can provide that assistance. Where necessary, the provision of a service to aircraft in need of assistance will have priority over all other air traffic services.

14.38 Application. The Alerting Service is provided to:

- All aircraft provided with ATC;
- As far as practicable, all aircraft that have filed a FP or are otherwise known to ATC, and
- Any aircraft known (or believed to be) the subject of unlawful interference.

FICs and ACCs will serve as the central point for collecting all information relevant to an aircraft state of emergency, and forwarding such information to the appropriate rescue co-ordination centre (RCC). If an emergency arises when an aircraft is under the control of the aerodrome or approach controller, that office will notify the ACC or FIC which in turn will notify the RCC. If the urgency of the situation dictates, the aerodrome or approach office will set in motion all necessary local emergency organizations that can give immediate assistance.

14.39 Communication of Information. Where it is established by an ATS unit that an aircraft is in a state of emergency in the vicinity of other aircraft, the ATS unit will inform the other aircraft of the nature of the emergency as soon as possible. If an aircraft is being subjected to unlawful interference, no reference will be made in ATC communications unless it has been referred to in communications from the aircraft in the first place, and such communication will not make the situation worse.

14.40 Stages of Emergency. There are three stages of alert (known generically as the emergency phase), these are:

- **Uncertainty phase (code word: INCERFA).** This stage exists when no communication has been received from an aircraft within a period of 30 minutes after a time at which normal communication should have been made, or the aircraft fails to arrive at the destination within 30 minutes of the estimated arrival time.
- **Alert phase (codeword: ALERFA).** The alert phase would be declared following the uncertainty phase (except when evidence exists that would allay apprehension as to the safety of the aircraft or its occupants) when:
 - Subsequent attempts to make communication have failed and there is not further news of the aircraft; or
 - The aircraft fails to land within 5 minutes after the issuing of a landing clearance; or
 - Information has been received that the operating efficiency of the aircraft is impaired (but not that a forced landing is likely); or
 - It is known that an aircraft has been subject to unlawful interference.
- **Distress phase (codeword: DETRESFA).** The distress phase would be declared following the alert phase (except where there is reasonable certainty that the aircraft and its occupants are not threatened by grave and imminent danger) when:
 - Further attempts at communication are unsuccessful and widespread enquiries indicate the probability that the aircraft is in distress; or
 - The fuel on board is considered to be exhausted; or
 - Information is received that the operating efficiency of the aircraft is impaired to the extent that a forced landing is likely; or
 - Information is received that the aircraft is about to or has made a forced landing.

Procedures

14.41 Speed Control. The speed of an aircraft may be prescribed by ATC as a means of maintaining separation. Where speed control is applied, adequate notice is to be given to flight crews to ensure compliance. Prolonged use of speed control is not recommended as this can affect fuel usage. When applied, changes in speed should be limited to those necessary to maintain separation minima or spacing. At or above FL250 speed adjustments should be in multiples of M 0.01 and below FL250 in multiples of 10 kt IAS. On intermediate and final approach, speed changes are to be limited to minor adjustments of 20 kt IAS. Speed control is not to be applied to aircraft after passing a point 4 NM from the threshold of the landing runway.

14.42 Automatic Dependent Surveillance (ADS). Automatic Dependent Surveillance-Broadcast (also called ADS-B) is a system by which aeroplanes constantly broadcast their current position and altitude, category of aircraft, airspeed, identification, and whether the aircraft is turning, climbing or descending, over a dedicated radio data link to the Controller.. The ADS system was developed in the 1990s. It relies on data from the Global Positioning System, or any navigation system that provides an equivalent or better service. The maximum range of the system is line-of-sight, typically less than 200 nautical miles (370 km). The ADS transmissions are received by the Air Traffic Service unit serving the airspace in which the aircraft is operating, and all other ADS equipped aircraft within reception range.

Basic ADS consists of:

- Latitude
- Longitude
- Altitude
- Time
- Figure of Merit (accuracy)

14.43 AIREP. Where required, operational and meteorological information can be transmitted in the form of an air-report (AIREP). AIREPs consist of routine and special reports. A routine report has three sections:

- Section 1 - Position report
- Section 2 - Operational information (ETA and endurance)
- Section 3 - Meteorological information

Section 1 is mandatory and section 2 is transmitted when requested by the operator or considered necessary by the pilot. Section 3 is transmitted when the aircraft has been requested to make routine met reports at specific en route points.

14.44 AIREP SPECIAL. Special air-reports (AIREP SPECIAL) are reported by all aircraft which encounter any of the following hazards:

- Severe turbulence;
- Severe icing;
- Severe mountain wave;
- Thunderstorms without hail that are obscured, embedded, widespread or in line-squalls;
- Heavy dust or sand storms;
- Volcanic ash cloud.

14.45 Air Traffic Incident Reports (ATIR). In order to provide a medium for reporting, investigation and feedback of incidents occurring whilst an aircraft is under ATC, a system of ATIRs has been established. The ATIRs relate to:

- Aircraft proximity reports (AIRPROX)
- ATC procedure reports
- ATC equipment reports

AIRPROX reports may be originated by either the pilot, AIRPROX(P), or by a controller, AIRPROX(C). From a pilot, the initial report is filed by RTF and the report completed on the ground.

14.46 Priority An aircraft known or believed to be in a state of emergency, including being subject to unlawful interference, shall be given priority over other aircraft.

14.47 Change of Callsign ATC may require an aircraft to temporarily change its callsign should there be a chance of confusion with another aircraft of a similar callsign on the same frequency.

Questions

- 1. What is the definition of Distress?**
 - a. An emergency condition where an aircraft is in grave and imminent danger and requires immediate assistance.
 - b. Persons on board an aircraft are in imminent danger and the flight cannot be continued.
 - c. The aircraft will be unable to land at a suitable aerodrome.
 - d. The aeroplane has a message to transmit concerning the safety of person on board or within sight.
- 2. What defines the alert phase (ALERFA)?**
 - a. A situation in which an aeroplane and passengers are known to be in serious and imminent danger.
 - b. A situation where it is certain that fuel is exhausted.
 - c. A situation where apprehension exists about an aeroplane and its safety.
 - d. A situation in which an aeroplane and its passengers are in emergency.
- 3. Voice ATIS is transmitted on a:**
 - a. discrete VHF frequency only.
 - b. discrete VHF frequency or on voice on VOR.
 - c. VHF frequency or on ILS frequency.
 - d. ILS only.
- 4. Who is responsible for initiating the Alert Phase?**
 - a. FIC or the relevant ATCU.
 - b. The State and ATC.
 - c. The Area Control and the RCC.
 - d. RCC and the FIR.
- 5. What is the definition of the Emergency Phase?**
 - a. The Distress Phase.
 - b. The Alarm Phase.
 - c. The Alert Phase.
 - d. A generic term meaning as the case maybe the Uncertainty Phase, the Alert Phase or the Distress Phase.
- 6. FIS is provided to aircraft concerning collision hazards in the following classes of airspace:**
 - a. C, D, E, F, G.
 - b. F and G only.
 - c. F.
 - d. A, B, C, D, E, F, G.
- 7. What are the three elements of an Air Traffic Control Service?**
 - a. Radar, SAR and FIS.
 - b. Area, Approach and Aerodrome.
 - c. Radar, Procedural and FIS.
 - d. Radar, Procedural and Alerting Service.

8. **What does an ATSU consist of?**
- a. An ACC and FIC.
 - b. An ATCU and FIC.
 - c. A combined radar unit and ATC tower.
 - d. An ACC and Approach Control.
9. **How often is an ATIS updated?**
- a. Every 30 minutes for VFR, every 60 minutes for IFR.
 - b. When there is a change in information, irrespective of content or intensity.
 - c. When the minimum ceiling and visibility are below VFR minimum.
 - d. When there is a significant change in information.
10. **Which of the following statements concerning the alerting service is correct?**
- a. The alert phase is initiated when an aircraft fails to communicate within 30 minutes.
 - b. FIS and the alerting service may be provided by the same ATCU.
 - c. The distress phase is always initiated for aircraft subject to unlawful interference.
 - d. All other traffic in the vicinity of an aircraft subjected to unlawful interference is to be notified.
11. **An aircraft has been cleared to land and fails to do so within 5 minutes of the ETA of landing and communications have not been re-established with the aircraft. What phase of the Alerting Service will be declared by the ATSU?**
- a. DETRESFA.
 - b. INCERFA.
 - c. ALERFA.
 - d. EMERGFA.
12. **When an aircraft encounters difficulty, the initiation of the alert phase is the responsibility of:**
- a. Air Traffic Co-ordination Centres.
 - b. Air Traffic Control Units and Flight Information Centres.
 - c. Search and Rescue Co-ordination Centres.
 - d. Air Traffic Control Centres only.
13. **According to ICAO Annex 11, what does the following statement define: "Information concerning the occurrence or expected occurrence of specified en route weather phenomena which may affect the safety of low-level aircraft operations and which was not already included in the forecast issued for low-level flights in the FIR concerned or sub-area thereof."**
- a. NOTAM.
 - b. SIGMET Information.
 - c. AIRMET Information.
 - d. En route Weather Report.
14. **A Flight Information Service shall be provided to all aircraft which are likely to be affected by the information and which are:**
- a. provided with ATC or which are otherwise known to the relevant ATS unit.
 - b. provided with ATC.
 - c. known to the relevant ATS unit.
 - d. known to the relevant ATS unit and which have filed a FP.

15. Aircraft "A" with ATC clearance is flying in VMC in a CTR. Aircraft "B" without ATC clearance is converging at approximately the same altitude. Which aircraft has the right of way?
- Aircraft "A" if "B" is on its right.
 - Aircraft "A" regardless of the position of "B".
 - Aircraft "B" regardless of the position of "A".
 - Aircraft "B" if "A" is on its left.
16. Air Traffic Control Centres issue clearances for the purpose of:
- providing advisory ATC.
 - expediting and separating traffic.
 - achieving separation between IFR flights.
 - providing FIS.
17. ATSU clocks and other time recording devices shall be checked as necessary to ensure correct time to within UTC plus or minus:
- 10 seconds.
 - 1 minute.
 - 30 seconds.
 - 15 seconds.
18. The Alerting Service is to be provided for:
- all aircraft having filed a FP or otherwise known to ATC, as far as is practicable.
 - for all controlled flights; to any aircraft known or believed to be the subject of unlawful interference; and all aircraft having filed a FP or otherwise known to ATC, as far as is practicable.
 - only to aircraft provided with ATC.
 - only to aircraft known or believed to be the subject of unlawful interference.
19. The Approach Control Service is an ATC service:
- provided for arriving and departing controlled flights.
 - provided for arriving and departing IFR flights.
 - provided for IFR and VFR flights within a CTR.
 - provided for IFR flights within an ATZ.
20. A Flight Information Region (FIR) is airspace within which the following services are provided:
- Flight Information Service; Alerting Service; Advisory Service.
 - Flight Information Service only.
 - Flight Information Service and Advisory Service.
 - Flight Information Service and Alerting Service.
21. An AIREP comprises a number of sections. What is the content of part 1?
- Noted weather.
 - Flight identification and noted weather.
 - Urgent messages.
 - A position report.

22. Clearances will be issued by ATC for the purpose of:
- providing alerting services.
 - achieving separation between air traffic.
 - providing a flight information service.
 - providing advisory ATC.
23. Air Traffic Service Unit (ATSU) means:
- ATCUs and Air Services reporting units.
 - FICs and Air Services reporting units.
 - ATCUs; FICs and Air Services reporting units.
 - ATCUs and FICs.
24. What is the content of section 2 of an AIREP?
- ETA and endurance.
 - EET and endurance.
 - Present position and ETA.
 - ETA for the FIR boundary and endurance.
25. The Air Traffic service is provided for the purpose of:
- preventing collisions between aircraft, between aircraft and obstacles on the manoeuvring area and expediting and maintaining an orderly flow of air traffic.
 - applying separation between aircraft and expediting and maintaining an orderly flow of air traffic.
 - preventing collisions between controlled aircraft and expediting and maintaining an orderly flow of air traffic.
 - avoiding collisions between all aircraft and expediting and maintaining an orderly flow of air traffic.
26. The Alerting Service is provided by:
- the ATS unit responsible for the aircraft at that moment.
 - the ATS unit responsible for the aircraft at that moment when it can transmit on 121.5 MHz.
 - only ATC units.
 - Area Control Centres.
27. When is ATIS updated?
- Only when the weather conditions change enough to require a change in the active runway or instrument approach in use.
 - Only when the ceiling and/or visibility changes by a reportable value.
 - Upon the receipt of any significant change.
 - Every 30 minutes if weather conditions are below those for VFR, otherwise hourly.
28. Who is responsible for an ATC clearance to be safe in respect of terrain avoidance?
- ATC.
 - The ATSU when accepting the FP.
 - The PIC.
 - The Operator.

- 29. Which of the following statements regarding the Alerting Service is correct?**
- a. The distress phase is established when an aircraft is known or believed to be the subject of unlawful interference.
 - b. Aircraft in the vicinity of an aircraft that is known or believed to be the subject of unlawful interference, shall be informed about this.
 - c. The Alerting Service and FIS are often provided by the same ATSU.
 - d. The Alert phase is established when no communication has been received from an aircraft within a period of 30 minutes after the time communications should have been received.
- 30. ATIS broadcasts for departing and arriving aircraft are to contain cloud cover information when:**
- a. the cloud base is below 5000 ft or the highest MSA whichever is higher.
 - b. the cloud base is below 3000 ft or the highest MSA whichever is higher, or there is cumulonimbus reported.
 - c. the cloud base is below 5000 ft or the highest MSA whichever is higher, or there is cumulonimbus reported.
 - d. the cloud base is below 10 000 ft or the highest MSA whichever is higher, or there is cumulonimbus reported.
- 31. ATIS broadcast:**
- a. shall not be transmitted on the voice channel of a VOR beacon.
 - b. shall only be transmitted on a discrete VHF frequency.
 - c. shall not be transmitted on the voice channel of ILS.
 - d. shall be transmitted on the voice channel of ILS, on a discrete VHF frequency or on the voice channel of a VOR beacon.
- 32. Whenever ATIS is provided, the preparation and dissemination of the ATIS message is the responsibility of:**
- a. the Met office serving the aerodrome.
 - b. both ATC and the Met office.
 - c. whichever office is prescribed by the state.
 - d. ATS.
- 33. Flight information provided to flights shall include provision of information concerning collision hazards to aircraft operating in airspace classes:**
- a. F and G only.
 - b. C to G inclusive.
 - c. A to G inclusive.
 - d. A to E inclusive.
- 34. The phases of the Alerting Service to an aircraft in emergency or believed to be in emergency are:**
- a. uncertainty phase; urgency phase; distress phase.
 - b. uncertainty phase; urgency phase; emergency phase.
 - c. uncertainty phase; alert phase; urgency and distress phase.
 - d. uncertainty phase; alert phase; distress phase.

35. The ATIS broadcast should not exceed:

- a. 3 minutes.
- b. 30 seconds.
- c. 1 minute.
- d. 2 minutes.

36. An aerodrome Flight Information Service:

- a. can only relay ATC instructions to aircraft on the ground or in the air.
- b. can supply limited services to the users but not ATC under any circumstances to aircraft in the air.
- c. can supply ATC but is not subject to authority supervision.
- d. is the same as ATC but is only provided at an aerodrome.

Answers

1	2	3	4	5	6	7	8	9	10	11	12
a	c	b	a	d	a	b	b	d	b	c	b

13	14	15	16	17	18	19	20	21	22	23	24
c	a	d	b	c	b	a	d	d	b	d	a

25	26	27	28	29	30	31	32	33	34	35	36
a	a	c	c	c	c	c	d	b	d	b	b

Chapter

15

Separation

Concept of Separation	299
Vertical Separation	299
Horizontal Separation	301
Radar Separation	311
Procedural Wake Turbulence Separation	311
Radar Wake Turbulence Separation.....	316
Visual Separation in the Vicinity of Aerodromes	316
Stacking	320
Questions	322
Answers	330

Concept of Separation

15.1 General Provisions for the Separation of Controlled Traffic. Separation methods and minima are stipulated in ICAO PANS Document 4444. Within CAS the ATC service will make sure that all controlled flights (flights provided with ATC) are separated from each other to comply with the first requirement of the service - to prevent collisions between aircraft. Separation can be either:

- Vertical or
- Horizontal or
- Composite (a mixture of both - see para. 16.3)

It is applied to a defined standard, known as the separation minima. Separation is also applied to achieve spacing between aircraft to counter the effects of wake vortices and to facilitate timed arrivals and departures from busy aerodromes. Separation is applied:

- Between all flights in class A and B airspaces
- Between IFR flights in class C, D and E airspaces
- Between IFR flights and VFR flights in class C airspace
- Between IFR flights and special VFR flights
- Between special VFR flights, when so prescribed by the appropriate ATS authority

Note: *IFR flights in VMC during daylight hours in classes D and E airspace may be cleared to climb and descend whilst maintaining own separation.*

15.2 Minimum Separation. Clearance will not be given to execute any manoeuvre that would reduce the spacing between two aircraft to less than the separation minimum applicable. Larger separations than the specified minima will be applied whenever wake turbulence or exceptional circumstances such as unlawful interference call for extra precautions. Whenever the type of separation or minimum used to separate two aircraft cannot be maintained, action shall be taken to ensure that another type of separation exists, or is established, when the previously applied separation becomes insufficient.

15.3 Composite Separation. In circumstances where (usually due to an emergency or a serious deterioration in operating capability) the aircraft cannot maintain the necessary requirements for normal navigation, a compromise separation standard may be specified (in accordance with a RAN agreement), whereby the aircraft will take up altitude and track spacing not less than half that specified in the standards for normal separation. The RTF failure procedure for the NAT region specifies composite separation; likewise, the suggested procedure for unlawful interference where the pilot cannot maintain two-way RTF also specifies composite separation.

15.4 Essential Traffic Information. Essential Traffic is defined as that controlled traffic to which ATC separation is applicable but to which in relation to another controlled flight is not, or will not, be separated by the required minimum. ‘Essential traffic information’ will be passed to the controlled flights concerned when they constitute essential traffic to each other.

Vertical Separation

15.5 Vertical Separation Minima. Wherever possible, ATC will arrange vertical separation to maximize the use of airspace and minimize horizontal use of airspace. Vertical separation is obtained by requiring aircraft using the same altimeter setting to fly at different levels expressed in terms of flight levels or altitudes dependent upon the magnetic track of the aircraft. The vertical separation minimum (VSM) is:

- Within designated airspace (subject to RAN agreement (RVSM)), a nominal 300 m (1000 ft) below FL410 or a higher level where so prescribed for use under specified conditions, and a nominal 600 m (2000 ft) at or above this level; and
- Within all other airspace: a nominal 300 m (1000 ft) below FL290 and a nominal 600 m (2000 ft) at or above this level.

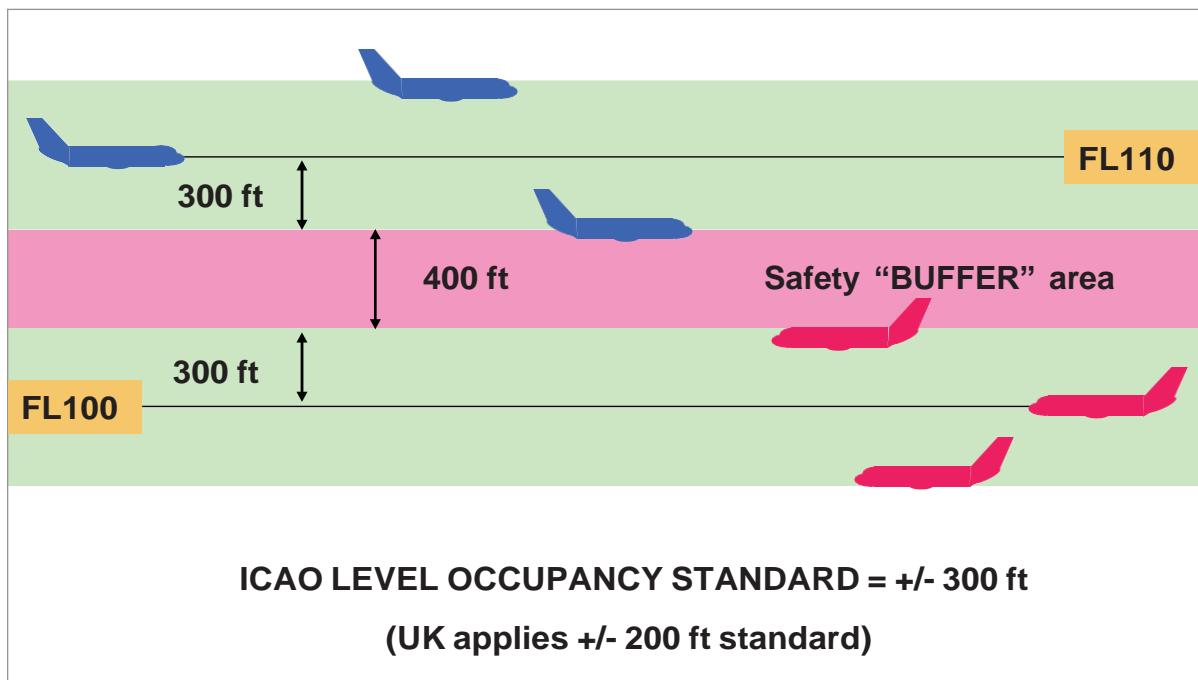


Figure 15.1 ICAO level occupancy standard

15.6 RVSM Cruising Levels. The RVSM cruising levels defined for domestic airspace (outside of the NAT MNPSA) are those between FL290 and FL410 inclusive. In other words, both FL290 and FL410 are RVSM levels.

15.7 Minimum Cruising Level. Except when specifically authorized by the appropriate authority, cruising levels below the minimum flight altitudes (established by the State) shall not be assigned. Area Control Centres shall, when circumstances warrant it, determine the lowest usable flight level or levels for the whole or parts of the control area for which they are responsible, and use it when assigning flight levels and pass it to pilots on request. Unless otherwise prescribed by the State concerned, the lowest usable flight level is that which corresponds to, or is immediately above, the established minimum flight altitude. The portion of a control area for which a particular lowest usable flight level applies is determined in accordance with air traffic services requirements.

15.8 Assignment of Cruising Level. An ACC will normally allocate only one cruising level to an aeroplane (except where cruise climb is authorized), for flight in the control area or for flight entering another control area.

15.9 Level Change. If a change in cruising level is required, the aircraft is to request a level change en route (after initial clearance received). Aircraft, cruise climb authorized, will be cleared to operate between two levels. On ATS routes (airways) extending beyond the control area, level changes are to be effected over a radio navigation aid. If an aircraft has been cleared into a CTA below the minimum cruising level for that airspace, the ACC will issue a clearance to climb even though the pilot has not requested it. When necessary, an aircraft may be cleared to change cruising level at a specified time, place or rate.

15.10 Same Destination. If practicable, cruising levels of aircraft bound for the same destination will be assigned to facilitate the correct approach sequence at the destination.

15.11 Priority. An aircraft at a cruising level will have priority over aircraft requesting that level. When two or more aircraft are at the same level, the preceding aircraft will have priority

15.12 Allocation Separation. An aircraft may be assigned a level previously occupied by another aircraft after the latter has reported vacating it. In the case of severe turbulence or cruise climb, the assignment will be withheld until the other aircraft has reported at another level separated by the required minimum.

15.13 Vertical Separation During Ascent or Descent. Pilots in direct communication with each other may, with their concurrence, be cleared to maintain a specified vertical separation between their aircraft during ascent or descent.

15.14 Clearance to Maintain Own Separation in VMC. If requested by the pilot of an aircraft and it is agreed by the pilot of the other aircraft and authorized by ATC, a flight operating in classes D and E airspace in VMC during daylight, may be cleared to climb or descend maintaining own separation from one other aircraft providing:

- The clearance is specifically for the portion of flight below 10 000 ft;
- Alternative instructions are passed to the pilot to cover loss of VMC;
- If conditions deteriorate to the limits of VMC, the pilot is to inform ATC that he/she is complying with the alternative instructions.

Horizontal Separation

15.15 Definition. Horizontal separation relates to the distance between aircraft in the horizontal plane. This may be:

- Longitudinal (aircraft following the same route), where the separation standard is based on time (or distance) along track between aircraft, or
- Lateral.

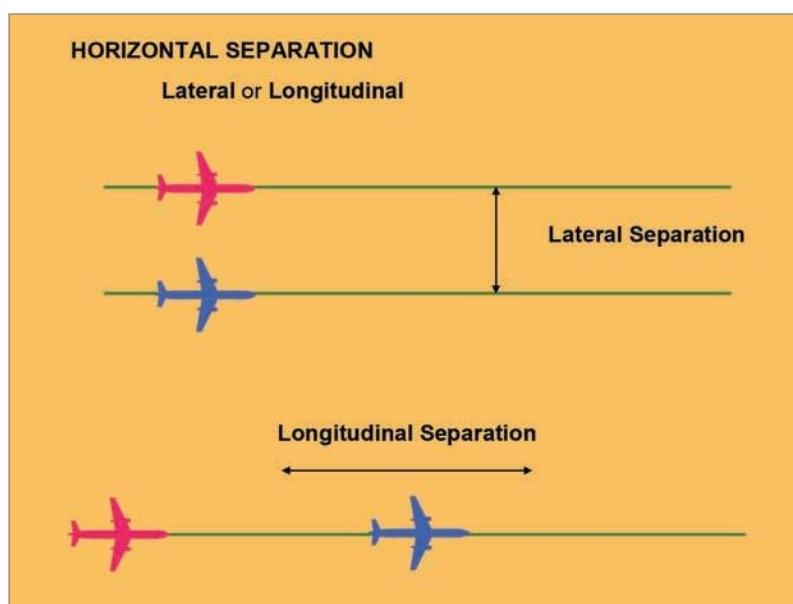


Figure 15.2

15.16 Lateral Separation. Lateral separation shall be applied so that the distance between those portions of the intended routes for which the aircraft are to be laterally separated is never less than an established distance to account for navigational inaccuracies plus a specified buffer. This buffer shall be determined by the appropriate authority and included in the lateral separation minima. Lateral separation of aircraft at the same level is obtained by requiring operation on different routes or in different geographical locations as determined by visual observation, by use of navigation aids or by use of area navigation (RNAV) equipment. The ‘buffer’ concept is applied to all methods of separation.

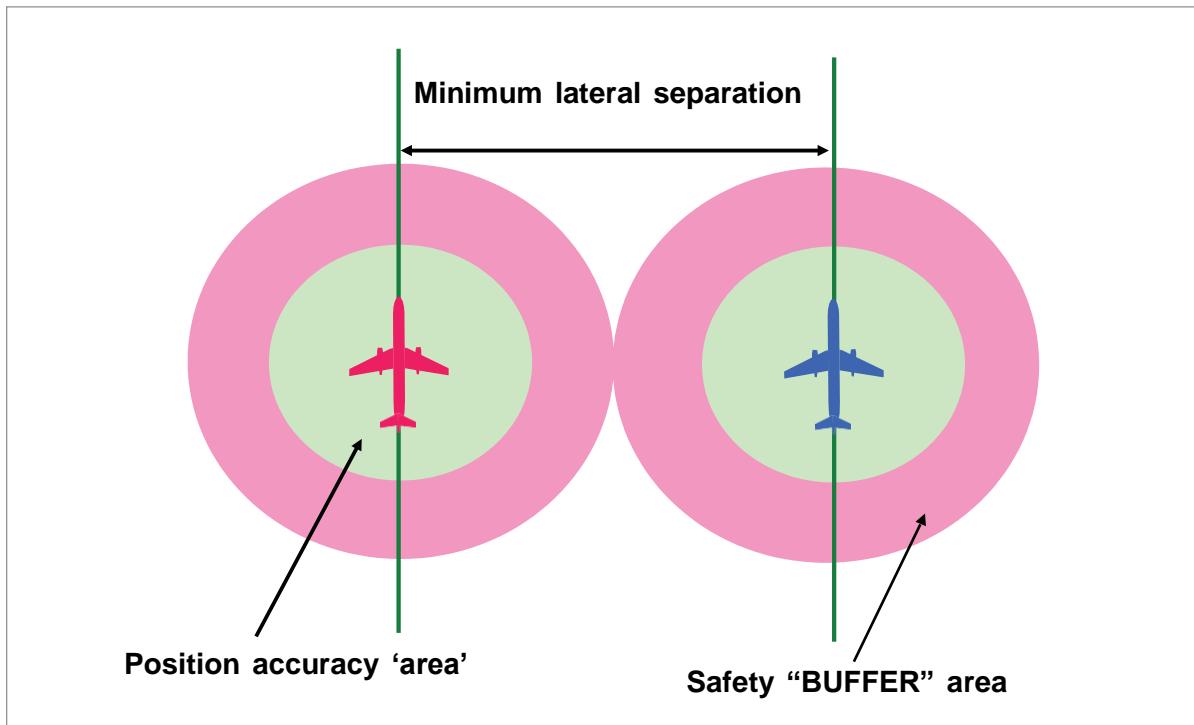


Figure 15.3

15.17 Lateral Separation Criteria and Minima. Means by which lateral separation may be achieved include the following:

- **Geographical Separation.** Separation positively indicated by position reports over different geographical locations as determined visually or by reference to a navigation aid.
- **Track Separation.** This can be achieved between aircraft using the same navigation aid or method. It is achieved by requiring aircraft to fly on specified tracks which are separated by a minimum amount (angle and distance) appropriate to the navigation aid or method employed as follows. For the three cases specified the distance required is 15 NM from the common position with track divergence as follows:
 - VOR: Track divergence 15°
 - NDB: Track divergence 30°
 - DR Fix: Track divergence 45°

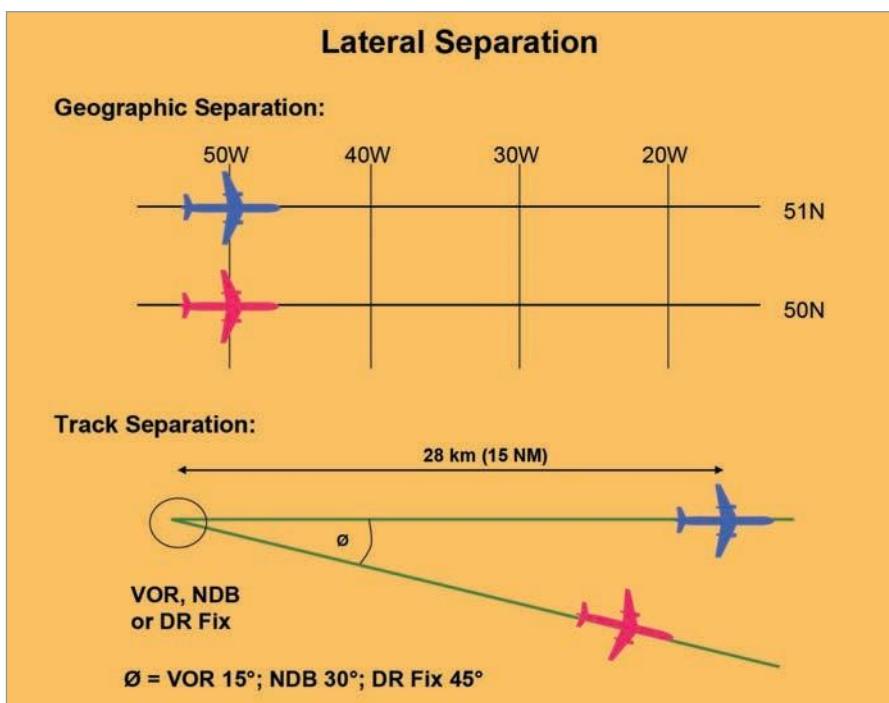


Figure 15.4 Lateral separation

15.18 Different Navigation Aids. Lateral separation between aircraft using different navigation aids, or where one aircraft is using RNAV equipment, is to be established by ensuring that the derived protected airspaces (buffer areas) do not overlap.

15.19 RNAV Operations. Within designated airspace or on parallel routes where RNP is specified, lateral separation between RNAV aircraft may be obtained by requiring aircraft to be established on the centre lines of parallel tracks or ATS routes spaced at a distance which ensures that the protected airspaces do not overlap. This is the policy that determines the spacing of the NAT tracks employed in the NAT MNPSA.

15.20 Longitudinal Separation. Longitudinal separation is the most complex application of separation standards. In procedural ATC (not radar control) the position of the aircraft is that which is reported by the pilot. The positions reported are usually specified reporting points, radio navigation facilities, or geographic points for routes not specified by navigation aids. In any event, the position known to the ATCO is only as good as that reported by the pilot. In applying procedural separation, all possible errors must be allowed for and then a safety margin (buffer) applied. The only situation in which the safety margins may be relaxed is where the pilots of aircraft to which separation should be applied have (and confirmed) that they have visual contact with each other and that they can maintain visual contact during the necessary manoeuvre to which separation would otherwise be applied. Clearly, the separation standards assume operations in IMC. The accuracy of pilot position reporting relies on the accuracy of the navigation system in use. In remote areas (over the oceans and desert regions) where RNAV procedures may be used, greater protection needs to be applied. Longitudinal separation applied is either in terms of time or distance.

15.21 Application. Longitudinal separation is applied so that the spacing between the estimated positions of the aircraft being separated is never less than a prescribed minimum. Longitudinal separation between aircraft following the same or diverging tracks may be maintained by application of the Mach number technique, when so prescribed on the basis of RAN agreement. Longitudinal separation is established by requiring aircraft to depart at a specific time, to lose time, to arrive over a geographical location at a specified time, or to hold over a geographical location until a specified time. For the purpose of the application of longitudinal separation, the following terms are defined:

- **Same track.** The same track case applies when the tracks of two aircraft that require separation, converge or diverge by an angular difference less than 45° , or more than 315° and whose protection areas overlap.
- **Reciprocal track.** The reciprocal track case applies when the tracks of two aircraft that require separation, converge or diverge by an angular difference more than 135° but less than 225° and whose protection areas overlap.
- **Crossing tracks.** When there is an angular difference between tracks of 45° or more but not exceeding 315° (ie : 045 to 135 degrees or 225 to 315 degrees).

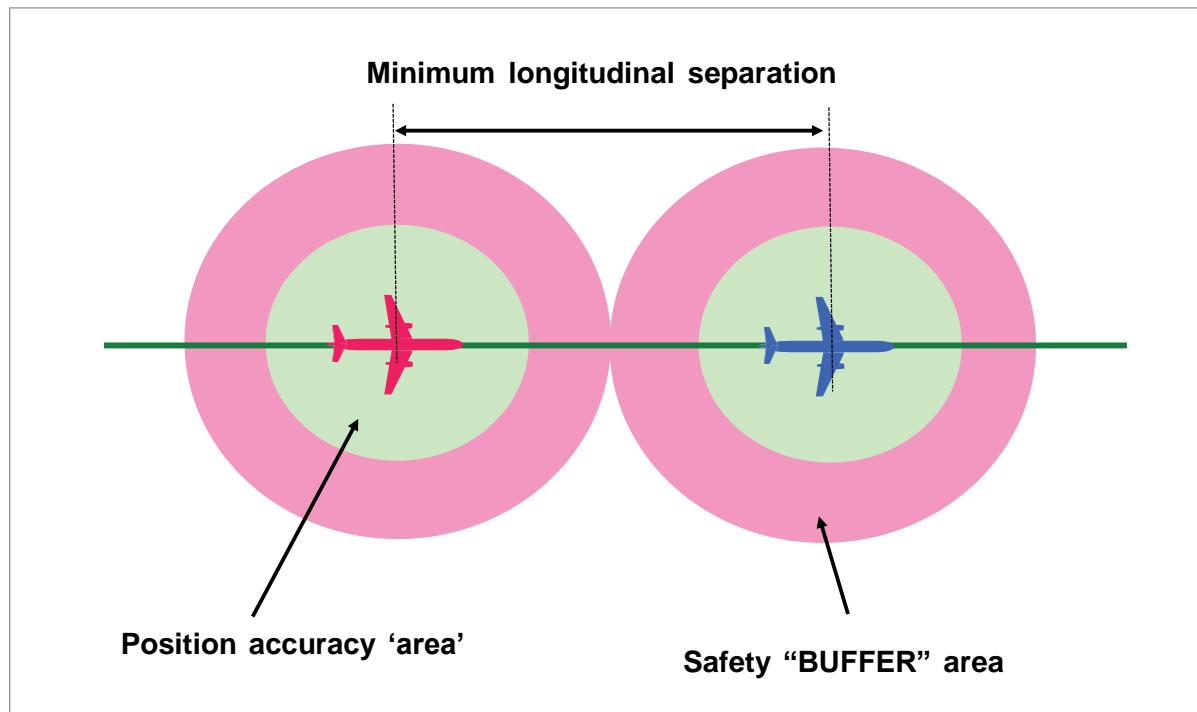


Figure 15.5 Longitudinal separation

15.22 Time Based Longitudinal Separation. The separation standards applied depend upon whether the aircraft concerned are maintaining the same level, or are climbing/descending.

15.23 Same Level. In this situation the separation is dependent upon the track case:

- **Same track case.** The basic standard is that aircraft should be at least 15 minutes apart. If, however, navigation aids for the route being flown permit frequent determination of position and speed, the basic standard may be reduced to 10 minutes. The standard may be further reduced to 5 minutes providing the aircraft have departed from the same aerodrome, or

passed over the same en route reporting point, or reported over a fix that is located relative to the departure point, to ensure that 5 minutes separation can be established at the point the departing aircraft will join the route, with the overriding proviso that the preceding aircraft has TAS 20 kt or more faster than the succeeding aircraft. If the speed difference is increased to 40 kt, the standard may be further reduced to 3 minutes.

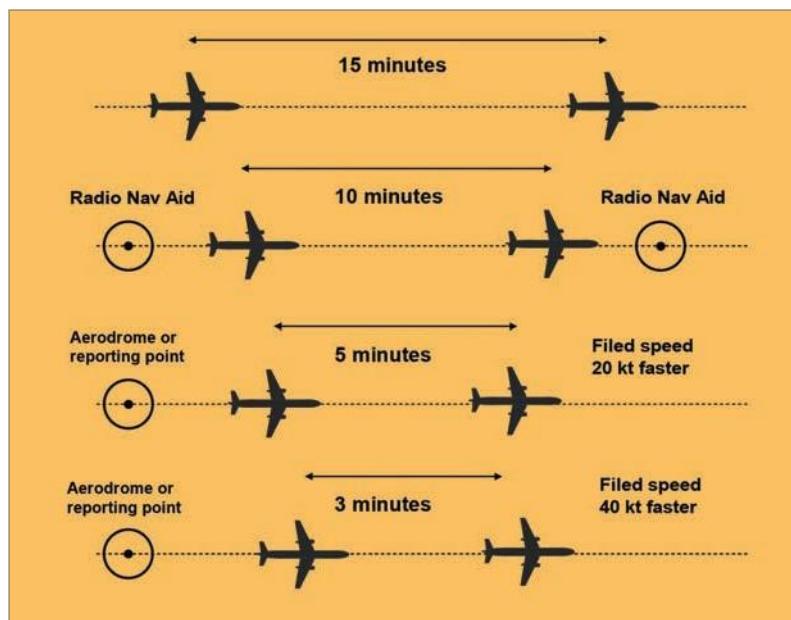


Figure 15.6

- **Crossing tracks case.** The basic standard is 15 minutes. If, however, the frequent determination of position and speed caveat applies, the standard may be reduced to 10 minutes.

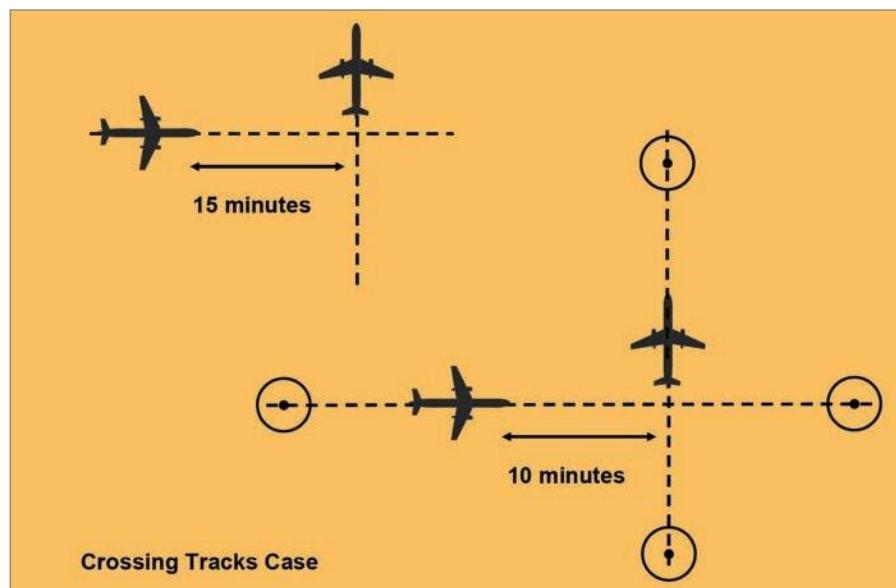


Figure 15.7

15.24 Climbing or Descending. This is a more complex case. The problem only exists when vertical separation does not exist (the aircraft are within the vertical separation standard of each other). Again it depends upon the relative tracks of the aeroplanes but now also involves the reciprocal track case.

- **Same track.** When an aircraft will pass through the level of another aircraft on the same track, the separation applied is 15 minutes, but may be reduced to 10 minutes provided that navigation aids permit frequent update of position and speed (and approved by the authority); or 5 minutes provided that the level change is commenced within 10 minutes of the time that the second aircraft has reported over an exact reporting point.

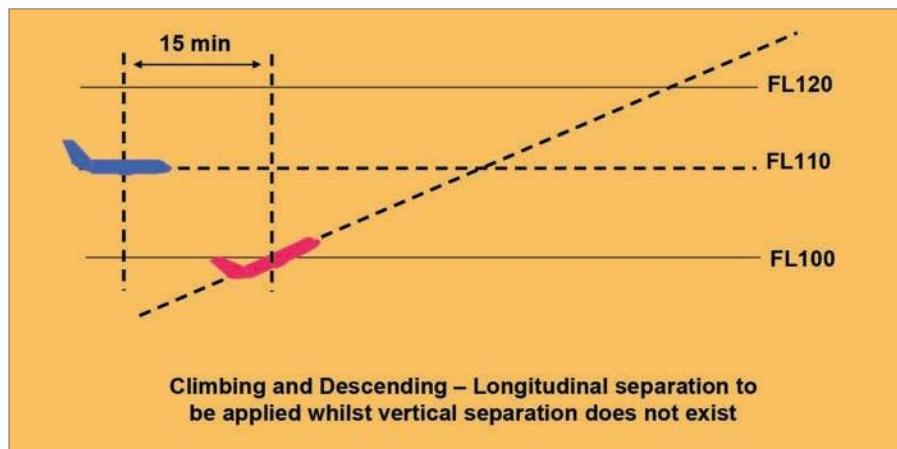


Figure 15.8

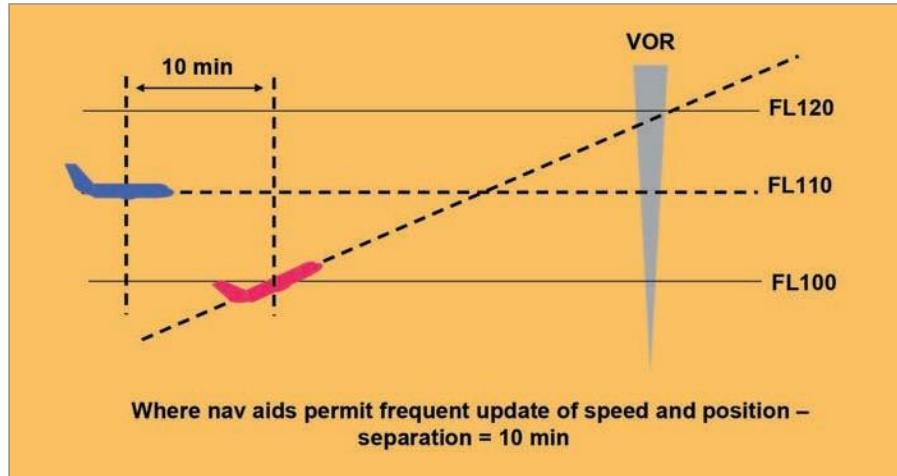


Figure 15.9

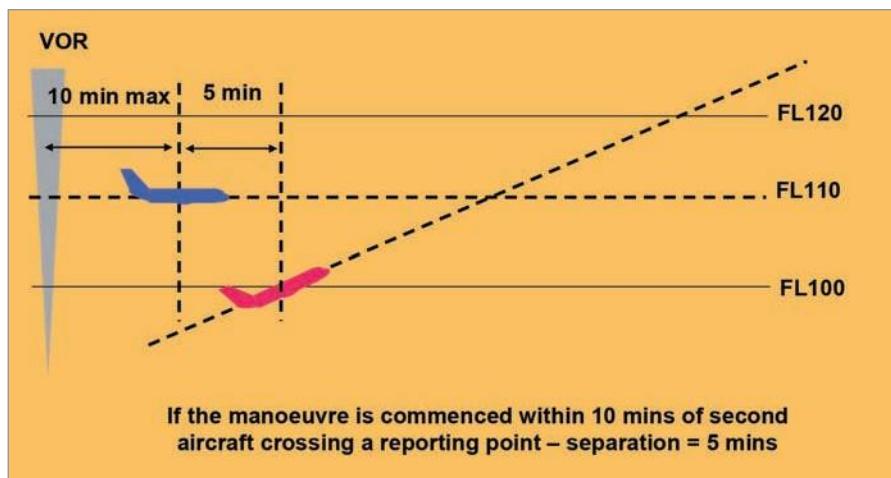


Figure 15.10

Note: If the level change involved is considerable, an intermediate level just above or just below (depending on the case - climb or descend) may be allocated to the manoeuvring traffic. Once at that level, separation will be assessed and if applied, the level crossing manoeuvre approved and executed.

- **Crossing tracks.** The applicable standard is 15 minutes unless frequent update of position and speed is available, in which case the minimum is reduced to 10 minutes.
- **Reciprocal tracks.** Where lateral separation is not provided, vertical separation shall be provided for at least 10 minutes prior to and after the time the aircraft are estimated to have passed. Once it has been established (usually visually) that the aircraft have indeed passed, this minimum need not then further apply.

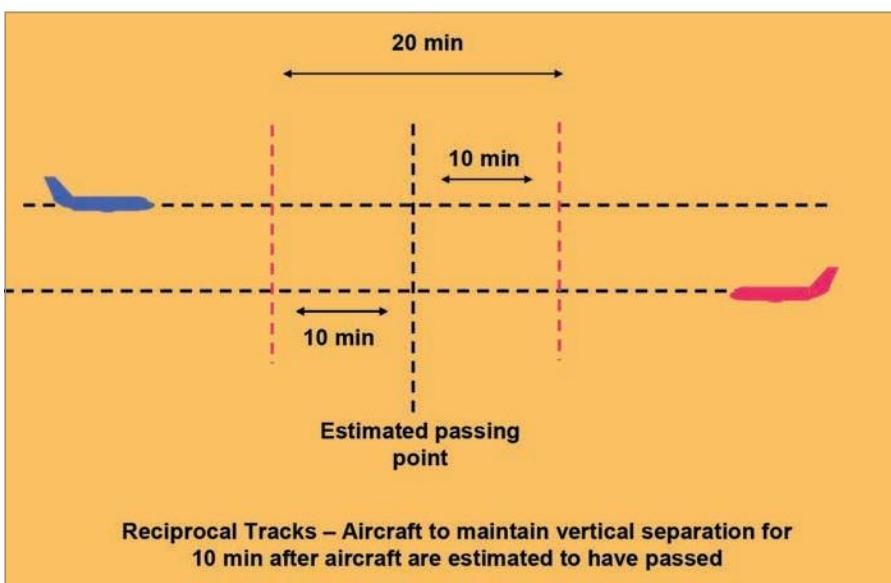


Figure 15.11

15.25 Longitudinal Separation Based on DME. Where DME information is available, separation can be established by maintaining not less than the specified distances between aircraft positions. In this case it is a requirement that direct pilot - controller communication is maintained.

Note: in the NAT region using HF, communication is via a radio operator not direct to the controller.

15.26 Aircraft at the Same Level. The previously defined same and crossing track situations apply:

- **Same track.** The normal standard is 20 NM provided each aircraft uses on-track DME stations and separation is checked by obtaining simultaneous DME readings from the aircraft at frequent intervals. The standard may be reduced to 10 NM provided the leading aircraft maintains a TAS 20 kt or more, faster than the succeeding aircraft.
- **Crossing tracks.** The same track standards apply to crossing traffic providing that each aircraft reports distance from the station located at the crossing point and that the relative angle of the tracks is less than 90°.
- **Climbing or descending.** The standard separation is 10 NM whilst vertical separation does not exist, providing each aircraft uses 'on-track' DME stations; one aircraft maintains a level whilst vertical separation does not exist, and separation is established by simultaneous DME readings from the aircraft.
- **Reciprocal tracks.** Aircraft using on-track DME may be cleared to climb or descend to or through levels occupied by other aircraft using on-track DME, provided it has been positively established that the aircraft have passed each other and are at least 10 NM apart (or such other value as the authority specifies).

15.27 Longitudinal Separation with Mach Number Technique Based on Time. The Mach number technique requires turbojet aircraft to fly at the Mach number approved by ATC, and to request approval before making any speed changes. If it is essential to make immediate temporary changes to speed (e.g. due to turbulence), ATC is to be informed as soon as possible. If it is not feasible due to aircraft performance to maintain the last assigned Mach number during en route climbs and descents, pilots are to advise ATC at the time clearance to climb or descent is requested. Separation will be deemed to exist when the required time interval exists providing:

- The aircraft concerned have reported over the same reporting point and follow the same track or continuously diverging tracks until some other form of separation is provided, or
- It is possible to ensure, by radar or other means, that the appropriate time interval will exist at the common point from which they will either follow the same track or continuously diverge, if the aircraft have not already reported over the same point.

15.28 Time Intervals. When the Mach number technique is applied, minimum longitudinal separation between turbojet aircraft on the same track, whether in level, climbing or descending flight is:

- 10 minutes providing the preceding aircraft maintains a Mach speed equal to or greater than that maintained by the following aircraft, or

- Between 9 and 5 minutes inclusive, providing the preceding aircraft is maintaining a Mach number greater than the following aircraft in accordance with the following:

Mach No. difference between preceding and following	Longitudinal Separation standard
0	10 minutes
0.01	10 minutes
0.02	9 minutes
0.03	8 minutes
0.04	7 minutes
0.05	6 minutes
0.06	5 minutes

Figure 15.12 Mach number separation

15.29 Longitudinal Separation Based on RNAV. This is applicable to RNAV aircraft operating along RNAV routes or ATS routes defined by VOR. In this case, separation is established by maintaining the specified distance between aircraft positions reported by reference to the RNAV equipment. It is a requirement that direct controller/pilot communications are maintained. RNAV positions are defined as standard way points common to both aircraft subject to separation. The minimum is 150 km (80 NM) distance based separation instead of the normally required 10 minutes. It is also essential that the Mach number technique is applied. In the event of equipment failure reducing the navigation capability to less than the RNAV requirement, the normal longitudinal separation will be applied. The specific separation requirements are:

- Same cruising level.** 150 km (80 NM) providing each aircraft reports position from same point and separation is checked by obtaining simultaneous RNAV distance readings from the aircraft at frequent intervals.
- Climbing or descending on same track.** 150 km (80 NM) whilst vertical separation does not exist, provided each aircraft reports distance from same way point, one aircraft maintains level flight whilst vertical separation does not exist, and separation is established by obtaining simultaneous RNAV distance readings from the aircraft.
- Reciprocal tracks.** Aircraft may be permitted to climb or descend through levels occupied by other aircraft providing it has been positively established by simultaneous RNAV distance readings to or from the same on-track way point that the aircraft have passed each other by at least 150 km (80 NM).

15.30 Longitudinal Separation Based on RNAV where RNP is Specified. For aircraft cruising, climbing or descending on the same track in an RNP RNAV environment, the separation standards detailed in the table below may be used. During the application of the 50 NM minimum, if an aircraft fails to report its position, the controller is to take action within 3 minutes to establish communications. If communication has not been established within 8 minutes, alternative separation is to be applied. An aircraft may climb or descend through an occupied level once it has been established that the aircraft concerned have passed.

RNP Type	Communication Requirement	Surveillance Requirement	Distance Verification Requirement	Separation
20	Direct pilot/controller communications	Procedural Position Reports	At least every 60 minutes	80 NM
10	Direct pilot/controller communications	Procedural Position Reports	At least every 30 minutes	50 NM

Figure 15.13 RNP RNAV separation

15.31 Reduction in Separation Minima. The separation minima may be reduced as determined by the appropriate ATS authority, after prior consultation with the aircraft operators, as appropriate, in the following circumstances:

- When special electronic or other aids enable the pilot-in-command of an aircraft to determine accurately the aircraft's position and when adequate communication facilities exist for that position to be transmitted without delay to the appropriate air traffic control unit; or
- When, in association with rapid and reliable communication facilities, radar-derived information of an aircraft's position is available to the appropriate air traffic control unit; or
- When special electronic or other aids enable the air traffic controller to predict rapidly and accurately the flight paths of an aircraft and adequate facilities exist to verify frequently the actual aircraft positions with the predicted positions; or
- When RNAV-equipped aircraft operate within the coverage of electronic aids that provide the necessary updates to maintain navigational accuracy.
- In accordance with RAN agreements, after prior consultation with the aircraft operators, when:
 - Special electronic, area navigation and other aids enable the aircraft to closely adhere to their current flight plans; and
 - The air traffic situation is such that the conditions regarding communications between pilots and the appropriate ATS unit or units need not necessarily be met to the degree specified therein, in order to maintain an adequate level of safety.

Radar Separation

15.32 Separation Minima. Radar provides the ATCO with fairly accurate position information for an aircraft under his/her control. Problems associated with radar include: slant range display, target discrimination and loss of contact close to the radar overhead. These ‘errors’ must be handled in the same manner that other positional errors are: by the addition of ‘buffer’ allowances. The errors are worse for long range radars used in area control but must still be considered for terminal radars covering a much smaller area. The basic radar separation standard is 5 NM. This means that where two aircraft identified on radar are at the same level, they are not permitted to approach closer than 5 NM to each other on the radar display.

15.33 Reduced Radar Separation. When approved by the authority and in specific circumstances, the radar separation standard (5 NM) may be reduced. The following describe these specific occasions:

- **Radar capabilities.** When radar capabilities so permit at a given location, the radar separation standard may be reduced to 3 NM.
- **ILS Localizer.** Where two (or more) aircraft are established on the same ILS localizer course and within 10 NM of the threshold of the landing runway, the separation standard may be reduced to 2.5 NM between contacts on the radar display.
- **Simultaneous Parallel Approaches (Mode 2 - Dependent).** During Mode 2 parallel runway operations radar separation is applied. Between aircraft on adjacent localizer courses the separation standard may be reduced to 2 NM between contacts on the radar display.

Procedural Wake Turbulence Separation



Figure 15.14

15.34 Situation. When the wings are creating lift (from ‘rotate’ to ‘touchdown’), wake vortices are created behind the aircraft. This is apparent in the form of turbulence, the severity of which is a function of aircraft mass, the worst case being a heavy aircraft at low speed. Where an aircraft is following another aircraft, allowance must be made for the ‘wake turbulence effect’ which under certain circumstance can be so severe as to cause structural damage (even catastrophic damage) to an airframe. The nature of the wake vortex is that it emanates from the wing tip in the form of spiralling air from the high pressure area below the wing to the low

pressure area above the wing. It spirals ‘in board’ towards the fuselage. The vortex exists at the level of the generating aircraft and to an altitude not exceeding 1000 ft below the generating aircraft. Where the following aircraft is within this airspace, wake turbulence separation must be applied.

15.35 Wake Turbulence Categories. Aircraft are categorized by maximum take-off mass (MTOM) to relate to the severity of the wake vortices generated. There are three categories as follows:

- **Heavy** - all aircraft types with MTOM equal to 136 000 kg or more
- **Medium** - aircraft types with MTOM less than 136 000 kg but more than 7000 kg
- **Light** - aircraft types with MTOM of 7000 kg or less

Note: MTOM is stated on the Certificate of Airworthiness for the aircraft.

15.36 Separation Minima. The following procedural (non-radar) wake turbulence separation is applied. Note the criteria are only applicable where the following aircraft is ‘lighter’ than the preceding aircraft.

15.37 Arriving Aircraft. Timed approaches:

- Medium behind a heavy - 2 minutes
- Light behind a medium or heavy - 3 minutes

15.38 Departing Aircraft. For a light or medium taking off behind a heavy, or a light behind a medium, a minimum of 2 minutes is applied when they are using:

- The same runway.
- Parallel runways separated by less than 760 m.
- Crossing runways if the projected flight paths cross at the same altitude or within 1000 ft below the heavier.
- Parallel runways separated by 760 m or more if the projected flight paths cross at the same altitude or within 1000 ft below the heavier.

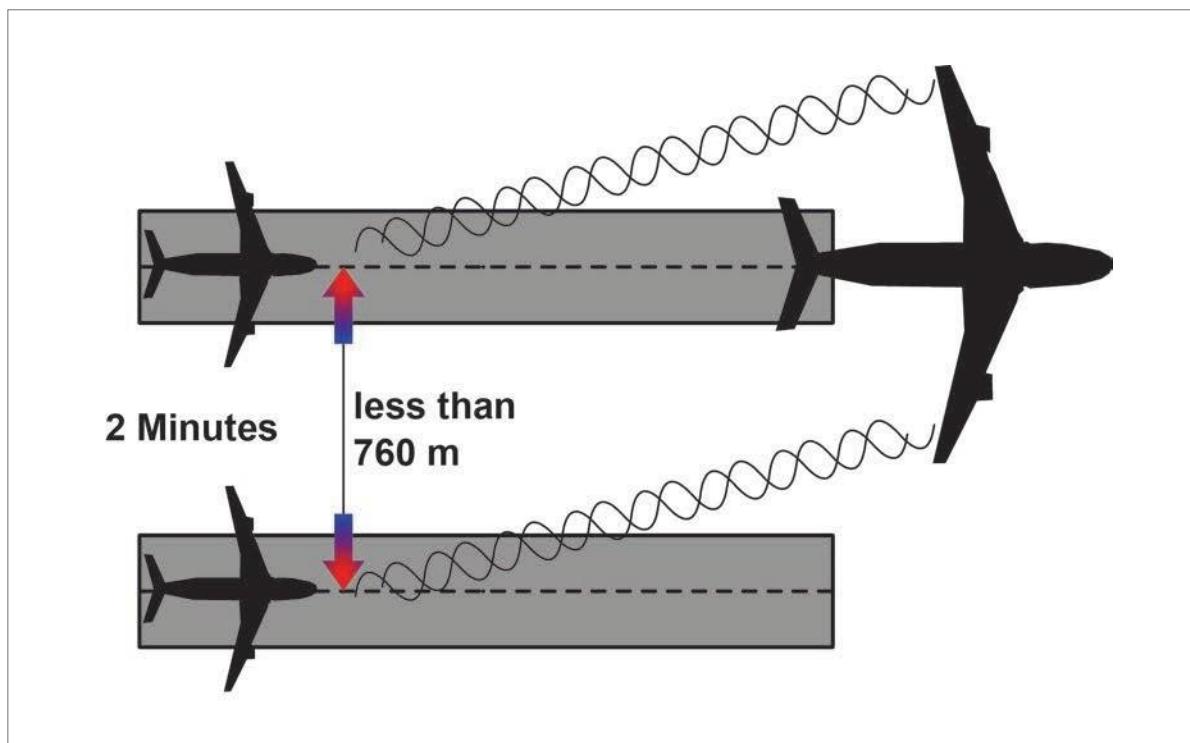


Figure 15.15 Parallel runways

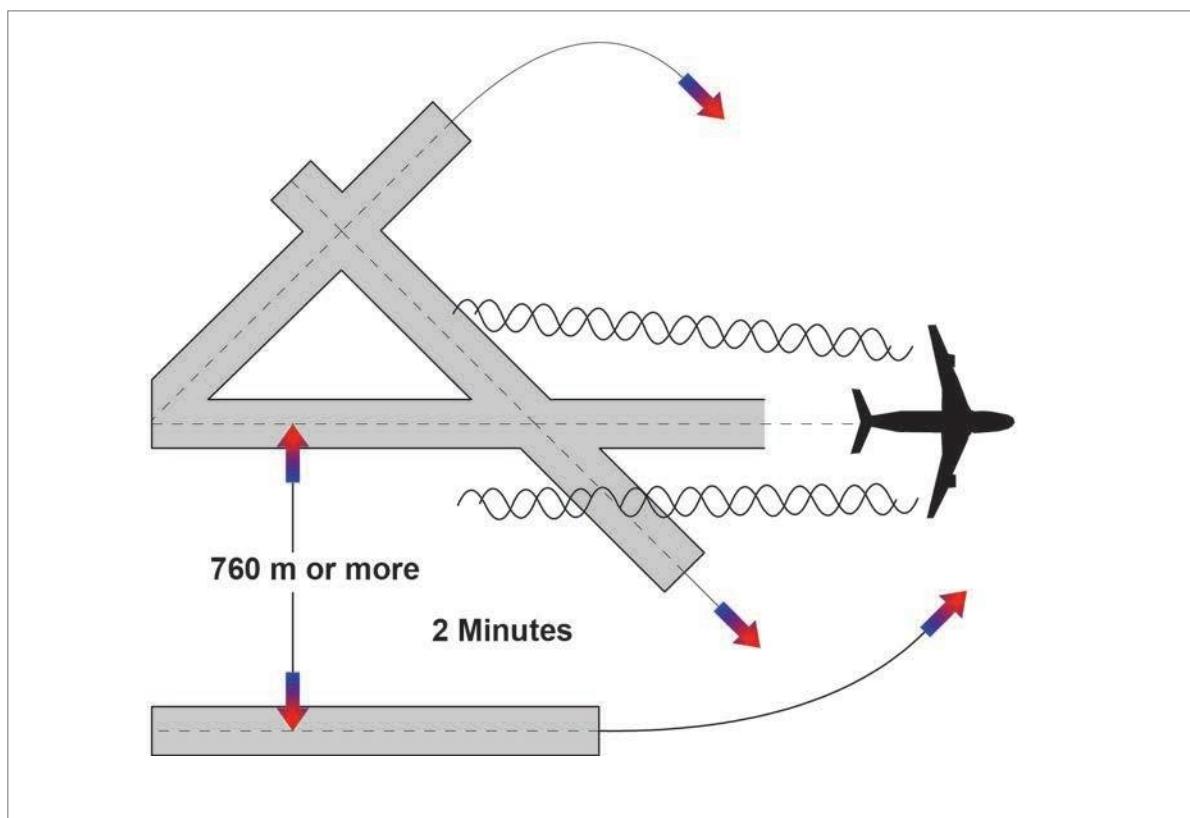


Figure 15.16 Parallel and crossing runways

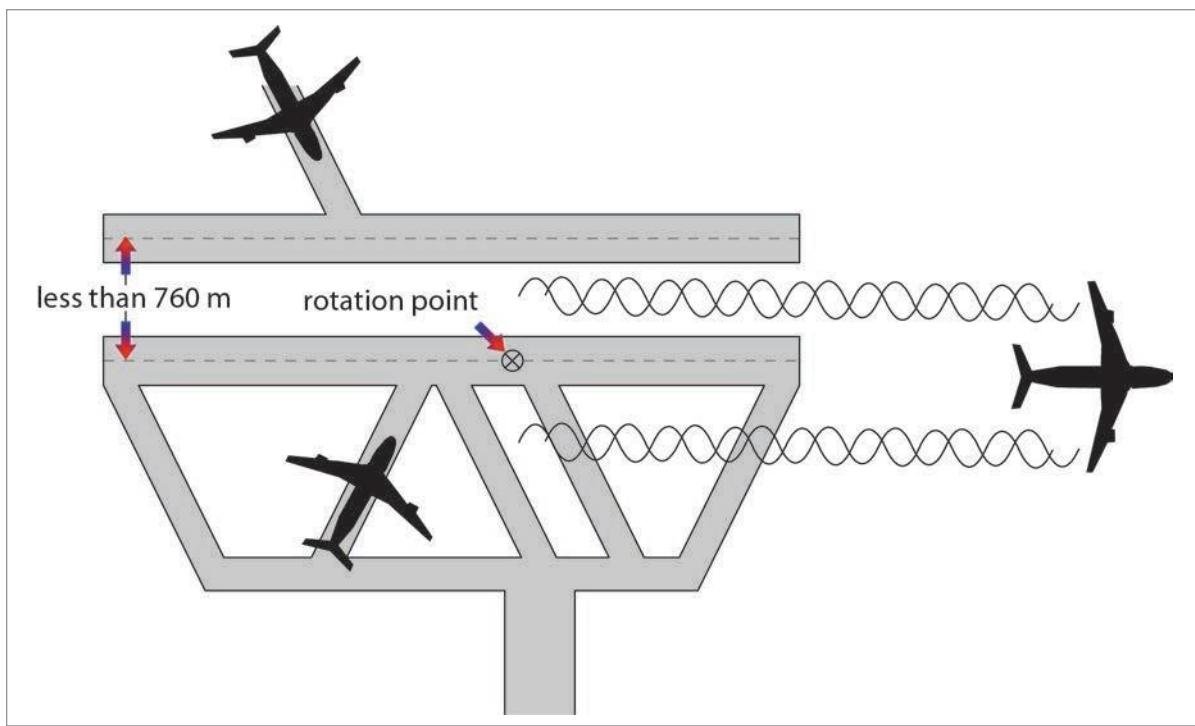


Figure 15.17 Intermediate take-off

Note: Separation is increased to 3 minutes where a light or medium is taking off behind a heavy (or light behind a medium) from an intermediate part of the same runway or an intermediate point on parallel runways.

15.39 Displaced Landing Threshold. A separation of 2 minutes is applied between light or medium and heavy (or between light and medium) when operating on a runway with a displaced threshold when:

- A departing light or medium follows a heavy arriving, or a departing light follows a medium arriving, or
- An arriving light or medium follows a heavy departing, or an arriving light follows a medium departing, if the projected flight paths are expected to cross.

15.40 Opposite Direction. A separation of 2 minutes is applied between a light or medium and a heavy, or between a light and a medium, when the heavier aircraft is making a low or missed approach and the lighter aircraft is using an opposite direction runway for take-off, or is landing on the same runway in the opposite direction, or on a parallel opposite direction runway separated by less than 760 m.

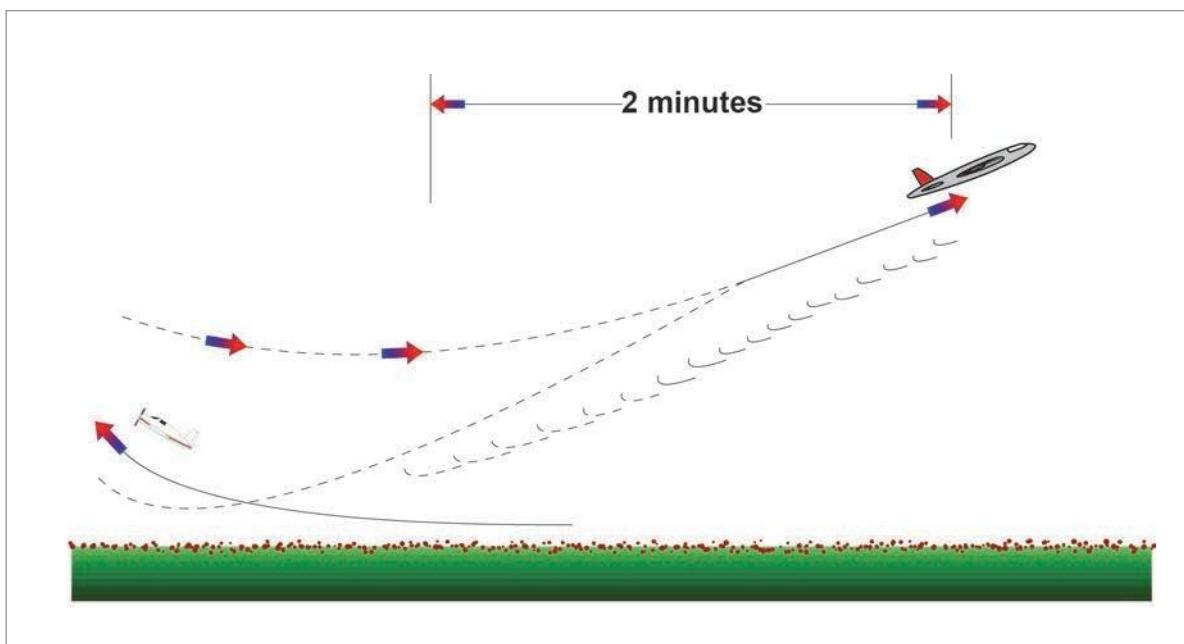


Figure 15.18 Opposite direction for take-off

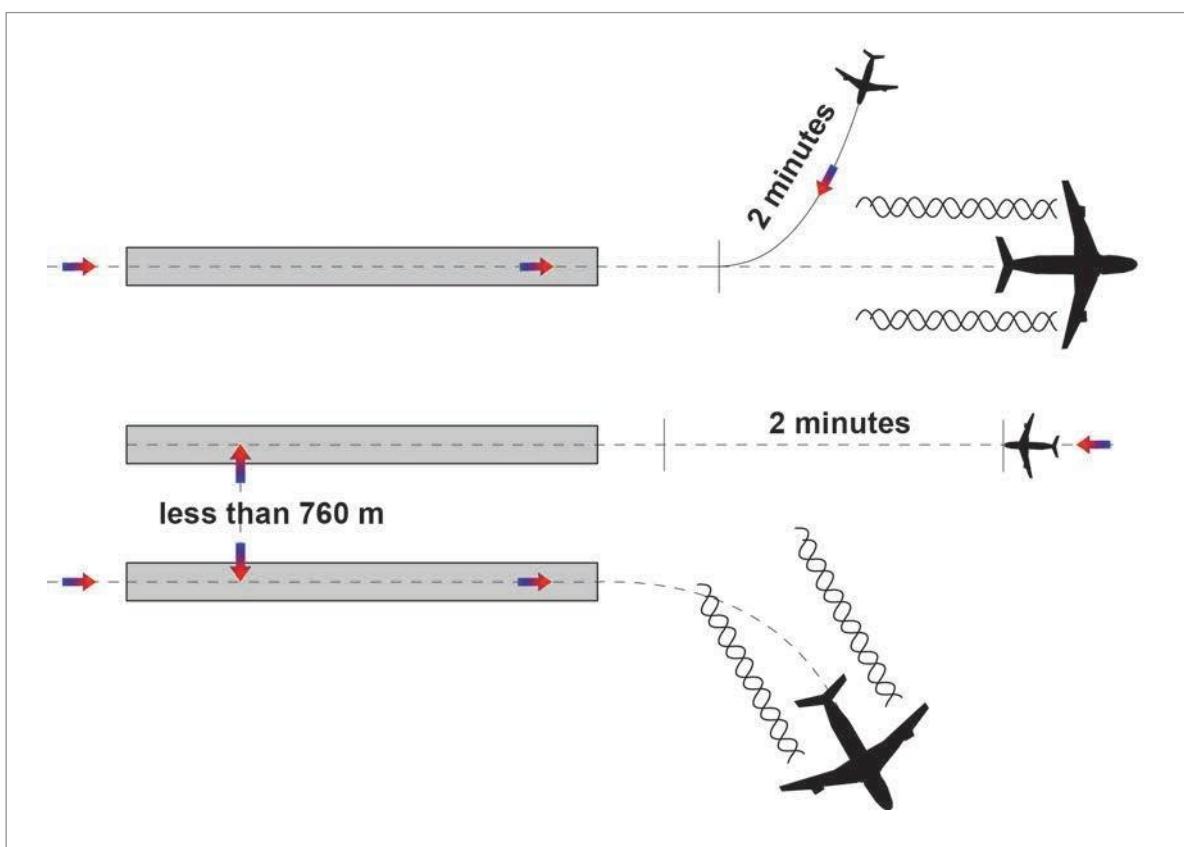


Figure 15.19 Opposite direction for landing

15.41 Indication of Heavy Category. Because of the inherent problems caused by heavy wake turbulence category aircraft requiring additional separation, pilots of heavy category aircraft are to indicate the aircraft's heavy category in the initial RTF contact with an ATCU by the inclusion of the suffix "heavy" to the identifying call sign of the aircraft. e.g. "**London Control this is Speedbird 216 heavy on 133.650**"

Radar Wake Turbulence Separation

15.42 Radar Wake Turbulence Separation. Because the position of the aircraft is displayed to the controller, the required separation for wake turbulence in this case is expressed in distance. The table below contains the wake turbulence radar separation minima specified by ICAO which will be applied to aircraft in the approach and departure phases of flight. Note that in this case the criteria apply where the category of the following aircraft is lighter than the leading aircraft, except for the heavy/heavy case.

Aircraft Wake Turbulence Category		
Leading Aircraft	Following Aircraft	Separation
Heavy	Heavy	4 NM
Heavy	Medium	5 NM
Heavy	Light	6 NM
Medium	Light	5 NM

Figure 15.20 Radar wake turbulence separation criteria

Visual Separation in the Vicinity of Aerodromes

15.43 Introduction. Except in conditions where 'Low Visibility' operations are in progress at an aerodrome, traffic flying in the vicinity of the aerodrome including arriving, departing and local area traffic, will be flying in conditions which will either permit VFR or pilots of aircraft to maintain separation from other aircraft visually. The importance of this cannot be overstressed as the application of visual separation not only relieves the ATCO of having to impose either procedural or radar separation, but permits minimum runway occupancy time, 'land after' procedures and multiple aircraft flying in the visual traffic pattern. In effect, the application of visual separation increases aerodrome capacity and hence aerodrome utilization. Typically, Heathrow has the capacity to accommodate about 60 take-off operations and 60 landing operations per hour and at peak time the traffic load gets close to this. If procedural or radar separation had to be applied to the arrival or departure phases of operations, the utilization would reduce dramatically. The standards previously mentioned can be reduced if:

- Adequate separation can be provided by the aerodrome controller when each aircraft is continuously visible to the controller; or
- Flight crews report that they have visual contact with other aircraft and this can be maintained; or
- In the case of one aircraft following another, the crew of the following aircraft report that the leading aircraft is within sight and that separation can be maintained.

15.44 Essential Local Traffic. Any aircraft, vehicle or personnel on or near the runway, or traffic in the take-off and climb out areas or the final approach area, which may constitute a collision hazard to a departing or arriving aircraft is defined as essential local traffic. Where essential local traffic is known to the controller the information is to be transmitted to flight crews without delay.

15.45 Departing Aircraft. Under IFR, departing aircraft will normally be separated from each other by requiring the aircraft to follow a SID. ATCUs will co-ordinate the issuing of clearances, and where possible, standard clearances will be used. Such clearances will normally be specified by the approach controller and passed to the aircraft by the aerodrome control tower. For departures in VMC, the aerodrome controller will clear an aircraft for take-off once the preceding aircraft has either:

- Passed the upwind end of the runway, or
- Has made a turn away from the runway.

Where wake turbulence separation is applied, departures will be sequenced to minimize delays and maximize runway utilization. For IFR traffic, the standard separation between departures is 5 minutes (12 movements per hour). This may be reduced to 2 minutes between aircraft following the same departure track providing the preceding aircraft has filed a FP speed 40 kt greater than the succeeding aircraft. This may further be reduced to 1 minute (60 movements per hour) providing the track of the succeeding aircraft diverges from that of the preceding aircraft by 45° or more. Obviously, where parallel runways are used for simultaneous take-offs, or diverging runways are used, higher utilization rates (lower separation) may be achieved.

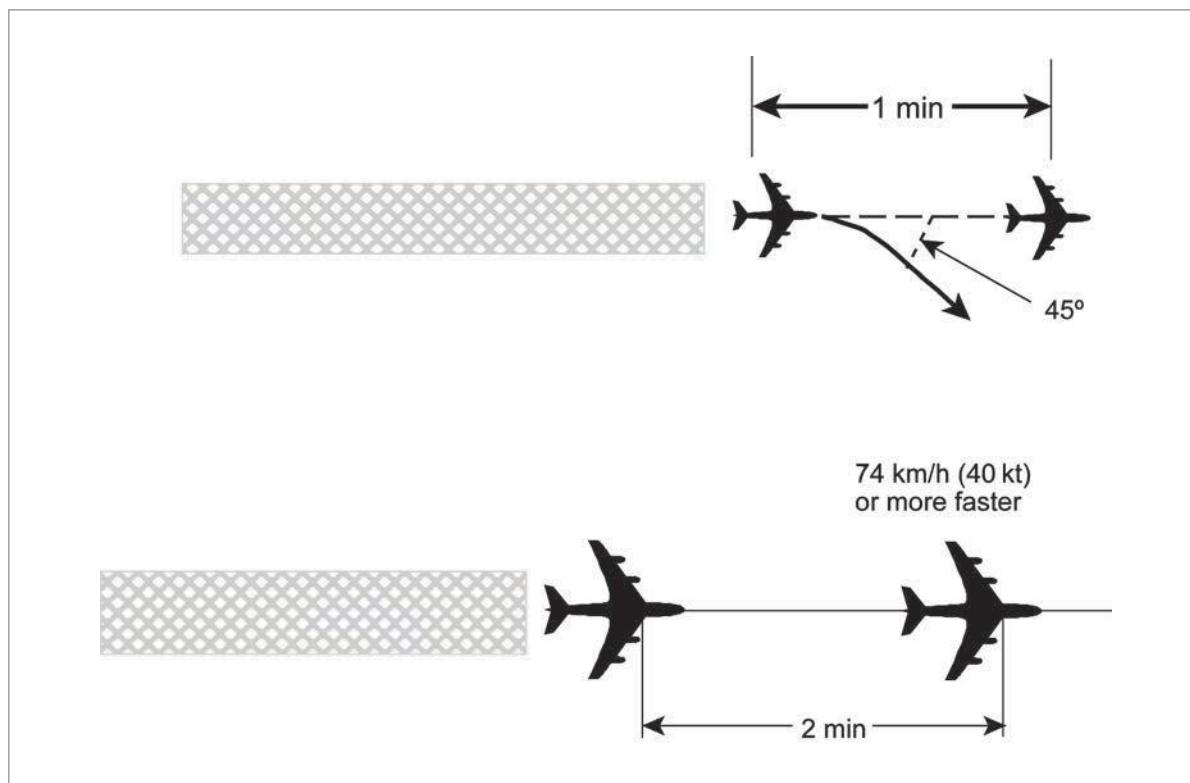


Figure 15.21

15.46 Departure Sequence. At busy aerodromes, the ground movement of aircraft will be planned to ensure that the stated Off Blocks Time can be translated into the necessary slot time for the aircraft. This is the job of the Ground Movements Planner working for the aerodrome controller. If correctly sequenced, the aircraft will arrive at the holding point (or holding area) in the correct order for take-off. Consideration will also be given to the route of the aircraft immediately after take-off to minimize wake turbulence separation. Departure may be expedited by suggesting a take-off direction that is not into wind. In this case, the PIC is to make the decision if this is acceptable.

15.47 Delays. It is inevitable that at some point a delay will occur. In which case, flights may be cleared to take off in an order based on the estimated departure time. Deviation from this may be made to facilitate the maximum number of departures with the least average delay, or in response to requests from operators. ATCUs should inform operators when anticipated delays exceed 30 minutes.

15.48 Arriving Aircraft. Arriving IFR aircraft may be cleared to make a visual approach provided that:

- The pilot can maintain visual reference to terrain; and
- The reported ceiling is at or above the approved initial approach level; or
- The pilot reports that at any time during an instrument approach the meteorological conditions are such that there is a reasonable assurance that an approach and landing will be made visually.

15.49 Separation. ATC will provide separation between aircraft making a visual approach and all other arriving or departing traffic. For arriving IFR traffic (in IMC) the Approach Controller will transfer control of the aircraft to the Aerodrome Controller at a point during the approach so that separation from departing traffic can be achieved and sufficient time is available to issue a landing clearance. For certain types of approach (PAR or SRA) the aircraft will remain under control of the Approach Radar Controller throughout the approach. This will necessitate the radar controller obtaining the landing clearance and passing it to the pilot during the latter stages of the approach. The Aerodrome Controller in co-operation with the Approach Controller will be responsible for sequencing departures during low visibility IFR operations. Two situations are considered:

- **Complete Approach.** If an aircraft is making a complete instrument approach, a departing aircraft may take off in any direction until an arriving aircraft has started its procedure turn or base turn leading to final approach OR in a direction which is different by at least 45 degrees from the reciprocal of the direction of approach after the arriving aircraft has started a procedure turn or base turn leading to final approach, provided that the take-off will be made at least 3 minutes before the arriving aircraft is estimated to be over the beginning of the instrument runway. (see *Figure 15.22*)
- **Straight-in Approach.** If an aircraft is making a straight-in approach, a departing aircraft may take off in any direction until 5 minutes before the arriving aircraft is estimated to be over the instrument runway OR in a direction which is different by at least 45 degrees from the reciprocal of the direction of approach of the arriving aircraft until 3 minutes before the arriving aircraft is estimated to be over the beginning of the instrument runway OR before the arriving aircraft crosses a designated fix on the approach track as determined by the ATS authority. (see *Figure 15.22*)

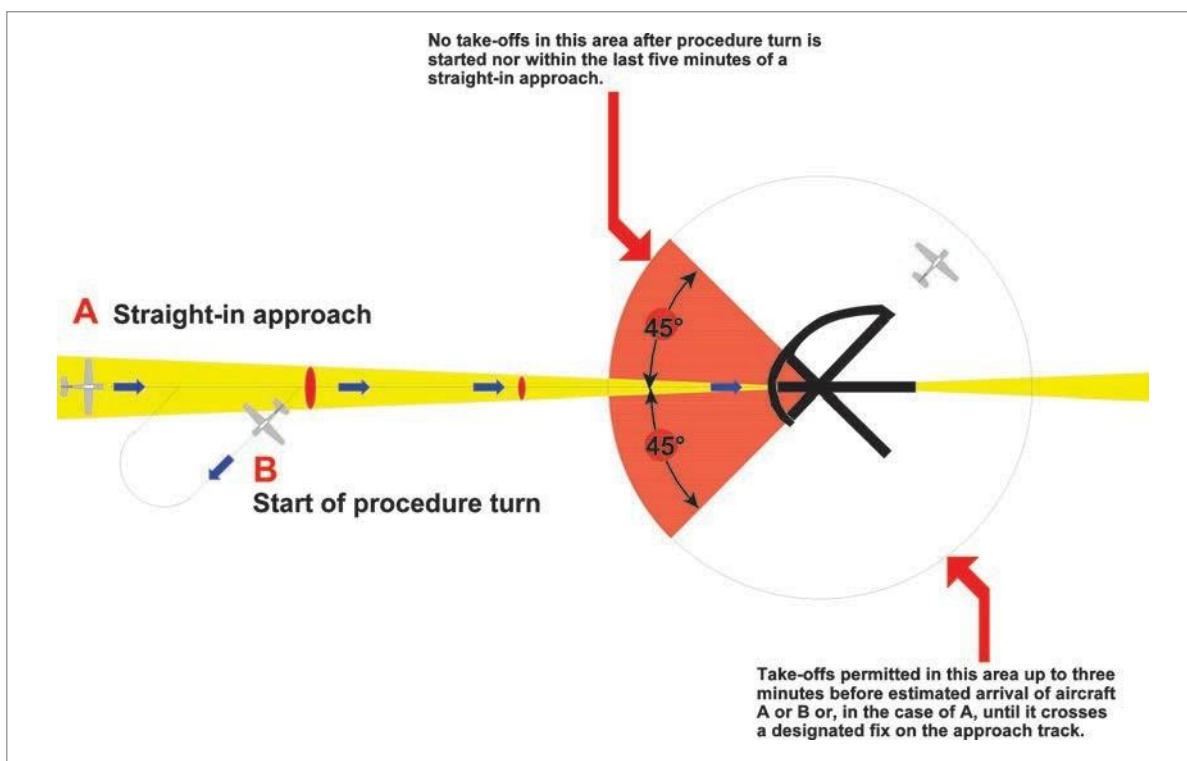


Figure 15.22

15.50 Information to Arriving Aircraft. If a pilot requests it, or it is apparent to ATC that the pilot of an aircraft is not familiar with the procedures for an instrument approach, information will be passed to enable the approach to be flown. If the aircraft has been cleared for a straight-in approach, only details of the final approach track need be passed.

15.51 Missed Approach Tracks. Where parallel runway segregated operations (the Heathrow case) are in progress, a missed approach to the landing runway creates a simultaneous departure situation where procedures for Mode 3 are not in force. To overcome the problems this creates, procedures are to be implemented to ensure that the missed approach track diverges from the normal departure track by at least 30°.

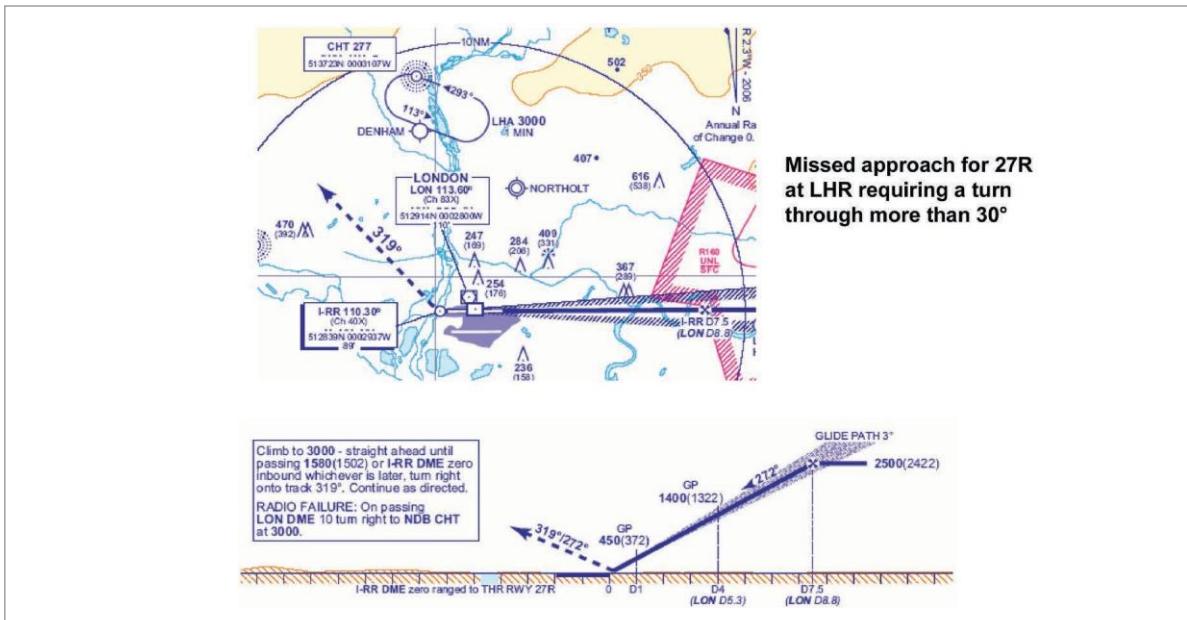


Figure 15.23

Stacking

15.52 Approach Sequence. Where more than one aircraft is arriving it is normal for the aircraft at the lowest altitude to land first. Where necessary, a holding pattern will be established for ‘stacking’ of aircraft waiting to start the approach. Under certain circumstances, a later arrival will be given priority over earlier arrivals. Such circumstances are:

- Where an aircraft is compelled to land because of factors affecting the safety of the aeroplane or the occupants. In this case, the PIC of the aircraft involved will be expected to declare an emergency using either “MAYDAY” or “PAN PAN” procedures;
- Hospital aircraft or aircraft carrying sick or seriously injured people. International hospital flights will prefix initial RTF with “PAN PAN MEDICAL”;
- Aircraft engaged in SAR operations;
- Other aircraft as may be determined by the authority.

15.53 Procedure. It is normal for ‘stacks’ to be established on the radio navigation beacons serving as the IAF for the instrument procedures to be used. The vertical size of the stack may be limited by airspace considerations and when full, ‘overspill’ stacks would be established on remote beacons. Arriving aircraft will be cleared into the stack at the lowest available level. Normal holding pattern joining procedures are used. Aircraft will be cleared to commence the instrument procedure from the lowest holding altitude (the bottom of the stack) using timed arrival procedures. If a pilot states his/her intention to continue holding awaiting a weather improvement when other pilots wish to make an instrument approach, the holding pilot will be instructed to take up another holding pattern or directed to rejoin the hold at the top. If a pilot elects to attempt an instrument approach when others remain in the hold, an unsuccessful approach would result in the aircraft being directed back into the stack at the top.

15.54 Expected Approach Time (EAT). When an aircraft enters a stack the controlling ATCO will pass an EAT which must be acknowledged by the pilot. This will be the time that the pilot can expect to commence the instrument approach. Initially the EAT will not be less than 30 minutes after the time of entry. If it is expected that the aircraft will not be held for more than 20 minutes, the pilot will be informed “no delay expected”. As the approach sequence progresses, if necessary the EAT will be revised by 5 minute intervals, passed to the pilot and acknowledged.

15.55 En Route Holding. It is often preferred to hold an aircraft en route at cruising altitude, rather than to progress the flight to the terminal stage and hold at low level with high fuel burn rates. Where delays are known to exist and aircraft are held en route, credit will be given for time spent holding en route by inserting the aircraft into the approach sequence ahead of other aircraft so that the aircraft that has held en route is not penalized.

Should an en route aircraft be instructed by ATC to take up a hold while en route, this may necessitate basing the hold over a non-standard holding point (a town, a point of latitude and longitude, a significant point along the route) - i.e. not over an authorized navigational aid over which a recognized hold is based. In this case, unless otherwise instructed, the aircraft should take up a right-hand hold.


UK AIP

STANDARD ARRIVAL CHART - INSTRUMENT (STAR) - ICAO

(15 Mar 07) AD 2-EGLL-7-1-1

LONDON HEATHROW via BIGGIN

DISTANCES IN NAUTICAL MILES.
BEARINGS, TRACKS AND RADIALS ARE MAGNETIC
ALTITUDES AND ELEVATIONS ARE IN FEET

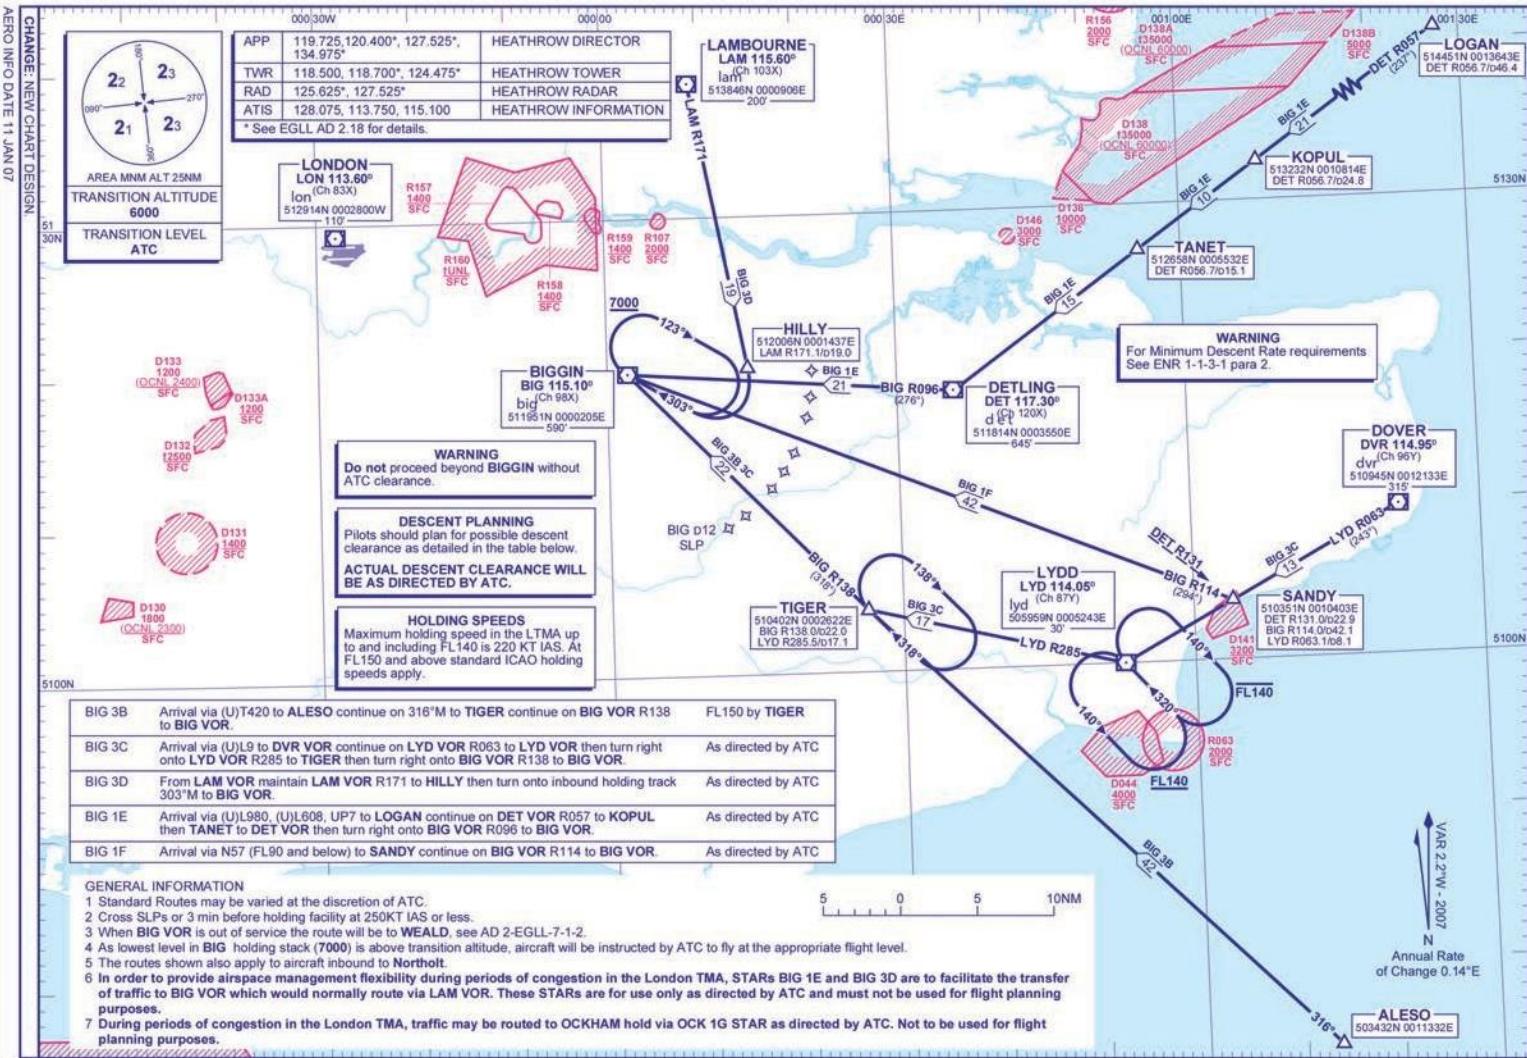

Questions

1. **What types of separation does ATC apply?**
 - a. Horizontal, longitudinal and timing.
 - b. Horizontal, vertical and longitudinal.
 - c. Horizontal, vertical and composite.
 - d. Horizontal, vertical and lateral.
2. **If you want to descend through the level of another aircraft on the same track, the minimum separation is:**
 - a. 20 minutes.
 - b. 10 minutes.
 - c. 5 minutes.
 - d. 15 minutes.
3. **What is the minimum longitudinal separation standard required for RNAV routes?**
 - a. 80 NM.
 - b. 60 NM.
 - c. 50 NM.
 - d. 20 NM.
4. **What is the vertical separation minimum below FL290?**
 - a. 500 ft.
 - b. 1000 ft.
 - c. 2000 ft.
 - d. It depends whether or not RVSM is applied.
5. **What is the minimum vertical separation between IFR aircraft flying in the same direction above FL290 in non-RVSM airspace?**
 - a. 1000 ft.
 - b. 500 ft.
 - c. 2000 ft.
 - d. 4000 ft.
6. **When can one aircraft pass through the level of another aircraft which is flying along an ATS route, in VMC maintaining own separation?**
 - a. If the pilot requests and the state approves.
 - b. If the pilot requests and it is day time.
 - c. If the pilot requests during day or night.
 - d. Irrelevant - the manoeuvre is not permitted.
7. **What is the separation based on RNAV when RNP is specified?**
 - a. 80 NM.
 - b. 50 NM.
 - c. 80 or 50 dependent upon the RNP type.
 - d. 15 minutes.

8. If two aircraft are using the same VOR for track separation, what distance must the aircraft be from the VOR before one of the two may commence a climb or descent?
- 5 NM.
 - 10 NM.
 - 15 NM.
 - 20 NM.
9. Whilst under IFR in VMC you decide to maintain your own separation to descend through the level of another aircraft. What is required?
- During day you must request clearance and with ATC authority approval.
 - You must request clearance and the ATC authority must approve, during day or night.
 - You only need to request approval for the manoeuvre.
 - In CAS the manoeuvre is illegal.
10. Two aircraft are on the same track at the same level and are using simultaneous DME fixes from the same on track DME station. What is the minimum longitudinal separation applied?
- 10 NM.
 - 5 NM.
 - 20 NM.
 - 15 NM.
11. What is the separation standard between aircraft at the same altitude when using DME to determine range from a beacon?
- 10 NM where the first aircraft speed is 40 kt faster than the second.
 - 10 NM where the first aircraft speed is 20 kt faster than the second.
 - 20 NM where the first aircraft speed is 40 kt faster than the second.
 - 20 NM where the first aircraft speed is 20 kt faster than the second.
12. Two aircraft are using the Mach number technique (both at same Mach number or first faster than second) for same track separation. If using an RNAV track, what would be the standard separation in lieu of time?
- 80 NM.
 - 60 NM.
 - 50 NM.
 - 25 NM.
13. When can a controlled flight be given permission to climb/descend maintaining own separation in VMC?
- When directed by ATC.
 - When requested by the pilot and the ATC approves.
 - When there is no conflicting traffic.
 - When approved by the operator.
14. What is essential traffic?
- Flights engaged in priority flights i.e. VIP, hospital or police flights.
 - Any conflicting traffic.
 - Traffic which should be separated but which isn't.
 - Unidentified traffic on radar.

15. When is essential traffic information passed to an aircraft?
- Before a take-off clearance is issued.
 - Where traffic constitutes essential traffic to another controlled flight.
 - When the separation minima cannot be maintained.
 - When a pilot requests permission to descend or climb maintaining own separation.
16. What is the divergence angle that must be maintained from overhead an NDB to a range of 15 NM to allow one aircraft to climb/descend through the level of another?
- 15°.
 - 30°.
 - 45°.
 - 60°.
17. The longitudinal separation minimum, based on time between two aircraft at the same altitude, for which navigation aids can give a frequent determination of position and speed and when the proceeding aircraft has a true airspeed of at least 40 kt higher than the following aircraft, is:
- 5 minutes.
 - 6 minutes.
 - 10 minutes.
 - 3 minutes.
18. A separation minimum based on “RNAV” distance can be used at the moment the level is being passed, assuming that every aircraft reports its distance to or from the same “on-track” waypoint. The minimum is:
- 60 NM.
 - 80 NM.
 - 50 NM.
 - 20 NM.
19. With the Mach number technique applied what is the longitudinal standard separation between two aircraft of which the preceding aircraft is M 0.04 faster than the following aircraft?
- 10 minutes.
 - 9 minutes.
 - 8 minutes.
 - 7 minutes.
20. What is the divergence angle that must be maintained from overhead a VOR to a range of 15 NM to allow one aircraft to climb/descend through the level of another?
- 15°.
 - 30°.
 - 45°.
 - 60°.

21. The longitudinal separation minimum, based on time between two aircraft at the same altitude, for which navigation aids can give a frequent determination of position and speed and when both aircraft have updated navigation data, can be reduced to 5 minutes if:
- the first aircraft has updated the navigation data within the last 10 minutes.
 - both aircraft have updated the navigation data within the last 10 minutes.
 - the second aircraft is updating navigation data at the time.
 - the second aircraft has updated the navigation data within the last 10 minutes.
22. Two aircraft are on crossing tracks at the same level where the navigation aids do not permit frequent update of speed and position. What is the minimum separation applied?
- 3 minutes.
 - 5 minutes.
 - 10 minutes.
 - 15 minutes.
23. What is the required track divergence between the departure track and the missed approach track for parallel runway operations?
- 15°.
 - 30°.
 - 45°.
 - 60°.
24. Longitudinal separation based on time for aircraft at the same level when navigation aids permit frequent determination of speed and position and where the preceding aircraft is maintaining TAS 20 kt faster than the succeeding aircraft, is:
- 10 minutes.
 - 2 minutes.
 - 5 minutes.
 - 3 minutes.
25. The reduced radar separation provided to aircraft established on the same localizer course is:
- 2 NM.
 - 5 NM.
 - 3 NM.
 - 2.5 NM.
26. Longitudinal separation based on time for aircraft at the same level when navigation aids permit frequent determination of speed and position is:
- 10 minutes.
 - 2 minutes.
 - 5 minutes.
 - 3 minutes.

- 15
Questions
27. If an aircraft is making a ‘straight-in’ approach a departing aircraft may take off in any direction:
- until 2 minutes before the arriving aircraft is estimated to be over the threshold of the instrument runway.
 - until 10 minutes before the arriving aircraft is estimated to be over the threshold of the instrument runway.
 - until 5 minutes before the arriving aircraft is estimated to be over the threshold of the instrument runway.
 - until 3 minutes before the arriving aircraft is estimated to be over the threshold of the instrument runway.
28. Unless otherwise prescribed by the appropriate ATS authority, the horizontal radar separation minimum is:
- 2.5 NM.
 - 5 NM.
 - 3 NM.
 - 2 NM.
29. Separation between departing aircraft may be reduced to 2 minutes when:
- the preceding aircraft is 30 kt or more faster than the succeeding aircraft.
 - the preceding aircraft is 20 kt or more faster than the succeeding aircraft.
 - the preceding aircraft is 10 kt or more faster than the succeeding aircraft.
 - the preceding aircraft is 40 kt or more faster than the succeeding aircraft.
30. To meet wake turbulence separation criteria for aircraft using timed approaches, what is the minimum applied to aircraft landing behind a heavy or medium aircraft?
- Medium behind heavy = 2 minutes.
 - Medium behind medium = 2 minutes.
 - Light behind medium = 4 minutes.
 - Medium behind heavy = 3 minutes.
31. Track separation between aircraft using the same DR fix shall be applied requiring the aircraft to fly:
- at least 45° separated at a distance of 15 NM or more from the fix.
 - at least 30° separated at a distance of 15 km or more from the fix.
 - at least 30° separated at a distance of 15 NM or more from the fix.
 - at least 45° separated at a distance of 15 km or more from the fix.
32. A separation minimum shall be applied between a light or medium aircraft and a heavy aircraft, and between a light and a medium aircraft, when the heavier aircraft is making a low or missed approach and the lighter aircraft is landing on the same runway in the opposite direction, or on a parallel opposite direction runway separated by:
- 730 m.
 - Less than 760 m.
 - 760 m.
 - Less than 730 m.

33. What would be the minimum distance applied in an approach sequence between a heavy aircraft followed by a light aircraft?

(Note: It is assumed that this question is applicable to radar wake turbulence and assumes that the following aircraft is at the same level as the preceding aircraft.)

- a. 6 NM.
- b. 3 NM.
- c. 4 NM.
- d. 5 NM.

34. What is the minimum vertical separation between IFR aircraft flying below FL290?

- a. 500 ft.
- b. 1500 ft.
- c. 2000 ft.
- d. 1000 ft.

35. What is the minimum radar separation applied between aircraft on adjacent localizer courses during simultaneous parallel approaches mode 2 - dependent?

- a. 2 NM.
- b. 2.5 NM.
- c. 3 NM.
- d. 5 NM.

36. When one aircraft will pass through the level of another aircraft on the same track where navigation aids permit frequent determination of speed and position, the minimum longitudinal separation provided is:

- a. 5 minutes at the time the level is crossed.
- b. 10 minutes at the time the level is crossed.
- c. 15 minutes at the time the level is crossed.
- d. 20 minutes at the time the level is crossed.

37. In order to meet the wake turbulence separation criteria, what separation should be applied when a medium aircraft is taking off behind a heavy and both are using the same runway?

- a. 2 minutes.
- b. 3 minutes.
- c. 4 minutes.
- d. 1 minute.

38. What is the reduced radar separation applied between aircraft on the same ILS localiser course within 10 NM of touchdown?

- a. 5 NM.
- b. 2.5 NM.
- c. 3 NM.
- d. 2 NM.

39. Longitudinal separation based on time for aircraft at the same level when navigation aids permit frequent determination of speed and position and the preceding aircraft is maintaining a TAS 40 kt faster than the succeeding aircraft is:
- 10 minutes.
 - 15 minutes.
 - 5 minutes.
 - 3 minutes.
40. RNAV distance based separation may be used at the time the level is crossed, provided that each aircraft reports its distance to or from the same 'on track' waypoint. The minimum is:
- 60 NM.
 - 50 NM.
 - 20 NM.
 - 80 NM.
41. The normal radar separation standard may be reduced, when radar capabilities permit, to:
- 3 NM.
 - 5 NM.
 - 1.5 NM.
 - 1 NM.
42. What wake turbulence separation is applied when a light aircraft is taking off behind a medium aircraft?
- 3 minutes.
 - 1 minute.
 - 2 minutes.
 - 5 minutes.
43. One minute separation may be used between departing aircraft if the tracks to be flown diverge by at least:
- 25° immediately after take-off.
 - 45° immediately after take-off.
 - 30° immediately after take-off.
 - 15° immediately after take-off.
44. The separation method whereby the vertical and horizontal separation may be reduced to a minimum of half the standard is called:
- composite separation.
 - combined separation.
 - reduced separation.
 - essential separation.

45. The longitudinal separation minima based on distance using DME from 'on track' DME stations is:

- a. 10 NM.
- b. 5 NM.
- c. 20 NM when the leading aircraft maintains a TAS 20 kt faster than the succeeding aircraft.
- d. 20 NM.

46. The longitudinal separation minima based on distance using DME where each aircraft uses 'on track' DME stations is:

- a. 10 NM when the leading aircraft maintains a TAS 20 kt faster than the succeeding aircraft.
- b. 10 NM when the leading aircraft maintains a TAS 40 kt faster than the succeeding aircraft.
- c. 20 NM when the leading aircraft maintains a TAS 10 kt faster than the succeeding aircraft.
- d. 10 NM when the leading aircraft maintains a TAS 10 kt faster than the succeeding aircraft.

47. Aircraft flying reciprocal tracks may be cleared to climb and descend through the level of the other aircraft provided the manoeuvre does not commence until:

- a. 5 minutes after the aircraft are assumed to have passed each other.
- b. 10 minutes after the aircraft are assumed to have passed each other.
- c. 15 minutes after the aircraft are assumed to have passed each other.
- d. 20 minutes after the aircraft are assumed to have passed each other.

48. An aircraft will not be given clearance to take off until the preceding aircraft has:

- a. reported airborne and climbed to 500 ft.
- b. left the aerodrome traffic zone.
- c. crossed the upwind end of the runway or made a turn away from the runway.
- d. reported 'downwind'.

49. A departing aircraft will not be permitted to take off when arriving instrument traffic has:

- a. started the procedure turn.
- b. passed a point 10 minutes from the threshold of the instrument runway.
- c. reported "field in sight".
- d. reported "long final".

50. Wake turbulence separation is:

- a. applicable at all times.
- b. applicable only between aircraft of different wake turbulence categories.
- c. applicable only between aircraft at the same level or where the succeeding aircraft is less than 1000 ft below the preceding aircraft.
- d. not applicable to parallel runway operations.

Answers

1	2	3	4	5	6	7	8	9	10	11	12
c	d	a	b	d	b	c	c	a	c	b	a

13	14	15	16	17	18	19	20	21	22	23	24
b	c	b	b	d	b	d	a	d	d	b	c

25	26	27	28	29	30	31	32	33	34	35	36
d	a	c	b	d	a	a	b	a	d	a	b

37	38	39	40	41	42	43	44	45	46	47	48
a	b	d	d	a	c	b	a	d	a	b	c

49	50
a	c

Chapter

16

Control of Aircraft

Procedural ATC	333
Radar Control	333
Radar Identification.....	335
Radar Service	335
Aerodrome Control	339
Approach Control Service	341
Air Traffic Advisory Service	347
Aircraft Emergencies	347
Questions	349
Answers	356

Procedural ATC

16.1 Concept. The provision of ATC to air traffic is largely a post WW2 concept. The need for ATC was highlighted by the high loss rate of aeroplanes during WW2 on and in the vicinity of aerodromes due to mid air collisions, collisions with obstacles and inadvertent flight into terrain. This led to the establishment of ATC at aerodromes provided by the control tower but beyond the aerodrome boundary (now replaced by the ATZ) little was provided other than a 'flight following' monitoring service essentially to ascertain that the aircraft was still airborne! After an accident in the US involving two Constellations over the Grand Canyon in the early 1950s concern was expressed that two relatively small objects flying over a vast geographic area could be a threat to each other. This led to the establishment of a 'one-way' system for east/west flight over the continental US and gave rise to the first established 'procedural' ATC service. The service provided separation by requiring aircraft naturally cruising at the same altitude to fly via different routes (lateral geographic separation). It required the pilot to tell the air traffic controller where the aircraft was by passing position reports. The data collected was plotted and as the flight progressed any apparent collision risk was determined and the flights concerned would be asked to alter course to eliminate the problem. The problems with this were that the equipment used to determine the aircraft position was, by modern standards, somewhat crude; the communications equipment and facilities were poor and the availability of flight information including met data was virtually nonexistent. However, the density of air traffic was also low and the application of large 'buffer' distances overcame the problems of inaccuracy and poor communications.

16.2 Flight Strips. Within the ATC centres, the progress of a flight is tracked with a paper system known as a flight strip. The strip is originated from the ATS Flight Plan and in theory, is transferred from ATCO to ATCO and from centre to centre. Clearly, the progress of the flight strips may not actually be 'physical' but will require a new strip to be compiled at centre 'B' from information passed by telephone from centre 'A'. Within a centre the progress may be a physical passing of the strip from one controller to another. This system is virtually fool-proof and over the last 20 years ATC research centres (e.g. Eurocontrol at Brétigny) have tried to come up with electronic replacements.

16.3 Procedural Separation. The procedural separation standards are covered in Chapter 15 of these notes.

16.4 Communications. Ever since aircraft have been able to carry radios, they have been used for air to ground communications. The present day ATC system relies on VHF two-way communications to make the system work. Over the ocean areas and remote land areas, HF is used together with the ability to maintain a radio watch using the Selcal system which relieves the pilot of having to actually listen to the radio. Each ATC unit has a radio callsign e.g. Oxford Approach, as does each aircraft. If two aircraft have the same or confusingly similar call signs, ATC can ask one aircraft to use another call sign for the time being.

Radar Control

16.5 Concept. The primary use of radar in ATC is to enhance the provision of separation. In theory, radar gives the ATCO the ability to determine the aircraft position with more accuracy than the pilot can! However, SATNAV systems with precision accuracy (+/- 30 cm) are now adding a whole new dimension to ATC. Radar systems cover long range surveillance used in area control (en route traffic), terminal aerodrome radar (TAR) used in the vicinity of an aerodrome or aerodromes to provide a service to arriving and departing traffic, and surface movement radar at an aerodrome to provide the aerodrome controller with information in poor visibility or at night.

The system that provides a radar return displayed on a display system is called Primary Surveillance Radar (PSR). All radar systems can be augmented with Secondary Surveillance Radar (SSR) to provide flight specific identification and altitude information. Radar can also be used in the provision of precision or non-precision approaches.



*Figure 16.1 ATC radar head at Clee Hill,
Shropshire*



Figure 16.2 ATC radar head at London Heathrow

16.6 Radar Services. At its most basic, radar is used to derive information for the updating of information displayed on the flight strips. In this manner, it is augmenting a procedural system. If, however, the radar response from a specific aircraft can be individually determined (identified) then the provision of separation from other radar contacts (aircraft) can be achieved. In this manner, the radar derived information is used directly to provide separation to a much greater degree of accuracy. The types of radar service are:

- Radar Control for controlled en route aircraft
- Approach Radar Control for arriving and departing controlled traffic
- Radar vectoring: the provision of navigation instructions to an aircraft to achieve a specific aim e.g. positioning to intercept the ILS localizer.
- PAR and SRA as instrument approach systems

As with all ATC procedures, a radar service is only provided inside CAS. ICAO does however permit the use of radar to obtain information to enable the provision of an FIS outside of CAS. Radar may also be used to assist the provision of information as part of the Advisory ATC service provided in class F airspace. At an aerodrome, radar may be used by the aerodrome controller to determine the separation between departing aircraft but not to actually apply the separation.

16.7 Radar Separation. There is only one radar separation standard and this is 5 NM. As defined in Chapter 15, reduced radar separation may be applied under specific conditions. The separation applied is based upon the aircraft position derived from PSR only. As defined and specified in Chapter 15, wake turbulence separation can be applied using radar derived information. In this case the separation standards applied are based on distance.

Radar Identification

16.8 Requirement. Before a radar controller can provide any service to an aircraft, the radar identity of the aircraft must be established. Clearly, the basic SSR capability is to identify a specific aircraft squawking a specifically allocated code, therefore this method of identification is most commonly used. It is also the quickest method of identification. Once an aircraft has been allocated an SSR code, it must be retained until otherwise advised by the radar controller. If an emergency situation arises, the pilot should not squawk A7700 if the identity of the aircraft has already been established using SSR. All other methods of identification by radar require the ATCO to observe the radar contacts on the display screen and determine, either from geographic position or from a specific manoeuvre, which contact is the aircraft requiring the service. Such observations include:

- Geographic location e.g. ‘2 NM west of Woodstock’
- Relative to a radio navigation aid - “On the 230 radial from the Daventry VOR DME 5 NM”
- Latitude and longitude
- Georef position
- Turn through 30° or more away from desired course and then return to the course
- Positive handover from a radar controller who had previously identified the aircraft

16.9 Procedure. When identifying a radar contact as a specific aircraft, the radar controller must tell the pilot how the identification was achieved. The controller will use the phrase ‘radar contact’ to indicate that the aircraft has been identified and that until further advised, a service will be provided - “G-CD radar contact 2 NM west of Oxford”. This position should agree with the position the pilot thinks the aircraft is at. If significantly different, the pilot must inform the controller in the event that the controller has misidentified the aircraft.

Radar Service

16.10 Commencement. After identification, the pilot is to be told what type of radar service is to be provided and what the objective is - “G-CD radar contact 6 NM west of Compton, radar control, expect radar vectors for ILS approach runway 26”

16.11 Termination. When an aircraft reaches the limit of radar cover or the edge of a radar vectoring area, or the aim of the service has been achieved, the pilot will be advised that the service is terminated, given position information and instructions/advice how to continue. For instance: “G-CD radar service terminated, presently 10 NM south of Benson, resume own navigation, suggest continue with London Information 125.650”

16.12 Radar Vectoring. Radar vectoring is the passing of navigation information to a pilot by a radar controller to achieve the aircraft flying a required track. This may be simply to avoid weather or manoeuvre around another aircraft radar contact. Once the aim of the vectoring has been achieved, the pilot will be told to “Resume own navigation” giving the pilot the aircraft’s position and any appropriate instructions. This implies that the radar vectoring has ended. It may be provided to position the aircraft such that a straight-in instrument approach can be achieved. In any event, radar vectoring for approach control purposes is only carried out inside a radar vectoring area (RVA). Obstacles are marked on an RVA chart.

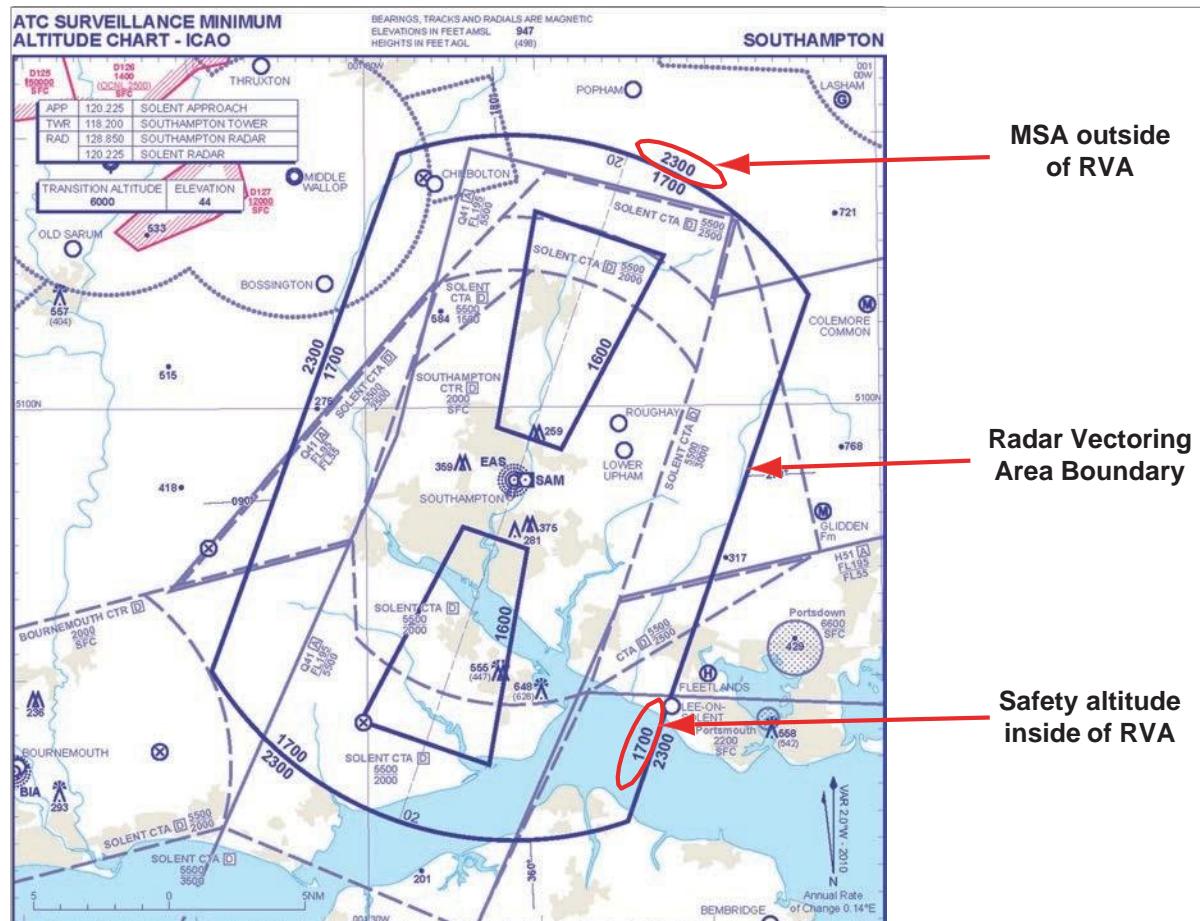


Figure 16.3 Radar vectoring area

16.13 Vectoring Procedure. Radar vectoring will not begin until the aircraft radar contact is determined to be within the RVA. The RVA will be displayed on the radar display in the form of a video map electronically generated within the radar display software. Because of possible inaccuracies ('slippage') aircraft will not be radar vectored closer to the edge of the RVA than half the applicable radar separation standard or 2.5 NM whichever is greater. Normally, radar vectoring will begin at a fix at MSA. It may, however, begin at any time after the aircraft has been identified on radar and the aircraft altitude is known to the ATCO. The RVA chart displays the obstacles in the area together with the elevation of the terrain. The radar controller will pass magnetic headings to the pilot to steer to make good a desired track over the ground. The pilot will fly the heading and the controller will adjust the heading for the wind. The aircraft will not be given clearance to descend below the RVA safe altitude (highest obstacle in RVA plus MOC rounded up) until established on the ILS localizer course or on the final approach track, or the pilot reports that he/she is continuing the approach visually. Throughout the procedure, the radar controller must be aware of the elevation of the terrain and the aircraft configuration to avoid spurious GPWS warnings.

16.14 ILS Vectoring Requirements. Where the purpose of vectoring is to position the aircraft at a point where localizer capture is achieved, the closing heading to the centre line of the ILS localizer is 45° . If parallel runway operations Modes 1 or 2 are in use, the angle is limited to 30° . The closing heading is to be maintained for a distance of not less than 1 NM.

16.15 Radar Controlled Approach. Radar may be used to provide a precision (PAR) or non-precision (SRA) approach to a runway. In both cases, the radar controller provides radar derived information to the pilot to permit the aircraft to be flown along a predefined track and, in the case of PAR, a defined glide path. For SRA, a recommended vertical profile (virtual glide path) is published. If radar contact is lost for any significant period during the last 2 NM of a radar approach, the pilot will be advised to carry out a missed approach procedure.

16.16 PAR. This is specifically engineered radar equipment that provides very accurate (precision) azimuth and glide path information to a dedicated radar controller. Whilst providing a PAR service, the controller will be engaged in providing the service to one aircraft and will not have any other duty. The pilot will be passed azimuth (right or left turn or heading) information and elevation ('on'; 'above'; or 'below') information to fly the aircraft along the predetermined flight path. The service will continue until the aircraft reaches DH which would have been passed by the pilot to ATCO at the beginning of the procedure. At DH the pilot will be informed that the aircraft is at DH and radar service is terminated. Because the information is passed in the form of a continuous talk-down, the pilot must stay on the PAR approach frequency. The radar controller is therefore responsible for obtaining a landing clearance from the aerodrome controller. Normally this would be done at 4 NM from the threshold of the landing runway, but may be delayed by the aerodrome controller until 2 NM. If no clearance has been received at 2 NM, the pilot will automatically begin the missed approach procedure. At some time during the approach (usually at 3 NM) the pilot will be asked to confirm a final check of the landing gear (and at a military aerodrome, the flap configuration). At some point during the approach, the flight crew will cross-check the position of the aircraft against the PAR information (for instance using DME and rad alt information). PAR will not generally be found at civilian aerodromes; however, the new generation of PAR equipment is widely installed at military aerodromes.



Figure 16.4 PAR installation at RAF Marham

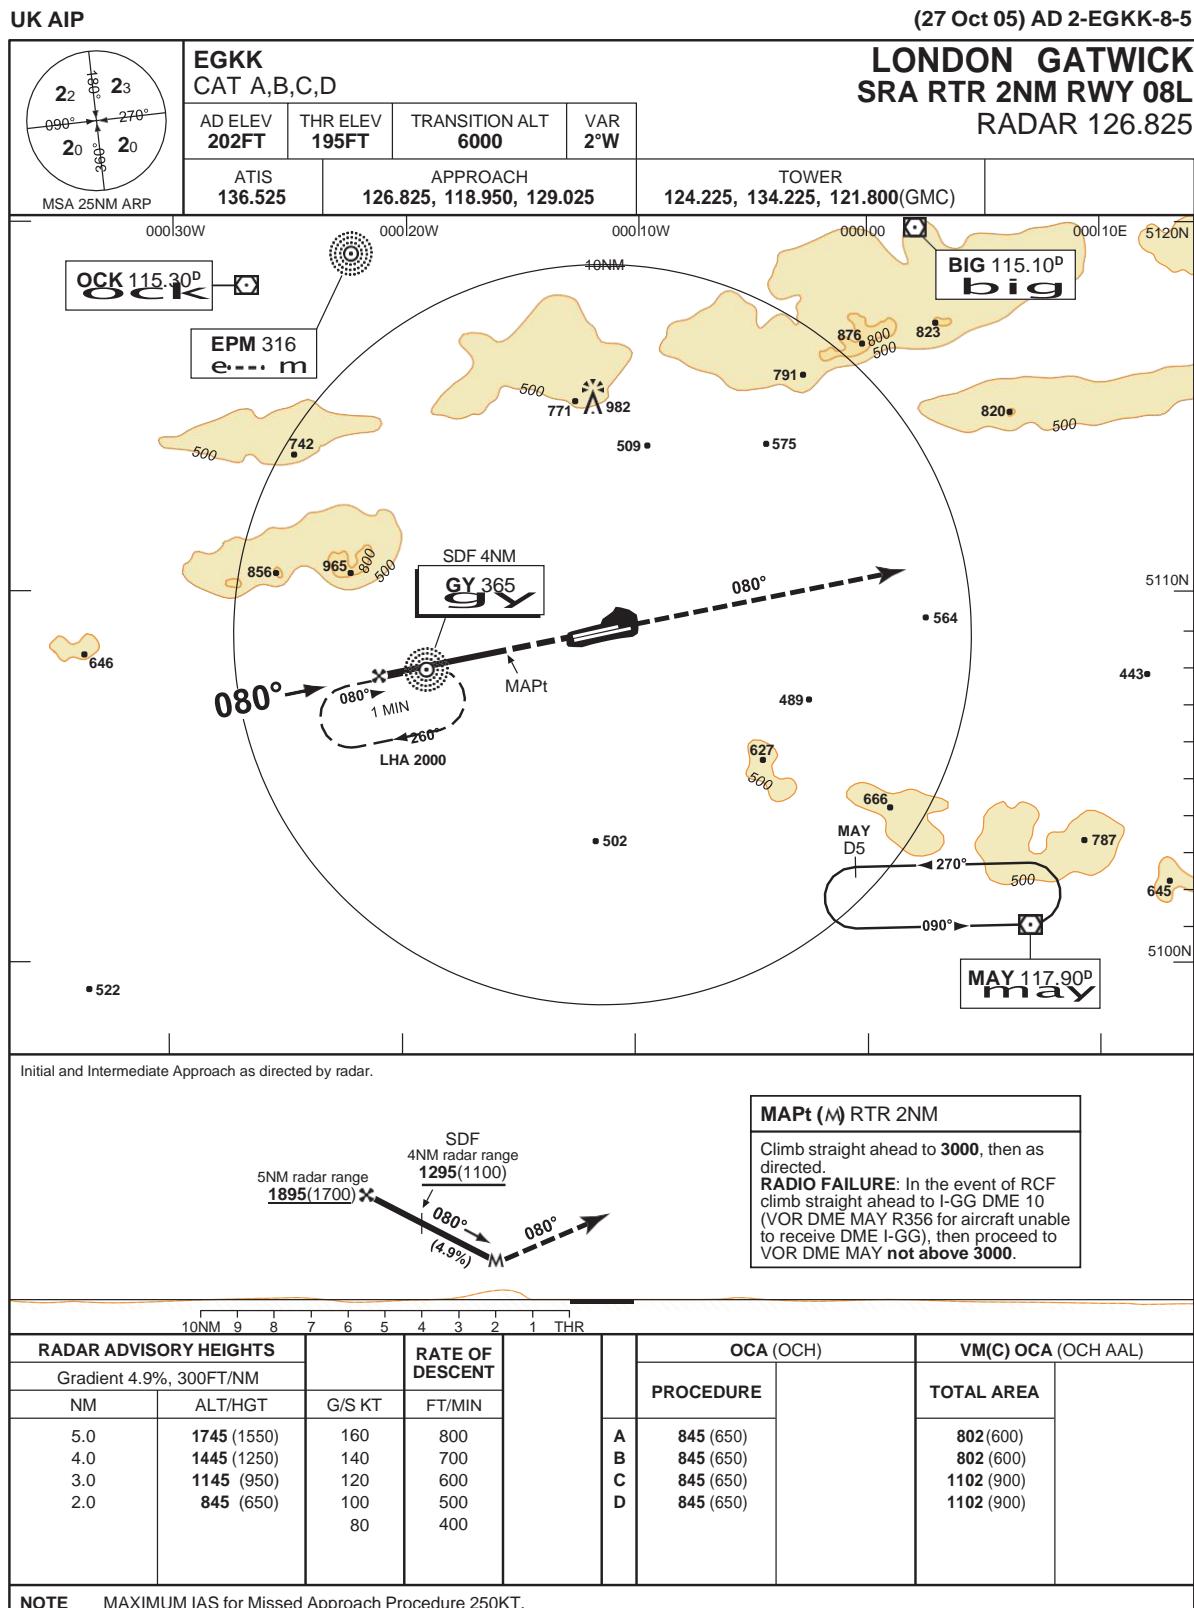


Figure 16.5 SRA approach

16.17 SRA. An SRA approach is a non-precision procedure using TAR and will therefore have a determined MDA/H. The procedure for SRA is similar to PAR except that in this case advisory height information is passed with range information e.g. "5 miles from touchdown, you should be passing one thousand five hundred and fifty feet". SRA approaches always have an RTR

figure stated. This is the range at which the radar service will be automatically terminated. RTR stands for Radar Termination Range. Typically RTR2 is used indicating that the radar service will be terminated at 2 NM from the threshold of the landing runway. During the procedure, the pilot is passed magnetic headings to fly and corrections (left or right) to the extended centre line of the landing runway. If the RTR is 2, distance information is passed (with advisory height information) every 1 NM. If RTR1 is applicable, range and height information is passed every 0.5 NM. As for PAR, the radar controller will be responsible for obtaining a landing clearance from the aerodrome controller and passing it to the pilot. The approach plate for the SRA approach to Gatwick is shown in *Figure 17.5*.

Aerodrome Control

16.18 Introduction. The responsibility for avoiding collisions involving aircraft, obstacles, vehicles and personnel on or in the air in the vicinity of an aerodrome rests with the aerodrome controller. At a ‘controlled aerodrome’ (see definition) the aerodrome controller usually operates from the visual control room (VCR) situated at the top of the control tower. The VCR normally allows the aerodrome controller to see all parts of the aerodrome but may also have electronic aids to assist the controller when visibility is poor or at night. The primary duty of the aerodrome controller is to control access to the runway in use. The nature of the service offered is procedural, with the pilot telling the aerodrome controller where the aircraft is and the controller basing any instructions or clearances on that information. For departing aircraft the aerodrome controller will give a take-off clearance which will be de-facto permission to enter and take off from the runway. Once airborne the pilot will report ‘airborne’ at which time another aircraft can be cleared to use the runway.

16.19 Use of the Runway. The aerodrome controller will normally decide which runway will be used for take-off and landing operations. The ‘runway-in-use’ will determine the direction for instrument approaches and the direction for the visual circuit. Normally, the wind direction will be the deciding factor; however, in calm or light wind conditions, another direction may be preferable for ATC, airspace restriction or noise abatement requirements. At London Heathrow, a departing aircraft will be expected to accept a 5 kt tail wind and use the noise preferential runways. It is a generally accepted practice that only one aircraft is permitted on the runway at any time.

16.20 Departing Aircraft. Aircraft waiting for take-off will be held at a runway holding point on the taxiway at a safe distance from the centre line of the runway. It is normal procedure for aircraft to be given a ‘take-off immediate’ clearance. This requires the pilot to taxi the aircraft on to the runway and without stopping, line the aircraft on the centre line and then apply the necessary power to commence the take-off run. A succeeding aircraft may be permitted to enter the runway (given the instruction ‘line up and wait’) as soon as the preceding aircraft has commenced the take-off run. A succeeding aircraft will not be given clearance to take off until the preceding aircraft has either crossed the upwind threshold, or has commenced a turn away from the runway direction.

16.21 Arriving Aircraft. When established on final approach, an arriving aircraft will be given clearance to land if the runway is available. For an arriving instrument approach, the clearance to land will normally be given at about 4 NM from the threshold and certainly no later than 2 NM from the threshold. If the pilot of an arriving instrument approach has not been given a landing clearance, the missed approach procedure is to be flown commencing at 2 NM. Once the landing run is complete and the pilot has turned the aircraft onto the taxiway, he/she is required to make a report to the aerodrome controller to confirm that the aircraft has ‘vacated the runway’. This is to be made when all of the aircraft has passed the appropriate holding point.

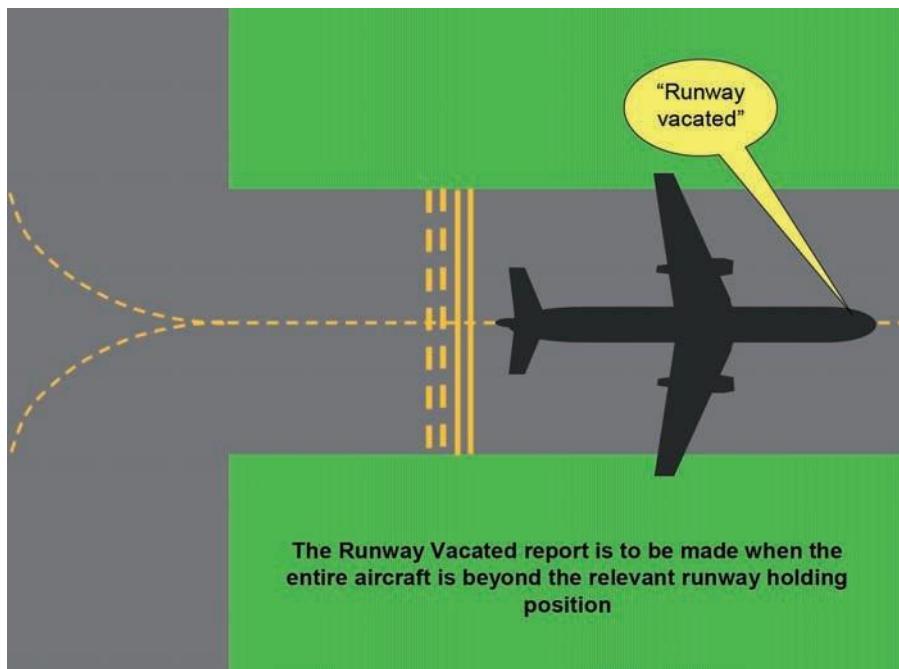


Figure 16.6 Runway vacated report

16.22 Essential Local Traffic. Information on essential local traffic known to the Controller, shall be also transmitted to departing and arriving aircraft. Essential local traffic consists of any aircraft, vehicle or personnel on or near the runway to be used, or traffic in the take-off, climb-out or final approach areas, which may constitute a collision hazard to a departing or arriving aircraft.

16.23 “Land After” Clearance. Under certain conditions, a pilot may be given a provisional clearance to “land after the preceding aircraft”. This will be done to increase the utilization of the runway at peak times so that aircraft may arrive at 1 minute intervals. In this case, the pilot of the second aircraft will decide if the preceding aircraft will be clear of the runway at the time he/she lands and that there is sufficient separation between the aircraft throughout the manoeuvre. Throughout the landing, the pilot of the following aircraft must be able to see the previous aircraft and is responsible for maintaining separation. In this case, the pilot of the following aircraft will apply the appropriate visual separation which may be less than the procedural separation. The provision of ‘fast turn off lanes’ or ‘rapid exit taxiways’ on aerodromes enhances this option. The necessary conditions are:

- Only permitted during daylight;
- The pilot of the second aircraft must be able to see the preceding aircraft throughout the manoeuvre;
- The runway must be dry (braking action good);
- The pilot and operator of the aircraft concerned must be aware that the runway occupancy time is limited to 50 seconds;
- The ATCO must be able to see the entire length of the landing runway.

16.24 Flight Information. As with all other ATSUs the aerodrome controller is responsible for the provision of flight information to aircraft on the aerodrome or in flight in the vicinity of the aerodrome. Routine information may be passed using ATIS but the aerodrome controller is responsible for making sure that departing aircraft and arriving aircraft at the initial contact with ‘tower’ are aware of any limitations to the radio navigation or visual aids on the aerodrome. Likewise any work in progress on the aerodrome is to be reported in a timely manner.

16.25 Information to Departing and Arriving Aircraft. The aerodrome controller is required to ensure that pilots have adequate and accurate aerodrome information prior to using the aerodrome. Where wind information is passed, the direction is to be in degrees magnetic so that the pilot can relate this directly to the aircraft compass.

- **Prior to Taxi.** Before taxiing a pilot is to be told:
 - What runway is in use;
 - The surface wind direction and speed;
 - The aerodrome QNH;
 - The air temperature for the runway to be used (for turbine engine aircraft only);
 - The visibility in the direction of take-off or the RVR;
 - The correct time.
- **Prior to Take-off.** The following is passed to a pilot prior to take-off:
 - Any significant changes in wind conditions, air temperature, visibility or RVR
 - Significant meteorological conditions in the take-off and climb-out areas (unless the pilot has already been informed)
- **Prior to Entering the Traffic Pattern.** Before entering the traffic pattern or commencing an approach to land, a pilot is to be provided with the following information:
 - The runway to be used;
 - The surface wind direction and speed;
 - The aerodrome QNH;

16.26 Alerting Service. The aerodrome controller is responsible for the activation of the aerodrome crash rescue and firefighting service when required. If necessary, all visual circuit traffic can be suspended by the aerodrome controller for the duration of an emergency situation. The aerodrome controller may suspend the visual circuit on the instructions of the Area Control Centre if an aircraft in an emergency is likely to land at the aerodrome. If an aircraft which has been cleared to land fails to do so within 5 minutes after the landing clearance has been issued, or fails to contact the aerodrome controller after having been transferred, the aerodrome controller will report the fact immediately to the ACC or the FIC and the Alert Phase will be declared immediately.

Approach Control Service

16.27 Establishment. Approach control provides ATC to traffic departing from, and arriving at, aerodromes. Where IFR traffic is departing to join airways, the approach controller is the link between the aerodrome departure procedures and the airways joining procedures and vice versa for arriving traffic. It is usual nowadays for radar to be used in approach control although procedural approach control exists (as here at Oxford for the VDF and NDB approach procedures). Where an aerodrome is in a CTR, approach control is mandatory and the controller may be known as the zone controller. The approach office (approach control room) may be at another aerodrome if there is more than one aerodrome in the CTR. Where an aerodrome is outside of a CTR, approach control (where established, as here at Oxford) is advisory. Where procedures are established for instrument approaches, the approach controller may delegate radar vectoring (and monitoring of self positioning) to a radar director. At aerodromes in CTRs where the met conditions are IMC or the criteria for VMC take-off cannot be met, the approach controller will be responsible giving clearance for take-offs. It will also be the approach controller's responsibility for obtaining clearance to land from the aerodrome controller for IFR flights carrying out low visibility instrument approaches.

16.28 Departing Aircraft. When the control of traffic is based on an air traffic control clearances, the clearance is to specify:

- Direction of take-off and turn after take-off,
- Track to be made good before proceeding on desired heading,
- Level to maintain before continuing climb to assigned cruising level,
- Time, point and/or rate at which level change shall be made,
- Any other necessary manoeuvre consistent with the safe operation of the aircraft.

16.29 Take-off direction. Departing aircraft may be expedited by suggesting a take-off direction which is not into the wind. It is the responsibility of the pilot-in-command of an aircraft to decide between making such a take-off, and waiting for normal take-off in a preferred direction.

16.30 Delays. In order to avoid excessive holding at the destination, aircraft may be held at the departure aerodrome prior to take-off. ATC is required to advise operators (or their nominated representative) of substantial delays and in any case where the delay is expected to exceed 30 minutes.

16.31 Information for Departing Aircraft. The following information is to be passed to departing aircraft by the approach controller:

- **Meteorological information.** Information regarding significant changes in the meteorological conditions in the take-off or climb-out area, obtained by the unit providing approach control service is to be transmitted to departing aircraft without delay, except when it is known that the aircraft already has received the information. Significant changes in this context include those relating to surface wind direction or speed, visibility, runway visual range, or air temperature (for turbine engined aircraft), and the occurrence of thunderstorm or cumulonimbus, moderate or severe turbulence, windshear, hail, moderate or severe icing, severe squall line, freezing precipitation, severe mountain waves, sand storm, dust storm, blowing snow, tornado or waterspout.
- **Visual or non-visual aids.** Information regarding changes in the operational status of visual or non-visual aids essential for take-off and climb shall be transmitted without delay to a departing aircraft, except when it is known that the aircraft already has received the information.
- **Essential traffic information.** Information regarding essential local traffic known to the controller shall be transmitted to departing aircraft without delay.

16.32 Arriving Aircraft. Arriving aircraft (aircraft being handed over to approach from area (airways)) may be required to report when leaving or passing a reporting point, or when starting procedure turn or base turn, or to provide other information required by the controller to expedite departing aircraft.

16.33 Initial Approach Clearance. An IFR flight will not be cleared for an initial approach below the appropriate minimum altitude unless:

- The pilot has reported passing an appropriate point defined by a radio navigation aid; or
- The pilot reports that the aerodrome is (and can be maintained) in sight; or
- The aircraft is conducting a visual approach; or
- The aircraft's position has been positively determined by radar.

16.34 Visual Approach. Visual approach is defined as an approach by an IFR flight when either part or all of an instrument approach procedure is not completed and the approach is executed with visual reference to terrain. An IFR flight may be cleared to execute a visual approach provided that the pilot can maintain visual reference to the terrain and the reported ceiling is at or above the approved initial approach level for the aircraft so cleared; or the pilot reports at the initial approach level or at any time during the instrument approach procedure that the meteorological conditions are such that with reasonable assurance a visual approach and landing can be completed.

16.35 Separation. Separation shall be provided between an aircraft cleared to execute a visual approach and other arriving and departing aircraft. For successive visual approaches, radar or non-radar separation shall be maintained until the pilot of a succeeding aircraft reports having the preceding aircraft in sight. The aircraft shall be instructed to follow and maintain separation from the preceding aircraft. Transfer of communications should be effected at such a point or time that clearance to land or alternative instructions can be issued to the aircraft in a timely manner.

16.36 Instrument Approach. Instrument approaches are carried out under the supervision of the approach controller. Where radar vectoring and monitoring of approaches is carried out, control may be delegated to a radar director or radar final controller.

- **Speed control.** The method of maintaining separation during sequenced instrument approaches using radar is by asking the aircraft concerned to fly at specified a speed. It is usual for an aircraft to start an instrument approach (from the IAF) at 210 kt (IAS). For example a clearance might be: "Speedbird 289 leave Ockham heading 290 speed 210 kt". This is a speed that most commercial operations aircraft can achieve without having to use drag or lift enhancing devices. If necessary, the speed of a subsequent aircraft will be reduced to maintain the necessary time/distance interval between the aircraft. Speed adjustments will be made in intervals of no more than 20 kt and required speeds will always be in multiples of 10 e.g. "Speedbird 289 maintain 180 kt". During the latter stages of an approach, the pilot will need to reduce the speed to V_{at} so no further speed control will be applied after the aircraft has passed 4 NM from touchdown.
- **Unfamiliar procedures.** If a pilot-in-command reports (or if it is clearly apparent to the ATC unit) that he or she is not familiar with an instrument approach procedure, the initial approach level, the point (in minutes from the appropriate reporting point) at which procedure turn will be started, the level at which the procedure turn shall be carried out and the final approach track shall be specified, except that only the last-mentioned need be specified if the aircraft is to be cleared for a straight-in approach. The missed approach procedure shall be specified when deemed necessary.
- **Visual reference to terrain.** If visual reference to terrain is established before completion of the approach procedure, the entire procedure must nevertheless be executed unless the aircraft requests and is cleared for a visual approach.
- **Choice of procedure.** A particular approach procedure may be specified to expedite traffic. The omission of a specified approach procedure will indicate that any authorized approach may be used at the discretion of the pilot.

16.37 Holding. Where holding is required as part of an arrival procedure leading to an instrument approach, the approach controller will control the holding procedure (stack). Control may be delegated to a radar controller (director). Holding and holding pattern entry shall be accomplished in accordance with procedures established by the appropriate ATS authority and published in Aeronautical Information Publications. If entry and holding procedures have not been published or if the procedures are not known to the pilot-in-command of an aircraft, the appropriate air traffic control unit shall describe the procedures to be followed.

- **Holding point.** Aircraft shall be held at a designated holding point. The required minimum vertical, lateral or longitudinal separation from other aircraft, according to the system in use at that holding point, shall be provided.
- **Separation.** When aircraft are being held in flight, the appropriate vertical separation minima shall continue to be provided between holding aircraft and en route aircraft while such en route aircraft are within five minutes flying time of the holding area, unless lateral separation exists.
- **Holding levels.** Levels at holding points shall be assigned in a manner that will facilitate clearing each aircraft to approach in its proper priority. Normally the first aircraft to arrive over a holding point should be at the lowest level, with following aircraft at successively higher levels. However, aircraft particularly sensitive to high fuel consumption at low levels, such as supersonic aircraft, should be permitted to hold at higher levels than their order in the approach sequence, whenever the availability of discrete descent paths and/or radar makes it possible, subsequently, to clear the aircraft for descent through the levels occupied by other aircraft.
- **Alternative procedures.** If a pilot-in-command of an aircraft advises of an inability to comply with the approach control holding or communication procedures, the alternative procedure(s) requested by the pilot-in-command should be approved if known traffic conditions permit.

16.38 Stacking (Approach Sequence). Whenever approaches are in progress, the following procedures (stacking) are applied:

- **Priority.** The approach sequence (the stack) is established to permit the arrival of the maximum number of aircraft with the least average delay. Special priority **may** be given to:
 - An aircraft which anticipates being compelled to land because of factors affecting the safe operation of the aircraft (engine failure, fuel shortage, etc.).
 - Hospital aircraft or aircraft carrying any sick or seriously injured person requiring urgent medical attention.
- **Procedural sequence.** Except where timed approaches are in progress (see paragraph 16.39), succeeding aircraft will be cleared for approach (to start the procedure - leave the stack) when the preceding aircraft:
 - Has reported that it is able to complete its approach without encountering IMC; or
 - Is in communication with and has been sighted by the aerodrome controller, and reasonable assurance exists that a normal landing can be made.

- **Holding.** ATC will approve a request to hold for weather improvement (or for other reasons). If other aircraft holding decide to make an approach and radar is available, a pilot deciding to remain holding will be vectored to an adjacent fix to continue holding. Alternatively, he/she may be vectored (or given a procedural clearance) to place the aircraft at the top of the stack so that other aircraft may be permitted to carry out the procedure and land.
- **Credit time.** Where an aircraft has been authorized to absorb delay time whilst en route (by reduced cruising speed or en route holding), the time delayed should be credited in any stacking.

16.39 Timed Approaches. Timed approaches allow subsequent aircraft to commence approaches more frequently than as specified in paragraph 16.38. In this case an aircraft would be cleared to depart the fix of the stack a period of time after the preceding aircraft. The procedure must be authorized by the authority and the following complied with:

- A suitable point on the approach path (capable of being determined by the pilot - VOR radial, DME range) is to be specified as a check point for timing of successive approaches;
- Aircraft are to be given a time at which to pass the specified point inbound (the purpose of which is to achieve the desired interval between successive landings on the runway while respecting the applicable separation minima at all times including runway occupancy period). The time determined is to be passed to the pilot to allow sufficient time for him/her to arrange the flight to comply.

16.40 Expected Approach Time (EAT). An expected approach time shall be determined for an arriving aircraft that will be subjected to stacking, and shall be transmitted to the aircraft, as soon as practicable and preferably not later than at the commencement of its initial descent from cruising level. In the case of aircraft particularly sensitive to high fuel consumption at low levels, an expected approach time should, whenever possible, be transmitted to the aircraft early enough before its intended descent time to enable the pilot to choose the method of absorbing the delay and to request a change in the flight plan if the choice is to reduce speed en route. A revised expected approach time shall be transmitted to the aircraft without delay whenever it differs from that previously transmitted by 5 minutes or more or such lesser period of time as has been established by the appropriate ATS authority or agreed between the ATS units concerned. An expected approach time shall be transmitted to the aircraft by the most expeditious means whenever it is anticipated that the aircraft will be required to hold for thirty minutes or more. The holding point to which an expected approach time relates shall be identified together with the expected approach time whenever circumstances are such that this would not otherwise be evident to the pilot. Expected Approach Time is defined as the time at which ATC expects that an arriving aircraft, following a delay, will leave the holding fix to complete its approach for landing.

16.41 Information for Arriving Aircraft. The following information is to be passed to aircraft during the approach phase:

- **When established.** As early as practicable after an aircraft has established communication with the approach controller, the following information, in the order listed, shall be transmitted to the aircraft, except where it is known the aircraft has already received it:
 - Runway-in-use;
 - Meteorological information;

Note: The meteorological information is identical to that required in ATIS broadcasts for aircraft arriving, and is to be extracted from meteorological reports disseminated locally at the aerodrome.

- Current runway surface conditions, in case of precipitants or other temporary hazards;
- Changes in the operational status of visual and non-visual aids essential for approach and landing.
- **Commencing final approach.** At the commencement of final approach, the following information shall be transmitted to the aircraft:
 - Significant changes in the mean surface wind direction and speed;

Note: Significant changes are detailed in Annex 3 (Met). If the controller has access to wind component tables, the following are considered to be significant:

◦ Mean head-wind component	10 kt
◦ Mean tail-wind component	2 kt
◦ Mean crosswind component	5 kt

- The latest information, if any, on wind shear and/or turbulence in the final approach area;
- The current visibility representative of the direction of approach and landing or, when provided, the current runway visual range value(s) and the trend, if practicable, supplemented by slant visual range value(s), if provided.
- **During final approach.** The following information shall be transmitted without delay:
 - The sudden occurrence of hazards (for example: unauthorized traffic on the runway);
 - Significant variations in the current surface wind, expressed in terms of minimum and maximum values;
 - Significant changes in runway surface conditions;
 - Changes in the operational status of required visual or non-visual aids;
- Changes in observed RVR value(s), in accordance with the reported scale in use, or changes in the visibility representative of the direction of approach and landing.

16.42 Transfer of Aircraft from One ATC Unit to Another. Transfer of the control of aircraft from one ATC Unit to another shall be at such a point, level or time that information and instructions can be passed to the aircraft in a timely manner.

Air Traffic Advisory Service

16.43 Establishment and Objective. The Air Traffic Advisory Service is defined as a service provided within advisory airspace (class F) to ensure separation between aircraft operating on IFR flight plans. In practice, this service is established in response to a request where the establishment of a full ATC service has not been determined. In other words, it is a temporary arrangement pending a decision on whether or not a full ATC service is required. The objective is to make information on collision hazards more effective than it would be in the provision of a flight information service only. It is provided to IFR flights in advisory airspace or on advisory routes.

16.44 Operation. The Air Traffic Advisory Service does not afford the degree of safety and does not assume the same responsibilities as a full ATC service. To this end clearances are not issued and only advice or suggestions are offered by the ATCOs. An IFR flight electing to use the service is expected to comply with the same procedures as would be in force in CAS, except that Flight Plan changes are not subject to clearance. All IFR flights flying in class F airspace are required to file Flight Plans. Traffic electing to use the advisory service will receive an 'acknowledgement' of the submission of the Flight Plans only. IFR flights crossing an advisory route are required to do so at 'right angles' to the route direction at a level appropriate to the semi-circular rule.

Aircraft Emergencies

16.45 Use of SSR. Use of the reserved SSR codes is the most expeditious means of indicating a situation where an aircraft requires assistance. Clearly, the aircraft must be flying in an area where radar is used for ATC, and in this may be a factor of altitude. Even outside of radar control areas there are military facilities and mobile units that can interrogate and receive SSR information which can assist the alerting service to provide the necessary assistance. The reserved codes are:

- Mode A code 7700 Emergency
- Mode A code 7600 Radio failure
- Mode A code 7500 Unlawful Interference

Additionally:

- Mode A code 7000 Conspicuity code for an aircraft operating in an area where a radar service is available but the aircraft is not in receipt of the service (commonly referred to as VFR conspicuity)
- Mode A code 2000 An aircraft is operating in an area where a radar service is not available but will be entering an area where a radar service is available and will be requesting that service (this is used for eastbound NAT traffic east of 30W that intend entering the Scottish UIR).

16.46 Aircraft Already Identified. If a pilot is already in receipt of a radar service and has been identified by the use of a discrete SSR code, selection of a reserved code to indicate a state of emergency may delay the application of the assistance. In this case the allocated Mode A code should be retained.

16.47 ATC Contact in an Emergency. In an emergency pilots can expect to be contacted by ATC on 121.5 MHz or, as a back-up, on the inter-pilot air-to-air frequency 123.45 MHz.

16.48 Emergency Descent. If an aircraft suffers a pressurization failure at altitude, the rules require the aircraft to be descended to an altitude where oxygen in the air supports life. In the event, ATC will broadcast a warning to aircraft in the vicinity of a descending aircraft. The pilot of the descending aircraft should attempt to broadcast the aircraft altitude at intervals to assist other aircraft to avoid a collision.

16.49 Fuel Jettison. In certain circumstances, it may be necessary to reduce the mass of the aircraft to maximum landing mass as soon as possible by dumping as much fuel as is required. All aircraft which have a maximum take-off mass greater than the maximum landing mass are required to have a fuel jettison system. If the aircraft is flying in CAS, before commencing fuel jettison, the controlling ATCU is to be informed. The route over which the fuel is to be jettisoned should be clear of towns, preferably over water and clear of areas where thunderstorm activity has been reported or is expected. The level at which the jettison takes place is to be not lower than 6000 ft. This will allow the fuel in aerosol form to evaporate before reaching the ground. The ATCU is to be advised of the duration of the operation.

16.50 Strayed and Unidentified Aircraft. A strayed aircraft is one that has deviated significantly from its intended track or reports that it is lost, whereas an unidentified aircraft is one of which the ATCU is aware but the identity is not known.

Questions

1. In what class of airspace is an advisory service provided for participating IFR traffic and an FIS for all other traffic?
 - a. A
 - b. D
 - c. C
 - d. F
2. List the services that must be provided in an FIR:
 - a. FIS only.
 - b. FIS, advisory ATC, ATC.
 - c. FIS, aerodrome control.
 - d. FIS, alerting service.
3. An aircraft has been cleared to land and fails to do so within 5 minutes of the ETA of landing and communications have not been re-established with the aircraft. What phase of the Alerting Service will be declared?
 - a. DETRESFA.
 - b. INCERFA.
 - c. ALERFA.
 - d. EMERGFA.
4. When must QNH be passed to an aircraft prior to take-off?
 - a. In the taxi clearance.
 - b. On engine start-up request.
 - c. On first contact with ATC.
 - d. Just prior to take-off.
5. The necessary separation minima for controlled traffic in the vicinity of an aerodrome may be reduced when:
 - a. the commander of the aircraft requests reduced separation.
 - b. the aerodrome controller has the involved aircraft in sight.
 - c. the commander in the following aircraft has the preceding aircraft in sight and is able to maintain own separation.
 - d. directed by the aerodrome controller.
6. At commencement of final approach, if the approach controller has wind component information, what change in crosswind component change would be passed to the pilot?
 - a. 10 kt.
 - b. 8 kt.
 - c. 3 kt.
 - d. 5 kt.

7. For IFR departures, 1 minute separation can be applied if the aircraft fly on diverging tracks immediately after take-off of at least:
- 45°.
 - 15°.
 - 30°.
 - 2°.
8. During an approach, when can normal separation be reduced?
- When the controller has both aircraft in sight.
 - When the following aircraft has the preceding in sight and can maintain it.
 - When both pilots request it.
 - When both aircraft are under radar control.
9. For parallel runway operations, the missed approach tracks must diverge by:
- 15°.
 - 30°.
 - 45°.
 - 20°.
10. When the air traffic controller has wind information as components at the start of final approach, significant changes in the average surface wind direction and speed must be given to the pilot. The significant change of the average tailwind is:
- 5 kt.
 - 2 kt.
 - 4 kt.
 - 3 kt.
11. According to international agreements the wind direction, in degrees magnetic converted with local magnetic variation from the true wind direction must be passed to the pilot of an aircraft:
- before entering the traffic pattern or commencing an approach to landing, and prior to taxiing for take-off.
 - in anticipation of the upper wind for areas North of 60°N and South of 60°S.
 - when an aircraft is requested by the meteorological office or on specified points to give a AIREP.
 - when the local variation is greater than 10° East or West.
12. What is the closest to touchdown that a radar controller can request a change of speed to an aircraft on final approach?
- 5 NM.
 - 3 NM.
 - 2 NM.
 - 4 NM.
13. What defines a controlled aerodrome?
- It must be located within a CTR.
 - It must have a control tower giving an ATC service.
 - It must have a control tower and be in a CTR.
 - It must be in controlled airspace.

14. What is the primary use for radar in ATC?
- a. Separation.
 - b. Helping when aircraft communications have failed.
 - c. To assist pilots with technical problems.
 - d. To assist pilots of aircraft that are lost.
15. When must the SSR transponder be operated?
- a. Always.
 - b. At all times unless otherwise instructed by ATC.
 - c. At the pilot's discretion regardless of ATC instructions.
 - d. Mode A always; Mode C at pilot's discretion.
16. What is the minimum distance from threshold that a controller must have issued clearance to land by, for a non-precision approach?
- a. 5 NM.
 - b. 2 NM.
 - c. 3 NM.
 - d. 10 NM.
17. The maximum speed change that may be required during a radar approach is:
- a. ± 40 kt.
 - b. ± 5 kt.
 - c. ± 10 kt.
 - d. ± 20 kt.
18. What is the distance on final approach within which the controller should suggest that the aircraft executes a missed approach if the aircraft either is lost from the radar for a significant time, or the identity of the aircraft is in doubt?
- a. 1 NM.
 - b. 2 NM.
 - c. 3 NM.
 - d. 4 NM.
19. What is the closest point to the threshold that a radar controller may request a speed change?
- a. 1 NM.
 - b. 2 NM.
 - c. 3 NM.
 - d. 4 NM.
20. An aircraft in receipt of a radar service is told to "resume own navigation". What does this mean?
- a. The pilot is responsible for own navigation.
 - b. Radar vectoring is terminated.
 - c. The pilot should contact next ATC unit.
 - d. The pilot should contact the current ATC unit.

- 21. What is standard radar separation?**
- a. 5 NM.
 - b. 3 NM.
 - c. 10 NM.
 - d. 2.5 NM.
- 22. By how much will a radar controller turn an aircraft to identify that aircraft on the radar?**
- a. 45° .
 - b. 15° .
 - c. 30° or more.
 - d. a minimum of 25° .
- 23. What is the acceptable tolerance for Mode 'C' altitude indication (not in RVSM airspace)?**
- a. ± 100 ft.
 - b. ± 150 ft.
 - c. ± 300 ft.
 - d. ± 200 ft.
- 24. When may the pilot operate the 'IDENT' switch on the transponder?**
- a. Only in controlled airspace.
 - b. When instructed by ATC.
 - c. Only in uncontrolled airspace.
 - d. Only when under radar control.
- 25. If you are given an instruction by ATC to steer heading 030, the heading is:**
- a. degrees true and must be corrected for wind.
 - b. degrees magnetic and must be corrected for wind.
 - c. degrees true no correction to be applied.
 - d. degrees magnetic no correction to be applied.
- 26. When would you squawk SSR mode C?**
- a. Only when directed by ATC.
 - b. Always.
 - c. Always in controlled airspace.
 - d. Only in controlled airspace.
- 27. If radar contact is lost during an approach, at what range from touchdown would ATC order a missed approach to be flown?**
- a. 1 NM.
 - b. 2 NM.
 - c. 3 NM.
 - d. 4 NM.

28. When is an aircraft considered to have left the allocated flight level in the descent when referencing altitude to Mode C?
- Once it has descended through 100 ft.
 - Once it has descended through 200 ft.
 - Once it has descended through 300 ft.
 - Once it has descended through 500 ft.
29. If you are intercepted by a military aircraft, what do you set on the SSR transponder?
- A/2000 + C.
 - A/7500 + C.
 - A/7600 + C.
 - A/7700 + C.
30. Aerodrome traffic is considered to be:
- aircraft on the movement area and flying in the vicinity.
 - aircraft on the manoeuvring area and flying in the vicinity.
 - aircraft on the movement area only.
 - aircraft on the manoeuvring area only.
31. The criterion that determines the specific level occupied by an aircraft based on Mode C information (except where the appropriate ATC authority specifies a lesser criterion) is:
- +/- 300 ft.
 - +/- 150 ft.
 - +/- 250 ft.
 - +/- 200 ft.
32. If approved by the authority within 40 NM of the radar transmitter, radar separation can be reduced to:
- 5 NM.
 - 4.5 NM.
 - 4 NM.
 - 3 NM.
33. How close to the boundary of a radar vectoring area can an aircraft be vectored?
- 2 NM.
 - 2.5 NM.
 - 5 NM.
 - 3 NM.
34. A radar controller can request an aircraft to change speed when it is on the intermediate and final approach phase, except in certain conditions specified by the proper ATS authority. The speed change must not be more than:
- ± 15 kt.
 - ± 8 kt.
 - ± 10 kt.
 - ± 20 kt.

- 35. What does the ATC term “radar contact” mean?**
- a. The aircraft is identified and will receive separation from all aircraft while you are communicating with this radar facility.
 - b. ATC is receiving your transponder and will provide you with vectors and advice concerning traffic, until you are notified that contact is lost.
 - c. Your aircraft is seen and identified on the radar display and until further advised a service will be provided.
 - d. You will receive radar advisory concerning traffic until you are notified that the contact is lost or radar service is terminated.
- 36. The “land after” procedure may only be applied during:**
- a. daylight hours.
 - b. night or day.
 - c. VMC.
 - d. IMC.
- 37. An aircraft making a radar approach must be told to make a missed approach, when no landing clearance has been received from the non-radar traffic controller, when the aircraft is at a distance of:**
- a. 5 NM from the touchdown.
 - b. 1.5 NM from the touchdown.
 - c. 4 NM from the touchdown.
 - d. 2 NM from the touchdown.
- 38. A radar controller cannot ask a pilot to change speed if the aircraft is within:**
- a. 4 NM from the threshold on final approach.
 - b. 5 NM from the threshold on final approach.
 - c. 2 NM from the threshold on final approach.
 - d. 3 NM from the threshold on final approach.
- 39. When an aircraft’s SSR transponder appears to be unserviceable prior to departure and repair is not possible:**
- a. the pilot must indicate the failure in the flight plan, after which ATC will approve the operation of the aircraft without SSR.
 - b. if required by ATC, departure to the nearest suitable airport where repair can be effected will be approved.
 - c. the pilot will not be allowed to commence the flight.
 - d. the flight can only continue in the most direct manner.
- 40. Using SSR, a method by which a radar controller may identify an aircraft is to ask the pilot to:**
- a. set a specific SSR Code.
 - b. switch from “off” to “on”.
 - c. switch to “off”.
 - d. switch to “on”.

Answers

1	2	3	4	5	6	7	8	9	10	11	12
d	d	c	a	c	d	a	b	b	b	a	d

13	14	15	16	17	18	19	20	21	22	23	24
b	a	b	b	d	b	d	b	a	c	c	b

25	26	27	28	29	30	31	32	33	34	35	36
d	b	b	c	d	b	a	d	b	d	a	a

37	38	39	40
d	a	b	a

Chapter

17

Aeronautical Information Service (AIS)

Introduction.....	359
General	359
The Integrated Aeronautical Information Package.....	360
The Aeronautical Information Publication (AIP).....	360
Notices to Airmen (NOTAM)	363
SNOWTAM.....	364
ASHTAM	366
Aeronautical Information Circulars (AICs).....	367
Pre-flight and Post-flight Information	368
Questions	370
Answers	374

Introduction

17.1 Objectives of the AIS. The safety, regularity and efficiency of international air navigation rely on an organized and efficient flow of information. Pilots and Operators must have information concerning the availability of aerodromes, navigation facilities and ATS routes to enable a scheduled flight to take place. Air Traffic Controllers require the same information but also need information from pilots to ensure safety. The provision of this information, its handling and dissemination (publication) is the responsibility of the Aeronautical Information Service of the State. Whilst it has always been necessary for such information to be available, the role and importance of aeronautical information/data has changed significantly with the implementation of area navigation (RNAV), required navigation performance (RNP) and airborne computer-based navigation systems. Corrupt or erroneous aeronautical information/data can potentially affect the safety of air navigation. The introduction of precision RNAV approach systems, using GLS (GPS based landing systems) is another example of the need for precise information being available at all times to ensure the success of the system.

17.2 Annex 15. The ICAO document concerning the Standards and Recommended Practices for the provision of the AIS and which contains the material relevant to the learning objectives is Annex 15 to the Convention on Civil Aviation.

General

17.3 Functions. Each Contracting State is required to provide an aeronautical information service; or agree with one or more other Contracting State(s) for the provision of a joint service; or delegate the authority for the service to a non-governmental agency, provided the Standards and Recommended Practices of Annex 15 are adequately met.

17.4 Responsibilities. The State concerned shall remain responsible for the information published. Aeronautical information published for and on behalf of a State shall clearly indicate that it is published under the authority of that State. Each Contracting State shall take all necessary measures to ensure that aeronautical information/data it provides relating to its own territory, as well as areas in which the State is responsible for air traffic services outside its territory, is adequate, of required quality and timely. This shall include arrangements for the timely provision of required information to the aeronautical information service by each of the State services associated with aircraft operations.

17.5 Availability. Generally, the AIS will be available on a 24 hour a day basis. Where 24-hour service is not provided, service shall be available during the whole period an aircraft is in flight in the area of responsibility of an AIS plus a period of at least two hours before and after such period. The service shall also be available at such other time as may be requested by an appropriate ground organization.

17.6 Sources of Information. An AIS is also required to provide a pre-flight information service as well as in-flight information from the aeronautical information services of other States and from other sources that may be available.

17.7 Requirements of the Service. Aeronautical information distributed by the AIS is to be verified by and attributable to the State of Origin. If this is not possible when distributed, the information must be clearly identified as such. The AIS is to make available any information necessary for the safety, regularity or efficiency of air navigation to any other State that requires the information. The information provided is to be in a form suitable for the operational requirements of flight operations personnel including flight crews, flight planning and flight

simulator; and the ATSU responsible for the FIS within an FIR and the services responsible for pre-flight information.

17.8 Publication. The AIS is to receive and/or originate, collate or assemble, edit, format, publish/store and distribute aeronautical information/data concerning the entire territory of the State as well as areas in which the State is responsible for ATS outside its territory. Aeronautical information is published in the form of an Integrated Aeronautical Information Package (IAIP).

17.9 World Geodetic System - 1984 (WGS - 84). Since 1 January 1998, published geographical co-ordinates indicating latitude and longitude used in aviation have been expressed in terms of the World Geodetic System - 1984 (WGS - 84). Since 5 November 1998, in addition to the elevation (referenced to mean sea level) for the specific surveyed ground positions, geoid undulation (gravity variations caused by the varying radius of the Earth referenced to the WGS-84 ellipsoid) for those positions specified in the AIP AD section is also required to be published. This has implications for the orbits of satellites used in SatNav systems.

The Integrated Aeronautical Information Package

17.10 Definition and Contents. The Integrated Aeronautical Information Package is a system of dissemination of information essential to aviation operations and safety. It consists of the following elements:

- Aeronautical Information Publication (AIP - including amendment service)
- Supplements to the AIP
- NOTAM and pre-flight information bulletins (PIBs)
- Aeronautical Information Circulars (AICs)
- Checklists and Summaries

The Aeronautical Information Publication (AIP)

17.11 Use. The AIP (previously called the ‘Air Pilot’ in the UK) is designed to allow information of a generally ‘static’ nature to be published, if practicable, in a form that can be used in flight (e.g. instrument approach plates or SID plates). The AIP is required to be the definitive reference for permanent information and for information concerning long duration temporary changes. This means that aircrew and operators can rely on the information published to be accurate and up to date. The AIP does not contain aerodrome operating minima which are defined by the operator e.g. visual criteria to continue an instrument approach.

17.12 Contents. The AIP consists of three parts:

- Part 1 - General (GEN)
- Part 2 - En route (ENR)
- Part 3 - Aerodrome Data (AD)

17.13 Part 1 - GEN. Part 1 contains information of a regulatory and administrative nature. It consists of five sections. It is important to know that differences to the ICAO SARPs and PANS notified by the State publishing the AIP are detailed fully at GEN 1.7 (this is the usual method of referral to the AIP contents). The complete content of part 1 (by headings) is as follows but the learning objectives only require the student to recall the location of the information in bold italics:

- **GEN 0** Preface; Record of AIP amendments; Record of AIP Supplements; Checklist of AIP pages; List of hand amendments to Part 1; Table of Contents to Part 1;
- **GEN 1** National regulations and requirements - Designated authorities; Entry, transit and departure of aircraft; *Entry, transit and departure of passengers, crew and cargo; Aircraft instruments, equipment and flight documents*; Summary of national regulations and international agreements/conventions; *Differences from ICAO Standards and Recommended Practices*.
- **GEN 2** Tables and Codes - Measuring system, aircraft markings, holidays; Abbreviations used in AIS publications; Chart symbols; *ICAO 4 letter Location indicators*; List of Radio Navigation Aids; Conversion tables; Sunrise/Sunset tables; Rate of Climb Table.
- **GEN 3** Services - *Aeronautical Information Services*; Aeronautical Charts; Air Traffic Services; Communications Services; *Meteorological Services*; Search and Rescue.
- **GEN 4** Charges for aerodrome/heliport and air navigation services.

17.14 Part 2 - En Route (ENR). This part contains information for planning flights. It also contains information of a procedural administrative nature to allow notification of flights (submission of a Flight Plan) and compliance with ATC requirements. It consists of seven sections.

- **ENR 0** Preface: List of hand amendments to Part 2; Table of Contents of Part 2.
- **ENR 1** General rules and procedures - *General rules; Visual flight rules; Instrument flight rules*; ATS airspace classification; *Holding, Approach and Departure procedures*; Radar services and procedures; *Altimeter setting procedures*; Regional Supplementary procedures; Air Traffic flow management; Flight Planning; Addressing of flight plan messages; *Interception of civil aircraft; Unlawful interference; Air traffic incidents*; Off-shore operations.
- **ENR 2 Air traffic services airspace** - Detailed description of Flight Information Regions (FIR); Upper Flight Information Regions (UIR); Terminal Control Areas (TMA); other regulated airspace.
- **ENR 3 ATS routes** - Detailed description of Lower ATS routes; Upper ATS routes; Area navigation routes; Helicopter routes; Other routes; En route holding; *Minimum flight Altitude*.
- **ENR 4 Radio Navigation aids/systems** - Radio navigation aids - en route; Special navigation systems; Name-code designators for significant points; Aeronautical ground lights - en route.
- **ENR 5 Navigation warnings - Prohibited, restricted and danger areas**; Military exercise and training areas; Other activities of a dangerous nature; Air navigation obstacles - en route; Aerial sporting and recreational activities; Bird migration and areas of sensitive fauna.
- **ENR 6** En route charts - En route Chart ICAO and index charts.

17.15 Part 3 - Aerodromes. This part consists of four sections containing information concerning aerodromes (and heliports). Each aerodrome entry contains specified information in accordance with a set schedule. For instance, AD2.3 for EGLL (Heathrow) contains details of operational hours of the aerodrome; AD2.3 for EGTK (Oxford) contains the same information applicable to that aerodrome. The contents are:

- **AD 0** Preface; List of hand amendments to Part 3; Table of Contents to Part 3.
- **AD 1** Aerodrome/Heliports - Introduction - Aeronautical/helicopter availability; Rescue and fire fighting services and snow plan; Index to aerodromes and heliports; Grouping of aerodromes/heliports.
- **AD 2** Aerodromes - Detailed information about aerodromes (including helicopter landing areas if located at the aerodromes) listed under 24 sub-sections, including information concerning: Aprons, taxiways and check locations; surface movement guidance and control systems and markings; radio navigation and landing aids; charts relating to an aerodrome; refuelling facilities.
- **AD 3** Heliports - Detailed information about heliports (not located at aerodromes), listed under 23 sub-sections.

17.16 AIP Amendments. All changes to the AIP, or new information on a reprinted page, is identified by a distinctive symbol or annotation. In the UK this is a vertical black line in the page margin adjacent to the amended/new data. The AIP is amended or reissued at regular intervals as are necessary to keep the data up to date. The normal method of amendment is by replacement pages. Permanent changes to the AIP are published as AIP amendments. Each AIP amendment is allocated a consecutive serial number and each amended page, including the cover sheet, shows the publication date.

17.17 AIRAC. Operationally significant changes to the AIP are published in accordance with Aeronautical Information Regulation and Control procedures, and shall be clearly identified by the acronym - AIRAC. Each AIRAC AIP amendment page, including the cover sheet, must display an effective date. AIRAC is based on a series of common effective dates at intervals of 28 days (started 10 Jan 91). AIRAC information is distributed by the AIS unit at least 42 days in advance of the effective date and the information notified must not be changed for at least another 28 days after the effective date, unless the circumstance notified is of a temporary nature and would not persist for the full period. Whenever major changes are planned and where additional notice is desirable, a publication date 56 days in advance of the effective date should be used.

17.18 AIP Supplements. Temporary changes of long duration (three months or longer) and information of short duration which contains extensive text and/or graphics are published as AIP supplements. Each AIP supplement is allocated a serial number which shall be consecutive and based on the calendar year. AIP supplement pages are kept in the AIP as long as all or some of their contents remain valid. When an AIP supplement is sent in replacement of a NOTAM, it is to include a reference to the serial number of the NOTAM. A checklist of AIP supplements currently in force is issued at intervals of not more than one month (i.e. monthly or more frequent). AIP supplement pages should be coloured in order to be conspicuous, preferably in yellow.

Notices to Airmen (NOTAM)

17.19 Definition. NOTAM are notices distributed by means of telecommunications containing information concerning the establishment, condition or change in any aeronautical facility, service, procedure or hazard, the timely knowledge of which is essential to personnel concerned with flight operations.

17.20 Origination. NOTAM are to be originated and issued promptly whenever the information to be distributed is of a temporary nature and of short duration, or when operationally significant permanent changes, or temporary changes of long duration, are made at short notice (except when extensive text and/or graphics is essentially included, in which case, the information is published as an AIP supplement). NOTAM are required whenever information is of direct operational significance.

17.21 AIRAC Notification. When an AIP amendment or an AIP Supplement is published in accordance with AIRAC procedures, NOTAM are to be originated giving a brief description of the contents, the effective date and the reference number to the amendment or supplement. This NOTAM shall come into force on the same effective date as the amendment or supplement.

17.22 Notice and Validity. NOTAM should remain in force as a reminder in the pre-flight information bulletin until the next checklist/summary is issued. Whenever possible, at least 24 hours' advance notice is desirable, to permit timely completion of the notification process and to facilitate airspace utilization planning. NOTAM notifying the unserviceability of aids to air navigation, facilities or communication services should give an estimate of the period of unserviceability or the time at which restoration of service is expected.

17.23 Excluded Matter. NOTAM should not include information of non-operational importance including partial failures of lighting or ground systems, routine maintenance, any work in progress on runways not in use or if the equipment can be rapidly removed from the duty runway, temporary obstructions, local area parachuting, and the lack of apron marshalling services and road traffic control.

17.24 Distribution. NOTAM are to be distributed to addressees to whom the information is of direct operational significance, and who would not otherwise have at least seven days prior notification. The aeronautical fixed telecommunication network (AFTN - teleprinter) is, whenever practicable, employed for NOTAM distribution. When NOTAM are sent by means other than the AFTN a six digit date-time group indicating the date and time of filing the NOTAM and the identification of the originator is used, preceding the text.

17.25 NOTAM Checklists. A checklist of current NOTAM is issued at intervals of not more than one month. The checklist is to refer to the latest AIP amendment, AIP supplement and the internationally distributed AICs.

17.26 Errors. When errors occur in a NOTAM, a NOTAM with a new number to replace the erroneous NOTAM will be issued or the erroneous NOTAM cancelled and a new NOTAM issued.

17.27 Summary. A monthly printed plain language summary of NOTAM in force, including the indications of the latest AIP amendments, checklist of AIP supplements and AIC issued, is to be sent by the most expeditious means to recipients of the IAIP.

SNOWTAM

17.28 Description. Information concerning snow, ice and standing water on aerodrome pavement areas is to be reported by SNOWTAM. Its validity is a maximum of 24 hours.

17.29 Contents of a SNOWTAM. Appendix 2 to Annex 15 details the requirements of a SNOWTAM. The information contained is as follows (If a field is not applicable then it is left blank and nothing is transmitted):

- A. The ICAO aerodrome locator code e.g. EGLL (Heathrow)
- B. The date/time of observation (UTC)
- C. Runway designators (e.g. 27R)
- D. Cleared runway length if less than published length (m)
- E. Cleared runway width if less than the published width (m; if off set: L or R)
- F. Deposits over total runway length:
 - Nil - Clear and dry
 - Damp
 - Wet or water patches
 - Rime or frost covered
 - Dry snow
 - Wet snow
 - Slush
 - Ice
 - Compacted or rolled snow
 - Frozen ruts or ridges
- G. Mean depth (mm) for each third of total runway length
- H. Friction measurement on each third of runway and friction measuring device

Friction Coefficient	Estimated surface friction	Code
0.4 and above	Good	5
0.39 - 0.36	Medium to good	4
0.35 - 0.3	Medium	3
0.29 - 0.26	Medium to poor	2
0.25 and below	Poor	1
Reading unreliable	Unreliable	9

Figure 17.1 Surface friction reporting codes

- J. Critical snow banks (m)
- K. Runway lights (if obscured “yes” followed by L , R or LR)
- L. Further clearance (if planned inset length/width to be cleared or if to full dimensions insert FULL)
- M. Further clearance expected to be completed by (UTC)
- N. Taxiway
- P. Taxiway snow banks (if > 60 cm insert “Yes” followed by distance apart (m))
- Q. Apron
- S. Next planned observation /measurement is for (month/day/hour (UTC))
- T. Plain language remarks

17.30 SNOWCLO. A term used in a VOLMET broadcast to indicate that an aerodrome is closed due to snow or snow clearance in progress.



Photo: Mercedes Benz

Figure 17.2 Snow clearance

17.31 Wheel Braking On Wet Runways. The inherent friction characteristics of a runway surface deteriorate only slowly over a period of time, but the friction of a runway surface and thus the braking action can vary significantly over a short period in wet conditions depending on the actual depth of water on the runway. Also, long term (six monthly) seasonal variations in friction value may exist. The consequence of combination of these factors is that no meaningful operational benefit can be derived from continually measuring the friction value of a runway in wet conditions. In the context of these paragraphs a ‘wet runway’ covers a range of conditions from ‘Damp’ to ‘Flooded’ as described below. It does not include ice or runways contaminated with snow, slush, or water associated with slush. Paved runways of 1200 m and longer at civil aerodromes licensed for public use have been calibrated, to ensure that the friction characteristics of a runway surface are of a quality to provide good braking action in wet conditions. The presence of water on a runway will be reported on R/T using the following descriptions:

Description	Meaning
Dry	The surface is dry
Damp	The surface shows a change of colour due to moisture
Wet	The surface is soaked but no significant patches of standing water are visible.
Water Patches	Significant patches of standing water are visible
Flooded	Extensive standing water is visible.

Figure 17.3 Runway surface description

17.32 Interpretation. When a runway is reported as ‘DAMP’ or ‘WET’ pilots may assume that an acceptable level of runway wheel braking friction is available. When a runway is reported as having ‘WATER PATCHES’ or being ‘FLOODED’ braking may be affected by aquaplaning and appropriate operational adjustments should be considered. “Water patches” will be used if at least 25% of the runway length is covered with standing water. When a runway is notified as liable to be slippery when wet, take-offs or landings in wet conditions should only be considered when the distances available equal or exceed those required for a very slippery or icy runway as determined from information in the aeroplane’s Flight Manual. At military aerodromes in the UK, runway surface conditions will be described in plain language, and, where a braking action measuring device has been used, braking action will be described as good, medium or poor.

ASHTAM

17.33 Purpose. Volcanic ash cloud presents a significant hazard to turbine engine aeroplanes. Timely warning of the presence of ash clouds or the possibility of an ash cloud existing is vital to safe operations in areas where volcanic activity is common. Information concerning an operationally significant change in volcanic activity, a volcanic eruption and/or volcanic ash cloud is reported by means of an ASHTAM.

17.34 Description. The ASHTAM provides information on the status of activity of a volcano when a change in its activity is, or is expected to be of operational significance. This information is provided using the volcano level of alert colour code. In the event of a volcanic eruption producing ash cloud of operational significance, the ASHTAM also provides information on the location, extent and movement of the ash cloud and the air routes and flight levels affected. The maximum period of validity of an ASHTAM is 24 hours. A new ASHTAM must be issued whenever there is a change in the alert level.

17.35 ASHTAM Colour Code. The table below details the volcano alert code used in field E of an ASHTAM:

Colour	Description of Volcanic Activity
Red	Volcanic eruption in progress. Pyroclastic ash plume/cloud reported above FL250, or volcano dangerous, eruption likely, with pyroclastic ash plume/cloud expected to rise above FL250
Orange	Volcanic eruption in progress. Pyroclastic ash plume/cloud not reaching nor expected to reach FL250, or volcano dangerous, eruption likely, with pyroclastic ash plume/cloud not expected to reach FL250
Yellow	Volcano known to be active from time to time and volcanic activity has recently increased significantly, volcano not currently considered dangerous but caution should be exercised, or after a volcanic eruption (i.e. change in alert to yellow from red or orange) volcanic activity has decreased significantly, volcano not currently considered dangerous but caution should be exercised.
Green	Volcanic activity considered to have ceased and volcano reverted to its normal state.

Figure 17.4 ASHTAM colour code

Aeronautical Information Circulars (AICs)

17.36 Description. AICs are a method whereby information that does not qualify for inclusion in the AIP or is not suitable for NOTAM is disseminated to all interested parties. An AIC is originated whenever it is desirable to promulgate: a long-term forecast of any major change in legislation, regulations, procedures or facilities; information of a purely explanatory or advisory nature liable to affect flight safety; or information or notification of an explanatory or advisory nature concerning technical, legislative or purely administrative matters.

17.37 General Specifications of AICs. AICs are issued in printed form, and both text and diagrams may be included. The originating State can select the AICs that are to be given international distribution. AICs are allocated a serial number which should be consecutive and based on the calendar year. When AICs are distributed in more than one series, each series is separately identified by a letter. It is normal for differentiation and identification of AIC topics according to subjects to use a colour coding system (i.e. the paper on which the information is published is distinguished by topic by different colour). A checklist of AIC currently in force is issued at least once a year, with distribution as for the AIC. AICs in the UK are published on Thursdays every 28 days.

17.38 Colour Coding of UK AICs. Annex 15 recommends that AICs are colour-coded according to topics. In the UK the following colour coding scheme for AICs is adopted.

Colour	Meaning
Pink	Matters relating to safety
Yellow	Operational matters including ATS facilities and requirements
White	Administrative matters e.g. exam dates and fees
Mauve (Purple)	UK airspace reservations imposed in accordance with applicable regulations
Green	Maps and Charts

Figure 17.5 Colour coding of AICs

Pre-flight and Post-flight Information

17.39 Pre-flight Information. At any aerodrome normally used for international air operations, aeronautical information essential for the safety, regularity and efficiency of air navigation and relative to the route stages originating at the aerodrome must be made available to flight operations personnel, including flight crews and services responsible for pre-flight information. Aeronautical information provided for pre-flight planning purposes at the aerodromes must include: relevant elements of the Integrated Aeronautical Information Package; and maps and charts. The documentation may be limited to national publications and when practicable, those of immediately adjacent states, provided a complete library of aeronautical information is available at a central location and means of direct communications are available between the aerodrome AIS unit and that library.

17.40 Aerodrome Information. Additional current information relating to the aerodrome of departure shall be provided concerning the following:

- Construction or maintenance work on or immediately adjacent to the manoeuvring area;
- Rough portions of any part of the manoeuvring area, whether marked or not (For example: broken parts of the surface of runways and taxiways);
- Presence and depth of snow, ice or water on runways and taxiways, including their effect on surface friction;
- Snow drifted or piled on or adjacent to runways or taxiways;
- Parked aircraft or other objects on or immediately adjacent to taxiways;
- Presence of other temporary hazards including those created by birds;

- Failure or irregular operation of part or all of the aerodrome lighting system including approach, threshold, runway, taxiway, obstruction and manoeuvring area unserviceability lights and aerodrome power supply;
- Failure, irregular operation and changes in operation status of ILS (including markers) SRE, PAR, DME, SSR, VOR, NDB, VHF aeronautical mobile channels, RVR observing system, and secondary power supply;
- Presence and operations of humanitarian relief missions, such as those undertaken under the auspices of the United Nations, together with any associated procedures, and/or limitations applied thereof.

17.41 PIBs. A recapitulation of current NOTAM and other information of urgent character shall be made available to flight crews in the form of plain language pre-flight information bulletins (PIB).

17.42 Post-flight Information. States shall ensure that arrangements are made to receive at aerodromes/heliports information concerning the state and operation of air navigation facilities noted by aircrews, and shall ensure that such information is made available to the aeronautical information service for such distribution as the circumstances necessitate.

Questions

1. What level of alert would be inserted in field E of an ASHTAM following a volcanic eruption in which a pyroclastic ash cloud extends above FL250?
 - a. Red alert.
 - b. Orange alert.
 - c. Yellow alert.
 - d. Green alert.
2. In which section of the AIP would you find information on holding, approach and departing procedures?
 - a. GEN.
 - b. ENR.
 - c. SAT.
 - d. AD.
3. An integrated aeronautical information package consists of:
 - a. AIP and amendment service, supplement to the AIP, NOTAM, Pre-flight Information Bulletins (PIBs), AICs, checklists and summaries.
 - b. AIP and amendment service, NOTAM, Pre-flight Information Bulletins (PIBs), and AICs, AIRAC, checklists and summaries.
 - c. AIP and amendment service, supplement to the AIP, NOTAM, AIRAC, AICs, checklists and summaries.
 - d. AIP & Supplements, AIRAC, NOTAM and pre-flight bulletins.
4. In what section of the AIP are details of SIGMET found?
 - a. GEN.
 - b. ENR.
 - c. AD.
 - d. COMMS.
5. Where in the AIP is a list of Location Indicators to be found?
 - a. GEN.
 - b. COMMS.
 - c. AD.
 - d. AGA.
6. A check list for NOTAM is issued:
 - a. every 5 days.
 - b. every 28 days.
 - c. every 18 days.
 - d. at intervals of not more than one month.
7. AIP approach charts do not give information for Instrument Approach Procedures for:
 - a. OCA/H.
 - b. visibility minima.
 - c. obstacles protruding above the obstacle free zone.
 - d. DME frequencies.

8. AIP supplements with extensive text and graphics cover a short period. What is a long period in this respect?

- a. 1 yr.
- b. 2 months.
- c. 3 months.
- d. 6 months.

9. AIRAC is:

- a. a breakdown service.
- b. operationally significant changes to the AIP.
- c. a medical evacuation flight.
- d. an Army Air Corps publication.

10. What information is not on an aerodrome approach plate?

- a. DME frequency.
- b. OCA.
- c. Dominant obstacles.
- d. Operating minima if the aerodrome is being used as an alternative.

11. Where in the AIP is information concerning re-fuelling facilities and services found?

- a. ENR.
- b. SUPP.
- c. AD.
- d. GEN.

12. Where in the AIP would you find information concerning prohibited, restricted or danger areas?

- a. ENR.
- b. SUPP.
- c. AD.
- d. GEN.

13. In what part of the AIP are the details of SIGMET found?

- a. GEN.
- b. ENR.
- c. AD.
- d. AIRAC.

14. What is the coefficient of braking, if the braking action is reported as medium?

- a. Between 1.0 and 0.25.
- b. Between 0.25 and 0.3.
- c. Between 0.30 and 0.35.
- d. Between 0.35 and 0.4.

15. Regarding the AIS what is the time limit for a checklist of current NOTAM to be issued?
 - a. 7 days.
 - b. 14 days.
 - c. 28 days.
 - d. One month.
16. A checklist of the active NOTAM must be published on the AFTN at intervals of:
 - a. not more than 28 days.
 - b. not more than 15 days.
 - c. not more than 1 month.
 - d. not more than 10 days.
17. Operationally significant changes to the AIP shall be published in accordance with:
 - a. AICs.
 - b. AIP Supplements.
 - c. AIRAC procedures.
 - d. trigger NOTAMS.
18. A notice containing information concerning flight safety, air navigation, administration or legislative matters and originated at the AIS of a state is called:
 - a. Aeronautical Information Publication (AIP).
 - b. Aeronautical Information Circular (AIC).
 - c. AIRAC.
 - d. NOTAM.

Answers

1	2	3	4	5	6	7	8	9	10	11	12
a	b	a	a	a	d	b	c	b	d	c	a

13	14	15	16	17	18
a	c	d	c	c	b

Chapter

18

Aerodromes - Physical Characteristics

Introduction.....	377
Aerodrome Reference Code.....	378
Glossary of Terms	380
Aerodrome Data	382
Runways	384
Taxiways.....	388
Aprons.....	393
Questions	394
Answers	398

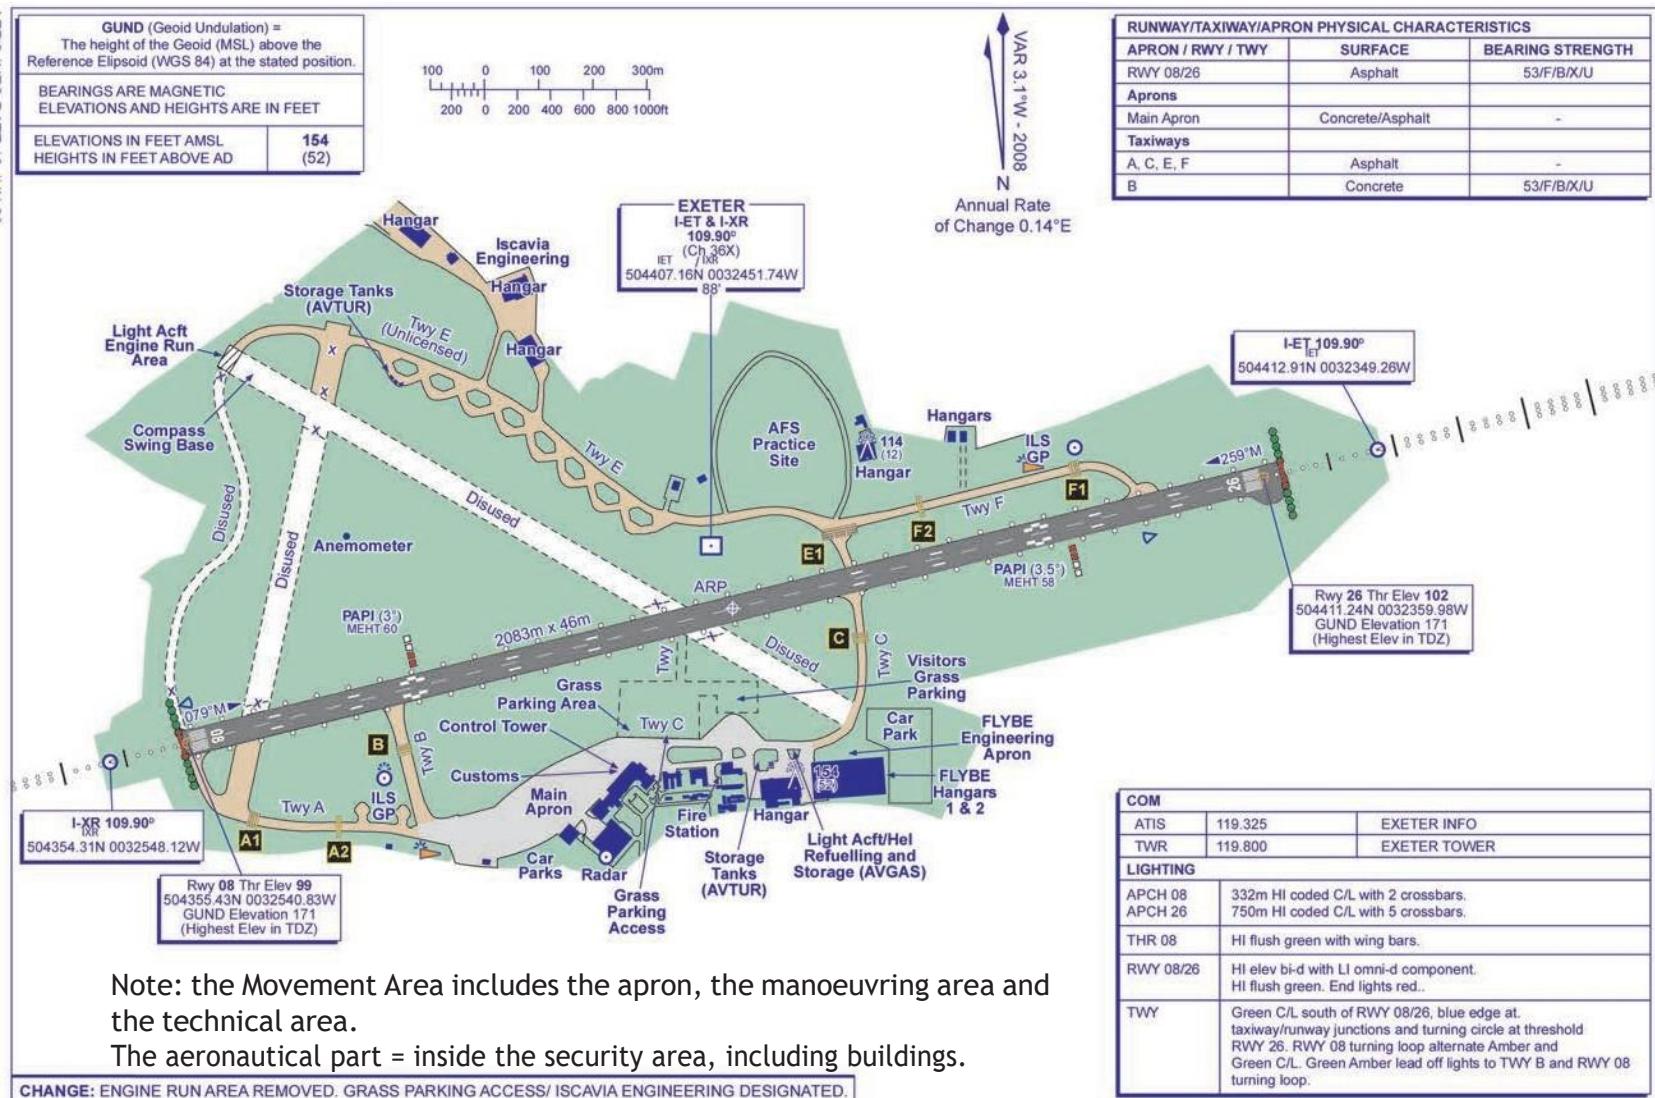


Figure 18.1

Introduction

18.1 Aerodromes. The place on the surface of the Earth where aeroplanes (aircraft) take off and land is known as an aerodrome. Aerodromes may be nothing more than a field used for light private flying, a defined strip of open water (a water aerodrome) or the complex and fascinating areas of real estate we associate with places like Heathrow, Gatwick, Chicago O'Hare, JFK etc... The one thing they all have in common is that they are all provided especially for the use of aeroplanes. In this chapter of the notes discussion will be limited to the physical construction of land aerodromes with emphasis on the aerodromes used for international commercial aviation. There is widely differing terminology used with reference to aerodromes, mostly colloquial and usually incorrect in interpretation. For instance, an airfield is exactly that: a field (usually unprepared) which is occasionally used as a landing ground for aeroplanes. An airport is a portal (entry) into a state for people and cargo which arrives by air, just as a sea port is the same for arrival by ship. The accepted and legally correct term is an aerodrome.

18.2 Annex 14. The annex to the Conference on International Civil Aviation that is concerned with aerodromes is Annex 14. In common with other annexes, it contains standards and recommended practices (SARPs) and states can notify differences to Annex 14 under article 38 of the convention. In accordance with article 15 of the convention, Annex 14 is only concerned with aerodromes that are open to the public. Each contracting state is required to ensure that such aerodromes comply with the requirements of the annex. In the United Kingdom, the authority responsible for ensuring compliance is the CAA. In the UK there are 4 types of aerodrome:

- Public use licensed aerodrome (open for general use on an equal basis)
- Ordinary (private) licensed aerodrome (use by licence holder and others with licence holder's permission only)
- Unlicensed aerodrome (limited use only)
- Government owned (Military, DERA etc.)

18.3 Use by Commercial Air Transport. The learning objectives of the course are directed towards the use of aerodromes by commercial air transport (CAT). The differentiation between public and private (ordinary) is immaterial. If an aerodrome is to be used for CAT, the services, facilities, markings, lighting and aircraft handling capability must comply with the requirements of the state for the issue of a licence. The use of an unlicensed aerodrome is not precluded for CAT, but the absence of a licence means that any instrument procedures associated with instrument approaches have not been certified as safe for use for CAT. It is therefore implicit that the use of an unlicensed aerodrome for CAT is restricted to visual operations only.

18.4 International Airports. Each state has the right to impose immigration, health and customs and excise controls on persons and cargo entering that state. An aerodrome at which such procedures and facilities for those controls are established and operated is known as an International Aerodrome. The place name of the aerodrome is usually suffixed with the word 'international' to denote the fact. For instance 'Los Angeles International'. In the UK such aerodromes are defined as 'customs aerodromes' although the term 'international' is becoming common place e.g. Birmingham International. As the student will recall, the Montreal Convention is only concerned with acts of unlawful interference committed at an 'international' aerodrome.

18.5 Basic Layout. All aerodromes complying with the SARPs of Annex 14 have a movement area, a manoeuvring area and an apron. The ‘real estate’ of an aerodrome is generally covered by the requirements of the licence but certain safety features associated with large aerodromes may fall outside the control of the licensing authority and be devolved to the local civil planning authority. For instance the erection of a 30 storey block of flats half a mile from the end of runway 27R at Heathrow would not be permitted by the local planning authority. At a controlled aerodrome there must be an ATC control tower which has a visual control room (VCR). If the aerodrome accepts non-radio traffic, there must be a signals area laid out on the ground so that it is visible from the air within a defined distance and height from the aerodrome. The omission of a signal square implies that the aerodrome cannot accept non-radio traffic. The signals used have already been covered in the Rules of the Air. The physical construction of an aerodrome will depend upon the requirements of the aeroplanes using it and the required availability (utilization) of the aerodrome and its services.

18.6 Movement Area. This is defined as: that part of an aerodrome intended for the surface movement of aircraft including the manoeuvring area, aprons and any part of the aerodrome provided for the maintenance of aircraft. Effectively, this is all the ‘real estate’ of the aerodrome. It may include grass areas where these are specified for aircraft use, but clearly does not include buildings and other constructed facilities.

18.7 Manoeuvring Area. This is defined as: that part of an aerodrome provided for the take-off and landing of aircraft and for the movement of aircraft on the surface, excluding the apron and any part of the aerodrome used for the maintenance of aircraft. The manoeuvring area will include runways (grass and paved), the taxiways (grass and paved) and any defined stop way or pre take-off areas before the threshold of a runway.

18.8 Apron. The apron is a legally defined portion of the aerodrome where passengers, mail and cargo are loaded on to an aeroplane. It is commonly called the ‘ramp’ in the US. It is also the place where the pilot is required to check the accuracy of the altimeter(s). At busy commercial aerodromes, ATC delegates the safe movement of aircraft on the apron to the Apron Management Service. This is usually provided by an organization contracted to the aerodrome authority specializing in the provision of baggage handling, refuelling, and marshalling and associated transportation requirements.

18.9 Aeronautical Part. This again is a legal definition of that portion of the aerodrome, this time including buildings and facilities, which are not accessible without security control. A commonly used term is ‘air-side’.

18.10 Failure or Irregularity of Systems and Equipment. ATCs shall immediately report - in accordance with local instructions - any failure or irregularity of communication, navigation and surveillance systems which could adversely affect the safety or efficiency of flight operations and/or the provision of air traffic control service.

Aerodrome Reference Code

18.11 Use. The reference code, which is used for aerodrome planning and construction purposes, is a simple method of inter-relating the specifications concerning the characteristics of aerodromes, so as to provide aerodrome facilities that are suitable for the aeroplanes that are intended to operate at the aerodrome. It is not intended to be used for determining the runway length or pavement strength requirements for aeroplanes or to specify a minimum or maximum length for a runway. In the discussion of aerodrome characteristics, reference will be made to the code elements where the learning objectives require it. Historically, questions have been asked in the exam concerning the code elements.

18.12 Elements. The code is composed of two elements which are related to aeroplane performance characteristics and dimensions. Element 1 is a number based on the aeroplane reference field length and element 2 is a letter based on the aeroplane wing span and the outer main gear wheel span (the distance between the outside wheels of the undercarriage). A particular specification is related to the more appropriate of the two elements of the code or to an appropriate combination of the two code elements. The code letter or number selected for design purposes is related to the critical aeroplane characteristics for which the facility is provided. In aerodrome design and operations, the aeroplanes which the aerodrome is intended to serve are first identified and then the two elements of the code. The following table defines the aerodrome code.

Aerodrome Reference Code				
Code Element 1		Code Element 2		
Code Number	Aeroplane Reference Field Length	Code Letter	Wing Span	Outer Main Gear Wheel Span
1	Less than 800 m	A	Up to but not including 15 m	Up to but not including 4.5 m
2	800 m or more, but less than 1200 m	B	15 m or more, but less than 24 m	4.5 m up to but not including 6 m
3	1200 m or more, but less than 1800 m	C	24 m or more, but less than 36 m	6 m up to but not including 9 m
4	1800 m or more	D	36 m or more, but less than 52 m	9 m up to but not including 14 m
		E	52 m or more, but less than 65 m	9 m up to but not including 14 m
		F	65 m up to but not including 80 m	14 m up to but not including 16 m

Figure 18.2 Aerodrome reference code

18.13 Aeroplane Reference Field Length. This is defined as the minimum field length (take-off distance) required for take-off at max certificated take-off mass, at sea level, with standard atmospheric conditions, still air and runway slope, as shown in the appropriate AFM prescribed by the certifying authority or equivalent data from the aeroplane manufacturer.

Glossary of Terms

18.14 Knowledge Requirement. The learning objectives require the student to be able to recall the definitions contained in the following table. Most of them will already be familiar and the remainder will be used in the ensuing discussions concerning aerodromes.

Term	Definition
Aerodrome	Any area of land or water designed, equipped, set apart or commonly used for affording facilities for the landing and departure of aircraft and includes any area or space, whether on the ground, on the roof of a building or elsewhere, which is designed, equipped or set apart for affording facilities for the landing and departure of aircraft capable of descending or climbing vertically, but shall not include any area the use of which for affording facilities for the landing and departure of aircraft has been abandoned and has not been resumed.
Aerodrome elevation	The elevation of the highest point of the landing area.
Aerodrome Reference Point (ARP)	The geographical location of the aerodrome and the centre of its traffic zone where an ATZ is established.
Aircraft stand taxi lane	A portion of an apron designated as a taxiway and intended to provide access to aircraft stands only.
Apron taxiway	A portion of a taxiway system located on an apron and intended to provide a through taxi route across the apron.
Clearway	An area at the end of the take-off run available and under the control of the aerodrome licensee, selected or prepared as a suitable area over which an aircraft may make a portion of its initial climb to a specified height.
Crosswind component	The velocity component of the wind measured at or corrected to a height of 33 feet above ground level at right angles to the direction of take-off or landing.
Instrument approach runway	A runway intended for the operation of aircraft using non-visual aids providing at least directional guidance in azimuth adequate for a straight-in approach.
Instrument approach strip	An area of specified dimensions which encloses an instrument runway.
Landing area	That part of the manoeuvring area primarily intended for the landing or take-off of aircraft.
Main runway	The runway most used for take-off and landing.
Non-instrument (visual) runway	A runway intended for the operation of aircraft using visual approach procedures.
Obstacle	All fixed (whether temporary or permanent) and mobile objects, or parts thereof, that are located on an area intended for the surface movement of aircraft or that extend above a defined surface intended to protect aircraft in flight.

Obstacle free zone	A volume of airspace extending upwards and outwards from an inner portion of the strip to specified upper limits which is kept clear of all obstructions except for minor specified items.
Precision approach runway	A runway intended for the operation of aircraft using visual and non-visual aids providing guidance in both pitch and azimuth adequate for a straight-in approach. These runways are divided into three categories.
Rapid exit taxiway (High speed turn-off)	A taxiway connected to a runway at an acute angle and designed to allow landing aeroplanes to turn off at higher speeds than are achieved on other exit taxiways thereby minimizing runway occupancy times.
Runway	A defined rectangular area on a land aerodrome prepared for the landing and take-off run of aircraft along its length.
Runway End Safety Area (RESA)	An area defined about the extended runway centre line and adjacent to the end of the strip primarily intended to reduce the risk of damage to an aeroplane undershooting or overrunning the runway.
Shoulder	An area adjacent to the edge of a paved surface so prepared as to provide a transition between the pavement and the adjacent surface for aircraft running off the pavement.
Stopway	A defined rectangular area at the end of the take-off run available, prepared and designated as a suitable area in which an aircraft can be stopped in the case of a discontinued take-off.
Strip	An area of specified dimensions enclosing a runway and taxiway to provide for the safety of aircraft operations.
Take-off Runway	A runway equipped to allow take-offs in specified weather minima.
Taxiway	A defined path on a land aerodrome established for the taxiing of aircraft and intended to provide a link between one part of the aerodrome and another.
Taxiway holding position	A designated position at which taxiing aircraft and vehicles may be required to hold in order to provide adequate clearance from a runway.
Taxiway intersection	A junction of two or more taxiways.
Threshold	The beginning of that portion of the runway usable for landing.
Usability	The percentage of occasions on which the crosswind component is below a specified value. The usability may be determined for any combination of take-off and landing directions available at an aerodrome.

Aerodrome Data

18.15 Aerodrome Reference Point (ARP). An aerodrome reference point must be established for an aerodrome. It is defined as the designated geographical (Lat and Long) location of the aerodrome and is to be reported to the aeronautical information services authority in degrees, minutes and seconds. The ARP should be located near the initial or planned geometric centre of the aerodrome and will normally remain where first established. In reality, it is usually the centre of the longest runway.

18.16 Pre-flight Altimeter Check Location. One or more pre-flight altimeter check locations are required for an aerodrome. These should be located on an apron to enable an altimeter check to be made prior to obtaining taxi clearance and thus eliminate the need for stopping for that purpose after leaving the apron. Normally an entire apron can serve as a satisfactory altimeter check location. The elevation of a pre-flight altimeter check location is given as the average elevation, rounded to the nearest metre or foot, of the area in which it is located. The elevation of any portion of a pre-flight altimeter check location must be within 3 m (10 ft) of the average elevation for that location.

18.17 Aerodrome and Runway Elevations. The aerodrome elevation and geoid undulation at the aerodrome elevation position (the highest point of the landing area) is measured to the nearest half metre or foot. For precision runways, it is to be measured to the nearest 0.25 m or foot. Note: The geoid is the gravitational level of mean sea level extending continuously through the continents. It is irregular due to local gravitational disturbances, hence geoid undulations.

18.18 Pavement Strengths. Where paved areas (runways, taxiways, aprons) are used by aircraft with maximum take-off mass greater than 5700 kg, the strength of the pavement is reported by the aircraft classification number - pavement classification number (ACN-PCN) system. An aircraft can safely use a paved area if the PCN is equal to or greater than the ACN.

18.19 PCN. The Pavement Classification Number (PCN) is used to indicate the strength of a runway, taxiway or apron. It is of primary importance for the apron as this is where the aircraft mass will be greatest. PCN is only used for paved areas.

18.20 ACN. The Aircraft Classification Number (ACN) is a single unique number expressing the relative effect of an aircraft on a paved area relating to pavement type and thickness. It is a number on a continuous scale increasing from 0 with no upper limit. Each aircraft has an ACN.

18.21 Aircraft of 5700 kg or less. The strength of the pavement for use by aircraft with maximum mass equal to and less than 5700 kg is calculated from the maximum allowable mass or the maximum tyre pressure.

18.22 Declared Distances. The following distances must be calculated to the nearest metre or foot for a runway intended for the use by international commercial air transport:

- Take-off run available (TORA);
- Take-off distance available (TODA);
- Accelerate-stop distance available (ASDA);
- Landing distance available (LDA).

18.23 TORA. Definition: The distance between the point at which an aeroplane can commence the take-off run to the nearest point in the direction of take-off at which the surface is incapable of bearing the mass of the aeroplane under normal operating conditions.

18.24 TODA. Definition: The distance from the start of TORA to the nearest obstacle in the direction of take-off projecting above the surface of the aerodrome and capable of affecting the safety of an aeroplane in flight (up to a maximum distance of $1.5 \times \text{TORA}$). Usually, TODA is TORA plus clearway if a clearway exists.

18.25 ASDA. Definition: The distance from the start of the take-off run to the nearest point in the direction of take-off at which the aircraft cannot roll over the surface and be brought to rest in an emergency without risk of accident. ASDA used to be called EDA (Emergency Distance Available). Usually ASDA consists of TORA plus the stopway if available.

18.26 LDA. Definition: The distance from the point where an aeroplane can commence its landing to the point where the surface is incapable of bearing the mass of the aircraft under normal operating conditions. Usually this is the full length of the runway, but may include a paved stopway (if available) where the threshold is displaced.

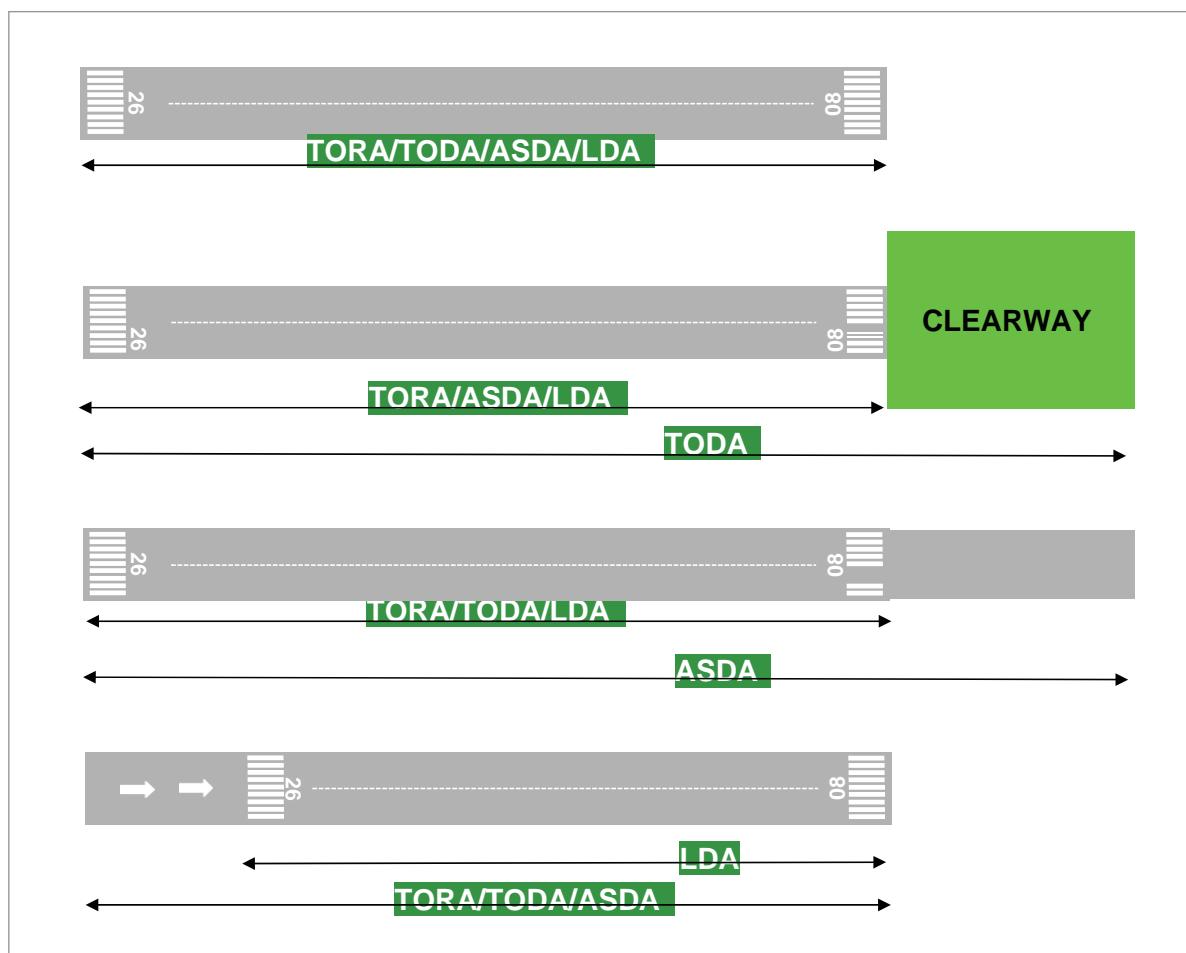


Figure 18.3 Declared distances

18.27 Condition of the Movement Area and Related Facilities. Information on the condition of the movement area and the operational status of related facilities must be provided to the appropriate aeronautical information service units, and similar information of operational significance to the air traffic service units, to enable those units to provide the necessary information to arriving and departing aircraft. The information must be kept up to date and changes in conditions reported without delay. The condition of the movement area and the operational status of related facilities are to be monitored and reports on matters of operational significance or affecting aircraft performance given, particularly in respect of the following:

- Construction or maintenance work;
- Rough or broken surfaces on a runway, a taxiway or an apron;
- Snow, slush or ice on a runway, a taxiway or an apron;
- Water on a runway, a taxiway or an apron;
- Snow banks or drifts adjacent to a runway, a taxiway or an apron;
- Anti-icing or de-icing liquid chemicals on a runway or a taxiway;
- Other temporary hazards, including parked aircraft;
- Failure or irregular operation of part or all of the aerodrome visual aids; and
- Failure of the normal or secondary power supply.

Note. The 3 defined states of frozen water on a runway are: snow, slush and ice.

Runways

18.28 General. Runways are the parts of the manoeuvring area used for take-off and landing of aircraft. Except in remote areas, runways will always be prepared and usually paved (concrete and tarmac). A runway should be straight and not have excessive slopes. It is usual to be able to use the ‘concrete strip’ in either direction hence one concrete strip will provide two runways. In all cases, runways require markings (painted on the surface) which will give the pilot indications about the use of the runway and also assist the pilot to land the aircraft. It is true to say that no two runways are identical, and part of the learning curve for a pilot new to an airline is to become familiar with the aerodromes and the runways used during the operation. At a controlled aerodrome, the runway ‘belongs’ to the aerodrome controller. The pilot will be given permission to enter, backtrack, cross, take off from and land on a specified runway. The ATCO will always specify the runway and the pilot always reads back the runway designator in RTF communications. For instance: ATCO “G-AG clear take-off runway 01”; pilot “Clear take-off runway 01 G-AB”. In issuing this instruction, the ATCO is ‘lending’ the pilot the runway and after use it is returned to the ATCO.

18.29 Usability. Many factors affect the orientation, position and number of runways at an aerodrome. One important consideration is the usability factor with regard to the wind, which could be affected by the alignment of the runway. The number and orientation of runways should be such that the usability factor of the aerodrome is not less than 95% for the aeroplanes that the aerodrome is intended to serve. It is normal practice to take off and land into wind.

18.30 Types of Runway. Runways are defined by the use to which the runway is put, rather than by physical characteristics. An ‘airfield’ (a defined area of grass on which runways may be marked out or the direction of landing is indicated) may have several or no defined runways, whereas an ‘airport’ (a point of entry or exit from a country by air) may have several defined paved runways. The types of operations carried out on or to a runway determine the runway type. The service provided, markings, signs, and physical characteristics of a runway are type dependent.

18.31 Visual Runway. A non-instrument (visual) runway is used where take-off and landing criteria are determined visually. The criteria are usually defined by reference to ground visibility or RVR, cloud ceiling and day/night considerations. The markings of the runway will clearly indicate this fact.

18.32 Instrument Runway. An instrument runway is one to which instrument departure and approach procedures are applied. For departing traffic, the instrument departure procedure will be defined in the form of a SID. For arriving traffic, instrument runways are sub-divided into:

- Precision runways (using ILS, MLS or PAR approaches)
- Non-precision (using VOR, NDB, SRA or ILS in azimuth only approaches)

18.33 Take-off Runway. A take-off runway is a runway that can be used only for take offs. This is usually due to terrain preventing an instrument approach or precluding a missed approach. A take-off runway is usually only in one direction (the reciprocal not being used).

18.34 Location of Runway Threshold. The threshold of a runway should normally be located at the extremity of a runway unless operational considerations justify the choice of another location. If the threshold is displaced from the beginning of the paved strip, the location of the threshold is shown by a transverse white stripe across the runway surface and arrows leading to the position of the threshold. Reasons for displacing a threshold may include unserviceable runway conditions, RESA, radio altimeter operating area, glide path angle, obstacle clearance etc...

18.35 Length of Runways. The actual length of a runway should be adequate to meet the operational requirements of the aeroplanes for which the runway is intended and should be not less than the longest length calculated to correct for local conditions (elevation, temperature, runway slope, humidity and surface characteristics). There is no requirement to cater for the worst case aeroplane at critical mass. Where a secondary runway is constructed, the length criteria are applied in order to obtain a usability factor of 95%. Runway length is reported in metres, however, fixed distance markers (distance to go signs) along the edge of runways are in 1000s of ft but are defined in terms of 300 m starting 300 m from the threshold. For a ‘concrete strip’ to accommodate instrument approaches from either end it must be at least 1800 m between thresholds.

18.36 Width of Runways. Clearly, the width of a runway should not be less than that required for the aeroplanes using the aerodrome. During the construction of an aerodrome this can be easily achieved but with the introduction of big aeroplanes (e.g. the A380) previously acceptable runways may be rendered inadequate. The primary factors in deciding the width of a runway are wing span and outer main gear wheel span. The table below specifies the width of runways in terms of the aerodrome reference code:

Width of Runways						
Code number	Code letter					
	A	B	C	D	E	F
1(a)	18 m	18 m	23 m	-	-	-
2(a)	23 m	23 m	30 m	-	-	-
3	30 m	30 m	30 m	45 m	-	-
4	-	-	45 m	45 m	45 m	60 m

Note:(a): For a precision runway, w = 30 m where code is 1 and 2

Figure 18.4 Width of runways

18.37 Runway Strips. A runway strip is defined as an area including the runway, and stopway if provided, in which obstacles are kept to a minimum. Any that are there must be constructed so as to present the minimum danger to aircraft, in other words, they must be frangible (collapse upon impact). The purpose of the runway strip is to reduce the risk of damage to aircraft running off a runway, and to protect aircraft flying over it during take-off or landing operations.

18.38 Length of Runway Strips. A runway strip should extend before the threshold and beyond the end of the runway or stopway for a distance of at least:

- 60 m where the code number is 2, 3 or 4;
- 60 m for a code 1 instrument runway; and
- 30 m for a code 1 non-instrument runway.

18.39 Width of Runway Strips. A runway strip, wherever practicable, is to extend laterally on each side of the centre line of the runway and its extended centre line, throughout the length of the runway strip, to a distance defined in the table below.

Width of Runway Strip				
Type of Runway	Runway code number			
	1	2	3	4
Precision	75 m	75 m	150 m	150 m
Non-precision	75 m	75 m	150 m	150 m
Non-instrument	30 m	40 m	75 m	75 m

Figure 18.5 Width of runway strips

18.40 Grading of Runway Strips. That portion of a strip of an instrument runway within a distance of at least 75 m where the code number is 3 or 4, and 40 m where the code number is 1 or 2, from the centre line of the runway and its extended centre line, should provide a graded area for aeroplanes which the runway is intended to serve in the event of an aeroplane running off the runway. The surface of that portion of a strip that abuts a runway, shoulder or stopway must be flush with the surface of the runway, shoulder or stopway.

18.41 Objects on a Runway Strip. No fixed objects other than visual aids (PAPIs) are permitted on a runway strip within 77.5 m of the centre line for code 4F precision CAT I/II/III runways (60 m code 3 or 4 precision CAT I/II/III runways; or 45 m code 1 or 2 CAT I). No mobile objects are permitted on this part of a runway strip during landing or take-off. An object which is situated within the stated dimensions is to be regarded as an obstacle and, as far as is practicable, removed.

18.42 Runway End Safety Area (RESA). This is an area of land usually at each end of a runway strip either side of the extended centre line which does not form part of the runway for operational (performance or planning) purposes, which is free from obstructions and set aside in case an aeroplane either overshoots or overruns the end of the runway. It is primarily intended to reduce the risk of damage to the aeroplane. RESAs should be provided for all code 3 and 4 runways and for code 1 and 2 instrument runways. The RESA should be at least twice the width of the runway and extend from the end of the runway strip for a distance not less

than 90 m. However, for a code 3 or 4 runway it is recommended to extend for 240 m, and for 120 m for code 1 and 2.

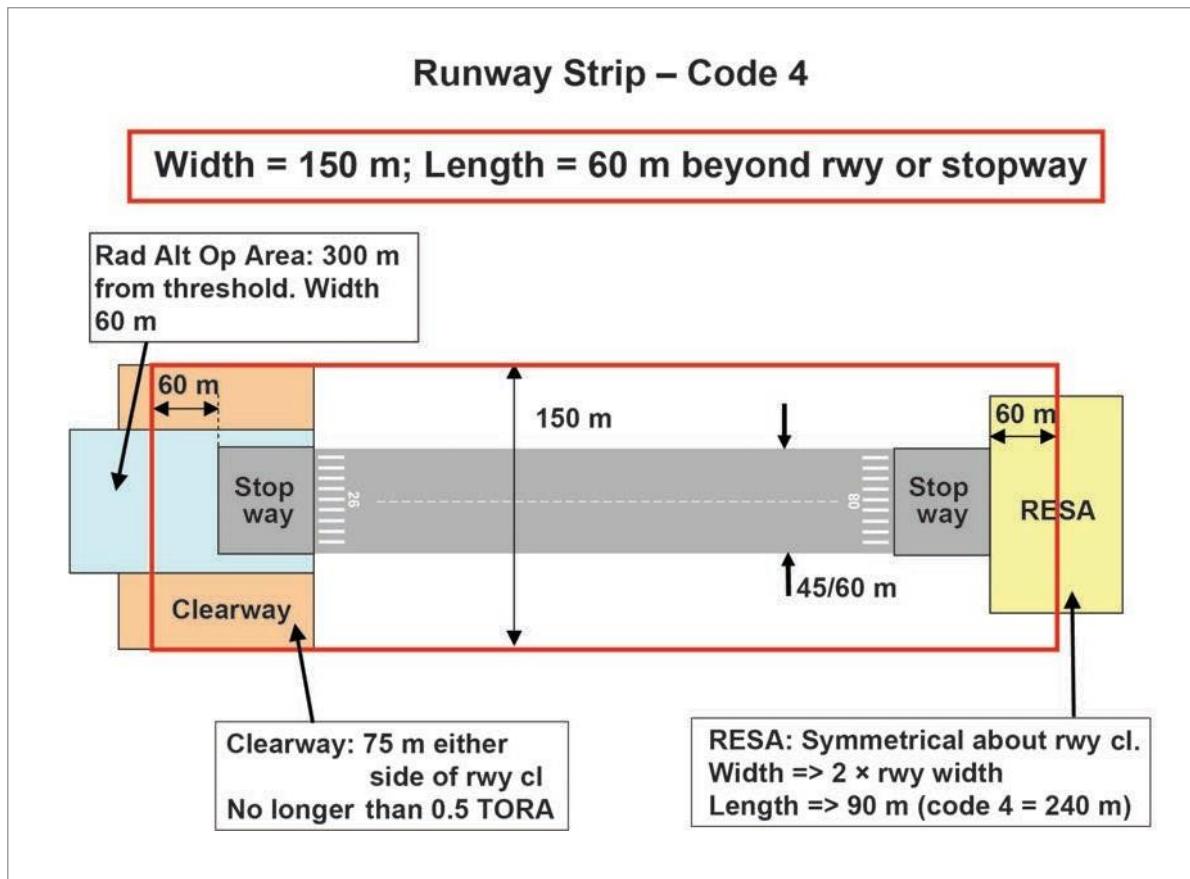


Figure 18.6 Runway strip - Code 4

18.43 Clearways. This is a defined rectangular area on the ground under the control of the appropriate authority, selected or prepared as a suitable area over which an aeroplane may make a portion of its initial climb to a specified height. The origin of a clearway should be at the end of the take-off run available (TORA). The length should not exceed half the length of TORA, and the width should extend laterally to a distance of at least 75 m on each side of the extended centre line of the runway.

18.44 Stopways. A stopway is a defined rectangular area on the ground at the end of the take-off run available (TORA), prepared as a suitable area in which an aircraft can be stopped in the case of an abandoned/rejected take-off. It is to have the same width as the runway with which it is associated.

18.45 Radio Altimeter Operating Area. The radio altimeter operating area should be established in the pre-threshold area of a precision approach runway. For CAT II/III operations the use of rad alt is mandatory to determine DH. For CAT II the minimum DH is 100 ft (system minima) and for a 300 ft/NM glide path this point would be at 600 m (1/3 NM) from the aiming point. Usually the aiming point is 300 m down the runway beyond the threshold; therefore the DH point would be 300 m before the threshold. For CAT III the DH is less than 50 ft, so a rad alt operating area for CAT II would be suitable for CAT III also. The area should extend before the threshold for a distance of at least 300 m. The area should extend laterally, on each side of the extended centre line of the runway, to a distance of 60 m, except that when special circumstances so warrant, the distance may be reduced to no less than 30 m if an aeronautical study indicates that such reduction would not affect the safety of operations of aircraft. The surface of the rad alt operating area should be level with no undulations of more than 7%.

Taxiways

18.46 Introduction. A major limitation to the use of an aerodrome is the capability of the taxiways to accommodate different sizes of aeroplanes. Clearly, a narrow taxiway cannot cope with a large aeroplane. However, width is not the only consideration. The strength of a taxiway needs to be equal to that of the runway and the surface of taxiways is more vulnerable to damage than a runway (constant loading and unloading, turning and stopping). Taxiways may include turns especially close to runways. Taxiways may cross, join, intersect and require signs and markings to enable pilots to reach their destination on the aerodrome. Taxiways, especially parallel to runways, must not be confused with runways. At some aerodromes, Gatwick for example, the parallel taxiway is also the secondary runway! Considerations have to be given to the points on taxiways where aeroplanes are held prior to entering the runway for take-off, and also portions of taxiways close to the runway where the presence of a large aeroplane (a large lump of electromagnetically friendly metal) may interfere with ILS or MLS transmissions, or more fundamentally, is an obstacle to operations. In basic terms according to Annex 14, taxiways should be provided to permit the safe and expeditious surface movement of aircraft.

18.47 General Layout. Sufficient entrance and exit taxiways for a runway are to be provided to expedite movement of aeroplanes to and from the runway including the provision of rapid exit taxiways (fast turn-off lanes) where traffic volumes are high. Where the end of a runway is not served by a taxiway, it may be necessary to provide additional pavement at the end of the runway for turning aeroplanes. Such areas may be usefully situated along the runway to reduce taxi times.

18.48 Taxiing of Aeroplanes. Taxiways are required to have a painted centre line which may be lit if the aerodrome is to be used at night. When taxiing an aeroplane it is vitally important that the nose wheel of the aeroplane is kept on the centre line especially during turns. Pilots usually gain this skill by experience but special procedures may be used in extreme cases e.g. Concorde where the nose wheel was so far aft of the nose of the aeroplane that pilots used marks on the windscreens to 'fix' the taxiway edge thus keeping the nose wheel in position on the centre line.

18.49 Rapid Exit Taxiways. Rapid exit taxiways, commonly called ‘fast turn-off lanes’, are provided where traffic density is high. They are used to allow aeroplanes to turn off of the duty runway at a speed higher than would be permitted at a right angle turn on to a normal taxiway. They are located along runways and are designed and constructed to cater for turn-off speeds of 93 km/h (50 kt) for code 3 or 4 runways and 65 km/h (35 kt) on code 1 and 2 runways, in wet conditions. Operators will specify the maximum speed for dry runway/taxiway operations. The taxiway is to include a straight section after the turn-off curve to allow an exiting aircraft to come to a full stop clear of the intersecting taxiway. The intersecting angle with the runway should not be greater than 45°, not less than 25°, and preferably 30°.

18.50 Minimum Requirements. As previously mentioned, width is the most important factor in taxiway design and construction. The table below specifies the minimum requirements for clearance of the outermost main wheels when the nose wheel is on the centre line of the taxiway. The shoulders of taxiways which are used by turbine aeroplanes are to be prepared to prevent erosion by jet blast, and the ingestion of surface material into the jet engines. Taxiway strips, similar to runway strips, are provided primarily to delineate the area to be cleared of objects which may be obstacles. In the table, wheel base refers to the distance from the front of the nose wheel to the trailing edge of the main gear. Wheel to edge clearance refers to the distance from the outer edge of the main gear tyres to the defined edge of the taxiway.

Wheel to Taxiway Edge Clearance	
Code Letter	Clearance
A	1.5 m
B	2.25 m
C	3 m if the taxiway is intended to be used by aeroplanes with wheel base less than 18 m; otherwise 4.5 m
D	4.5 m
E	4.5 m
F	4.5 m

Figure 18.7 Wheel to edge clearance

18.51 Width of Taxiways. The straight portion of a taxiway should have a width of not less than that specified in the table below.

Taxiway Width	
Code Letter	
A	7.5 m
B	10.5 m
C	15 m if the taxiway is intended to be used by aeroplanes with a wheel base less than 18 m; otherwise 18 m
D	18 m if the taxiway is intended to be used by aeroplanes with an outer main gear span of less than 9 m; otherwise 23 m
E	23 m
F	25 m

Figure 18.8 Width of taxiways

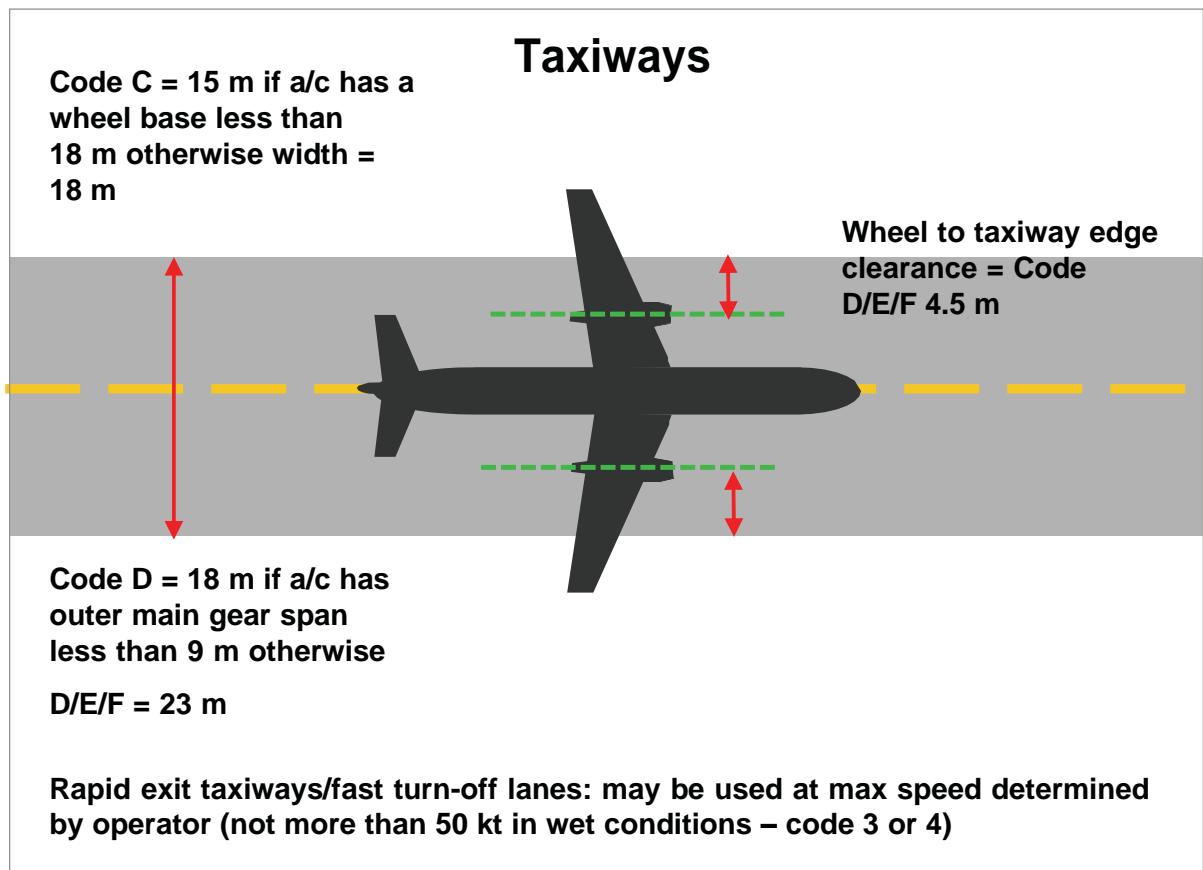


Figure 18.9: Taxiways

18.52 Taxiway Curves. Changes in direction of taxiways should be as few and small as possible. The radii of the curves should be compatible with the manoeuvring capability and normal taxiing speeds of the aeroplanes for which the taxiway is intended. An example of widening taxiways to achieve the wheel clearance specified is illustrated below.

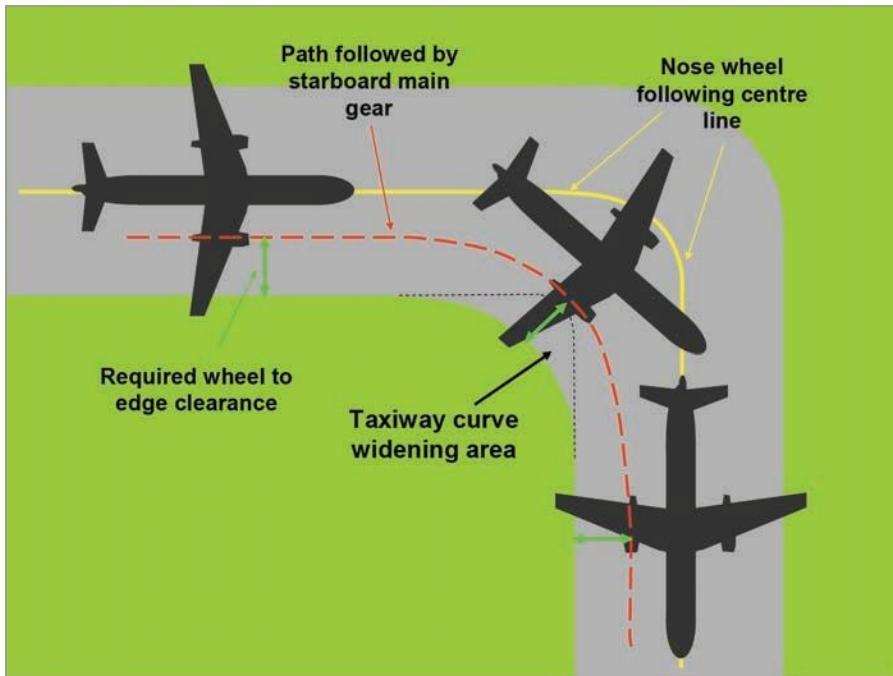


Figure 18.10: Taxiway curves

18.53 Holding Bays and Runway Holding Positions. Inevitably, at a busy aerodrome, aeroplanes will be required to wait their turn for take-off. It is common to see a stream of traffic waiting along the taxiway for take-off, but at an international airport the queues for take-off can exceed the capability of the taxiway to accommodate all the aircraft waiting. In this situation or where environmental considerations exist, holding bays are provided adjacent to runway entrances which leave the taxiways clear. At some major aerodromes with particularly high traffic levels or intense peaks in traffic density, 'sin bins' are established to take aeroplanes out of the stream if something has gone wrong. Regardless of the position of holding bays, the entrance to the runway will be protected by a defined mandatory holding point set back from the edge of the runway to accommodate all the traffic using the runway. A runway holding position must be established on a taxiway if the location or alignment of the taxiway is such that a taxiing aircraft or vehicle can infringe an obstacle limitation surface or interfere with the operation of radio navigation aids (ILS or MLS). The method of indicating a runway holding position is covered later in the notes (under Signs and Markings). A runway holding position, or positions, must be established at the distances in the table on [page 392](#) at an intersection of a taxiway with a runway; and an intersection of a runway with another runway when the former runway is part of a standard taxi-route.

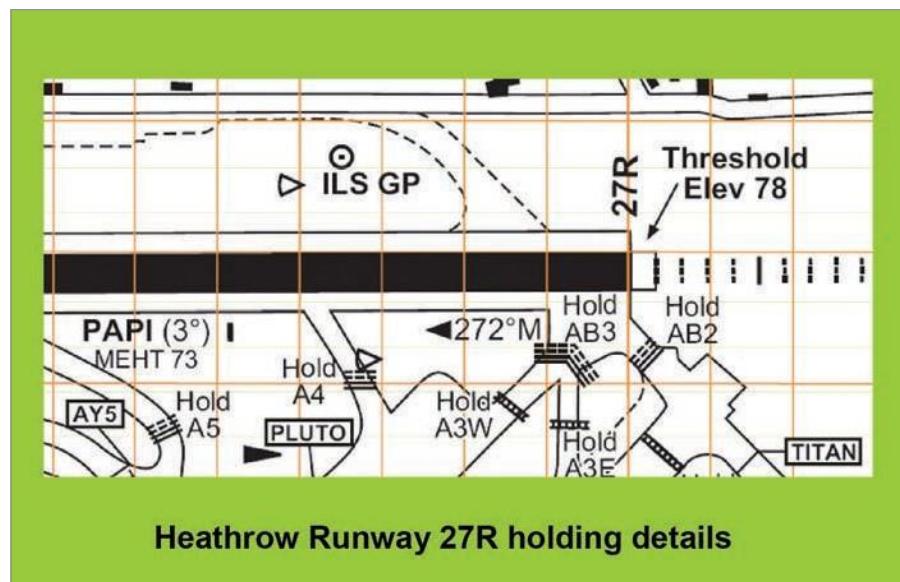


Figure 18.11 Holding points

Runway Holding Point Positions (Distance from Centre Line of Runway)				
Type of Runway	Runway code number			
	1	2	3	4
Take-off	30 m	40 m	75 m	75 m
Non-instrument (Visual)	30 m	40 m	75 m	75 m
Non-precision Instrument	40 m	40 m	75 m	75 m
Precision CAT I	60 m(b)	60 m(b)	90 m(a,b)	90 m(a,b,c)
Precision CAT II/III	-	-	90 m(a,b)	90 m(a,b,c)

Notes:

- a. May be increased if holding elevation lower than runway
- b. May be increased to avoid interference with radio navigation aids
- c. For code F this should be 107.5 m

Figure 18.12 Minimum distances from runway centre lines of holding positions



© Stewart Andrew

Figure 18.13 A “line-up” at Manchester for rwy 06L

18.54 Road Holding Position. This is a designated position at which vehicles may be required to stop and wait where the taxiway is also used as a road for aerodrome vehicular traffic. Normally, a road holding point will have traffic lights. A road holding position must be established at an intersection of a road with a runway. The distances in the table on [page 392](#) apply to road holding points.

Aprons

18.55 Requirement. Aprons are provided where necessary to permit the embarking and disembarking of passengers and the loading and off loading of cargo and mail, as well as the servicing of aircraft, without interference with aerodrome traffic. The total apron area should be adequate to permit the expeditious handling of the aerodrome traffic at its maximum anticipated density. Aprons are to be built to accommodate slow moving traffic and in any case to withstand higher stresses than runways. Aircraft parking areas on aprons (stands) are to be marked and are required to provide a minimum distance between parked aircraft. For code A the distance is 3 m, and for code D and above 7.5 m.

18.56 Isolated Aircraft Parking Position. An isolated aircraft parking position is to be designated, or the control tower advised of an area or areas, suitable for the parking of an aircraft which is known or believed to be the subject of unlawful interference, or which for other reasons needs isolation from normal aerodrome traffic. This special area is not to be less than 100 m from any other parking area, building, or public area, or over underground utilities (gas, aviation fuel, electrical or communications cables).

Questions

1. Aerodrome reference code 4 refers to field length of:
 - a. 900 m.
 - b. 1000 m.
 - c. 1600 m.
 - d. 1800 m or more.
2. The signal area should be located so that it is visible from the air. A lack of a signal area denotes that:
 - a. non-radio traffic will not be accepted at the aerodrome other than emergency traffic.
 - b. non-radio traffic will be accepted.
 - c. non-radio traffic will be accepted in daylight hours only.
 - d. non-radio traffic will not be accepted in daylight hours only.
3. The Aerodrome Reference Code consists of Code Element 1 (aeroplane reference field length) and Code Element 2. What does Code Element 2 define?
 - a. Wing span and inner main gear wheel span.
 - b. Fuselage width and inner main gear wheel span.
 - c. Fuselage width and outer main gear wheel span.
 - d. Wing span and outer main gear wheel span.
4. A radio altimeter operating area must extend before the threshold of a precision approach runway for a distance of at least:
 - a. 100 metres.
 - b. 200 metres.
 - c. 300 metres.
 - d. 500 metres.
5. Which of the following is a valid aerodrome reference code?
 - a. 6B.
 - b. 4G.
 - c. 7G.
 - d. 2B.
6. What is a stopway for?
 - a. Stopping after landing distance.
 - b. Extending the Landing Distance Available.
 - c. Stopping after a rejected take-off.
 - d. A runway extension for big aircraft.
7. A transverse white stripe on a runway is associated with a:
 - a. closed runway.
 - b. runway which is 2400 metres or longer.
 - c. displaced threshold.
 - d. runway available for circling to land approaches.

8. Which “code letter” identifies a taxiway that has to be used by an aircraft with a wheel-base of 15 metres?
- Code letter E.
 - Code letter C.
 - Code letter B.
 - Code letter D.
9. According to the Aerodrome Reference Code, the code letter E relates to an aircraft wingspan of:
- 15 m or more but less than 24 m.
 - 36 m or more but less than 52 m.
 - 52 m or more but less than 65 m.
 - 24 m or more but less than 36 m.
10. The stopway is a defined rectangular area on the ground at the end of the take-off run available which is prepared as a suitable area:
- to stop an aircraft after a rejected take-off.
 - to stop a landing aircraft in case of an emergency.
 - to stop a starting or landing aircraft.
 - to stop a landing aircraft if it overshoots the runway.
11. An area defined about the extended runway centre line and adjacent to the end of the strip, primarily intended to reduce the risk of damage to an aircraft undershooting or overrunning the runway is defined as a:
- clearway.
 - runway strip extension.
 - runway end safety area.
 - altimeter operating area extension.
12. What is the width of a code letter D taxiway used by aircraft with an outer main gear wheel span of less than 9 m?
- 10.5 m.
 - 15 m.
 - 18 m.
 - 23 m.
13. What is the minimum width of a code 4 runway?
- 18 m.
 - 23 m.
 - 30 m.
 - 45 m.
14. When a fixed distance marking has to be provided this marking shall commence at:
- 150 m from the threshold.
 - 300 m from the threshold.
 - 150 m from the aiming point.
 - 300 m from the aiming point.

15. TODA consists of:

- a. TORA but excluding the clearway.
- b. TORA and includes the clearway.
- c. TORA but excluding the stopway.
- d. TORA only.

Answers

1	2	3	4	5	6	7	8	9	10	11	12
d	a	d	c	d	c	c	b	c	a	c	c

13	14	15
d	b	b

Chapter

19

Aerodromes - Visual Aids, Markings and Signs

Requirements	401
Visual Aids for Navigation	401
Runway Markings	402
Taxiway Markings.....	407
Signs	412
Markers	418
Visual Docking Guidance Systems	420
Questions	422
Answers	424

Requirements

19.1 Background. The complex nature of aerodromes coupled with the fact than no two aerodromes have the same layout, operations and geographic position, makes standardization in the provision of visual information to pilots taxiing aircraft and preparing for landing or take-off, essential. Annex 14 specifies the applicable SARPs and the learning objectives are specific in requiring the student to have more than just a theoretical understanding of the subject. The discussion is broken down into three sections dealing with visual aids for navigation, aerodrome markings, and aerodrome signage. It must be born in mind that whilst the SARPs are adopted by all Contracting States, there may be differences and there may some signs for instance, seen at foreign aerodromes that are not seen on a UK aerodrome and vice versa.

Visual Aids for Navigation

19.2 Indicators and Signalling Devices. Aerodromes are required to be equipped with a means of indicating the wind direction to pilots of non-radio aircraft. Remember, the Rules of the Air require a pilot to land and take off into wind, so there must be a method of indication. In order for a non-radio pilot to know what the landing direction is, a landing indicator is required. Also a means of communicating visual signals to non-radio aircraft is required to be positioned in the visual control room.

19.3 Wind Direction Indicators. An aerodrome must be equipped with at least one wind direction indicator (commonly called a ‘wind sock’). The wind direction indicator should be in the form of a truncated cone made of fabric and should have a length of not less than 3.6 m and a diameter, at the larger end, of not less than 0.9 m. It should be constructed so that it gives a clear indication of the direction of the surface wind and a general indication of the wind speed. The colour or colours should be so selected as to make the wind direction indicator clearly visible and understandable from a height of at least 300 m, having regard to background. Where practicable, a single colour, preferably white or orange, should be used. The location of at least one wind direction indicator (the ‘master’ wind sock) should be marked by a circular white band 15 m in diameter and 1.2 m wide. Provisions should be made for illuminating at least one wind indicator at an aerodrome intended for use at night.

19.4 Landing Direction Indicator. When provided, a landing direction indicator shall be located in a conspicuous place on the aerodrome. If a signal square is provided, a landing “T” will always be included in the signs in the square. The landing direction indicator should be in the form of a “T”. The colour of the “T” should be either white or orange, the choice being dependent on the colour that contrasts best with the background against which the indicator will be viewed. Where required for use at night the landing “T” is to be either illuminated or outlined by white lights.

19.5 Signalling Lamp. A signalling lamp must be provided at a controlled aerodrome in the aerodrome control tower for the purpose of showing the light signals to aircraft either in the air or on the ground as defined in Chapter 5. The lamp, usually an Aldis lamp specially designed for signalling, must be capable of producing red, green and white light and of being aimed manually at any target as required; giving a signal in any one colour followed by a signal in either of the other two colours; and being operated to transmit a message in any one of the three colours by Morse code up to a speed of at least four words per minute.

19.6 Signal Panels and Signal Area. The provision of a signals area ('signals square') at an aerodrome implies that non-radio traffic is accepted. A signals area is not required if an aerodrome authority has proscribed routine non-radio traffic (the aerodrome would still be required to provide a service to an aircraft suffering a communications failure that has indicated the intention to land). The signals area should be located so as to be visible for all angles of azimuth above an angle of 10° above the horizontal when viewed from a height of 300 m. The signals area shall be an even horizontal surface of at least 9 m square. The colour of the signal area should be chosen to contrast with the colours of the signal panels used, and it should be surrounded by a white border not less than 0.3 m wide. It is normal for the signals area to be positioned in front (on the aerodrome side) of the control tower/VCR. The signals that may be displayed in the signals area are covered in Chapter 5.

Runway Markings

19.7 General. Markings are characters, numbers and shapes painted on the concrete surfaces of the aerodrome. Markings are found on runways, taxiways and aprons. Markings may either give location or directional information or indicate a mandatory requirement e.g. to stop. The colour of a marking is dependent upon where it is used and the size must be sufficient for it to be read or understood easily from the flight deck of an aeroplane. The ICAO standard is for runway markings to be white and taxiway markings to be yellow.

19.8 Runway Markings. Runway markings are white. It has been found that, on runway surfaces of light colour, the conspicuity of white markings can be improved by outlining them in black. Large areas of paint can create a friction problem; therefore this should be reduced, as far as practicable, by the use of a suitable kind of paint. Markings may consist of numbers and letters, solid areas, or a series of longitudinal stripes providing an effect equivalent to the solid areas. Generally, runway markings assist the pilot with locating the threshold, identifying the runway, defining the centre line and locating the aiming point. Additionally for an instrument runway, as well as the aiming point, it will have touchdown zone markings.



Figure 19.1 Runway markings at RAF Brize Norton

19.9 Runway Designation Marking. A runway designation marking is to be provided at the threshold of paved runways, and as far as is practicable at the threshold of unpaved (grass) runways. If the runway threshold is displaced from the extremity of the runway, a sign showing the designation of the runway may be provided for aeroplanes taking off.

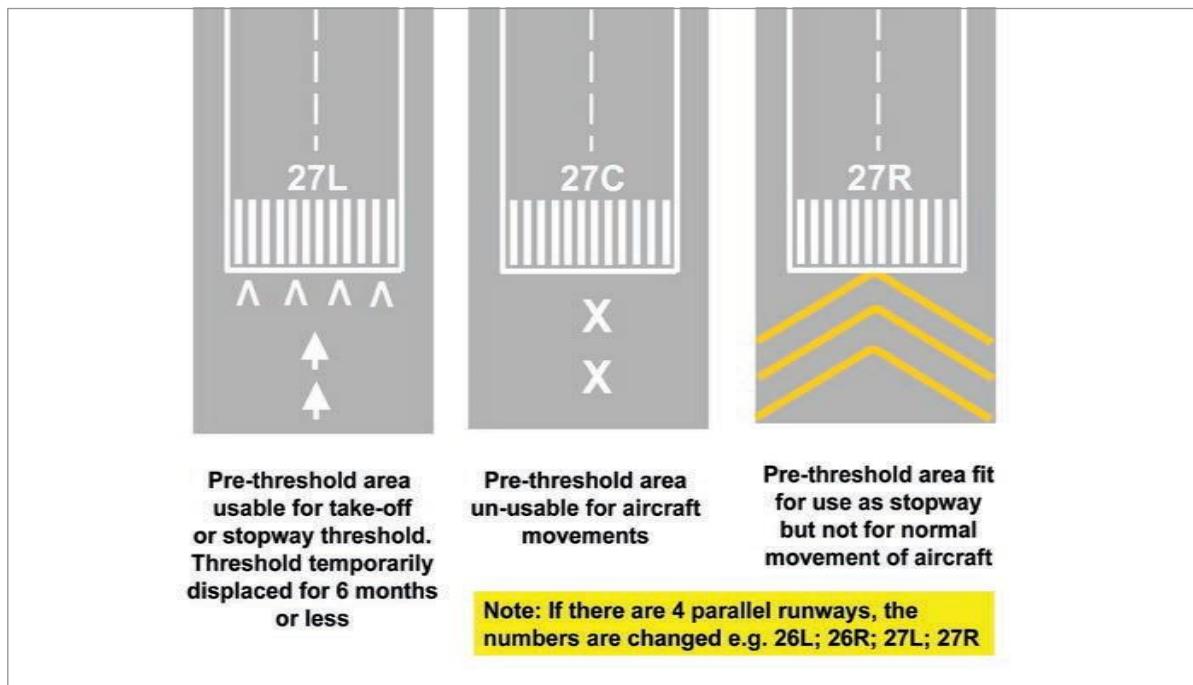


Figure 19.2 Runway designation markings

19.10 Characteristics. A runway designation marking should consist of a two digit number and on parallel runways shall be supplemented with a letter. On a single runway, dual parallel runways and triple parallel runways the two digit number shall be the whole number nearest the magnetic bearing (QDM) divided by 10 ($094 \div 10 = 09.4$ rounded down to 09) of the runway when viewed from the direction of approach. On four or more parallel runways, one set of adjacent runways shall be numbered to the nearest one tenth QDM and the other set of adjacent runways numbered to the next nearest one tenth of the QDM. When the above rule would give a single digit number, it shall be preceded by a zero. In some states the '0' is omitted e.g. at New York JFK the south to north runways are '4R' and '4L'. In the case of parallel runways, each runway designation number shall be supplemented by a letter as follows, in the order shown from left to right when viewed from the direction of approach:

- For two parallel runways "09L" "09R";
- For three parallel runways "09L" "09C" "09R";
- For four parallel runways "09L" "09R" "10L" "10R" (in this case the QDM for one pair will be increased to differentiate that pair from the other).

19.11 Runway Centre Line Marking. A runway centre line marking is required on a paved runway. The centre line marking is painted along the centre line of the runway between the runway designation markings.

19.12 Characteristics. A runway centre line marking consists of a line of uniformly spaced stripes and gaps. The length of a stripe plus a gap shall be not less than 50 m or more than 75 m. The length of each stripe shall be at least equal to the length of the gap or 30 m, whichever is greater.

19.13 Threshold Marking. The threshold of a runway is either the beginning of the marked out grass area, or the start of the concrete strip. A threshold marking is required to be provided at the thresholds of paved instrument runways, and of paved non-instrument code 3 and 4 runways and the runway is intended for use by international commercial air transport. A threshold marking should be provided, as far as is practicable, at the threshold of an unpaved runway.

19.14 Location. The stripes (commonly known as 'piano keys') of the threshold marking, should start 6 m from the threshold.

19.15 Characteristics. A runway threshold marking is a pattern of longitudinal stripes of uniform dimensions disposed symmetrically about the centre line of the runway. For a runway width of 45 m (for non-precision approach and non-instrument runways 45 m or greater in width) they may be placed either side of the runway designation number. The stripes should extend laterally to within 3 m of the edge of the runway or to a distance of 27 m on either side of a runway centre line, whichever results in the smaller lateral distance. Where a runway designation marking is placed within a threshold marking there will be a minimum of three stripes on each side of the centre line of the runway. Where a runway designation marking is placed above a threshold marking the stripes shall be continued across the runway. The stripes shall be at least 30 m long and approximately 1.80 m between them except where the stripes are continued across a runway, in which case a double spacing shall be used to separate the two stripes nearest the centre line of the runway. In the case where the designation marking is included within the threshold marking this spacing shall be 22.5 m. The number of stripes shall be in accordance with the runway width as follows:

Runway Threshold Markings	
Runway Width	Number of Stripes
18 m	4
23 m	6
30 m	8
45 m	12
60 m or more	16



16 bar threshold markings
Rwy 60 m wide

Shanghai

© Qin Wei

Figure 19.4 Runway threshold markings

19.16 Transverse Stripe. Where a threshold is displaced from the extremity of a runway (the end of the concrete) or where the end is not at right angles to the runway centre line, a transverse stripe should be added to the threshold marking. When a runway threshold is permanently displaced, arrows shall be provided on the portion of the runway before the displaced threshold. The reasons why a threshold may be displaced have been discussed in Chapter 18.

19.17 Aiming Point Marking. The aiming point marking indicates the position of the origin of the visual glide slope (PAPI) and the ILS GP transmitter. An aiming point marking is to be provided at each approach end of code 2, 3 or 4 paved instrument runways. It is recommended that an aiming point marking is provided on code 1 paved instrument runways and code 3 or 4 paved non-instrument runways when additional conspicuity of the aiming point is desirable. An ICAO specification aiming point marking consists of two conspicuous stripes.

19.18 Location. The aiming point marking shall commence no closer to the threshold than the distance indicated in the appropriate column of [Figure 19.5](#), except that on a runway equipped with a visual approach slope indicator system (PAPI or VASI), the beginning of the marking shall be coincident with the visual approach slope origin. For a code 4 runway less than 2400 m long, the aiming point is positioned 300 m from the threshold. For a normal 3° glide path (300 ft/NM), the aircraft on glide path will cross the threshold at a height of 50 ft. Bigger aircraft require longer LDA so for runways 2400 m or more in length have the aiming point 400 m from the threshold so the aircraft crosses the threshold at 67 ft thus giving additional gear to concrete clearance.

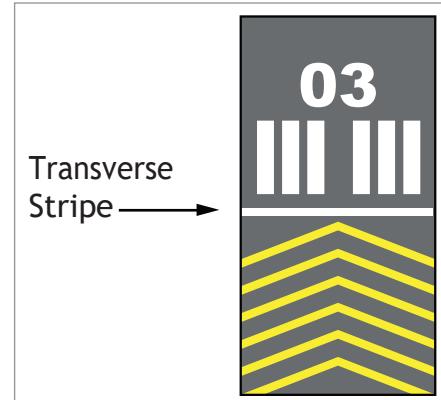


Figure 19.3

Aiming Point Marking Location	
Landing Distance Available (LDA)	Threshold to Beginning of Marking
Less than 800 m	150 m
800 m up to but not including 1200 m	250 m
1200 m up to but not including 2400 m	300 m
2400 m or more	400 m

Figure 19.5 Location of aiming point marking

19.19 Touchdown Zone Markings. Touchdown zone (TDZ) markings indicate the area of the runway where the aeroplane should be landed. Landing Distance Available is an operational consideration for the use of a runway, but it is not common practice to land the aeroplane on the threshold marking. The TDZ markings give the pilot an indication of extent of the usable touchdown area and if distance coded, the length of the touchdown zone remaining. Markings are required for code 2, 3 and 4 paved precision approach runways, and recommended for code 3 or 4 paved non-precision or non-instrument runways, where additional conspicuity is required.

19.20 Location. TDZ markings consist of pairs of rectangular markings symmetrically placed about the runway centre line with the number of pairs related to the landing distance available. For code 4 runways (2400 m or more in length) the TDZ markings have 6 pairs.

19.21 Characteristics. Touchdown zone markings conform to either of the two patterns shown below. Pattern “A” is the basic marking system whereas pattern “B” is distance coded. The choice of patterns is not runway length dependent. The pairs of markings have longitudinal spacing of 150 m beginning from the threshold. If a pair of TDZ markings is coincident with or located within 50 m of an aiming point marking, the TDZ marking at that position is deleted from the pattern.



Figure 19.6 Pattern “A”, basic plain markings



Figure 19.7 Pattern “B”, distance coded

19.22 Runway Side Stripe Markings. Runway side stripe markings are to be provided between the thresholds of precision runways, and paved runways where there is a lack of contrast between the runway edges and the shoulders or the surrounding terrain. It is recommended that side stripes are marked on all precision runways regardless of the contrast with the surrounding ground. The picture of the runway at Gran Canaria, *Figure 19.7* on the previous page, shows the use of side stripes.

Taxiway Markings

19.23 Requirements. Taxiway markings and aircraft stand markings are yellow. If there is a need to enhance conspicuity, the lines may be outlined in black.

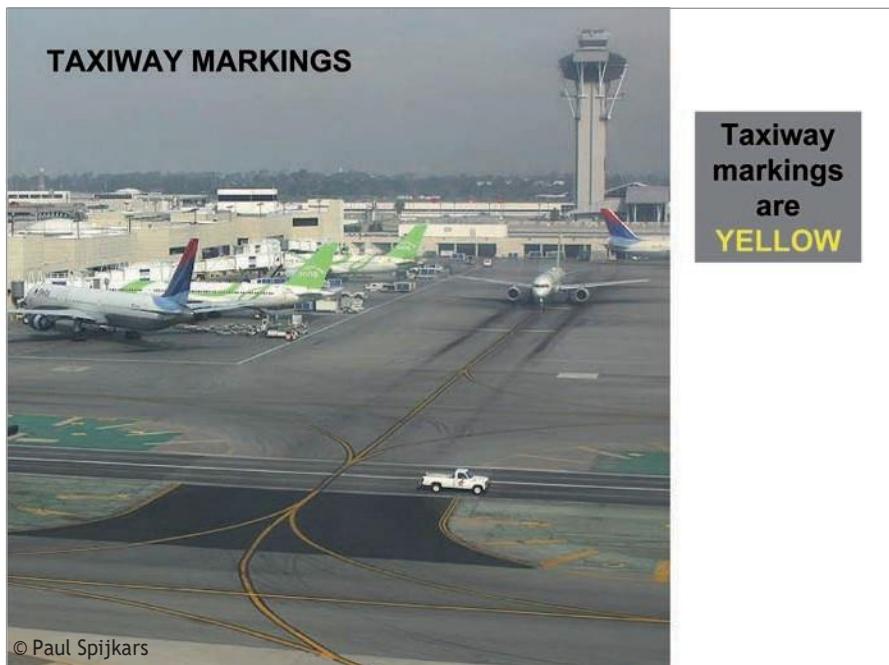


Figure 19.8 Taxiway markings

19.24 Apron Safety Lines. Although not strictly taxiway markings, in the apron areas the safe movement of aircraft into and out of parking stands can be enhanced by the use of apron safety lines. If all ground equipment and vehicles are parked or positioned behind the apron safety lines, a pilot or a marshaller can ignore the presence of those obstacles when parking aircraft. Apron safety lines are to be of a conspicuous colour which shall contrast with that used for aircraft stand markings.

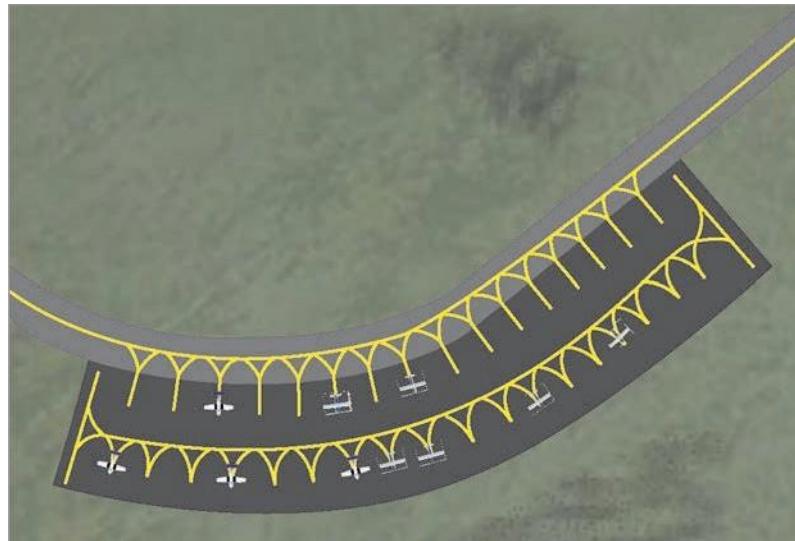


Figure 19.9 Example of aircraft stand markings

19.25 Taxiway Centre Line Markings. Taxiway centre line markings are to be provided on a paved taxiway, de/anti-icing facility and the apron areas where the code number is 3 or 4 (and recommended for code 1 and 2). Centre line markings are to give guidance from the runway centre line, to the point on the apron where aircraft stand markings commence. Taxiway centre line markings are also provided on a paved runway when the runway is part of a standard taxi-route and there is no runway centre line marking; or where the taxiway centre line is not coincident with the runway centre line. Taxiway centre line marking is a continuous yellow line. Should there be yellow side stripes, these mark non-load-bearing surfaces.

19.26 Runway Holding Position Marking. Holding points are established at the entrance to all runways. It is not uncommon for there to be more than one holding point at the entrance to a runway. A runway holding position marking is to be displayed at a runway holding point. The actual holding position is indicated by the mandatory sign (see signs later in this chapter) which will be displayed on at least the left hand side of the taxiway as the aeroplane approaches the runway. Ideally the sign should be on both sides of the taxiway. The marking is to extend all the way across the taxiway. The position may be augmented by stop bars or runway guard lights, see paragraph 21.38. The distance between a runway holding position and the centre line of the associated runway is specified in the picture after paragraph 19.53 and in the case of a precision approach runway, will be such that a holding aircraft (or vehicle) will not interfere with the operation of radio navigation aids, specifically ILS. A runway holding point may also be established where the approach to a runway passes over a taxiway to another runway. In this case, the associated sign will specify what the holding point is for.

19.27 Patterns. There are two distinct patterns for runway holding markings. These are defined as 'Pattern A' and 'Pattern B'.

19.28 Pattern A. The closest holding point to a runway will always be marked with a Pattern A marking, and it will be positioned at an intersection of a taxiway and a non-instrument (visual) runway, a non-precision approach runway or a take-off runway. Where a single taxi-holding position is provided at an intersection of a taxiway and a precision approach category I II or III runway, the taxi-holding position marking shall be Pattern A. For a code 4 runway, the Pattern A holding point will be no closer than 75 m to the centre line of the runway. It is also the visual holding point.

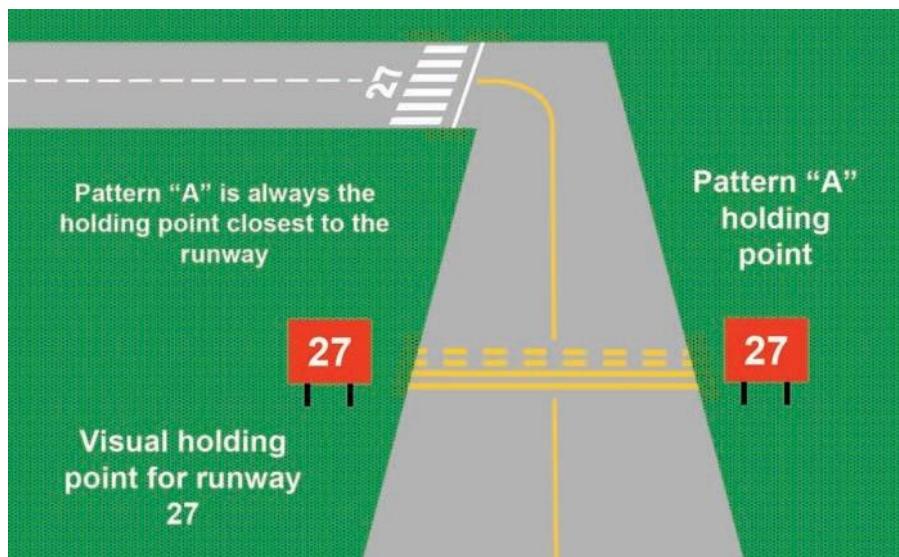


Figure 19.10 Runway holding markings, pattern A

19.29 Pattern B. Where two or three taxi-holding positions are provided at such an intersection, the taxi-holding position marking closer (closest) to the runway shall be as shown in pattern A and the markings further from the runway shall be pattern B. Any other holding point associated with a runway required on a taxiway will also be Pattern B.

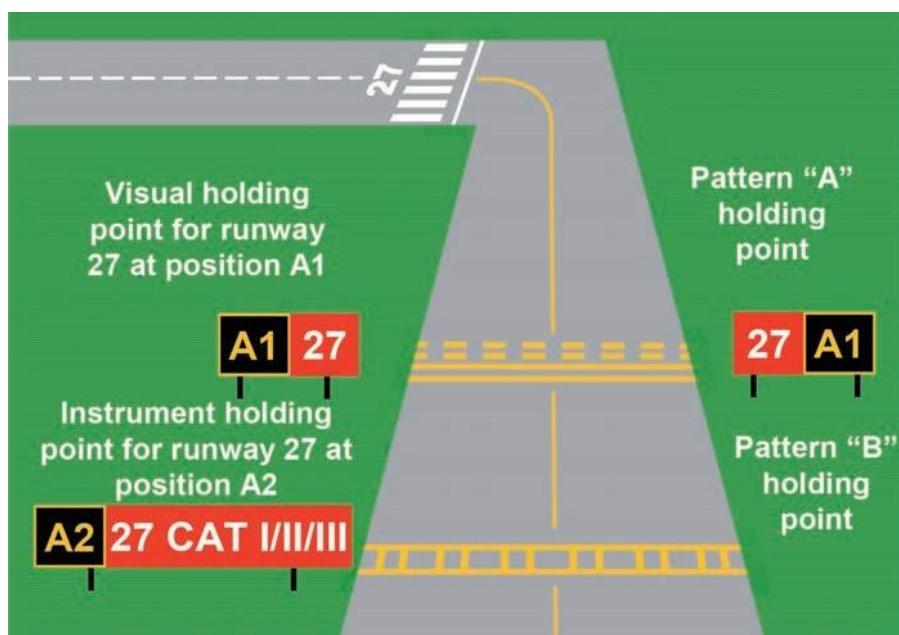


Figure 19.11 Runway holding markings, pattern B

19.30 Intermediate Holding Position Marking. Where two (or more) taxiways cross, holding points are established at suitable distances from the crossing taxiway. It may be that one taxiway has priority and the holding point marking may be augmented by a mandatory marking. It should be coincident with a stop bar or clearance bar, where provided. A taxiway intersection marking consists of a single broken yellow line.

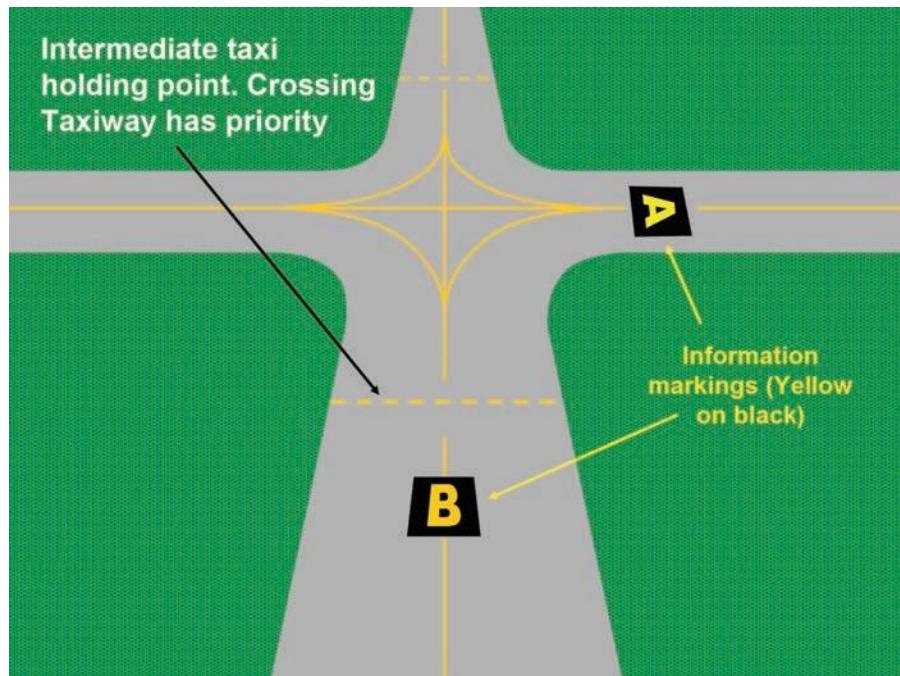


Figure 19.12 Intermediate holding position marking

19.31 Aircraft Stand Markings. Aircraft stand markings should be provided for designated parking positions on a paved apron and on de/anti-icing facilities. They should include such elements as stand identification, lead-in line, turn bar, turning line, alignment bar, stop line and lead-out line, as are required by the parking configuration and to complement other parking aids. The stand identification letter and/or number should be included a short distance after the beginning of the lead-in line. The height of the identification should be adequate to be readable from the cockpit of aircraft using the stand. Lead-in, turning and lead-out lines should normally be continuous in length. Where one or more sets of stand markings are superimposed on a stand, the lines should be continuous for the most demanding aircraft and broken for other aircraft. The curved portions of lead-in, turning and lead-out lines should have radii appropriate to the most demanding aircraft type for which the markings are intended. Where it is intended that aircraft proceed in one direction only, arrows pointing in the direction to be followed should be added as part of the lead-in and lead-out lines. A turn bar should be located at right angles to the lead-in line, abeam the left pilot position at the point of initiation of any intended turn. The distances to be maintained between the turn bar and the lead-in line may vary according to different aircraft types, taking into account the pilot's field of view. An alignment bar should be placed so as to be coincident with the extended centre line of the aircraft in the specified marking position and visible to the pilot during the final part of the parking manoeuvre. A stop line should be located at right angles to the alignment bar, abeam the left pilot position at the intended point of stop.



Figure 19.13 Aircraft stand markings

19.32 Road holding Position Markings. Road holding position markings are to be provided at all road entrances to a runway. The markings are to be located across the road at the holding position, and will be marked in accordance with the local road traffic regulations.

19.33 Mandatory Information Marking. Where it is impracticable to install a mandatory sign, a mandatory instruction marking is to be marked on the surface of the taxiway pavement. Mandatory markings are holding point signs (runway designator in white on a red background) and no entry signs. Pilots are not to pass any mandatory marking unless specifically cleared by ATC.

19.34 Information Markings. Where an information sign would normally be installed but it is physically impracticable, the information is to be displayed on the surface of the pavement. Where operationally required, an information sign should be supplemented by information markings. The information markings should be displayed across the surface of the taxiway or apron where necessary and positioned so as to be legible from the cockpit of an approaching aircraft. Information markings shall consist of an inscription in yellow, when it replaces or supplements a location sign; and an inscription in black, when it replaces or supplements a direction or destination sign. Where there is insufficient contrast between the marking and the pavement surface, the marking shall include a black background where the inscriptions are in yellow; and a yellow background where the inscriptions are in black. Markings will be combinations of characters and symbols. Markings containing numbers only are only used for runways and runway designators.

Signs

19.35 General Specification. Signs are provided on aerodromes to convey a mandatory instruction, information on a specific location or destination on a movement area, or to provide other information as required.

19.36 Characteristics. Signs shall be frangible. Those located near a runway or taxiway shall be sufficiently low to preserve clearance for propellers and the engine pods of jet aircraft. Signs shall be rectangular, with the longer side horizontal. The only signs on the movement area utilizing red shall be mandatory instruction signs. Signs showing numbers only refer to runways. Signs shall be reflective and/or illuminated when intended for use at night. Signs shall be illuminated when intended for use:

- In runway visual range conditions less than a value of 800 m, or
- At night in association with instrument runways, or
- At night in association with non-instrument runways where the code number is 3 or 4.

19.37 Mandatory Instruction Signs. A mandatory instruction sign is provided to identify the location beyond which an aircraft taxiing or vehicle shall not proceed unless authorized by the aerodrome control tower. Mandatory instruction signs include runway designation signs, category I, II and III holding position signs, taxi-holding position signs, road-holding position signs and NO ENTRY signs. A pattern "A" taxi-holding position marking shall be supplemented at a taxiway/runway intersection or a runway/taxiway intersection with a runway designation sign. A pattern "B" taxi-holding position marking shall be supplemented with a category I, II or III holding position sign. A runway designation sign at a taxiway/runway intersection should be supplemented with a location sign in the outboard (farthest from the taxiway) position as appropriate. A NO ENTRY sign shall be provided when entry into an area is prohibited.

19.38 Locations of Signs. Signs are to be located in positions such that pilots (or vehicle drivers) are able to see the sign. Signs are not to be positioned so as to create hazards to aircraft. Signs are positioned as follows:

- A runway designation sign at a taxiway/runway intersection shall be located at least on the left side of a taxiway facing the direction of approach to the runway. Where practicable, a runway designation sign shall be located on each side of the taxiway.
- A NO ENTRY sign shall be located at the beginning of the area to which the entrance is prohibited at least on the left hand side of the taxiway as viewed by the pilot. Where practicable, a NO ENTRY sign shall be located on each side of the taxiway.
- A Category I, II or III holding position sign shall be located on each side of the holding position marking facing the direction of the approach to the critical area.
- A taxi-holding position is to be located on the left-side of the taxi-holding position facing the approach to the runway or ILS/MLS critical/sensitive area, as appropriate, and where practicable, on each side of the taxi-holding position.

19.39 Characteristics. A mandatory instruction sign consists of white letters/numbers on a red background. The inscription on a runway designation sign consists of the runway designator. The inscription on a category I, II or III or joint II/III instrument approach holding position sign consists of the runway designator followed by CAT I, CAT II, CAT III, or CAT II/III, as appropriate. The inscription on a taxi-holding position sign shall consist of the taxiway designation and number.

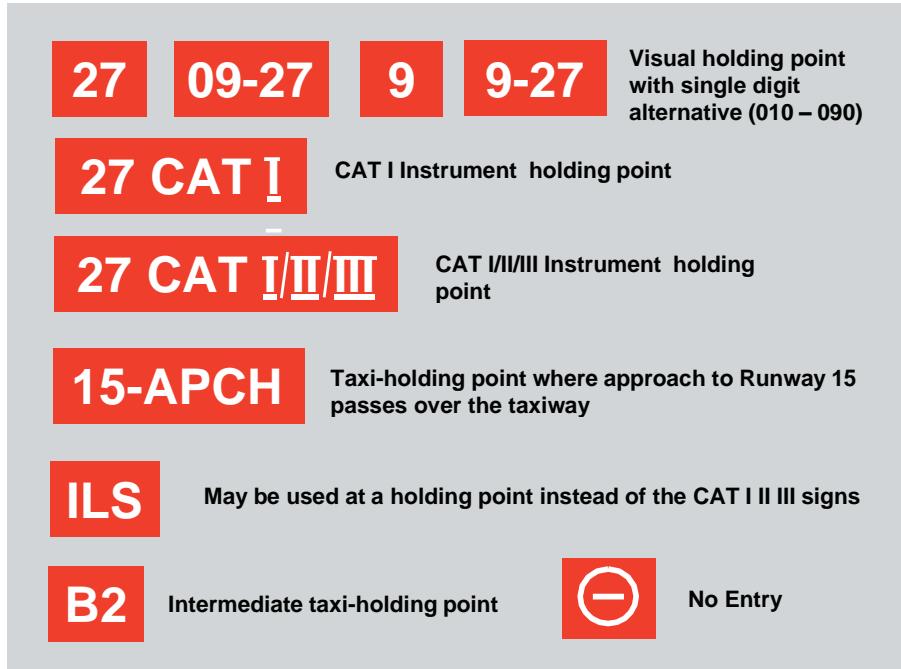


Figure 19.14 Sign characteristics

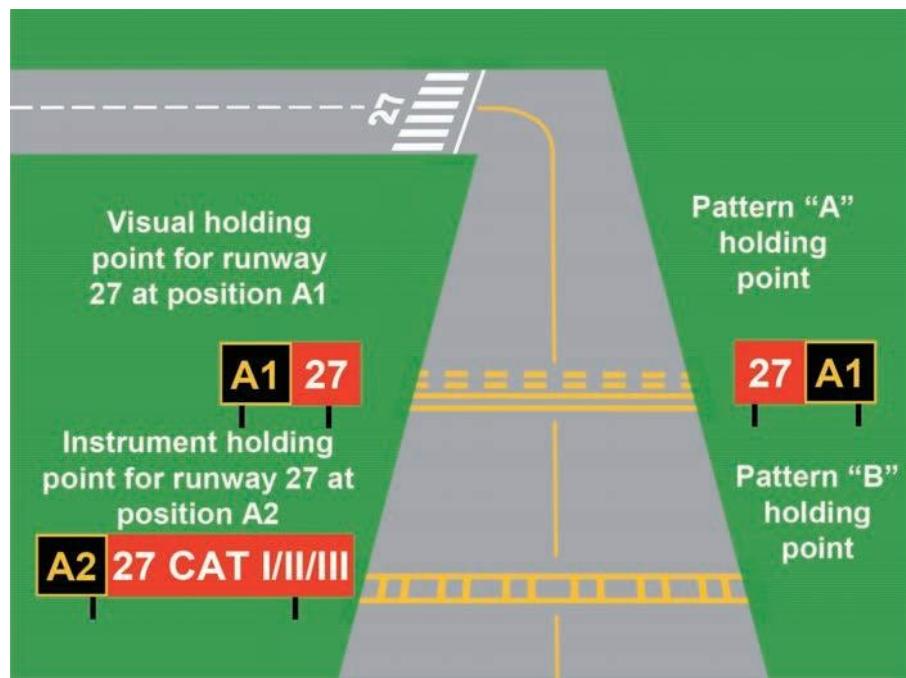


Figure 19.15 Information signs

19.40 Information Signs. Information signs are provided where there is an operational need to identify a specific location, or routing (direction or destination). Information signs include: direction signs, location signs, destination signs, runway exit signs and runway vacated signs. Wherever practicable, they are located on the left-hand side of the taxiway. At a taxiway intersection, information signs are located before the intersection and in line with the taxiway intersection marking. Runway exit signs are located on the same side of the runway as the exit is located (i.e. left or right). A runway vacated sign is located at least on one side of the taxiway to indicate when the aircraft is clear of the sensitive area. Where a runway vacated sign and a taxiway location sign are sited, the taxiway location sign is outboard of the runway vacated sign. A taxiway location sign installed in conjunction with a runway designation sign shall be positioned outboard of the runway designation sign. An information sign other than a location sign shall not be collocated with a mandatory instruction sign.

19.41 Characteristics. The colour and symbology of information signs is as follows:

- **Information Signs** (except location signs), consist of an inscription in black on a yellow background.
- **Location Signs** consist of an inscription in yellow on a black background and where it is a stand alone sign, has a yellow border.
- The inscription on a runway exit sign consists of the designator of the exit taxiway and an arrow indicating the direction to follow.
- The inscription on a runway vacated sign depicts the pattern 'A' taxi-holding position marking.



Figure 19.16 Runway vacated taxiway F

Note. A runway vacated sign also indicates that the aircraft is leaving the perimeter of the ILS/MLS critical/sensitive area.

- The inscription on a destination sign identifies the destination with an arrow indicating the direction to proceed.



Figure 19.17 Runway 02 straight ahead: holding point D3 to the right

- The inscription on a direction sign identifies the taxiway(s) with an arrow (or arrows) appropriately orientated.
- The inscription on a location sign is the designation of the location taxiway, runway or other pavement the aircraft is on or is entering.

Note: Where it is necessary to identify each of a series of taxi-holding positions on the same taxiway, the location sign should consist of the taxiway designation and number.

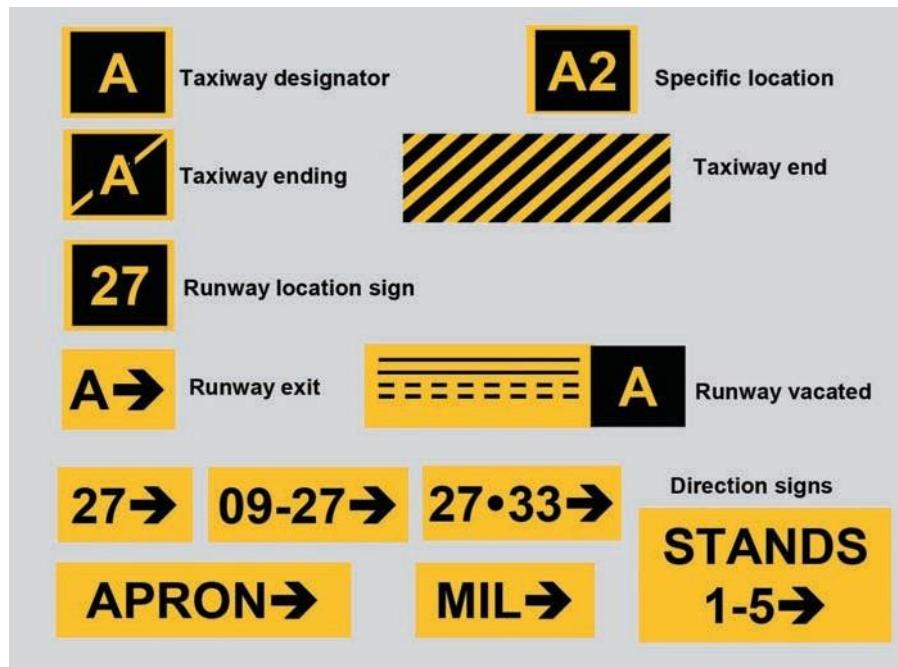


Figure 19.18

19.42 Combination Signs. Where a location sign and direction signs are used in combination, signs related to left turns are placed on the left side of the location sign and all direction signs related to right turns are placed on the right side of the location sign.

Exception: Where the junction consists of one intersecting taxiway, the location sign may be placed on the left hand side. Adjacent signs are delineated by a vertical black line.

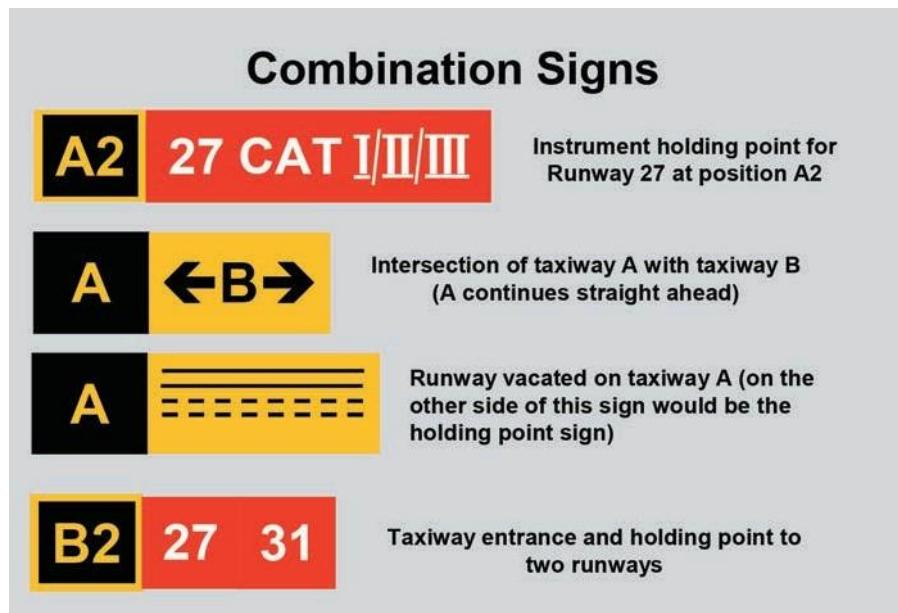


Figure 19.19 Combination signs

19.43 Taxiway Designators. Taxiways are identified by a designator comprising a letter(s) or a combination of a letter(s) followed by a number. When designating taxiways, the use of the letters I, O or X and the use of words such as inner and outer should be avoided wherever possible to avoid confusion with the numerals 1, 0 and closed marking. The use of numbers alone on the manoeuvring area is reserved for the designation of runways.



Figure 19.20

19.44 Aircraft Stand Identification Signs. An aircraft stand identification marking (see paragraph 19.55) should be supplemented with a sign where feasible. The sign should be located so as to be clearly visible from the cockpit of an aircraft prior to entering the stand. The sign consists of an inscription in black on a yellow background. Alternatively in Europe this may be white on a blue background.

19.45 Road-Holding Position Signs. Road-holding position signs are provided at all road entrances to runways. The road-holding position sign is to be located 1.5 m from the edge of the road (left or right as appropriate to the local traffic regulations) at the holding position. A road-holding position marking sign consists of an inscription in white on a red background. If the sign is intended for night use, it is to be reflective or illuminated. The inscription on a road-holding position sign is to be in the national language, must conform to the local traffic regulations and include a requirement to stop; a requirement to obtain an ATC clearance; and the location designator.

19.46 Illumination of Signs. Signs must be illuminated when intended for use:

- in RVR conditions less than 800 metres
- at night in association with instrument runways
- at night in association with non-instrument runways where the code number is 3 or 4

Markers

19.47 Definition. A marker is an object which is displayed above ground level in order to indicate an obstacle or delineate a boundary. Markers are used where lights are not provided or where lighting (or ground markings) does not serve the purpose. Typically, edge markers may be used to indicate the extremity of a taxiway where snow has fallen, or to mark areas of bad ground on a grass aerodrome. Their height shall be sufficiently low to preserve clearance for propellers and for the engine pods of jet aircraft. At Oxford, the refuelling area is marked by reflective green markers.

19.48 Unpaved Runway Edge Markers. Markers should be provided when the extent of an unpaved runway is not clearly indicated by the appearance of its surface compared with that of the surrounding ground. Where runway lights are provided, the markers should be incorporated in the light fixtures. Where there are no lights, markers of flat rectangular or conical shape should be placed so as to delimit the runway clearly. The flat rectangular markers should have a minimum size of 1 m by 3 m and should be placed with their long dimension parallel to the runway centre line. The conical markers should have a height not exceeding 50 cm.

19.49 Taxiway Edge Markers. Taxiway edge markers should be provided on a taxiway where centre line or edge lights or taxiway centre line markers are not provided. The markers should be installed at least at the same locations as would the taxiway edge lights had they been used. Markers are required to be reflective blue. Taxiway edge markers shall be frangible.

19.50 Taxiway Centre Line Markers. Taxiway centre line markers should be provided on a taxiway where edge lights or taxiway edge markers are not provided. The markers should be installed at least at the same location as would taxiway centre line lights had they been used. The markers should normally be located on the taxiway centre line marking, except that they may be offset by not more than 30 cm where it is not practicable to locate them on the marking. Taxiway centre line markers are reflective green. The markers shall be so designed and fitted to withstand being run over by the wheels of an aircraft without damage either to the aircraft or to the markers themselves.

19.51 Unpaved Taxiway Edge Markers. Where the extent of an unpaved taxiway is not clearly indicated by its appearance compared with that of the surrounding ground, markers should be provided. Where taxiway lights are provided, the markers should be incorporated in the light fixtures. Where there are no lights, markers of conical shape should be placed so as to delimit the taxiway clearly.

19.52 Stopway Edge Markers. The stopway edge markers shall be sufficiently different from any runway marker used to ensure that the two types cannot be confused.

Note: Markers consisting of small vertical boards camouflaged on the reverse side, as viewed from the runway, have proved operationally acceptable.

19.53 Boundary Markers. Boundary markers shall be provided at an aerodrome where the landing area has no runway. Boundary markers shall be spaced along the boundary of the landing area at intervals of not more than 200 m, if the type shown below is used, or approximately 90 m, if the conical type is used with a marker at any corner. Boundary markers should be of a form similar to those shown below, or in the form of a cone not less than 50 cm high and not less than 75 cm in diameter at the base. The markers should be coloured to contrast with the background against which they will be seen. A single colour, orange or red, or two contrasting colours, orange and white or alternatively red and white, should be used, except where such colours merge with the background.

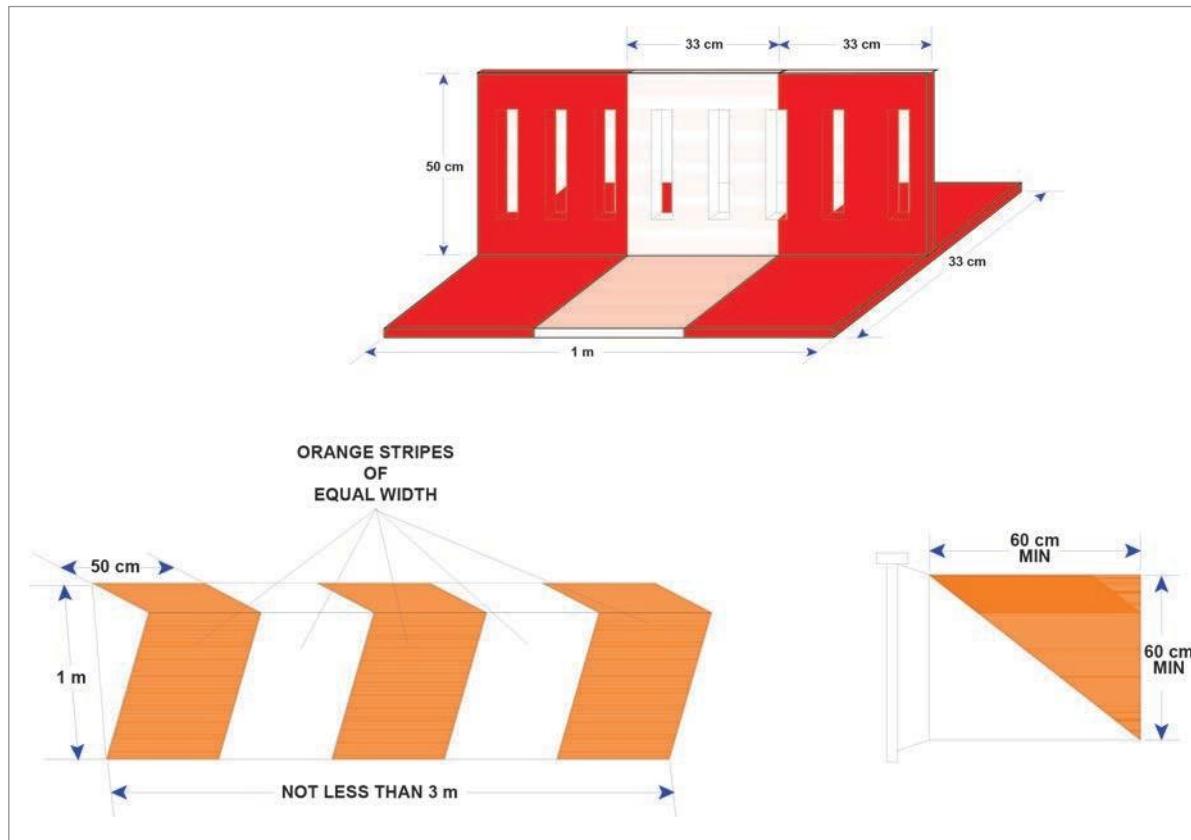


Figure 19.21 Boundary markers

19.54 Fixed Distance Markers. Fixed distance markers are used to indicate the length of runway remaining. They consist of white numbers on a black background and are positioned on the side of the runway at intervals of 1000 ft counting down as the end of the runway approaches. The first marker is positioned 1000 ft (300 m) from the threshold of the landing runway. These are commonly called ‘distance to go’ markers and are mainly used at military aerodromes.

19.55 Parking Stand Markers. These are positioned as markings at the entrance to a parking stand or as a sign positioned on a building at the end of the stand. The marker consists of white inscriptions on a blue background.

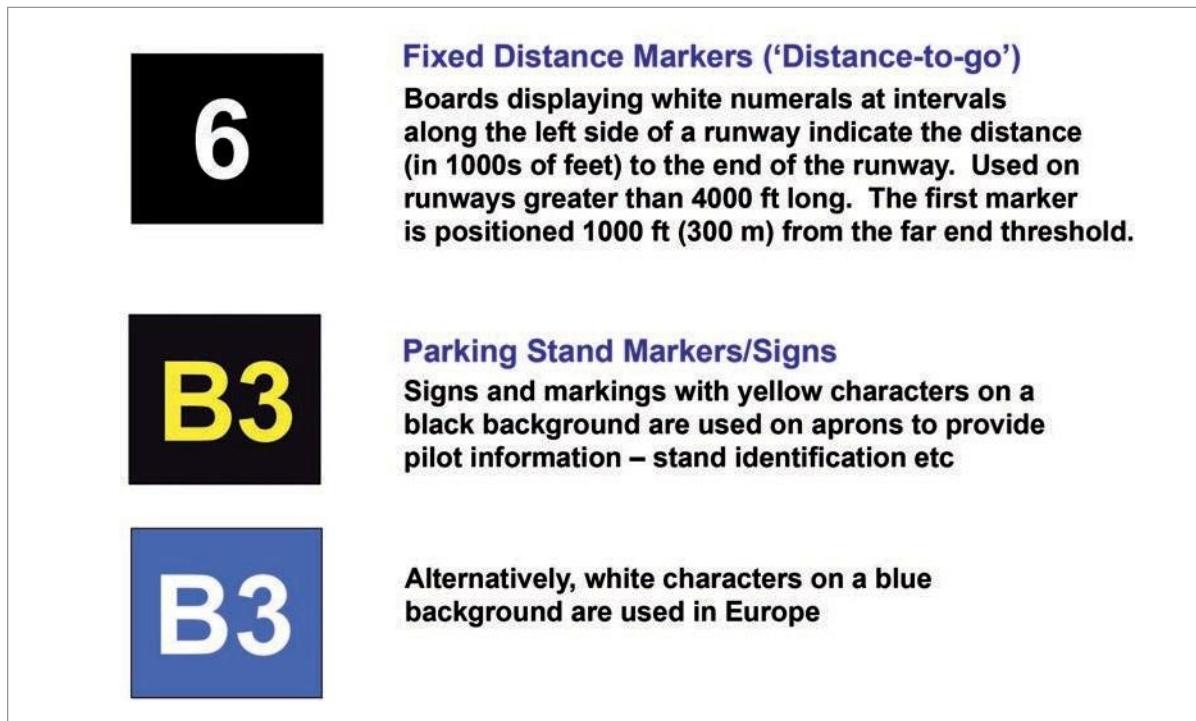


Figure 19.22 Fixed distance and parking stand markers

Visual Docking Guidance Systems

19.56 Overview. Visual Docking Guidance systems (sometimes referred to as Nose-in Docking Guidance systems or Stand Entry Guidance systems) provide guidance where pilot interpreted alignment and stopping information is required for accurate parking, particularly at air-bridges. ICAO states that aircraft stand manoeuvring guidance lights should be provided to facilitate the positioning of an aircraft on an aircraft stand on a paved apron, or on a de/anti-icing facility intended for use in poor visibility conditions, unless adequate guidance is provided by other means. There are no learning objectives concerning Visual Docking Systems, but students are advised to read Chapter 4 of CAP 637, just in case a question comes up in the examination.

Questions

1. How are the runways designated at an aerodrome where there are three parallel runways?
 - a. 02; 03; and 04.
 - b. The QDM for the third runway will be increased by 10°.
 - c. The L and R runways will have different QDM.
 - d. The QDM with 'L'; 'C' and 'R' added.
2. Runway threshold marking consists of a number of stripes. How many stripes are there for a runway width of 60 metres?
 - a. 6
 - b. 8
 - c. 12
 - d. 16
3. Touchdown zone markings are set out in pairs. How many such pairs are required for a runway of 2400 m or more?
 - a. 6
 - b. 4
 - c. 2
 - d. 8
4. A transverse white stripe on a runway is associated with:
 - a. a closed runway.
 - b. a runway which is 2400 metres or longer.
 - c. a displaced threshold.
 - d. a runway available for circling to land approaches.
5. Which of the following statements is correct?
 - a. Taxiway markings are white and runway markings are yellow.
 - b. Numerals on aerodrome signs are reserved for runways.
 - c. A clearway has the same function as a RESA.
 - d. The pairs of touchdown zone markings are separated from each other by 120 metres.
6. If a runway is 2000 m in length, how close to the runway centre line is the nearest taxiway holding point?
 - a. 50 m.
 - b. 35 m.
 - c. 40 m.
 - d. 75 m.
7. Which of the following statements are correct?
 - a. Runway markings are white and taxiway markings are yellow.
 - b. Runway and taxiway markings are white.
 - c. Runway and taxiway markings are yellow.
 - d. Runway markings are yellow and taxiway markings are white.

8. On an instrument approach runway which is more than 2400 m long there will be:

- a. an aiming point marking and centre line markings only.
- b. touchdown zone markings and centre line markings only.
- c. aiming point markings and touchdown zone markings.
- d. an aiming point marking 150 m from the threshold.

9. Which of the following concerning aerodrome signs is correct?

- a. Mandatory signs: Black background with red inscription.
- b. Information signs: Black or yellow background with black or yellow inscription.
- c. Mandatory signs: Red background with black inscription.
- d. Information signs: Orange background with black inscription.

10. Where fixed distance marking is provided, this shall commence:

- a. at 100 m from the far end threshold.
- b. at 150 m from the far end threshold.
- c. at 300 m from the far end threshold.
- d. at 500 m from the far end threshold.

Answers

1	2	3	4	5	6	7	8	9	10
d	d	a	c	b	d	a	c	b	c

Chapter

20

Aerodrome Lighting

Aerodrome Lights.....	427
Approach Lighting Systems	428
Runway Lighting	438
Taxiway Lighting	439
Questions	442
Answers	446

Aerodrome Lights

20.1 Introduction. The profusion of lights on an aerodrome can be both confusing and disorientating, but each light or lighting system has a purpose and most are to do with aircraft safety. In this chapter the various lighting systems are described and their uses explained. The learning objectives state that knowledge of lighting systems is required, but the spacing of lights or groups of lights (excluding approach lighting systems) is outside the scope of the course. The design of lighting systems is also beyond this course. It is an unfortunate fact of life that there is no standard system of lighting in use although ICAO has laid down the standards and recommended practices in Annex 14.

20.2 Aircraft Safety. A non-aeronautical light near an aerodrome which might endanger the safety of an aircraft is to be extinguished, screened or otherwise modified so as to eliminate the source of danger.

20.3 Elevated Lights. Elevated runway, stopway and taxiway lights shall be frangible. Their height shall be sufficiently low to preserve clearance for propellers and for the engine pods of jet aircraft. Where not sufficiently conspicuous, they are to be suitably marked.

20.4 Light Intensity. In poor visibility conditions by day, lights can be more effective than markings. For lights to be effective in such conditions or in poor visibility by night, they must be of adequate intensity. To obtain the required intensity, it will usually be necessary to make the light directional, in which case the arcs over which the light show will have to be adequate and so orientated as to meet the operational requirements. The runway lighting system will have to be considered as a whole, to ensure that the relative light intensities are suitably matched to the same end. The intensity of runway lighting shall be adequate for the minimum conditions of visibility in ambient light in which use of the runway is intended, and compatible with that of the nearest section of the approach lighting system when provided. While the lights of an approach lighting system may be of higher intensity than the runway lighting, it is good practice to avoid abrupt changes in intensity as these could give a pilot a false impression that the visibility is changing during approach.

20.5 Intensity Control. Where a high intensity lighting system is provided, a suitable intensity control shall be incorporated to allow for adjustment of the light intensity to meet the prevailing conditions. Separate intensity controls or other suitable methods shall be provided to ensure that the following systems, when installed, can be operated at compatible intensities:

- approach lighting system
- runway edge lights
- runway threshold lights
- runway end lights
- runway centre line lights
- runway touchdown zone lights
- taxiway centre line lights

20.6 Availability. Lights may be turned off providing that they can be turned on again within a period of 1 hour.

20.7 Emergency Lights. Normally, an aerodrome will have an alternate power supply to cope with general power failures. Where no such back-up supply exists, emergency lights are to be available for at least the primary runway.

20.8 Aeronautical Beacons. Where operationally necessary an aerodrome beacon or an identification beacon is to be provided where the aerodrome is intended for use at night. The need for a beacon is to be determined having regard to the requirements of the air traffic using the aerodrome, the conspicuity of the aerodrome features in relation to its surroundings and the installation of other visual and non-visual aids useful in locating the aerodrome.

20.9 Aerodrome Beacon. An aerodrome beacon shows ‘flashes’ of light. For land aerodromes the colours are white or white and green and for water aerodromes, white or white and yellow. Beacons are to be provided at an aerodrome intended for use at night if one or more of the following conditions exist:

- Aircraft navigate predominantly by visual means;
- Reduced visibilities are frequent; or
- It is difficult to locate the aerodrome from the air due to surrounding lights or terrain.

20.10 Identification Beacon. An identification beacon is provided at an aerodrome which is intended for use at night and cannot be easily identified from the air by any other means. An identification beacon will show Morse code identification of the aerodrome in flashing green at a land aerodrome (red at a UK military aerodrome) and flashing yellow at a water aerodrome.

Approach Lighting Systems

20.11 General. Approach lighting systems are patterns of fixed lights of variable intensity, showing white, designed to give the pilot guidance to the threshold (or aiming point) of a runway, in poor visibility or at night. The light patterns may include distance coding and give an indication of aircraft attitude. The arrangement may also give an indication of aircraft height above the approach plane. Systems can range in complexity from a simple centre line and crossbar, to the highly intricate layouts associated with Cat III precision instrument approach systems. The determination of the visual criteria for landing can be met by the visual acquisition of the approach light system and the design must cater for the requirement of the most restrictive decision heights and minimum descent heights. The primary unit of design is the length of the segments, set by ICAO at 300 m. Any ILS or MLS azimuth antenna protruding through the plane of the lights shall be treated as an obstacle and marked and lit accordingly.

20.12 Calvert Systems. Generally used in the UK and occasionally in other parts of the world, Calvert systems (named after the inventor) consist of 5 bars and a distance coded centre line. A NATO system is similar but does not have the distance coding of the centre line.

20.13 Barrettes. The individual lights that make up the lighting systems may be arranged either as single light units (as in the Calvert method) or in the form of groups of three or more lights arranged as a bar (the ICAO method). For instance the centre line of a system may consist of either single point source lights or a bar of 5 lights close together. The arrangement of 3 lights or more close together is called a ‘barrette’ (pronounced barre - et meaning small bar). They are called barrettes so that they are not confused with the bar constituent parts of any approach lighting system.

20.14 Simple Approach Lighting System. A simple approach lighting system consists of a row of lights on the extended centre line of the runway extending, whenever possible, over a distance of not less than 420 m from the threshold with a row of lights forming a crossbar 18 m or 30 m in length at a distance of 300 m from the threshold. The lights forming the crossbar shall be as nearly as practicable in a horizontal straight line at right angles to, and bisected by, the line of the centre line lights. This type of system is used on a non-instrument runway and may be used on a non-precision instrument runway.

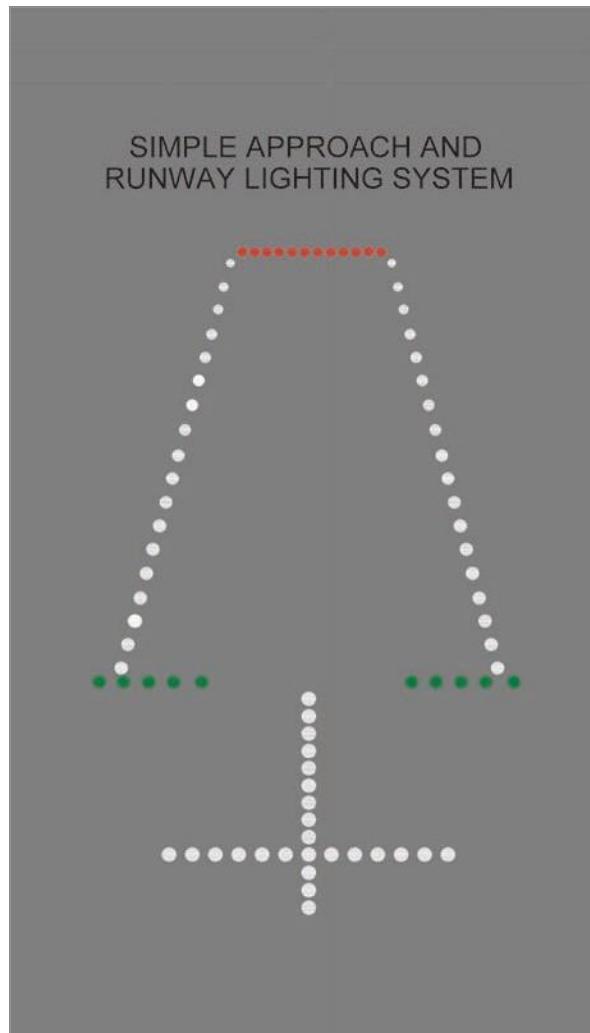


Figure 20.1 Simple approach lighting system

20.15 Precision Approach CAT I Lighting System. A precision approach category I lighting system consists of a row of lights on the extended centre line of the runway extending, wherever possible, over a distance of 900 m from the runway threshold. If the length is less than 900 m (which on a 3° glide path coincides with CAT I system minima - 200 ft) it is possible that an aircraft may not be over the approach lighting at DH. The 5 crossbars are 150 m apart and form three segments: the inner segment (0 - 300 m); the middle segment (300 - 600 m); and the outer segment (600 - 900 m). Any ILS or MLS azimuth antenna protruding through the plane of the lights will be treated as an obstacle and marked and lit accordingly.

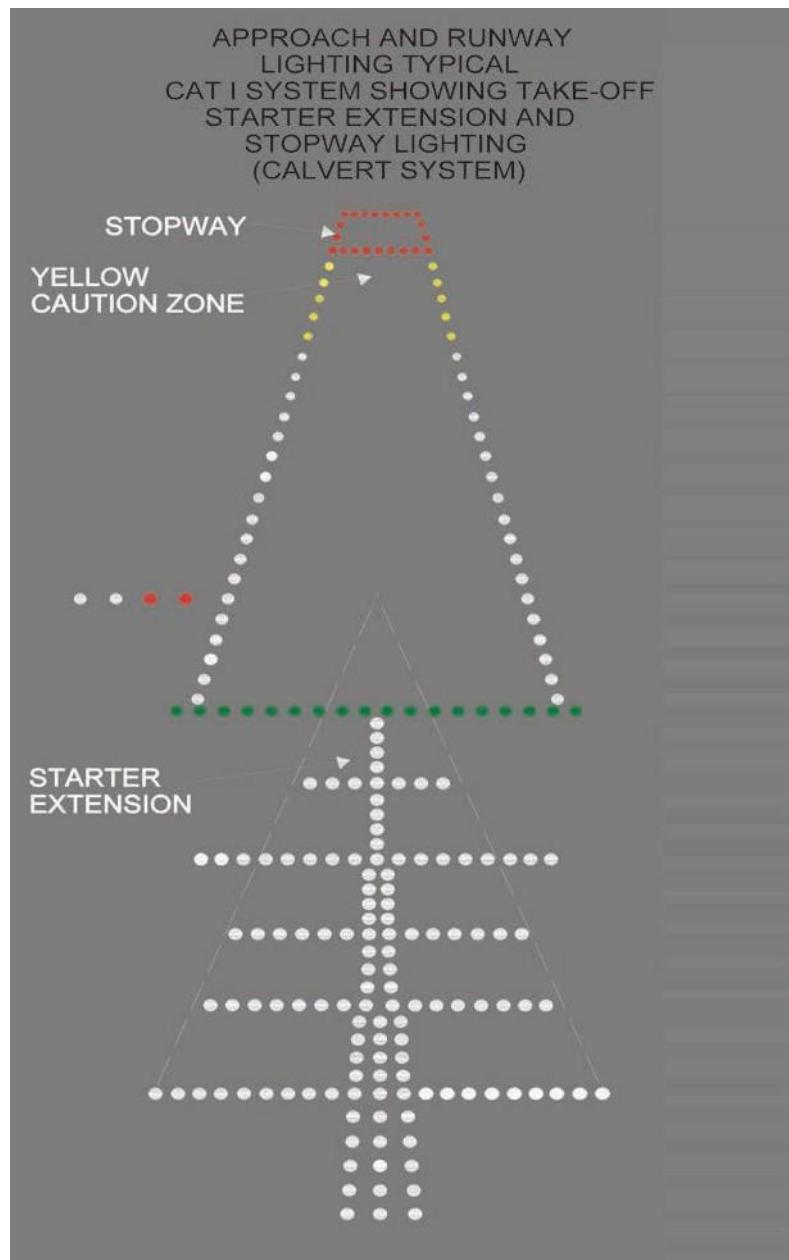


Figure 20.2 CAT I Calvert 5 bar and centre line system

20.16 ICAO Precision Approach CAT I Lighting System. In this arrangement, the centre line is in the form of barrettes with only one crossbar at 300 m from the threshold. Again, the centre line should be 900 m in length. The centre line may be augmented with strobe lights that ‘ripple’ towards the threshold from the start of the centre line. The visibility of the threshold may be enhanced by the use of wing strobes (rotating).

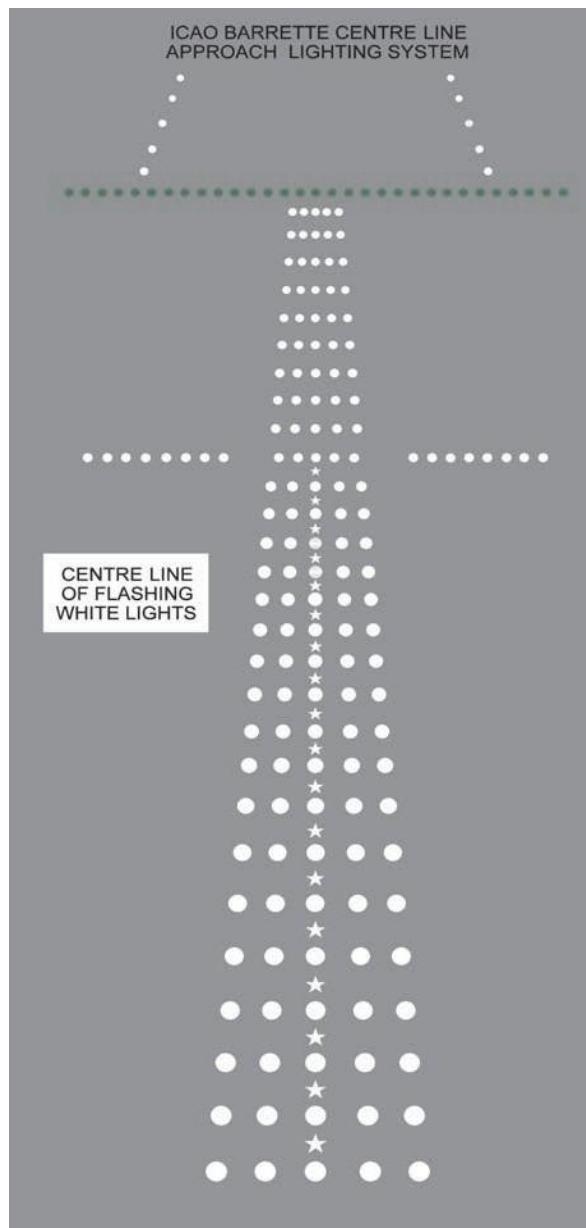


Figure 20.3 ICAO CAT I approach lighting system

20.17 Precision Approach Category II/III Lighting System. At those aerodromes where Cat II and III approaches are conducted more complex approach lighting system are installed to enhance the possibility of the pilot achieving the visual criteria at DH to complete the landing. The systems used are various but all are based on either the Calvert 5 bar and centre line system, or the ICAO barrette system. Both systems should be 900 m long and provide some element of attitude information. In both the Calvert and the ICAO systems the inner segment (0 - 300 m from the threshold) is augmented by the supplementary approach lighting. This consists of replacing the centre line of the Calvert system with barrettes and adding red wing barrettes to both systems. The effect is to enhance the visibility and conspicuity of the inner segment. DH for Cat II is not lower than 100 ft which equates to 300 m from the threshold (assuming the pilot crosses the threshold at 50 ft).

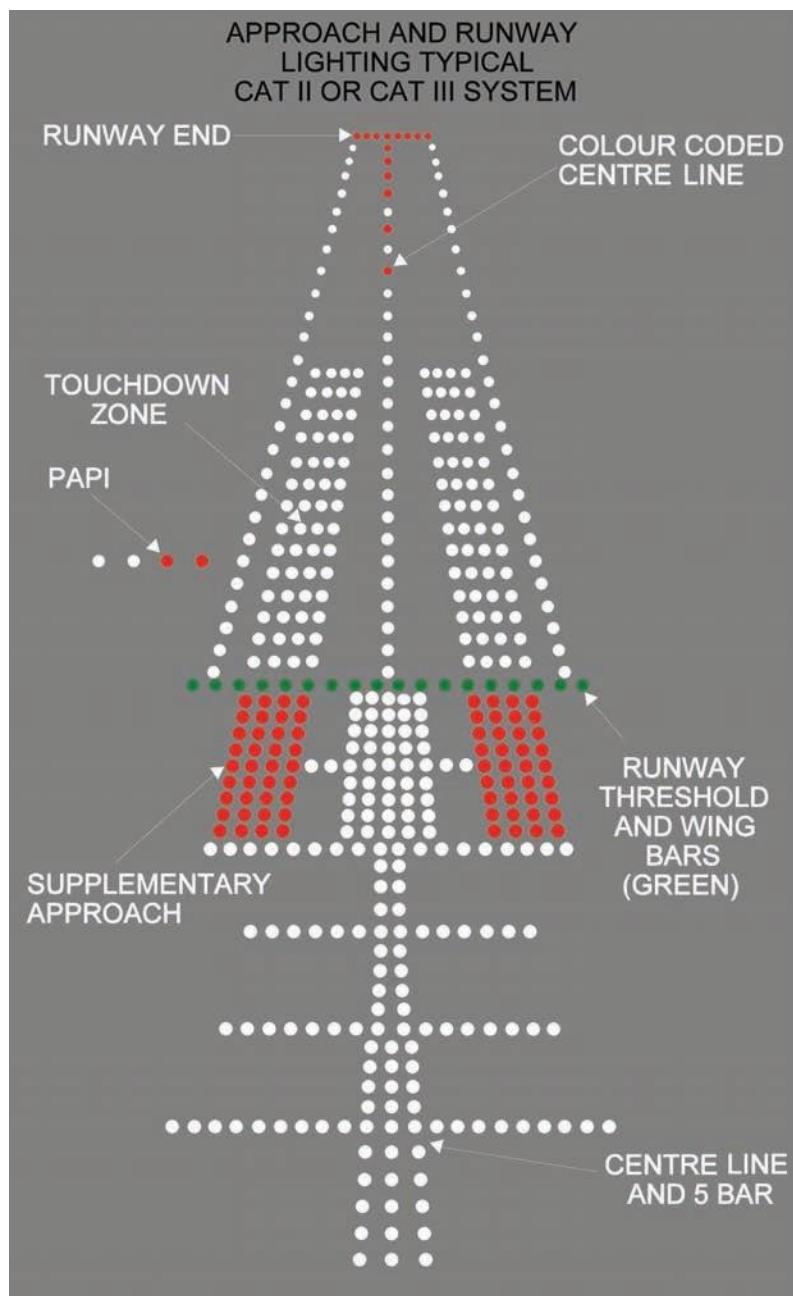


Figure 20.4 Approach & runway Cat II/III lighting system

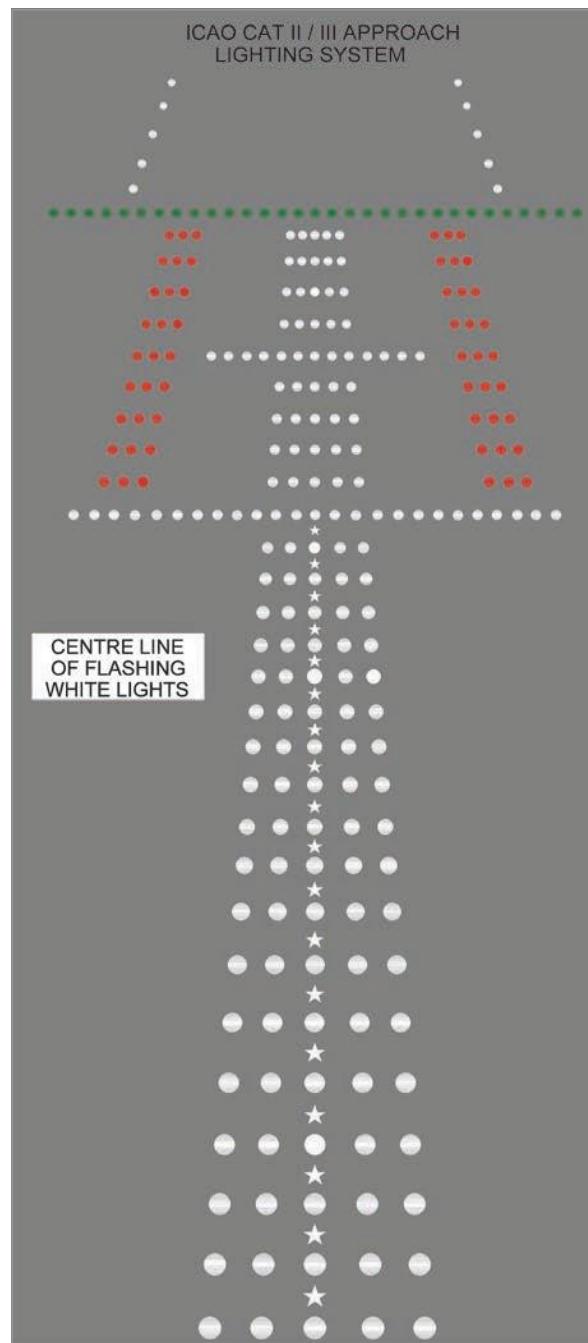


Figure 20.5 ICAO Cat II/III approach lighting system



Figure 20.6 Calvert Cat II/III system at Cork

20.18 Precision Approach Path Indicators (PAPI). As an additional aid to a precision approach, glide path guidance is provided during the visual phase (after DH) by the PAPI lighting system. This consists of 4 light units showing either red or white light through precision defined angles. Each light unit is set to a different mid angle and below that angle shows red and above shows white. The overall effect is to give a reference to the median angle which is set to the required glide path (e.g. 3°). ICAO define PAPI as “A wing bar of 4 lights uniformly spaced”.



Installation by: Godfrey Systems International, Inc

Figure 20.7 Precision approach path indicators (PAPI)

20.19 A (Abridged) PAPI - A reduced form of a PAPI. Consists of only 2 sets of lights instead of 4.

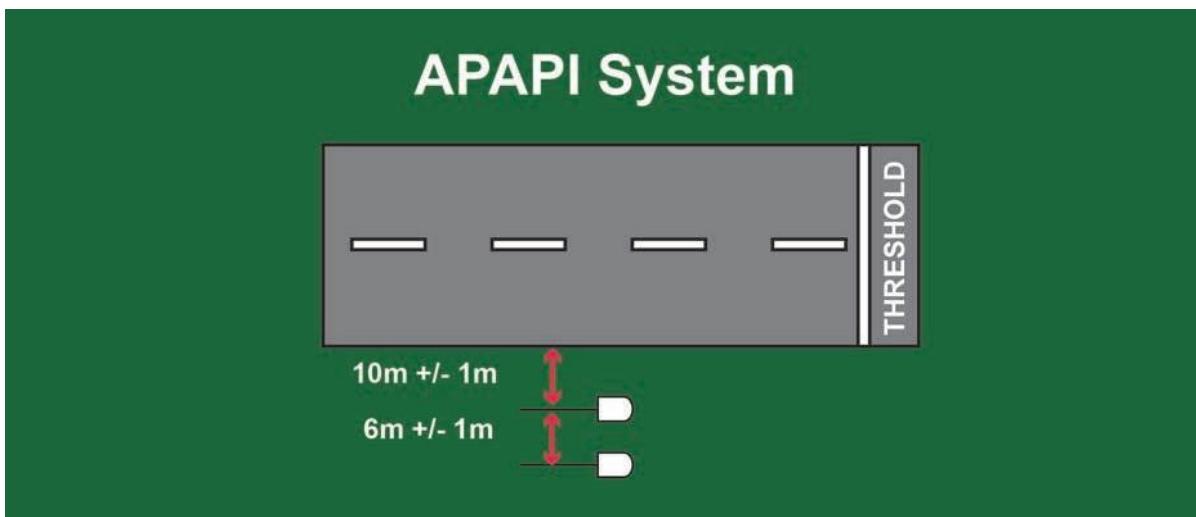


Figure 20.8 APAPI System

20.20 PAPI Indications. The possible combinations of the 4 light sets give 5 different indications relating to the aircraft position (correctly, the pilot's eye) with respect to the defined glide path.

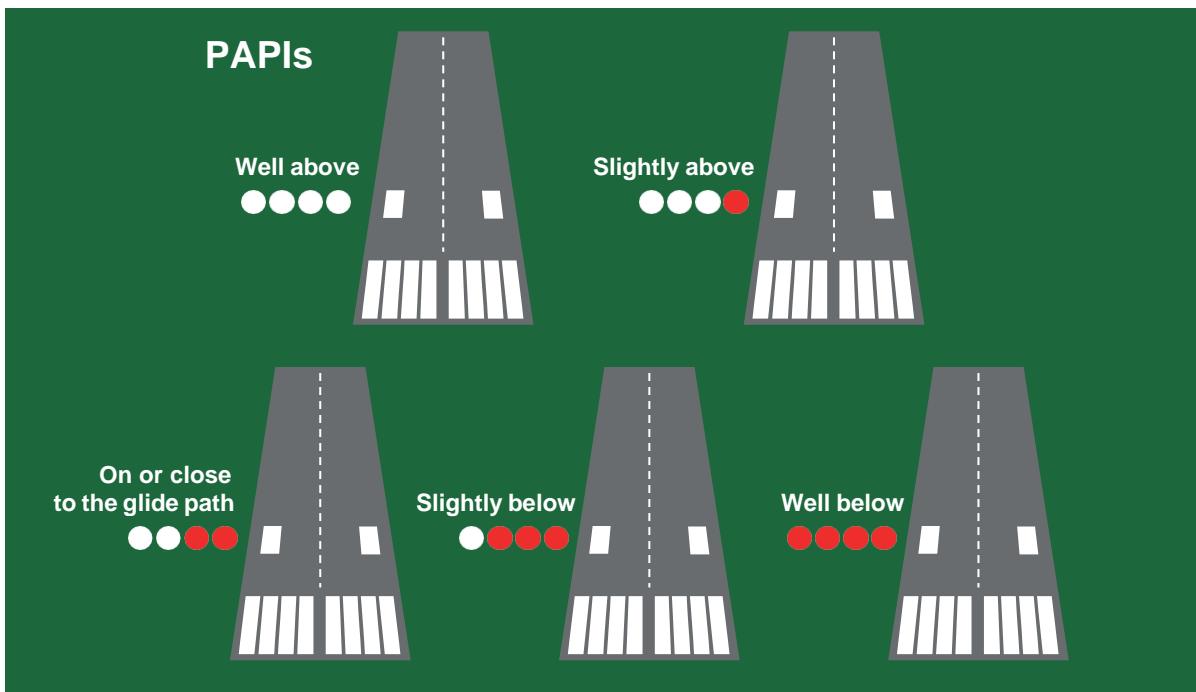


Figure 20.9 PAPI indications

20.21 Circling Approach. Where the runway is used for circling approaches (visual manoeuvring circling) a PAPI set is placed on either side of the runway. Normally there would only be one set on the left hand side. This allows the pilot to use the PAPI wing bars as a horizontal reference for aircraft attitude during the later part of the circling manoeuvre.

20.22 Minimum Eye Height (MEHT). If the PAPI system was located exactly at the threshold of the runway, and the pilot flew a visual approach keeping the aircraft exactly at the ‘on glide path’ position, the wheels of the aircraft would hit the ground before the aircraft reached the threshold. The distance before the threshold where the wheels hit the ground would be a function of the distance from the pilot’s eye to the bottom of the undercarriage. To overcome this, the visual aiming point (coincident with the PAPI location) is set a distance down the runway. On code 4 instrument runways at least 2400 m in length, the aiming point is set 400 m from the threshold in which case, for a normal 3° glide path, the pilot’s eye would be 65 ft above the surface on crossing the threshold. This assumes that the ‘on glide path’ indication is the ‘mid angle’, when in fact it is encompassed in a bandwidth of angles within which the ‘on glide path’ indication is visible. If the height of the pilot’s eye can be established when the aircraft is over the threshold with the lowest possible ‘on glide path’ indication, this could be used to determine if an aircraft can use the PAPI system as set up for that runway. The figure quoted on the ICAO aerodrome chart is the MEHT (minimum eye height) and is printed alongside the location of the PAPI on the chart. During type rating instruction, you will be made aware of the ‘eye to undercarriage’ requirement of the type, so that you can assess the usability of the PAPIs.

20.23 VASI. Standard Visual Approach Slope Indicator. This consists of 2 sets of 3 lights positioned as wing bars. Each set of lights is designed so that the lights appear as either white or red, depending on the angle at which the lights are viewed. When the pilot is approaching the lights on the glide slope the first set of lights appears white and the second set appears red. When both sets appear white, the pilot is flying too high, and when both appear red the approach is too low.

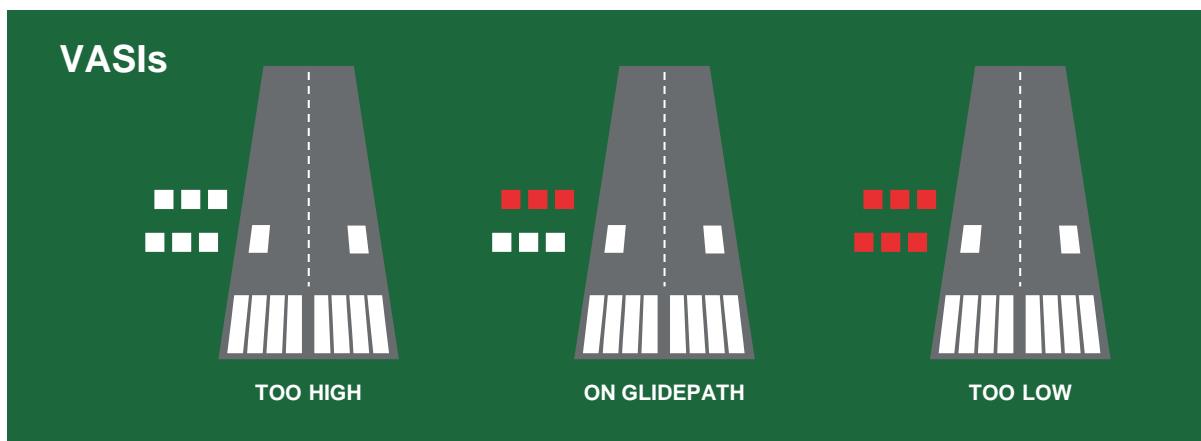


Figure 20.10 VASIs

20.24 T-VASIS. T-Visual Approach Slope Indicating System. A T-VASIS incorporates a horizontal bar in addition to the approach angle lights (forming a T like pattern). When on the correct approach path to a T-VASIS, only the horizontal bar is visible. A (Abridged)T-VASIS are only located to the left of the runway.

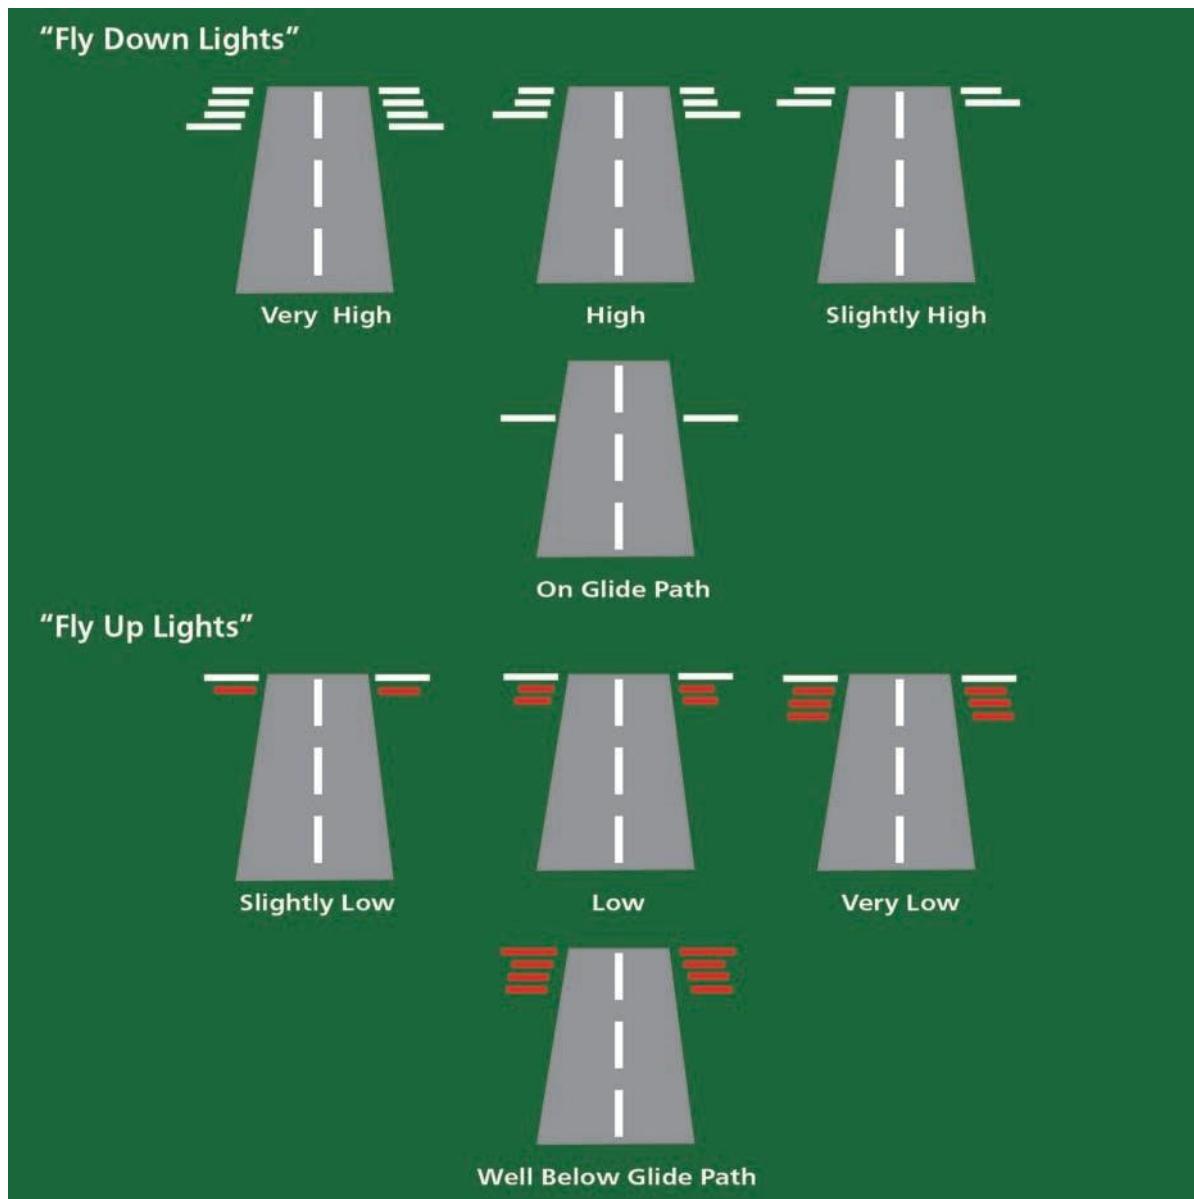


Figure 20.11 T-VASIS

Runway Lighting

20.25 Runway Edge Lights. Runway edge lights are provided for a runway intended for use at night or for a precision approach runway intended for use by day or night, and should be provided on a runway intended for take-off with an operating minimum below an RVR of the order of 800 m by day. Runway edge lights are placed along the full length of the runway in two parallel rows equidistant from the centre line. The lights shall be uniformly spaced. At intersections of runways, lights may be spaced irregularly or omitted, provided that adequate guidance remains available to the pilot. Runway edge lights are fixed, variable intensity white showing in the direction from which approaches are made. In the case of a displaced threshold, the lights between the beginning of the runway and the displaced threshold show red in the approach direction. A caution zone may be established over the last 600 m (or 1/3 of the runway whichever is least) where the lights are yellow. When the runway edge lights are intended to provide circling guidance, they shall show all round (omni-directional).

20.26 Runway Threshold and Wing Bar Lights. Runway threshold lights are provided for a runway equipped with runway edge lights (except on a non-instrument or non-precision approach runway where the threshold is displaced and wing bar lights are provided). When the threshold is at the extremity of a runway, the threshold lights are placed in a row at right angles to the runway axis as near to the extremity of the runway as possible. For a displaced threshold, the lights are in the form of a barrette (wing bar) either side of the displaced threshold. Runway threshold and wing bar lights are to be fixed, unidirectional lights showing green in the direction of approach to the runway.

20.27 Runway Threshold Identification Lights. Used at the threshold of a non-precision runway when additional threshold conspicuity is necessary or where the threshold is permanently displaced. They are flashing white lights unidirectional in the direction of the approach to the runway.

20.28 Runway End Lights. Runway end lights are provided for a runway equipped with runway edge lights. Runway end lights are fixed, unidirectional lights showing red in the direction of the runway. Runway end lights are placed in a line at right angles to the runway axis as near to the end of the runway as possible, and should consist of at least six lights. The lights should be either equally spaced between the rows of runway edge lights, or symmetrically disposed about the runway centre line.

20.29 Runway Centre Line Lights. Runway centre line lights are provided on Cat II/III precision approach runways. They should be provided on a Cat I precision approach runway where the width between the runway edge lights is greater than 50 m. Runway centre line lights are to be provided on a runway intended to be used for take-off with an operating minimum below an RVR of the order of 400 m. Runway centre line lights are fixed, variable intensity white. Over the last 900 m from the runway end, the lights show alternate red and white from 900 m to 300 m from the runway end; and all red from 300 m to the runway end.

20.30 Runway Touchdown Zone Lights. Touchdown zone lights are provided in the touchdown zone of a Cat II/III precision approach runway. Touchdown zone lights extend from the threshold for a distance of 900 m where the runway is 1800 m or more in length. The lights are arranged in the form of strips either side of the centre line, the width of the strips is to be the same width as the touchdown zone markings. Touchdown zone lights are fixed, variable intensity, unidirectional showing white.

20.31 Stopway Lights. Stopway lights are provided for a stopway intended for use at night with the lights placed along the full length of the stopway. Stopway lights shall be fixed, variable intensity, unidirectional lights showing red in the direction of the runway.

20.32 Runway Lead-in Lights. Runway lead-in lights provide visual guidance along a specific approach path to aircraft onto where the runway approach lighting is in view. The system may be curved, straight or a combination of both. They consist of groups of at least 3 flashing white lights and, where practical, each group should flash in sequence towards the runway.

20.33 Circling Guidance Lights. Circling guidance lights are provided when existing approach and runway lighting do not permit identification of the runway to an aircraft undertaking a circling approach to land. They may be fixed or flashing white.

Taxiway Lighting

20.34 Application. Taxiway lighting provides pilots with guidance and information during the taxi to and from the runway. It consists of centre line lights, edge lights, guard lights, and stop lights at holding points.

20.35 Taxiway Edge Lighting. Taxiway edge lighting is provided along the edges of holding bays, de/anti-icing facilities, aprons etc. It is intended for use at night on taxiways not provided with taxiway centre line lighting. If, however, sufficient alternative illumination is available (e.g. stadium lighting) then the edge lights may be dispensed with. Where a runway forms part of a standard taxi route intended for use at night and no taxiway centre line lighting exists, edge lights are to be provided. Taxiway edge lights are fixed, variable intensity omni-directional blue.

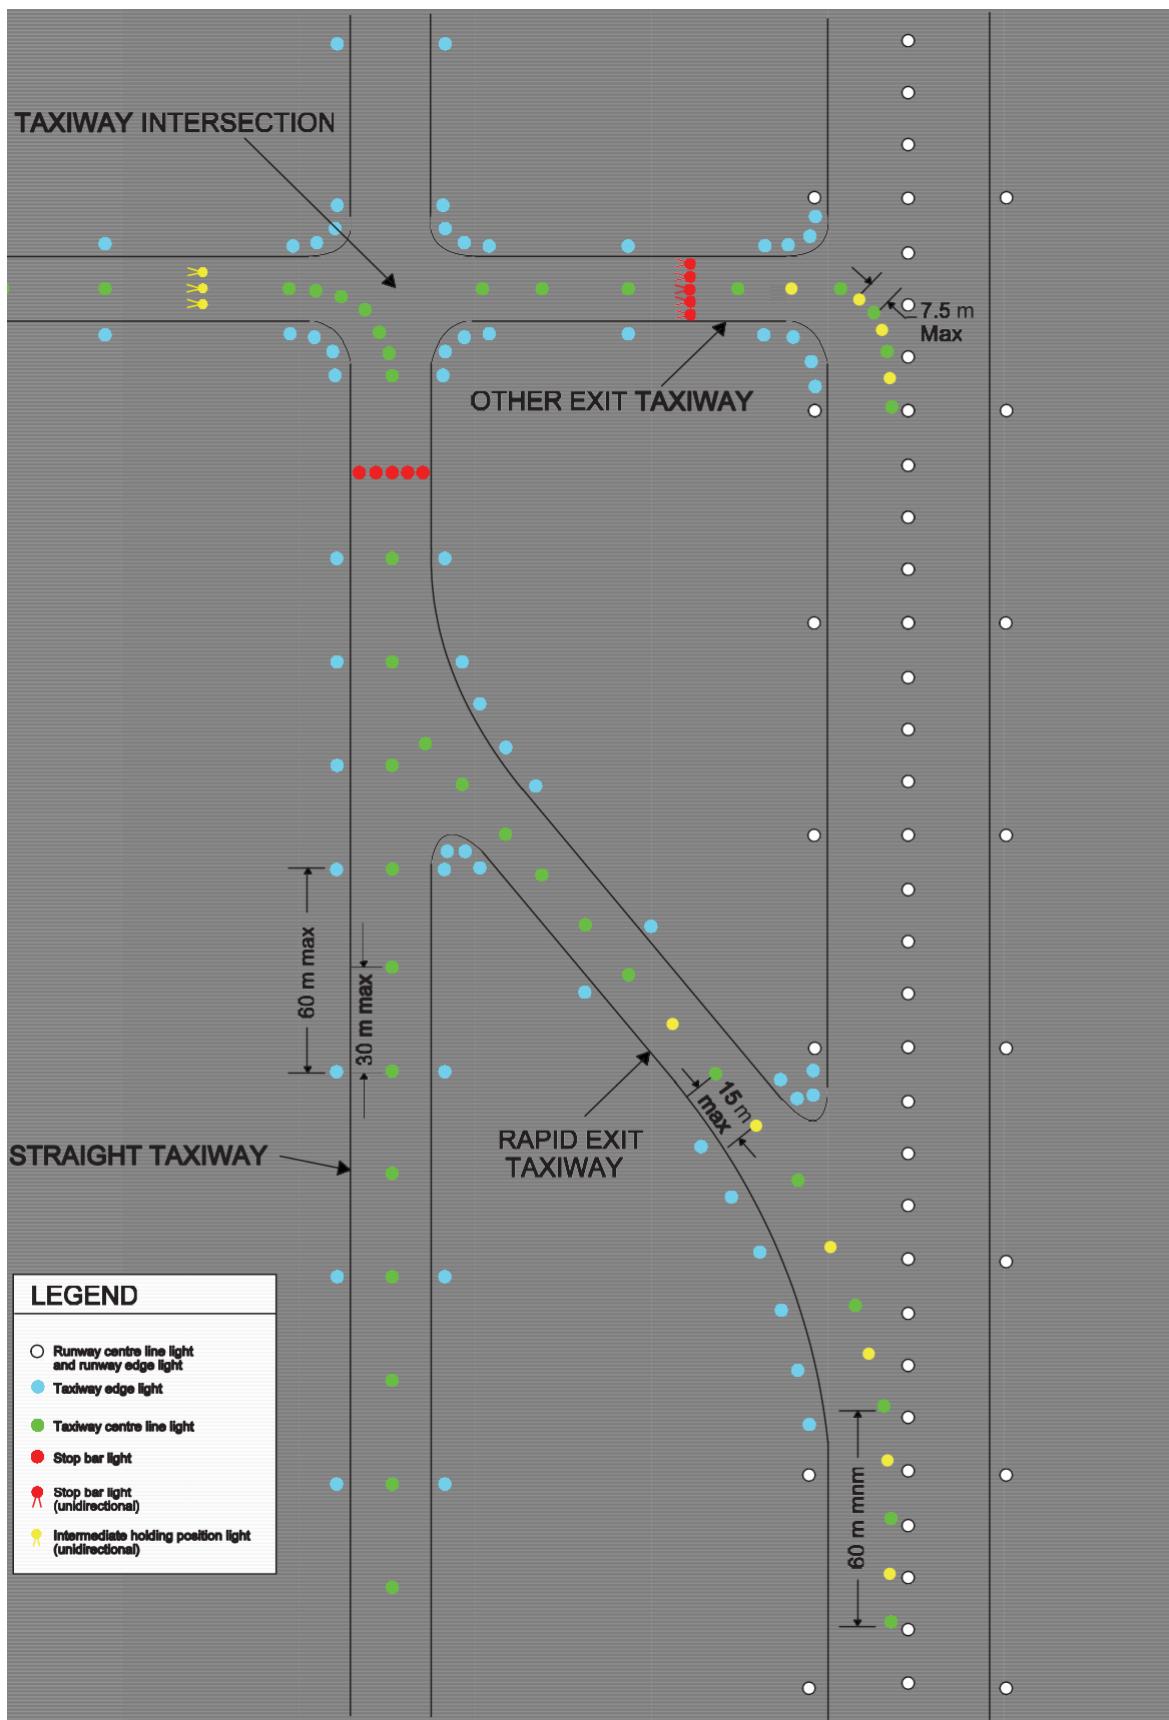


Figure 20.12 Arrangements of runway and taxiway lighting

20.36 Taxiway Centre Line Lights. Taxiway centre line lights are provided on an exit taxiway, taxiway and apron intended for use in runway visual range conditions less than a value of 350 m, in such a manner as to provide continuous guidance from the runway centre line to the point on the apron where aircraft commence manoeuvring for parking. These lights need not be provided where there is a low volume of traffic and taxiway edge lights and centre line marking provide adequate guidance. Taxiway centre line lights shall be provided on a runway forming part of a standard taxiway route and intended for taxiing in runway visual range conditions less than a value of 350 m. Taxiway centre line lights are fixed, variable intensity showing green such that the light is visible only from the aeroplanes on or in the vicinity of the taxiway. Within the ILS/MLS critical/sensitive area, the centre line lights are alternating green and yellow. This is the same for a high-speed exit. Where aircraft may follow the same centre line in both directions, all the centre line lights shall show green to aircraft approaching the runway.

20.37 Stop Bars. Stop bars are a row of red lights showing in the direction of taxiing aircraft and when illuminated require the aircraft to stop and not proceed until cleared by ATC. One or more stop bars, as appropriate, should be provided at a taxiway intersection or taxi-holding position when it is desired to supplement markings with lights and to provide traffic control by visual means. A stop bar shall be provided at every taxi-holding position serving a runway when it is intended that the runway will be used in runway visual range conditions less than a value of 350 m. Where the normal stop bar lights might be obscured (from a pilot's view), for example, by snow or rain, or where a pilot may be required to stop the aircraft in a position close to the lights that they are blocked from view by the structure of the aircraft, a pair of elevated lights should be added to each end of the stop bar.

20.38 Intermediate Holding Position Lights. Intermediate Holding Position lights consist of 3 fixed unidirectional lights showing yellow in the direction of approach and at right angles to the taxiway.

20.39 Road-holding Position Lights. Comprise of either :

- a controllable red (stop) / green (go) or
- a flashing red light

20.40 Runway Guard Lights. These are used to warn pilots and drivers of vehicles that they are about to enter an active runway. They are installed at the entrance to runways used in RVR conditions less than 550 m where a stop bar is not fitted, and in RVR conditions of 550 - 1200 m where traffic density is high. There are two configurations of runway guard lights known as Configuration A and Configuration B. The lights are flashing yellow and show in the direction of taxiing aircraft.

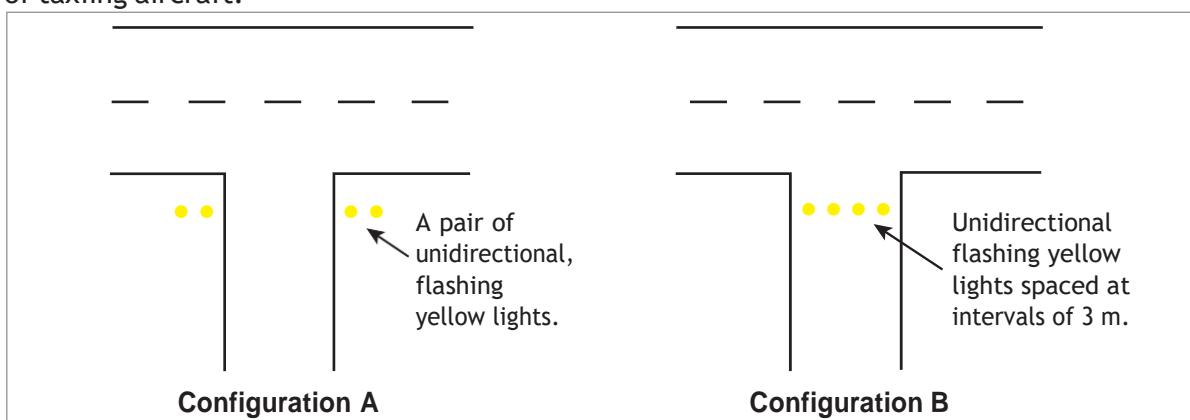


Figure 20.13 Runway and guard lights

Questions

1. How many bars are there on a full Calvert approach light system?
 - a. 5
 - b. 4
 - c. 3
 - d. 2
2. What length should the approach lighting system for a CAT I Calvert design be?
 - a. 900 m
 - b. 600 m
 - c. 1200 m
 - d. 400 m
3. What colour are runway end lights?
 - a. Unidirectional red
 - b. Unidirectional white
 - c. Omni-directional red
 - d. Omni-directional white
4. What is the colour of threshold lighting?
 - a. Omni-directional green
 - b. Unidirectional green, showing in the direction of the approach
 - c. Unidirectional white, showing in the direction of the approach
 - d. Red unidirectional
5. On a Cat I lighting system, what is the length of the single, double and treble light segments on the centre line of the approach lighting system?
 - a. 150 m
 - b. 200 m
 - c. 250 m
 - d. 300 m
6. What colour lights are runway edge lights, not including cautionary areas or pre-displaced thresholds?
 - a. White or yellow
 - b. White
 - c. Red
 - d. Blue
7. An aerodrome identification beacon on a land based aerodrome is:
 - a. blue
 - b. white
 - c. green
 - d. red

8. What colour is an aerodrome beacon for a land aerodrome?

- a. Flashing green
- b. Flashing green and white
- c. Steady green
- d. Flashing red

9. What is the colour of threshold lights?

- a. Steady white
- b. Flashing white
- c. Steady green
- d. Flashing green

10. What is the length of the approach lighting for a CAT I system?

- a. 300 m
- b. 600 m
- c. 900 m
- d. 1200 m

11. What is a barrette?

- a. 3 or more single lights close together which appear at a distance to be a short bar
- b. Frangible approach lights
- c. Lead-in lights
- d. Frangible lights

12. When the lights of an aerodrome are required to be on (night-time etc.) they can only be switched off providing it is possible to switch them on:

- a. not more than 1 hour before the ETA of an arriving flight
- b. not more than 30 minutes before the ETA of an arriving flight
- c. not more than 5 minutes before the ETA of an arriving flight
- d. not more than 15 minutes before the ETA of an arriving flight

13. Taxiway edge lights are:

- a. fixed showing blue
- b. fixed showing green
- c. fixed showing yellow
- d. flashing showing blue

14. A precision approach Category I lighting system, the centre line and the barrette lights have to be:

- a. flashing green lights for which the intensity of the light is adjustable
- b. fixed white lights for which the intensity of the light is adjustable
- c. flashing white lights for which the intensity of the light is adjustable
- d. fixed green lights for which the intensity of the light is adjustable

15. **What defines a Calvert type runway approach lighting system?**
- a. 3 crossbars with 3 lighting segments providing centre line lighting
 - b. 3 crossbars with 2 lighting segments providing centre line lighting
 - c. 5 crossbars with 2 lighting segments providing centre line lighting
 - d. 5 crossbars with 3 lighting segments providing centre line lighting
16. **On the PAPI system the pilot can see, during the approach, two white lights furthest from the runway and two red lights closest to the runway. The aircraft is:**
- a. under the approach glide path
 - b. above the approach glide path
 - c. precisely on the glide path
 - d. on or close to the approach glide path
17. **The abbreviation “PAPI” stands for:**
- a. Precision Approach Path Index
 - b. Precision Approach Power Indicator
 - c. Precision Approach Path Indicator
 - d. Precision Approach Power Index
18. **What is the light indication of a land-based aerodrome beacon?**
- a. Green alternating with white flashes or white flashes only
 - b. White flashes only
 - c. Green flashes only
 - d. Same as an Aerodrome Identity Beacon
19. **Runway guard lights are:**
- a. flashing red
 - b. flashing yellow
 - c. flashing green
 - d. steady red
20. **What are the characteristics of runway threshold identification lights?**
- a. Unidirectional flashing green
 - b. Omni-directional flashing alternate green and red
 - c. Unidirectional flashing white
 - d. Omni-directional flashing white
21. **A VASI consists of:**
- a. 2 sets of 3 lights
 - b. 3 sets of 3 lights
 - c. 3 sets of 2 lights
 - d. 2 sets of 2 lights
22. **What are the characteristics of intermediate holding position lights?**
- a. 5 fixed unidirectional lights showing yellow
 - b. 3 fixed unidirectional lights showing yellow
 - c. Continuous fixed unidirectional lights showing yellow
 - d. 5 fixed unidirectional lights showing yellow and green

23. What are the characteristics of runway lead-in lights?

- a. Groups of at least 3 flashing red lights which flash in sequence towards the runway
- b. Groups of at least 5 flashing red lights which flash in sequence towards the runway
- c. Groups of at least 3 flashing white lights which flash in sequence towards the runway
- d. Groups of at least 5 flashing green lights which flash in sequence towards the runway

24. What are the characteristics of circling guidance lights?

- a. Fixed or flashing red
- b. Fixed or flashing white
- c. Fixed or flashing green
- d. Fixed or flashing blue

25. What are the characteristics of runway touchdown zone lights?

- a. Fixed variable unidirectional showing alternating white and red
- b. Flashing variable unidirectional showing green
- c. Fixed variable unidirectional showing red
- d. Fixed variable unidirectional showing white

Answers

1	2	3	4	5	6	7	8	9	10	11	12
a	a	a	b	d	b	c	b	c	c	a	a

13	14	15	16	17	18	19	20	21	22	23	24
a	b	d	d	c	a	b	c	a	b	c	b

25
d

Chapter

21

Obstacle Marking and Aerodrome Services

Introduction.....	449
Visual Aids for Denoting Obstacles	450
Visual Aids for Denoting Restricted Use Areas	453
Emergency and Other Services	454
Other Aerodrome Services	455
Questions	457
Answers	460

Introduction

21.1 Obstacles. The marking and/or lighting of obstacles is intended to reduce hazards to aircraft by indicating the presence of obstacles. It does not necessarily reduce operating limitations which may be imposed by obstacles. The responsibility for marking/lighting of obstacles on or near aerodromes must be determined between the aerodrome licensee and the owners of the structures. Licensees are responsible for the marking and lighting of all obstacles on the movement area irrespective of ownership. During the establishment of instrument approach and departure procedures, obstacles are identified to allow the calculation of operating minima and obstacle clearance height/altitude. The treatment of obstacles in this chapter is concerned with the identification and marking of obstacles on and in the vicinity of aerodromes, which may be collision hazards to local flying and en route operations. Obstacles inside and outside the aerodrome boundary may result in limitations on the distance available for take-off and landing and on the range of meteorological conditions in which operations can be undertaken. For these reasons certain areas of local airspace must be regarded as integral parts of the aerodrome environment. The degree of freedom from obstacles in these areas is as important in the granting and retention of an aerodrome licence as the more obvious physical requirements of the runways and their associated runway strips.

21.2 Obstacle Identification Surface (OIS). Aerodrome obstacles are those obstacles that protrude through the OIS out to a distance of 15 km from the aerodrome. The obstacles are determined by survey and are detailed in the aerodrome entry in the AIP. The OIS is a complex plane starting with the cleared strip either side of the runway. From the cleared strip, the inner transition plane extends from surface to 45 m, and extends out to 3000 m from the edges of the strip. Beyond this, the outer transition plane lifts the OIS to 150 m and extends to the full 15 km.

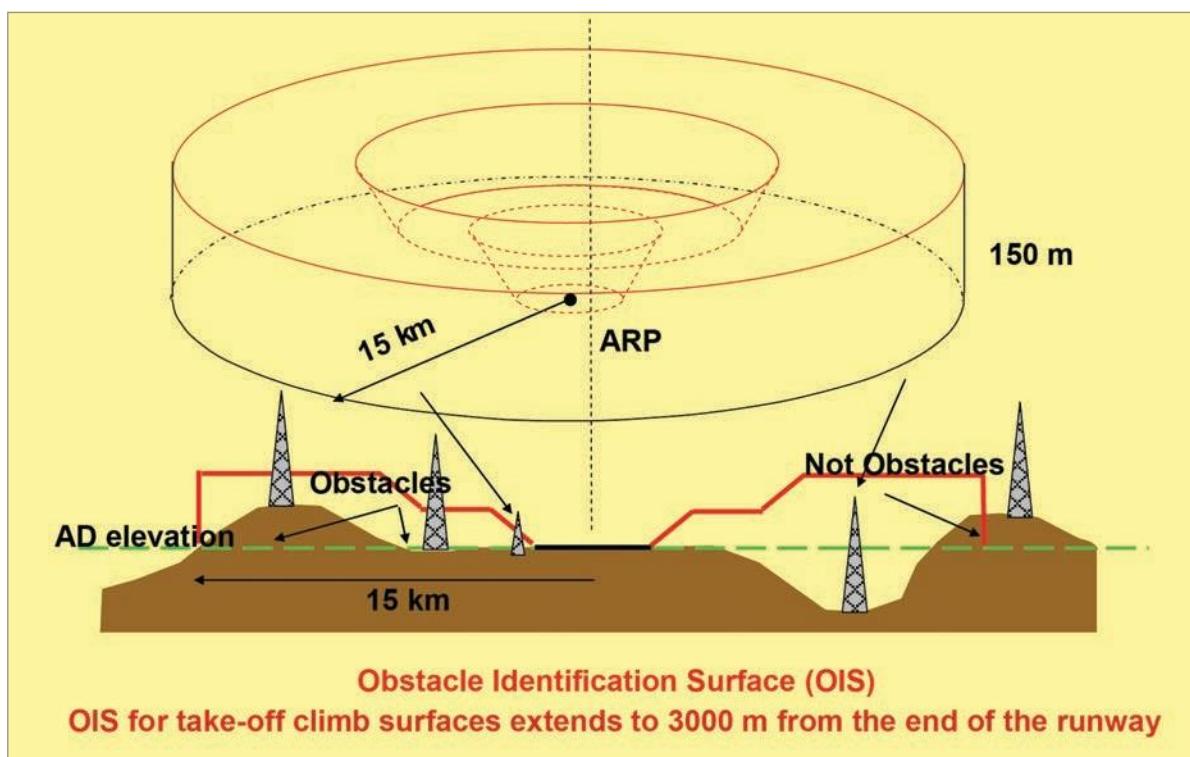


Figure 21.1 Obstacle identification surface (OIS)

Visual Aids for Denoting Obstacles

21.3 Requirement for Marking/Lighting. The marking and/or lighting of obstacles is intended to reduce hazards to aircraft by indicating the presence of the obstacles. Fixed obstacles should be marked and, if the aerodrome is used at night, lit. The marking may be omitted when the obstacle is lit by high intensity obstacle lights by day.

21.4 Obstacle on the Movement Area. Vehicles and other mobile objects excluding aircraft on the movement area of an aerodrome are obstacles and shall be marked and, if the vehicles and aerodrome are used at night or in conditions of low visibility, lit. Aircraft servicing equipment and vehicles used only on aprons may be exempt. Elevated aeronautical ground lights within the movement area shall be marked so as to be conspicuous by day.

21.5 Marking of Objects. All fixed objects to be marked shall, whenever practicable, be coloured, but if this is not practicable, markers or flags shall be displayed on or above them. Orange or red colours should be used, except where such colours merge with the background. Against some backgrounds it may be found necessary to use a different colour from orange or red to obtain sufficient contrast.



Figure 21.2 Marking of objects

21.6 Vehicles and Mobile Objects. When mobile objects are marked by colour, a single conspicuous colour, preferably red or yellowish green for emergency vehicles and yellow for service vehicles should be used. Aerodrome operators are responsible for ensuring that vehicles on the movement area of an aerodrome are lit and/or marked as required irrespective of ownership. These include maintenance vehicles, ATC vehicles, 'Follow Me' vehicles, aircraft towing vehicles, refuellers etc. Whenever a permitted vehicle is on the movement area the lights are to be switched on. Vehicle obstacle lights are low intensity flashing yellow. The lights specified are to be fitted at the highest point of the prime mover. Trailers are to be lit with low intensity steady red lights at the highest point. Objects with limited mobility (air bridges etc.) are to be lit with low intensity steady red lights.



Figure 21.3 Emergency vehicles

21.7 Emergency Vehicles. Aerodrome ambulances, police/security, fire and rescue appliances should in addition to the requirements of paragraph 22.6 also carry blue flashing lights for use whilst responding to an emergency. Vehicles which are not normally based on the aerodrome (civilian fire/rescue vehicles) when called upon for assistance, are to show flashing blue lights and are to be escorted by vehicles with radio communication with ATC.

21.8 Lighting of Objects. The presence of objects which must be lit shall be indicated by low, medium or high intensity obstacle lights, or a combination of such lights. Note: High-intensity obstacle lights are intended for day use as well as night use.

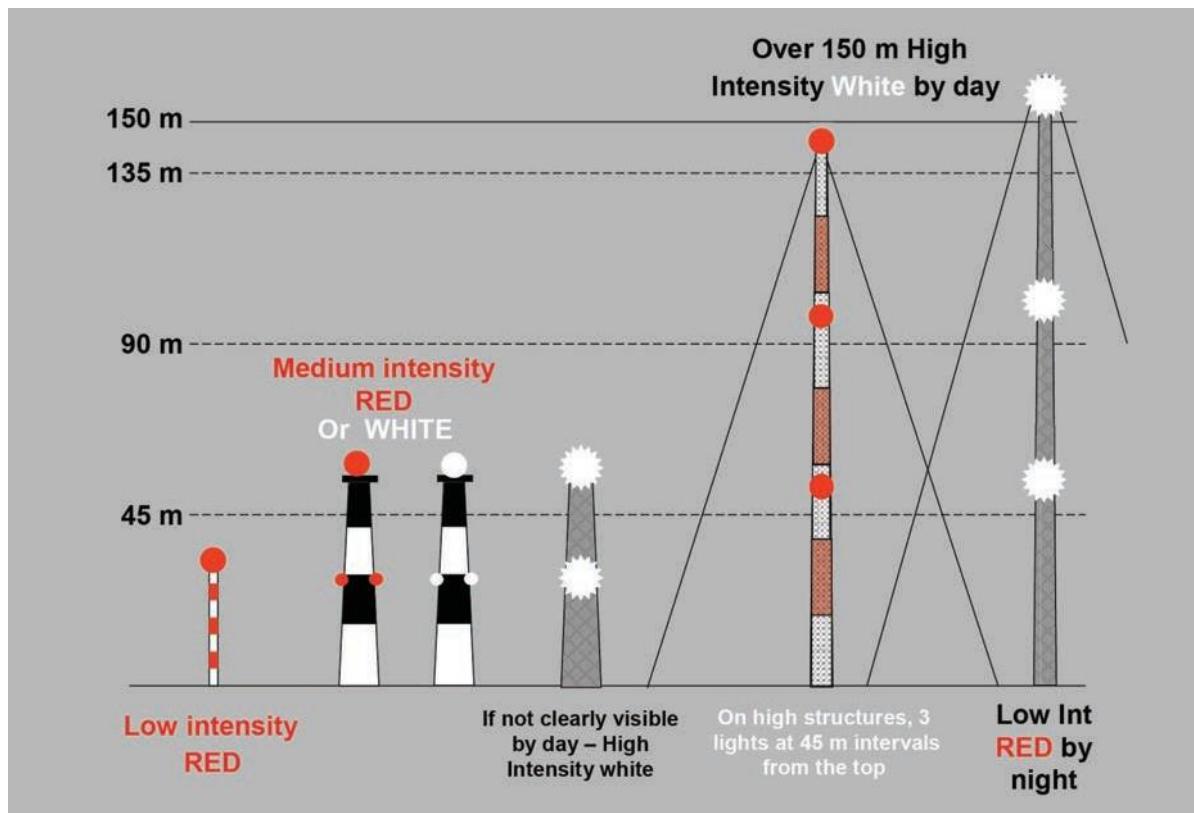


Figure 21.4 Methods of obstacle lighting

21.9 Low Intensity Lights. Low intensity obstacle lights on fixed objects shall be fixed red lights and have intensity sufficient to ensure conspicuity considering the intensity of the adjacent lights and the general level of illumination against which they would normally be viewed. Low intensity obstacle lights on objects with limited mobility such as aerobridges shall be steady-red. The intensity of the lights shall be sufficient to ensure conspicuity considering the intensity of the adjacent lights and the general levels of illumination against which they would normally be viewed. Where the use of low intensity obstacle lights would be inadequate or an early special warning is required, then medium or high intensity obstacle lights should be used.

21.10 Medium Intensity Lights. Medium intensity obstacle lights shall be flashing red lights, except that when used in conjunction with high intensity obstacle lights they shall be flashing white lights. The flash frequency shall be between 20 and 60 per minute. Medium intensity obstacle lights located on an object should flash simultaneously. Medium intensity obstacle lights should be used, either alone or in combination with low intensity obstacle lights, where the object is an extensive one or its height above the level of the surrounding ground is greater than 45 m.

21.11 High Intensity Lights. High intensity obstacle lights shall be flashing white lights. High intensity obstacle lights located on an object should flash simultaneously at a rate between 40 and 60 per minute. High intensity obstacle lights located on a tower should flash sequentially; first the middle light, second the top light and last the bottom light. High intensity obstacle lights should be used to indicate the presence of an object if its height above the level of the surrounding ground exceeds 150 m and an aeronautical study indicates such lights to be essential for the recognition of the object by day.

21.12 Tall Objects. Where an object is indicated by low or medium intensity obstacle lights, and the top of the object is more than 45 m above the level of the surrounding ground or the elevation of tops of nearby buildings (when the object to be marked is surrounded by buildings) additional lights shall be provided at intermediate levels. These additional intermediate lights shall be spaced as equally as practicable, between the top lights and ground level or the level of tops of nearby buildings, as appropriate, with the spacing not exceeding 45 m.

21.13 Lighting of Aircraft. The lighting of aircraft is detailed at Chapter 5 Rules of the Air. This subject is covered in detail in the OP syllabus. It should be noted that aircraft parked on the manoeuvring area are obstacles and should be lit either by the aircraft navigation lights or by ancillary lighting (anti-collision) that determines the extremities of the aeroplane.



Figure 21.5 Tall objects

21.14 En route Obstacles. Objects located beyond 15 km radius of the aerodrome are normally considered to be obstacles to aircraft in flight only if they exceed 150 m in height. Prominent objects of less height may be regarded as obstacles if they are on or adjacent to routes regularly used by helicopters. En route obstacles are usually lit by steady red lights at night and high intensity flashing white lights by day. Environmental considerations may preclude the use of high intensity lights.

21.15 Marking of Overhead Wires or Cables. Overhead wires or cables are marked by coloured spheres.

Visual Aids for Denoting Restricted Use Areas

21.16 Closed Runways and Taxiways. A ‘closed’ marking shall be displayed on a runway or taxiway, or portion thereof, which is permanently closed to the use of all aircraft. A closed marking should be displayed on a temporarily closed runway or taxiway or portion thereof, except when the closing is of short duration and adequate warning by air traffic services is provided. On a runway a ‘closed’ marking shall be placed at each end of the runway, or portion thereof, declared closed, and additional markings shall be so placed that the maximum interval between markings does not exceed 300 m. On a taxiway a closed marking shall be placed at least at each end of the taxiway or portion thereof closed. The marking shall be white when displayed on a runway and shall be yellow when displayed on a taxiway. (Note: When an area is temporarily closed, frangible barriers or markings utilizing materials other than paint or other suitable means may be used to identify the closed area). When a runway or taxiway or portion thereof is permanently closed, all normal runway and taxiway markings shall be obliterated. Lightings on a closed runway or taxiway or portion thereof shall not be operated, except as required for maintenance purposes.



© Susumu Tokunaga

Figure 21.6 Closed runway

21.17 Non-load-bearing Surfaces. Shoulders for taxiways, holding bays and aprons and other non-load-bearing surfaces which cannot readily be distinguished from load-bearing surfaces and which, if used by aircraft, might result in damage to the aircraft shall have the boundary between such areas and the load-bearing surface marked by a taxi side stripe marking.

21.18 Pre-threshold Area. When the surface before a threshold is paved and exceeds 60 m in length and is not suitable for normal use by aircraft, the entire length before the threshold should be marked with a chevron marking. The chevron marking should point in the direction of the runway.

Emergency and Other Services

21.19 Rescue and Fire Fighting (RFF). The principal objective of a RFF service is to save lives. For this reason, the provision of means of dealing with an aircraft accident or incident occurring at, or in the immediate vicinity of, an aerodrome assumes primary importance because it is within this area that there are the greatest opportunities of saving lives. This must assume at all times the possibility of, and need for, extinguishing a fire which may occur either immediately following an aircraft accident or incident, or at any time during rescue operations. The most important factors bearing on effective rescue in a survivable aircraft accident are: the training received, the effectiveness of the equipment and the speed with which personnel and equipment designated for rescue and fire fighting purposes can be put into use. Requirements to combat building and fuel farm fires, or to deal with foaming of runways, are not taken into account. Public or private organizations, suitably located and equipped, may be designated to provide the RFF service. It is intended that the fire station housing these organizations be normally located on the aerodrome, although an off-aerodrome location is not precluded provided the response time can be met.

21.20 Level of Protection to be Provided. The level of protection provided at an aerodrome for RFF shall be appropriate to the aerodrome category. Exceptionally, where the number of movements of the aeroplanes in the highest category normally using the aerodrome is less than 700 in the busiest consecutive three months, the level of protection provided may be (from 1 January 2000) not less than one category below the determined category. The aerodrome category shall be determined from the table below, based on the longest aeroplanes normally using the aerodrome and fuselage width. If, after selecting the category appropriate to the longest aeroplane's over-all length that aeroplane's fuselage width is greater than the maximum width for that category then one category higher is used. During anticipated periods of reduced activity, the level of protection available must be no less than that needed for the highest category of aeroplane planned to use the aerodrome during that time irrespective of the number of movements.

Category	Aeroplane Overall Length	Maximum Fuselage Width	Number of rescue/ fire fighting vehicles
1	0 m up to but not including 9 m	2 m	1
2	9 m up to but not including 12 m	2 m	1
3	12 m up to but not including 18 m	3 m	1
4	18 m up to but not including 24 m	4 m	1
5	24 m up to but not including 28 m	4 m	1
6	28 m up to but not including 39 m	5 m	2
7	39 m up to but not including 49 m	5 m	2
8	49 m up to but not including 61 m	7 m	3
9	61 m up to but not including 76 m	7 m	3
10	76 m up to but not including 90 m	8 m	3

Figure 21.7 RFF categories

21.21 Response Time. The operational objective of the RFF service should be to achieve a response time of not exceeding 3 minutes to the end of each runway, as well as to any other part of the movement area, in optimum conditions of visibility and surface conditions. Response time is considered to be the time between the initial call to the RFF service, and the time when the first responding vehicle is in position to apply foam at a rate of at least 50% of the discharge rate specified. To meet the operational objective as nearly as possible in less than optimum conditions of visibility it may be necessary to provide guidance for RFF vehicles.

21.22 Emergency Access Roads. Emergency access roads should be provided on an aerodrome where terrain conditions permit their construction, so as to facilitate achieving minimum response times. Particular attention should be given to the provision of ready access to approach areas up to 1000 m from the threshold, or at least within the aerodrome boundary. Where a fence is provided, the need for convenient access to outside areas should be taken into account. Note: Aerodrome service roads may serve as emergency access roads when they are suitably located and constructed.

21.23 Fire Stations. All RFF vehicles should normally be housed in a fire station. Satellite fire stations should be provided whenever the response time cannot be achieved from a single fire station. The fire station should be located so that the access for RFF vehicles into the runway area is direct and clear, requiring a minimum number of turns. Providing the response time (22.20) can be met, the fire station need not be within the aerodrome confines.

Other Aerodrome Services

21.24 Apron Management Service. When warranted by the volume of traffic and operating conditions, an appropriate Apron Management Service (not to be confused with Ground Control), should be provided on an apron by an aerodrome ATS unit, by the aerodrome operating authority, or by a co-operative combination of these. Commercial operations providing the Apron Management Service also provide refuelling, de-icing, baggage and cargo handling and passenger transportation where busses are used. When the aerodrome control tower does not participate in the apron management service, procedures should be established to facilitate the orderly transition of aircraft between the apron management unit and the aerodrome control tower. Typically, when the flight is ready to depart, the pilot will call Ground Control and request engine start. This serves not only as a request to actually start the engines, but also to notify ATC that administratively and from an engineering point of view, the flight is ready to commence. At this point the tug would be coupled to the aeroplane and the ‘crew chief’ would be on external intercom. The pilot would then request “push back” and when approved the aircraft will move out on to the taxiway. At the same time the engines will be started and when the flight deck crew is satisfied that all is well, the tug will be disconnected and the nose-wheel steering reconnected. When this has been completed the crew chief will confirm that all panels are secure and that he is now unplugging his intercom lead. An apron management service shall be provided with radiotelephony communications facilities. Where low visibility procedures are in effect, persons and vehicles operating on an apron shall be restricted to the essential minimum. An aircraft stand shall be visually monitored to ensure that the recommended clearance distances are provided to an aircraft using the stand. The purpose of the apron management service is to:

- Regulate movement with the objective of preventing collisions between aircraft, and between aircraft and obstacles;
- Regulate entry of aircraft into, and co-ordinate exit of aircraft from, the apron with the aerodrome control tower, and

- Ensure safe and expeditious movement of vehicles and appropriate regulation of other activities.

21.25 Emergency Vehicles. An emergency vehicle responding to an emergency shall be given priority over all other surface movement traffic. A vehicle operating on an apron shall:

- Give way to an emergency vehicle; an aircraft taxiing, about to taxi, or being pushed or towed, and
- Give way to other vehicles in accordance with local regulations.

21.26 Ground Servicing to Aircraft. Fire extinguishing equipment suitable for at least initial intervention in the event of a fuel fire and personnel trained in its use shall be readily available during the ground servicing of an aircraft, and there shall be a means of quickly summoning the rescue and fire fighting service in the event of a fire or major fuel spill. When aircraft refuelling operations take place while passengers are embarking, on board or disembarking, ground equipment shall be positioned so as to allow:

- The use of sufficient number of exits for expeditious evacuation, and
- A ready escape route from each of the exits to be used in an emergency.

Questions

1. What is the colour of a low intensity obstacle light?
 - a. Blue.
 - b. Steady red.
 - c. Yellow.
 - d. Flashing red.
2. Low intensity obstruction lights on fixed objects and slow moving objects are:
 - a. flashing green.
 - b. flashing yellow.
 - c. steady red.
 - d. steady blue.
3. Medium intensity obstacle lighting will normally consist of flashing red lights except that they may be flashing white when used:
 - a. in conjunction with high intensity obstacle lighting.
 - b. in conjunction with low intensity obstacle lighting.
 - c. in conjunction with runway obstacle lighting.
 - d. in conjunction with the approach path obstacle lighting.
4. OIS stands for:
 - a. Obstacle Interference Slope.
 - b. Obstacle Identification Surface.
 - c. Obstacle Inner Surface.
 - d. Obstacle Identification Slope.
5. What colour lights are vehicles moving routinely on the aerodrome required to show?
 - a. Flashing yellow.
 - b. Flashing red.
 - c. Flashing blue.
 - d. Steady red.
6. What colour are emergency vehicles painted that are used on the manoeuvring area of an aerodrome?
 - a. Green.
 - b. Dayglo orange.
 - c. A single conspicuous colour, preferably red or yellowish green.
 - d. White and red chequered.
7. An en route obstacle is located:
 - a. within 15 km radius of an aerodrome.
 - b. outside 5 NM from the boundary of any controlled airspace.
 - c. beyond 15 km radius of an aerodrome.
 - d. in any location that might be encountered during the cruise phase of a flight.

8. An object of limited mobility (an air bridge for example) is lit by:
 - a. low intensity steady red lights.
 - b. low intensity flashing red lights.
 - c. medium intensity steady red lights.
 - d. medium intensity flashing red lights.
9. Must an aerodrome fire station be located within the confines of an aerodrome?
 - a. No, providing the response time can be met.
 - b. Yes.
 - c. No.
 - d. No, providing it is within 3 minutes driving time of the aerodrome.
10. The level of rescue and fire fighting (RFF) facilities is dependent upon the category of the aerodrome. What factors determine this category?
 - a. Aeroplane reference field length, wing span and outer main gear wheel span of the largest aircraft using that aerodrome.
 - b. The length of the longest runway and the area to be covered.
 - c. The overall length and the fuselage width of the longest aircraft normally using that aerodrome.
 - d. The length of the longest runway and total area of hard standings (including access roads).
11. The aerodrome category for RFF is based on:
 - a. the overall length of the longest aeroplane.
 - b. the longest aeroplane maximum width only.
 - c. the overall length of the longest aeroplane normally using the aerodrome and its maximum fuselage width.
 - d. the overall length of the longest aeroplane normally using the aerodrome and its maximum fuselage weight.
12. High intensity obstacle lights should be:
 - a. flashing white.
 - b. flashing red.
 - c. fixed red.
 - d. fixed orange.

Answers

1	2	3	4	5	6	7	8	9	10	11	12
b	c	a	b	a	c	c	a	a	c	c	a

Chapter

22

Facilitation

Aim	463
Entry and Departure of Aircraft	463
Questions	468
Answers	470

Aim

22.1 Article 37. The Standards and Recommended Practices on Facilitation contained in Annex 9 are the outcome of Article 37 of the Convention, which provides that the “International Civil Aviation Organization shall adopt and amend from time to time, as may be necessary, international standards and recommended practices and procedures dealing with customs and immigration procedures and other matters concerned with the safety, regularity and efficiency of air navigation as may from time to time appear appropriate”. The policy with respect to the implementation by States of the Standards and Recommended Practices on Facilitation is strengthened by Article 22 of the Convention, which expresses the obligation accepted by each Contracting State “to adopt all practicable measures, through the issuance of special regulations or otherwise, to facilitate and expedite navigation by aircraft between the territories of Contracting States, and to prevent unnecessary delays to aircraft, crews, passengers, and cargo, especially in the administration of the laws relating to immigration, quarantine, customs and clearance”, and by Article 23 of the Convention, which expresses the undertaking of each Contracting State “so far as it may find practicable, to establish customs and immigration procedures affecting international air navigation in accordance with the practices which may be established or recommended from time to time pursuant to this Convention”.

22.2 Documentation. The documentation required by States for the entry and departure of aircraft, crew and passengers have evolved from the same documentation required for shipping and much of the terminology has been retained. The rapid movement of aircraft and the philosophy of expediting the movement of aircraft has led to procedures where the old documents are now out of date and, where still necessary, have been replaced by electronic data systems and digital transmission systems.

Entry and Departure of Aircraft

22.3 General. Government regulations and procedures applicable to the clearance of aircraft shall be no less favourable than those applied to other forms of transportation. Contracting States shall adopt procedures for the clearance of aircraft, including those normally applied for aviation security purposes, as well as those appropriate for narcotics control, which will be applied and carried out in such a manner as to retain the advantage of speed inherent in air transport.

22.4 Documents. No documents other than those provided for in Annex 9 shall be required by the public authorities from operators for the entry and departure of aircraft. Where a Contracting State introduces electronic data interchange (EDI) techniques for a clearance function, authorities should also execute a plan for migration to complete reliance on the electronic system for the exchange of required information with a view towards phasing out the requirement for preparation and exchange of paper documents. If a State permits a traveller to enter that State without a visa (e.g. under the US visa waiver scheme) the State of departure will not require the traveller to obtain any other document relating to the traveller's identity other than the passport.

22.5 General Declaration. A general declaration is an internationally recognized form which contains details of the aircraft (Registration Mark and nationality), the flight number, date and place of departure, and destination. It also contains details of the flight routing and the number of crew and passengers boarding and disembarking at the various locations. It contains a health declaration and a certificate signed by the PIC or an authorized agent. It is the eventual aim to eliminate from the general declaration, any reference to passengers.

 General Declaration <i>*Outward/Inward</i>		C155																								
Operator Marks of nationality and registration Flight prefix and number Date																										
Departure from Arrival at (Place) (Place)																										
Flight Routing ("Place" column always to list origin, every en-route stop and destination)																										
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; padding: 2px;">Place</th> <th style="text-align: left; padding: 2px;">Total number of crew</th> <th style="text-align: left; padding: 2px;">Number of passengers on this stage</th> </tr> </thead> <tbody> <tr><td>.....</td><td>.....</td><td>.....</td></tr> <tr><td>.....</td><td>.....</td><td>.....</td></tr> <tr><td>.....</td><td>.....</td><td>.....</td></tr> <tr><td>.....</td><td>.....</td><td>.....</td></tr> <tr><td>.....</td><td>.....</td><td>.....</td></tr> <tr><td>.....</td><td>.....</td><td>.....</td></tr> <tr><td>.....</td><td>.....</td><td>.....</td></tr> </tbody> </table>		Place	Total number of crew	Number of passengers on this stage	Departure Place: Embarking Through on same flight
Place	Total number of crew	Number of passengers on this stage																								
.....																								
.....																								
.....																								
.....																								
.....																								
.....																								
.....																								
		Arrival Place: Disembarking Through on same flight																								
Declaration of Health																										
Persons on board with illnesses other than airsickness or the effects of accidents (including persons with symptoms or signs of illness such as rash, fever, chills, diarrhoea) as well as those cases of illness disembarked during the flight. 																										
Any other conditions on board which may lead to the spread of disease 																										
Details of each disinsecting or sanitary treatment (place, date, time, method) during the flight. If no disinsecting has been carried out during the flight give details of most recent disinsecting. 																										
Signed if required Crew member concerned																										
I declare that all statements and particulars contained in this General Declaration, and in any supplementary forms required to be presented with this General Declaration are complete, exact and true to the best of my knowledge and that all through passengers *will continue/have continued on this flight																										
Signature Authorised agent or Pilot-in-command																										
Further supplies of this form can be obtained from any Collector of Customs and Excise																										
<small>*Delete as necessary</small>																										
Data Protection Act 1998 HM Customs and Excise collects information in order to administer the taxes for which it is responsible (such as VAT, insurance premium tax, excise duties, air passenger duty, landfill tax), and for detecting and preventing crime. Where the law permits we may also get information about you from third parties, or give information to them, for example in order to check its accuracy, prevent or detect crime or protect public funds in other ways. These third parties may include the police, other government departments and agencies.																										
C155 PT (January 2001)																										

Figure 22.1 General declaration

Contracting States will not require the presentation of the General Declaration when this information can be readily obtained in an alternative and acceptable manner.

A Contracting State which continues to require the presentation of the General Declaration shall accept it when signed by either the authorized agent or the pilot-in-command, but may, when necessary, require the health section thereof to be signed by a crew member when the General Declaration itself has been signed by a non-crew member. Where Contracting States require the presentation on entry and departure of aircraft of information relating to crew members, such information shall be limited to the number of crew on board. Where the General Declaration continues to be required, this information shall be provided in the column headed "Total number of crew".

22.6 Manifests. In addition to the General Declaration, Passenger and Cargo manifests are additional internationally recognized documents that detail names of passengers and the nature of goods and number of packages embarked on the aeroplane. When a Contracting State has eliminated the Passenger Manifest and no longer requires the General Declaration (except for purposes of attestation) it shall accept, at the option of the operator, either a General Declaration or an appropriate attestation, signed by the authorized agent or pilot-in-command, on one page only of the Cargo Manifest. The attestation on the Cargo Manifest can be provided by means of a rubber stamp. The information contained in the Cargo Manifest are details of: The Airway Bill number, the number of packages and the nature of the goods.

APPENDIX 3. CARGO MANIFEST

CARGO MANIFEST

Operator.....

Marks of Nationality and Registration*

Flight No.

Date

Point of lading

Point of unloading

(Place)

(Place)

Air Waybill
Number

Number of
packages

Nature of goods*

For me by operator only

For official use only

Figure 22.2

22.7 Passenger Baggage. Contracting States shall not require the presentation of a list of the number of pieces of accompanied baggage. Operators carrying baggage shall, upon request from the authorities, provide them with any available information where it has not otherwise been provided for customs clearance purposes by the passenger. Unaccompanied baggage may be cleared using a simplified procedure.

22.8 Stores List. This details the goods (whether or not sold) intended for the consumption of passengers and crew as well as goods necessary for the operation and maintenance of the aircraft, including fuel and lubricants.

22.9 Unaccompanied Baggage. Unaccompanied baggage is cleared under procedures applicable to cargo but in accordance with a simplified procedure.

22.10 Oral Declaration. An oral (spoken) declaration is acceptable concerning the content of crew and passenger baggage. A random inspection of baggage is acceptable.

22.11 Completion of Documents. Documents may be typewritten, produced in electronic data form or handwritten in ink or indelible pencil, providing it is in a legible form (block capitals).

22.12 Number and type of documents required. States are not to require from Operators more than 3 copies of the General Declaration, 3 copies of the Cargo Manifest and 3 copies of the General Stores List

22.13 Advanced Notification of Arrival. Where non-scheduled flights are made by an aircraft registered in an ICAO Contracting State which wishes to land in another Contracting State for non traffic purposes (2nd freedom flight), the submission of a flight plan is considered sufficient advanced notification to the State of Landing that the flight is to be conducted. However, the authority of State of Landing will accept that flight providing the flight plan is received at least two hours in advance of the arrival and that landing occurs at a previously designated international airport. Where such addressees are required to be notified (customs, immigration, police etc.) the flight plan is to be addressed to the appropriate authorities of the State concerned.

22.14 Crew and Other Operators' Personnel. Contracting States shall ensure that when inspection of crew members and their baggage is required on arrival or departure, such inspection shall be carried out as expeditiously as possible. Contracting States shall provide facilities which will enable crew members of their airlines to obtain without delay and without charge, crew members' certificates (CMC), valid for the crew members' term of employment.

Note: *The CMC was developed as a card for use for identification purposes by both flight crew and cabin attendants, leaving the crew licences to serve their primary purpose of attesting to the professional qualifications of the flight crew.*

In the case of airline flight crew and cabin attendants who retain their crew member certificates in their possession when embarking and disembarking, remain at the airport where the aircraft has stopped or within the confines of cities adjacent thereto, and depart on the same aircraft or their next regularly scheduled flight, each Contracting State shall accept a crew member certificate for temporary admission to the State and shall not require a passport or visa, (see Notes).

Note 1: *It is the intent of this provision that a crew member certificate shall be recognized as a satisfactory identity document even if the holder is not a national of the State of Registry of the aircraft on which he serves. It is not desired to discourage Contracting States from issuing such crew member certificates to resident alien crew members if they are willing to do so.*

Note 2: *The implementation of this permits rapid and efficient disposition of personnel by airlines. The full benefit cannot be derived from these provisions while some States withhold acceptance of them.*

22.15 Non-scheduled Operations. Each Contracting State shall extend privileges of temporary admission to flight crew and cabin attendants of an aircraft operated for remuneration or hire but not engaged in scheduled international air services, subject to the requirement that such flight crew and cabin attendants must depart on the aircraft on its first flight out of the territory of the State.

22.16 Transit Passengers. Passengers may remain in a transit lounge for a maximum of 2 days.

22.17 Freedom from Duty. An aircraft which is not engaged in international scheduled air services and which is making a flight to or through any designated airport in a Contracting State, and is admitted temporarily free of duty, shall be allowed to remain in that State for a period of time as established by the State.

22.18 Responsibility of the Operator for Custody and Care of Passengers. The responsibility of the Operator for custody and care of passengers and crew members shall terminate from the moment such persons have been admitted into that State.

Questions

1. The documents which allow an aircraft entry to a country:
 - a. must be typewritten.
 - b. can be hand-written in block capitals in ink or indelible pencil.
 - c. are accepted at the discretion of the State of arrival.
 - d. must be typewritten or sent in electronic data format.
2. Can an oral declaration concerning the passenger or crew baggage be acceptable?
 - a. Never.
 - b. Yes.
 - c. Only crew baggage.
 - d. Only passenger baggage.
3. The General Declaration is signed by the:
 - a. the pilot-in-command only.
 - b. the pilot-in-command or the Agent.
 - c. any flight crew member.
 - d. the Operator.
4. Where an aircraft registered in a Contracting State is making a flight over foreign territory for non-commercial purposes or is landing for non-traffic purposes, advanced notification is to be given to the foreign State. The information is to be received:
 - a. at least 2 hours in advance of arrival.
 - b. at least 4 hours in advance of arrival.
 - c. at least 1 hour in advance of arrival.
 - d. at least 12 hours in advance of the planned ETA.
5. The ICAO annex which deals with the entry and departure of persons and their baggage for international flights is:
 - a. Annex 6.
 - b. Annex 15.
 - c. Annex 9.
 - d. Annex 8.
6. In cases where a visitor travelling by air holds a valid passport and no visa is required of him, Contracting States:
 - a. shall not require the traveller to obtain any other identity document before boarding the aeroplane.
 - b. may require the traveller to obtain any other identity document before boarding the aeroplane.
 - c. in certain cases may require additional identification documents.
 - d. none of the above answers is correct.

Answers

1	2	3	4	5	6
b	b	b	a	c	a

Chapter

23

Search and Rescue

Definitions and Abbreviations	473
Establishment and Provision of SAR Service	473
Co-operation between States.....	474
Operating Procedures.....	474
Questions	478
Answers	480

Definitions and Abbreviations

23.1 Definitions. The following definitions are required knowledge.

Item	Definition
Alert phase	A situation wherein apprehension exists as to the safety of an aircraft and its occupants.
Distress phase	A situation wherein there is a reasonable certainty that an aircraft and its occupants are threatened by grave and imminent danger or require immediate assistance.
Emergency phase	A generic term meaning, as the case may be, uncertainty phase, alert phase or distress phase. ATS shall immediately notify the RCC following activation of the Emergency phase.
Operator	A person, organization or enterprise engaged in or offering to engage in an aircraft operation.
Pilot-in-command (PIC)	The pilot responsible for the operation and safety of the aircraft during flight time.
Rescue co-ordination centre (RCC)	A unit responsible for promoting efficient organization of SAR service and for co-ordinating the conduct of SAR operations within a SAR region.
State of Registry	The State on whose register the aircraft is entered.
Uncertainty phase	A situation wherein uncertainty exists as to the safety of an aircraft and its occupants.

Establishment and Provision of SAR Service

23.2 Basis of Establishment. Contracting States shall arrange for the establishment and provision of SAR services within their territories. Such services shall be provided on a 24 hour basis. In providing assistance to aircraft in distress and to survivors of aircraft accidents, Contracting States shall do so regardless of the nationality of such aircraft or survivors.

23.3 Establishment of SAR Regions. Contracting States shall delineate the SAR regions within which they will provide SAR service. Such regions shall not overlap. Boundaries of SAR regions should, in so far as is reasonably practicable, be coincident with the boundaries of corresponding flight information regions.

23.4 Establishment and Designation of SAR Service Units. Contracting States shall establish a rescue co-ordination centre (RCC) in each SAR region. Contracting States should establish rescue sub-centres whenever this would improve the efficiency of SAR services. The organization of SAR services is the responsibility of the RCC and any subcentres established. In areas where public telecommunications facilities would not permit persons observing an aircraft in emergency to notify the rescue co-ordination centre concerned directly and promptly, Contracting States should designate suitable units of public or private services as alerting posts.

Co-operation between States

23.5 Requirement. Contracting States shall co-ordinate their SAR organizations with those of neighbouring Contracting States. Contracting States should, in so far as practicable, develop common SAR procedures to facilitate co-ordination of SAR operations with those of neighbouring States. Subject to such conditions as may be prescribed by its own authorities, a Contracting State shall permit immediate entry into its territory of rescue units of other States for the purpose of searching for the site of aircraft incidents and rescuing survivors of such accidents. The authorities of a Contracting State which wishes its rescue units to enter the territory of another Contracting State for SAR purposes shall transmit a request, giving full details of the projected mission and the need for it, to the rescue co-ordination centre of the State concerned or to such other authority as has been designated by that State. The authorities of Contracting States shall:

- Immediately acknowledge the receipt of such a request, and
- As soon as possible indicate the conditions, if any, under which the projected mission may be undertaken;

23.6 Agreement with Other States. Contracting States should enter into agreements with neighbouring States setting forth the conditions for entry of each other's rescue units into their respective territories. These agreements should also provide for expediting entry of such units with the least possible formalities. Each Contracting State should authorize its rescue co-ordination centres to:


- request from other rescue co-ordination centres such assistance, including aircraft, vessels, personnel or equipment, as may be needed;
- grant any necessary permission for the entry of such aircraft, vessels, personnel or equipment into its territory; and
- make the necessary arrangements with the appropriate customs, immigration or other authorities with a view to expediting such entry.

23.7 Assistance to Other States. Each Contracting State should authorize its rescue co-ordination centres to provide, when requested, assistance to other rescue co-ordination centres, including assistance in the form of aircraft, vessels, personnel or equipment.

Operating Procedures

23.8 Information Concerning Emergencies. Contracting States should encourage any person observing an accident or having reason to believe that an aircraft is in an emergency to give immediately all available information to the appropriate alerting post or to the rescue co-ordination centre concerned. Any authority or any element of the SAR organization having reason to believe that an aircraft is in an emergency shall give immediately all available information to the rescue co-ordination centre concerned. Rescue co-ordination centres shall, immediately upon receipt of information concerning aircraft in emergency, evaluate such information and determine the extent of the operation required. When information concerning aircraft in emergency is received from other sources than air traffic service units, the rescue co-ordination centre shall determine to which emergency phase the situation corresponds and shall apply the procedures applicable to that phase.

23.9 First Aircraft on Scene. If the first aircraft to reach the scene of an accident is not a SAR aircraft the PIC of that aircraft shall take charge of on-scene activities of all other aircraft subsequently arriving until the first dedicated SAR aircraft reaches the scene of the accident. If, in the meantime, the aircraft is unable to establish communication with the appropriate rescue co-ordination centre or air traffic services unit, it shall, by mutual agreement, hand over to an aircraft capable of establishing and maintaining such communications until the arrival of the first SAR aircraft.

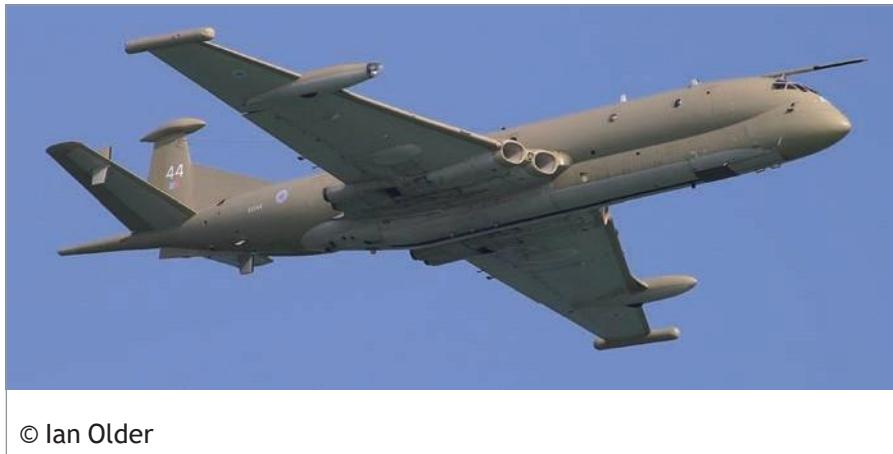

© Ian Older

Figure 23.1 RAF Nimrod MR2A used for long range SAR

23.10 Direction of Surface Craft. When it is necessary for an aircraft to direct a surface craft to the place where an aircraft or surface craft is in distress, the aircraft shall do so by transmitting precise instructions by any means at its disposal. All ships at sea maintain a radio watch on the HF Maritime Distress and calling frequency 2182 kHz (2.182 MHz). In coastal waters, all shipping maintains a watch on VHF FM Chan 16. Aircraft do not normally carry VHF FM transmitters but may be able to relay through Coast Guard units or coastal radio stations. If no radio communication can be established, the aircraft shall use the appropriate signal to attract the attention of the vessel. If the PIC can identify the vessel by name and port of registration (painted on the stern), the RCC can pass messages to the vessel through the maritime communications system.

23.11 Communication with Survivors. When it is necessary for an aircraft to convey information to survivors or surface rescue units, and two way communication is not available, it shall, if practicable, drop communication equipment that would enable direct contact to be established, or convey the information by dropping the message. When a ground signal has been displayed, the aircraft shall indicate whether the signal has been understood or not.

23.12 Signals with Surface Aircraft. The following manoeuvres performed in sequence by an aircraft mean that the aircraft wishes to direct a surface craft towards an aircraft or a surface craft in distress (repetition of such manoeuvres has the same meaning):

- Circling the surface craft at least once
- Crossing the projected course of the surface craft close ahead at low altitude and:
 - Rocking the wings; or
 - Opening and closing the throttle; or
 - Changing the propeller pitch.
- Heading in the direction in which the surface craft is to be directed.

23.13 Assistance No Longer Required. If assistance is no longer required by an aircraft, the aircraft should indicate the fact by crossing the wake of the surface craft close astern at a low altitude and rocking the wings; or opening and closing the throttle; or changing the propeller pitch.

23.14 SAR Signals. The signals detailed below shall, when used, have the meaning indicated therein. They shall be used only for the purpose indicated and no other signals likely to be confused with them shall be used. Upon observing any of the signals, aircraft shall take such action as may be required by the interpretation of the signal.

23.15 Ground/Air Visual Signal Code. In order to communicate basic messages and instructions from ground parties to aircraft, an internationally agreed system of signals has been established. There are two sets: signals from crash survivors; signals from search teams.

23.16 Ground/Air Visual Signal Code for Use by Survivors. The following signals may be set out in some form (marked in snow, oil on sand, burned grass in open areas) to ask for help.

	Message	Symbol
1	Require assistance	V
2	Require medical assistance	X
3	No (negative)	N
4	Yes (affirm)	Y
5	Proceeding in this direction	→

Figure 23.2 Ground/Air signals from survivors

23.17 Ground/Air from Search Parties.

No.	Message	Code Symbol
1	Operation completed	LLL
2	We have found all personnel	LL
3	We have found only some personnel	++
4	We are not able to continue. Returning to base	XX
5	Have divided into two groups. Each proceeding in direction indicated	
6	Information received that aircraft is in this direction	→ →
7	Nothing found. Will continue to search	NN

Figure 23.3

23.18 Air to Ground Signals. To indicate that the ground signals have been understood during the hours of daylight rock the aircraft's wings; during the normal hours of darkness, flashing on and off twice the aircraft's landing lights, or if not so equipped, by switching on and off twice its navigation lights. A lack of this signal from the aircraft indicates to the ground that their signal has not been understood by the pilot.

23.19 Marking of Droppable Supplies. Packages of supplies to survivors may be dropped from aircraft. In such circumstances the content of the packages is to be indicated by the attachment of colour coded streamers. Doc 7333 specifies the following:

- a. Red Medical supplies and first aid equipment.
- b. Blue Food and water.
- c. Yellow Blankets and protective clothing.
- d. Black Miscellaneous equipment such as stoves, axes, cooking utensils, etc.

23.20 Emergency Frequencies. The following are dedicated radio frequencies used to communicate Distress, Urgency and Safety messages. You are required to know these.

- VHF 121.500 MHz (Aeronautical mobile emergency VHF)
- UHF 243.000 MHz (Aeronautical mobile emergency UHF)
- HF 2182 kHz (International maritime distress and calling HF)
- SARSAT 406 MHz (SAR beacon frequency (also radiates on 121.5))

Questions

1. If you observe a distress light on the ground at night, you should:
 - a. flash landing lights or navigation lights twice.
 - b. fly over as low as possible then flash lights.
 - c. fly in circles above then flash lights.
 - d. fly a triangular pattern.
2. What does the SAR signal “X” on the ground mean?
 - a. We need help.
 - b. We are OK.
 - c. We need medical assistance.
 - d. We have gone away.
3. Aircraft No 1 is the first aircraft at the scene of a SAR incident but has no means of contacting the RCC, but No 2 aircraft does and arrives shortly afterwards. Finally No 3 aircraft (a specialist SAR aircraft) arrives on the scene. What is the transfer of command sequence?
 - a. No 1 assumes command throughout.
 - b. No 1, followed by No 2, followed by No 3.
 - c. No 1, then by discretion (or handover to) No 2, finally No 3 on arrival.
 - d. No 3 only.
4. For what period are SAR services to be provided by a Contracting State?
 - a. During the hours of operation of an FIR.
 - b. On a 24 hour basis.
 - c. 2 hours before until 2 hours after the first flight arrives and the last departing flight within an FIR.
 - d. During the hours of both commercial and military air operations within the FIR.
5. Three aircraft are at the scene of an accident. Aircraft 1 arrives first but cannot contact ATC. Aircraft 2 arrives second and has good communications with ATC. Aircraft 3 arrives last and is an SAR aircraft. Who assumes responsibility?
 - a. Aircraft 1 and 2 wait for aircraft 3 to arrive.
 - b. Aircraft 2 because he has good communications with ATC.
 - c. Aircraft 2 until aircraft 3 arrives.
 - d. Aircraft 1 until aircraft 2 arrives who then passes control to aircraft 3.
6. Which of the following means ‘Require assistance’?
 - a. Y
 - b. X
 - c. R
 - d. V

7. When sighting a distress flare during daytime, you should:

- a. circle once.
- b. flash landing lights or navigation lights.
- c. rock wings.
- d. send the letter 'R' in Morse by lights to the downed aircraft.

8. Who is responsible for the organization of an efficient SAR service?

- a. FIC and RCC.
- b. RCC and rescue sub-centres.
- c. FIC, RCC and ACC.
- d. ICAO through regional navigation plans.

9. What does the SAR ground signal ">" mean?

- a. We have gone south.
- b. We need assistance.
- c. We need medical assistance.
- d. Yes.

Answers

1	2	3	4	5	6	7	8	9
a	c	c	b	d	d	c	b	b

Chapter

24

Security

Introduction.....	483
Objectives.....	483
Organization	484
Preventative Security Measures	484
Management of Response to Acts of Unlawful Interference	485
Further Security Information	486
Questions	490
Answers	494

Introduction

Definitions. The following definitions are examinable:

Item	Definition
Airside	The movement area of an airport, adjacent terrain and buildings or portions thereof, access to which is controlled (used to be called ‘the aeronautical part’).
Screening	The application of technical or other means which are intended to identify and/or detect weapons, explosives or other dangerous devices, articles or substances which may be used to commit an act of unlawful interference.
Security	Safeguarding civil aviation against acts of unlawful interference. This objective is achieved by a combination of measures and human and material resources.
Security restricted area	Those areas of the airside of an airport which are identified as priority risk areas where in addition to access control, other security controls are applied. Such areas will normally include all commercial aviation passenger departure areas between the screening point and the aircraft, the ramp, baggage make-up areas, including those where aircraft are being brought into service and screened baggage and cargo are present, cargo sheds, mail centres, airside catering and aircraft cleaning premises.
Unidentified baggage	Baggage at an airport with or without a baggage tag, which is not picked up by or identified with a passenger.

24.1 Annex 17. The annex to the Chicago which contains the SARPs for Security is Annex 17. Information applicable to the implementation of security policy is also contained in other ICAO publications.

Objectives

24.2 General. The aim of aviation security shall be to safeguard civil aviation operations against acts of unlawful interference. Safety of passengers, crew, ground personnel and the general public shall be the primary objective of each Contracting State in all matters related to safeguarding against acts of unlawful interference with civil aviation.

24.3 Organization. Each Contracting State shall establish an organization, develop plans and implement procedures, which together provide a standardized level of security for the operation of international flights in normal operating conditions and which are capable of rapid expansion to meet any increased security threat.

24.4 Facilitation. Each Contracting State should whenever possible arrange for the security measures and procedures to cause a minimum of interference with, or delay to the activities of, international civil aviation.

Organization

24.5 National Organization. Each Contracting State shall establish a national civil aviation security programme the objective of which will be to safeguard civil aviation operations against unlawful interference, through regulations, practices and procedures which take account of the safety, regularity and efficiency of flights. This will include the designation of an appropriate authority to co-ordinate all security activities, to implement the security programme, to ensure the programme meets the needs of international traffic, to establish airport security committees, to ensure that contingency plans are in place for acts of unlawful interference, and to ensure training programmes are implemented. The programme may be extended to cover domestic air service. A copy of the programme is to be given to ICAO.

24.6 Airport Design. The State is required to ensure that airport design requirements, including architectural and infrastructure related requirements necessary for the implementation of security measures are integrated into the design and construction of new facilities and alterations to existing facilities at airports.

24.7 International Co-operation. The most effective means of combating international terrorism is to act within a co-ordinated framework and to common standards. Each Contracting State is therefore required to co-operate with other States in order to adapt their respective national civil aviation security programmes as necessary; to make available to other States on request a written version of the appropriate parts of its national civil aviation security programme; to include in its bilateral agreements on air transport, a clause related to aviation security; to ensure that requests from other States for special security measures in respect of a specific flight or specified flights by operators of such other States, as far as may be practicable, are met; to co-operate with each other in the development and exchange of information concerning training programmes; and to co-operate with other States in the field of research and development of new security equipment which will better satisfy international civil aviation security objectives.

Preventative Security Measures

24.8 Prohibited Objects. Each Contracting State shall establish measures to prevent weapons, explosives or any other dangerous devices which may be used to commit an act of unlawful interference, the carriage or bearing of which is not authorized, from being introduced, by any means whatsoever, on board an aircraft engaged in international civil aviation. Note: In applying this standard, special attention must be paid to the threat posed by explosive devices concealed in, or using electric, electronic or battery operated items carried as hand baggage and/or in checked baggage.

24.9 Protection of Cargo, Mail and Other Goods. States must protect cargo, mail and other goods by taking the following security controls:

- a. Screening prior to being loaded onto the aircraft
- b. Approval and security screening of Agents or known consignors
- c. Access Control (entry of only authorized personnel)

24.10 Law Enforcement Officers. Contracting States should ensure that the carriage of weapons on board aircraft, by law enforcement officers and other authorized persons, acting in the performance of their duties, requires special authorization in accordance with the laws of the States involved. The pilot-in-command is notified as to the number of armed persons and their seat location. Additionally, all en route States as well as the departure and destination States and the aerodrome authorities, must approve the transit of armed security personnel.

24.11 Passengers and Their Baggage. Each Contracting State is required to ensure that adequate measures exist to control the transfer and transit of passengers and their cabin baggage to prevent unauthorized articles being taken on board aircraft engaged in international civil aviation. States are also to ensure that there is no possibility of mixing or contact between passengers subjected to security control and other persons not subjected to security control, after the security screening at airports has been applied. If mixing does occur, the passengers and their baggage will be re-screened before boarding an aeroplane.

24.12 Deportees and Persons in Custody. States are required to establish procedures to ensure that the operator and the PIC are informed when deportees and persons in custody are travelling so that the appropriate security measures can be enforced. It is normal practice that deportees and persons in custody are embarked first and before any passengers. Operators are to ensure that procedures are detailed for the carriage of deportees and persons in custody. This includes ‘potentially disruptive’ passengers who are obliged to travel because they have been subject of judicial or administrative proceedings.

24.13 Checked Baggage and Other Goods. States are required to establish measures to ensure that operators do not transport the baggage of passengers who are not on board the aeroplane unless the baggage is stowed in separate compartments from the passengers, and it has been the subject of other security control measures.

24.14 Access. States are required to establish procedures and identification systems to prevent unauthorized access by persons or vehicles to the airside of an aerodrome serving international civil aviation, and other areas of importance to the security of the aerodrome (e.g. ATC etc.).

Management of Response to Acts of Unlawful Interference

24.15 Safety of Passengers and Crew. Each Contracting State shall take adequate measures for the safety of passengers and crew of an aircraft which is subjected to an act of unlawful interference until their journey can be continued.

24.16 Air Traffic Control. Each Contracting State responsible for providing air traffic services for an aircraft which is the subject of an act of unlawful interference shall collect all pertinent information on the flight of that aircraft and transmit that information to all other State responsible for the Air Traffic Services units concerned, including those at the airport of known or presumed destination, so that timely and appropriate safeguarding action may be taken en route and at the aircraft’s known, likely or possible destination. Each Contracting State should ensure that information received as a consequence of action taken is distributed locally to the Air Traffic Services units concerned, the appropriate airport administrations, the operator and others concerned as soon as practicable.

24.17 Provision of Assistance. Each Contracting State shall provide such assistance to an aircraft subjected to an act of unlawful seizure, including the provision of navigation aids, air traffic services and permission to land as may be necessitated by the circumstances.

24.18 Detention on the Ground. Each Contracting State shall take measures, as it may find practicable, to ensure that an aircraft subjected to an act of unlawful seizure which has landed in its territory is detained on the ground unless its departure is necessitated by the overriding duty to protect human life, recognizing the importance of consultations, wherever practicable, between the State where that aircraft has landed and the State of the operator of the aircraft, and notification by the State where the aircraft has landed to the States of assumed or stated destination. The State is required to make provision for the comfort and safety of the crew and passengers until they can continue their journey.

24.19 Operator Security Programme. Each Contracting State is required to ensure that air transport operators have established, implemented and maintain a written security programme that meets the requirements of the national aviation security programme for that State. Where code sharing is implemented the operator is to ensure/confirm that its partner airline complies with the operator security programme.

Further Security Information

24.20 Other Annexes and Documents. The content of other ICAO Annexes and Documents relates directly to security. The student is required to revise the following.

24.21 Extracts from Annex 2 - Rules of the Air

- **Unlawful interference.** An aircraft which is being subjected to unlawful interference shall endeavour to notify the appropriate ATS unit of this fact, any significant circumstances associated therewith and any deviation from the current flight plan necessitated by the circumstances, in order to enable the ATS unit to give priority to the aircraft and to minimize conflict with other aircraft. The following procedures are intended as guidance for use by aircraft when unlawful interference occurs and the aircraft is unable to notify an ATS unit of this fact.
- **Action by PIC.** Unless considerations aboard the aircraft dictate otherwise, the pilot-in-command should attempt to continue flying on the assigned track and at the assigned cruising level at least until able to notify an ATS unit or within radar coverage.
- **Departure from assigned track.** When an aircraft subjected to an act of unlawful interference must depart from its assigned track or its assigned cruising level without being able to make radiotelephony contact with ATS, the pilot-in-command should, wherever possible:
 - Attempt to broadcast warnings on the VHF emergency frequency and other appropriate frequencies, unless considerations aboard the aircraft dictate otherwise. Other equipment such as on-board transponders, data links, etc should also be used when it is advantageous to do so and circumstances permit; and
 - Proceed in accordance with applicable special procedures for in-flight contingencies, where such procedures have been established and promulgated.
 - If no applicable regional procedures have been established, proceed at a level which differs from the cruising levels normally used for IFR flight in the area by 300 m (1000 ft) if above FL290 or by 150 m (500 ft) if below FL290.

24.22 Extracts from Annex 6 - Operation of Aircraft (Part I - International Commercial Air Transport).

- **Security of the flight crew compartment.** In all aeroplanes which are equipped with a flight crew compartment door, this door shall be capable of being locked. It shall be lockable from within the compartment only.
- **Aeroplane search procedure checklist.** An operator shall ensure that there is on board a checklist of the procedures to be followed in searching for a bomb in case of suspected sabotage. The checklist shall be supported by guidance on the course of action to be taken should a bomb or suspicious object be found and information on the least-risk bomb location specific to the aeroplane.

- **Training programmes.** An operator shall establish and maintain a training programme which enables crew members to act in the most appropriate manner to minimize the consequences of acts of unlawful interference. An operator shall also establish and maintain a training programme to acquaint appropriate employees with preventive measures and techniques in relation to passengers, baggage, cargo, mail, equipment, stores and supplies, intended for carriage on an aeroplane so that they contribute to the prevention of acts of sabotage or other forms of unlawful interference.
- **Reporting acts of unlawful interference.** Following an act of unlawful interference the pilot-in-command shall submit, without delay, a report of such an act to the designated local authority.
- **Least-risk bomb location.** Specialized means of attenuating and directing the blast should be provided for use at the least-risk bomb location.
- **Carriage of weapons.** Where an operator accepts the carriage of weapons removed from passengers, the aeroplane should have provision for stowing such weapons in a place so that they are inaccessible to any person during flight time.

24.23 Extracts from Annex 9 - Facilitation

- **Transit and transfer of passengers and crew.** Contracting States should ensure that physical facilities at airports are provided, where the volume and nature of the traffic so require, whereby crew and passengers in direct transit on the same aircraft, or transferring to other flights, may remain temporarily without being subject to inspection formalities, except for aviation security measures, or in special circumstances. Note: This provision is not intended to prevent the application of appropriate narcotics control measures.
- **Inadmissible persons.** Where a person is returned to the operator for repatriation to the State of Departure or any other State to which the person is admissible, if that person is inadmissible to the State of Destination, nothing will prevent the operator from seeking compensation from the passenger in the State of Departure.
- **Deportees.** Contracting States removing deportees from their territory are to assume all obligations and costs associated with the removal.
- **Unruly passengers.** Contracting States should ensure that airport and aircraft operators and public authorities provide training to the relevant personnel concerning the identification and management of unruly passengers including recognition and defusing of escalating situations, and crisis containment.

24.24 Extracts from the Procedures for Air Navigation Services - Rules of the Air and Air Traffic Services (DOC 4444)

- **Emergency procedures.** The various circumstances surrounding each emergency situation preclude the establishment of exact detailed procedures to be followed. The procedures outlined herein are intended as a general guide to air traffic services personnel. Air traffic control units shall maintain full and complete co-ordination, and personnel shall use their best judgement in handling emergency situations. To indicate that it is in a state of emergency, an aircraft equipped with an SSR transponder might operate the equipment as follows:

- Mode A, Code 7700;
or
 - Mode A, Code 7500, to indicate specifically that it is being subjected to unlawful interference.
- **Priority.** An aircraft known or believed to be in a state of emergency, including being subjected to unlawful interference shall be given priority over other aircraft.
 - **Unlawful interference.** Air traffic services personnel shall be prepared to recognize any indication of the occurrence of unlawful interference with an aircraft.
 - **Verification of special SSR codes.** Whenever unlawful interference with an aircraft is suspected, and where automatic distinct display of SSR Mode A Code 7500 and Code 7700 is not provided, the radar controller shall attempt to verify his suspicion by setting the SSR decoder to Mode A Code 7500 and thereafter to Code 7700. An aircraft equipped with an SSR transponder is expected to operate the transponder on Mode A Code 7500 to indicate specifically that it is the subject of unlawful interference. The aircraft may operate the transponder on Mode A Code 7700, to indicate that it is threatened by grave and imminent danger, and requires immediate assistance.
 - **ATC response.** Whenever unlawful interference with an aircraft is known or suspected, ATS units shall promptly attend to requests by or to anticipated needs of the aircraft, including requests for relevant information relating to air navigation facilities, procedures and services along the route of flight and at any aerodrome of intended landing, and shall take such action as is necessary to expedite the conduct of all phases of the flight. ATS units shall also:
 - Transmit, and continue to transmit, information pertinent to the safe conduct of the flight, without expecting a reply from the aircraft.
 - Monitor and plot the progress of the flight with the means available, and co-ordinate transfer of control with adjacent ATS units without requiring transmissions or other responses from the aircraft, unless communication with the aircraft remains normal.
 - Inform, and continue to keep informed, appropriate ATS units, including those in adjacent flight information regions, which may be concerned with the progress of the flight.

Note: *In applying this provision, account must be taken of all the factors which may affect the progress of the flight, including fuel endurance and the possibility of sudden changes in route and destination. The objective is to provide, as far in advance as is practicable in the circumstances, each ATS unit with appropriate information as to the expected or possible penetration of the aircraft into its area of responsibility.*

- Notify:
 - The operator or his designated representative.
 - The appropriate RCC in accordance with appropriate alerting procedures.
 - The designated security authority. It is assumed that the designated security authority and/or the operator will in turn notify other parties concerned in accordance with pre-established procedures.
- Relay appropriate messages, relating to the circumstances associated with the unlawful interference, between the aircraft and designated authorities.

24.25 Extracts from Annex 14 - Aerodromes

- **Isolated aircraft parking position.** An isolated aircraft parking position is to be designated for the parking of aircraft subject to unlawful interference. The position shall be never less than 100 m from other parking positions. It is not to be over underground utilities such as gas and aviation fuel and where feasible electrical or communications cables.

24.26 Taxi Instruction Considerations. When issuing taxiing instructions, ATC must abide by the following considerations:

- a. The aircraft is to remain as far away from other aircraft and installations as possible
- b. The taxi route must be specified to the pilot
- c. The taxi route shall be selected with a view to minimizing any security risks to the public, other aircraft and installations

Questions

- 1. When taking firearms on board an aeroplane, carried by an authorized person, who needs to be informed?**
 - a. The commander.
 - b. The commander and the authority of the state of destination.
 - c. The authority of the state of destination.
 - d. The operator.
- 2. In ICAO Annex 17 (Security), what does Security mean?**
 - a. To safeguard civil aviation operations against unlawful interference.
 - b. To safeguard civil aviation operations.
 - c. To safeguard civil aviation operations against hijacking.
 - d. To safeguard civil aviation operations against terrorism.
- 3. ICAO Annex 17 states that each State is responsible for establishing security at:**
 - a. all aerial locations within the FIR.
 - b. at each aerodrome serving international civil aviation.
 - c. all international airports.
 - d. all international and commercial airports.
- 4. Contracting States must design a security programme, with regard to unlawful interference, to safeguard:**
 - a. passengers, cargo and crews for international flights.
 - b. passengers, crews, ground personnel and the general public.
 - c. crews only for international flights.
 - d. passengers, cargo and crews for international flights and, at their discretion, all of these for domestic flights.
- 5. If armed personnel are to be carried to ensure the safety of an aircraft, then:**
 - a. the PIC must be informed.
 - b. the state of departure must notify the state of arrival.
 - c. the state of departure must notify the airport of arrival.
 - d. all of the above.
- 6. According to Annex 17, security is defined as “a combination of measures and human resources intended to safeguard:**
 - a. civil aviation operations against acts of unlawful interference”.
 - b. international civil aviation operations against acts of unlawful interference”.
 - c. international aviation operations against acts of unlawful interference”.
 - d. aviation operations against acts of unlawful interference”.
- 7. Operators are to ensure that procedures are detailed for the carriage of:**
 - a. deportees and people under lawful custody.
 - b. deportees, people under lawful custody and inadmissibles.
 - c. only people under lawful custody when physically restrained.
 - d. only deportees and inadmissibles.

8. Airlines are to have procedures in place when carrying potentially disruptive passengers which include:
- inadmissibles, deportees, persons in custody.
 - persons in custody.
 - inadmissibles, deportees.
 - deportees, persons in custody.
9. An aircraft subjected to unlawful interference cannot be denied:
- permission to land and fuel.
 - Air Traffic Services, permission to land and the use of navigational aids.
 - food and water for the occupants of the aircraft.
 - Air Traffic Services and fuel.
10. To whom does the National Security organization of a state have to make available a written version of its national security programme for civil aviation?
- ICAO and ECAC.
 - ICAO.
 - ECAC.
 - Other States.
11. An isolated parking area is to be provided for an aircraft subjected to unlawful interference which is never less than..... metres from other parking positions:
- 1000.
 - 2500.
 - 3000.
 - 100.
12. A national civil aviation security programme must be established by:
- ICAO and other organizations including the Contracting States concerned.
 - ICAO.
 - all Contracting States.
 - ECAC.
13. Member States should ensure that specific security measures are conducted in the air transport of potentially disruptive passengers. These are seen as:
- none of the answers are correct.
 - deportees, inadmissible passengers and persons in custody.
 - deportees and inadmissible passengers only.
 - deportees and persons in custody.
14. The State shall take adequate measures for the safety of passengers and crew of an aircraft subjected to an act of unlawful interference until:
- the end of the subsequent investigation.
 - as such time as requested by the passengers and crew.
 - their journey can be continued.
 - they are returned to their country of origin.

24 *Questions*

15. A person found to be inadmissible shall be given to the custody of the operator who shall be responsible for:
- a. transportation to where the person commenced his/her journey or to any place where the person is admissible at the expense of the operator without redress.
 - b. transportation to where the person commenced his/her journey or to any place where the person is admissible at the expense of the operator. However, nothing precludes the operator from recovering from such a person any transportation costs arising from his/her inadmissibility.
 - c. returning such a person to their country of origin.
 - d. returning such a person to their normal residence.

Answers

1	2	3	4	5	6	7	8	9	10	11	12
b	a	b	b	d	a	b	a	b	d	d	c

13	14	15
b	c	b

Chapter

25

Aircraft Accident and Incident Investigation

Introduction.....	497
Objective of Investigation.....	499
Investigations	499
Serious Incidents	500
EU Considerations	501
Questions	502
Answers	504

Introduction

25.1 Annex 13. The ICAO SARPs for the investigation of aircraft accidents and incidents are contained in Annex 13.

25.2 Applicability. Unless otherwise stated, the specifications for investigations apply to activities following accidents and incidents wherever they occurred. In Annex 13 the specifications concerning the State of the Operator apply only when the aircraft is leased, chartered or interchanged and when that State is not the State of Registry and if it discharges, in respect of the annex, in part or in whole, the functions and obligations of the State of Registry.

25.3 Accident. An accident is defined as an occurrence associated with the operation of an aircraft which takes place between the time any person boards the aircraft with the intention of flight until such time as all such persons have disembarked, in which:

- A person is fatally or seriously injured as a result of:
 - Being in the aircraft, or
 - Direct contact with any part of the aircraft, including parts which have become detached from the aircraft, or
 - Direct exposure to jet blast.

Except when the injuries are from natural causes, self inflicted or inflicted by other persons, or when the injuries are to a stowaway hiding outside the areas normally available to the passengers and crew, or

- The aircraft sustains damage or structural failure which:
 - Adversely affects the structural strength, performance or flight characteristics of the aircraft, and
 - Would normally require major repair or replacement of the affected component.

Except for engine failure or damage, when the damage is limited to the engine, its cowlings or accessories; or for damage limited to propellers, wing tips, antennas, tyres, brakes, fairings, small dents or puncture holes in the aircraft skin, or

- The aircraft is missing or completely inaccessible.

Note: *The difference between an accident and a serious incident lies only in the result.*

Definitions. The following additional definitions are required knowledge.

Item	Definition
Incident	An occurrence, other than an accident, associated with the operation of an aircraft which affects or could affect the safety of operation.
Investigation	A process conducted for the purpose of accident prevention which includes the gathering and analysis of information, the drawing of conclusions, including the determination of causes and, when appropriate, the making of safety recommendations.
Serious incident	An incident involving circumstances indicating that an accident nearly occurred. (Examples given at para 26.9).
Serious injury	An injury which is sustained by a person in an accident and which: <ul style="list-style-type: none"> • Requires hospitalization for more than 48 hours commencing within seven days from the date the injury was received, and • Results in a fracture of any bone (except simple fractures of fingers, toes, or nose), or • Involves lacerations which cause severe haemorrhage, nerve, muscle or tendon damage, or • Involves injury to an internal organ, or • Involves second or third degree burns, or any burns affecting more than 5% of the body surface, or • Involves verified exposure to infectious substances or injurious radiation.
State of design	The State having jurisdiction over the organization responsible for the type design.
State of manufacture	The State having jurisdiction over the organization responsible for the final assembly of the aircraft.
State of occurrence	The State in the territory of which an accident or incident occurs.

Objective of Investigation

25.4 Objective. The objective of the investigation of an accident or incident shall be the prevention of accidents and incidents. It is not the purpose of this activity to apportion blame or liability.

Investigations

25.5 Responsibility for Instigating an Investigation. Where an accident or serious incident occurs in the territory of a contracting state, the State of Occurrence is to instigate the investigation. If the accident or incident occurred in a non-contracting state, the state of registry should endeavour to instigate an investigation. If the accident or incident occurred outside the territory of any state or the location of the occurrence cannot be determined, the State of Registry is to instigate the investigation. If the State of Occurrence declines to investigate the incident, the State of Registry (or the State of the Operator) may investigate.

25.6 Participation. The State of Registry, the State of the Operator, the State of Design and the State of Manufacture are entitled to be represented at any investigation. Any state, which when requested provides information, facilities, or experts to the state conducting the investigation, is entitled to be represented at the investigation. Where the citizens of a state have suffered fatalities or serious injuries, that state, if a request has been made, will be permitted to appoint an expert who should be entitled to:

- Visit the scene of the accident
- Have access to the relevant factual information
- Participate in the identification of the victims
- Assist in questioning survivors who are citizens of that state
- Receive a copy of the final report

25.7 Final Report. The final report of an investigation of an accident is to be sent with the minimum delay, by the State conducting the investigation to:

- The state that instigated the investigation
- The state of Registry
- The state of the Operator
- The state of Design
- The state of Manufacture
- Any state whose citizens have suffer fatalities or injuries, and
- Any state which provided relevant information, significant facilities or experts

25.8 ICAO. ICAO is to be notified of any accident or serious incident involving an aircraft with a maximum mass of over 2250 kg. A final report must be sent to ICAO for an aircraft with a maximum mass of more than 5700 kg.

Serious Incidents

25.9 Examples. The incidents listed are typical examples of incidents that are likely to be serious incidents. The list is not exhaustive and only serves as guidance to the definition of serious incident.

- Near collisions requiring an avoidance manoeuvre to avoid a collision or an unsafe situation or when an avoidance action would have been appropriate.
- Controlled flight into terrain only marginally avoided.
- Aborted take-offs on a closed or engaged runway.
- Take-offs from a closed or engaged runway with marginal separation from obstacle(s).
- Landings or attempted landings on a closed or engaged runway.
- Gross failures to achieve predicted performance during take-off or initial climb.
- Fires and smoke in the passenger compartment, in cargo compartments or engine fires, even though such fires were extinguished by the use of extinguishing agents.
- Events requiring the emergency use of oxygen by the flight crew.
- Aircraft structural failures or engine disintegrations not classified as an accident.
- Multiple malfunctions of one or more aircraft systems seriously affecting the operation of the aircraft.
- Flight crew incapacitation in flight.
- Fuel quantity requiring the declaration of an emergency by the pilot.
- Take-off or landing incidents including undershooting, overrunning or running off the sides of runways.
- Systems failures, weather phenomena, operations outside the approved flight envelope or other occurrences which could have caused difficulties controlling the aircraft.
- Failures of more than one system in a redundancy system mandatory for flight guidance and navigation.

EU Considerations

25.10 EU Directive 94/56. This Directive is the EU modification of ICAO Annex 13 with regards to the investigation of accidents.

Objective. The Directive aims to improve air safety by facilitating the expeditious holding of investigations, the sole objective of which is the prevention of future accidents and incidents. It applies to investigations into civil aviation accidents and incidents which have occurred in the territory of the EC or involving aircraft registered in a Member State.

Summary. Member States are obliged to investigate every accident or serious incident with the aim of preventing any reoccurrence thereof. Investigation of incidents, other than serious, is also encouraged. The Directive makes clear distinction between liability and technical investigation. *The investigations shall in no case be concerned with apportioning blame or liability.*

Each Member State shall ensure that technical investigations are conducted or supervised by a permanent and independent Air Accident Investigation Body.

The investigators-in-charge shall be able to carry out their task in the most efficient way and within the shortest time. They shall be granted free access to:

- the site of the accident and to the aircraft;
- the listing of evidence;
- the flight recorders;
- the results of examination of the bodies of victims or of tests made on samples taken from the bodies of victims.

Report. Any investigation into an accident shall be the subject of a report which shall contain safety recommendations. The investigating body shall make public the final accident report in the shortest possible time, and if possible within 12 months of the date of the accident.

Member States shall take the necessary measures to ensure that the safety recommendations made by the investigating bodies or entities are duly taken into consideration and acted upon.

25.11 EU Directive 2003/42. This Directive concerns itself with the reporting of occurrences.

Objective. The objective of this Directive is to contribute to the improvement of air safety by ensuring that relevant information on safety is reported, collected, stored, protected and disseminated. The sole objective of occurrence reporting is the prevention of accidents and incidents and not to attribute blame or liability.

Definition of an occurrence. ‘occurrence’ means an operational interruption, defect, fault or other irregular circumstance that has or may have influenced flight safety and that has not resulted in an accident or serious incident.

Summary

- Member States shall require that occurrences are reported to the competent authorities.
- Member States shall designate one or more competent authorities to put in place a mechanism to collect, evaluate, process and store reported occurrences.
- Member States shall participate in an exchange of information by making all relevant safety-related information available to the competent authorities of the other Member States and the Commission.
- The Directive lists in detail examples of the occurrences that must be reported.

Questions

1. An aircraft wheel gets stuck in the mud whilst taxiing to the runway for take-off and sustains damage. Is this:
 - a. an incident.
 - b. an accident.
 - c. a serious incident.
 - d. a normal operating hazard.
2. Who is responsible for the investigation of an accident?
 - a. State of Occurrence.
 - b. State or Registry.
 - c. ICAO.
 - d. Combination of A and B.
3. The purpose of Accident Investigations is the prevention of future accidents and:
 - a. apportion blame.
 - b. to improve manufacturing design.
 - c. to help judicial proceedings.
 - d. nothing more.
4. Just before arrival at the apron, the aircraft unintentionally taxies onto the grass causing the wheel to ride into a pothole. The aircraft has sustained serious damage and consequently the crew is forced to delay the departure:
 - a. considering that there is no physical injury and that the flight has ended, the action that has to be taken is merely confined to notification of the insurance company, the mechanic, the operator and persons who are in charge of runways and taxiways.
 - b. this is an accident and the crew should follow the appropriate procedures.
 - c. this is an incident and the captain has to report this to the aerodrome authority within 48 hours.
 - d. this is an irregularity in the exploitation. This crew should inform the operator about the delay caused by necessary repairs.
5. Who is entitled to be represented at any investigation?
 - a. The State of Registry.
 - b. The State of Design.
 - c. The State of Manufacture.
 - d. All the above.

Answers

1	2	3	4	5
b	d	d	b	d

Chapter

26

Revision Questions

Revision Questions	507
Answers	532
EASA Specimen Examination	533
Answers to Specimen EASA Examination	546

Revision Questions

1. ICAO Annex 17 lays down the rules to establish security measures for passengers with regard to:
 - a. cabin baggage, checked baggage, cargo and other goods, access control and airport design.
 - b. cabin baggage and checked baggage.
 - c. passenger baggage.
 - d. cabin baggage, checked baggage, cargo and other goods and access control.
2. Except in special cases, the establishment of change-over points shall be limited to route segments of:
 - a. 100 NM or more.
 - b. 75 NM or more.
 - c. 60 NM or more.
 - d. 50 NM or more.
3. Except when cleared by an ATC unit, a VFR flight cannot enter or leave a Control Zone when the cloud base is lower than:
 - a. 1000 ft and less than 8 km visibility.
 - b. 2000 ft and less than 5 km visibility.
 - c. 1500 ft or less than 5 km visibility.
 - d. 1000 ft and less than 5 km visibility.
4. When requesting to engage the parking brake, a marshaller will give the following signal:
 - a. arms repeatedly crossed over the head.
 - b. arms placed down and crossed in front of the body moving horizontally.
 - c. raise arm and hand with fingers extended horizontally in front of the body. Then clench fist.
 - d. arms placed horizontally sideways with palms towards the ground beckoning downwards.
5. When doing a procedure turn (45°/180°) going outbound turned 45° off track, the time taken from the beginning of the turn for Cat A and Cat B aircraft is:
 - a. 1 minute 30 seconds.
 - b. 1 minute.
 - c. 1 minute 15 seconds.
 - d. 2 minutes.
6. Concerning the three entries to the hold, the entry has to be flown on:
 - a. heading.
 - b. track.
 - c. course.
 - d. bearing.

7. When given instructions to set a mode/code, a pilot shall:
- only use the word "wilco".
 - only read back the code.
 - only use the word "roger".
 - read back mode and code.
8. In an instrument approach procedure, the segment where the aircraft is lined up with the runway centre line and when the decent is commenced is called:
- intermediate approach segment.
 - initial approach segment.
 - arrival segment.
 - final approach segment.
9. What does DER mean?
- distance end of route.
 - departure end of runway.
 - distance end of runway.
 - departure end of route.
10. What action should be taken when, during an IFR flight in VMC, you suffer a radio failure?
- Return to the aerodrome from which you departed.
 - Continue flying in VMC and land as soon as possible.
 - Maintain your assigned altitude and land at the nearest aerodrome at which there are VMC conditions.
 - Continue flying at your assigned altitude and start your approach at your ETA.
11. An ATS airspace, in which IFR and VFR flights are permitted and all flights receive air traffic control service; IFR flights are separated from other IFR flights and receive traffic information concerning VFR flights and VFR flights receive traffic information concerning all other flights, is classified as:
- Airspace E.
 - Airspace B.
 - Airspace A.
 - Airspace D.
12. The speed limit (IAS) in airspace E is:
- 250 kt for IFR and VFR, below FL100.
 - 250 kt for IFR only, below FL195.
 - 250 kt for IFR and VFR, at all altitudes.
 - 250 kt for IFR only, below FL100.
13. Who has the final authority as to the disposition of the aircraft?
- The State.
 - The Operator.
 - The Commander.
 - The owner.

14. Who is responsible for the safety of an ATC clearance concerning terrain clearance?
- a. The ATS reporting point when accepting the flight plan.
 - b. The Captain.
 - c. The Operator of the aircraft.
 - d. ATC.
15. In Mode 2 Parallel Runway operations, a minimum radar separation can be provided of:
- a. 3 NM between aircraft on the same localizer course.
 - b. 2 NM between aircraft on the same localizer course.
 - c. 3 NM between aircraft on adjacent localizer courses.
 - d. 5 NM between aircraft on the same localizer course.
16. For a controlled flight before departure, a flight plan must be filed at least:
- a. 50 minutes before off-block time.
 - b. 60 minutes before departure.
 - c. 10 minutes before departure.
 - d. 30 minutes before off-block time.
17. An aircraft, on a radar approach, should be told to consider making a missed approach when the aircraft is not visible on the radar screen for a significant period of time and when it is within:
- a. the last 2 NM of the approach.
 - b. the last 5 NM of the approach.
 - c. the last 4 NM of the approach.
 - d. the last 3 NM of the approach.
18. Clocks and other timing equipment used by air traffic services must be checked in order to be able to give the time within plus or minus:
- a. 15 seconds of UTC.
 - b. 10 seconds of UTC.
 - c. 30 seconds of UTC.
 - d. 1 minute of UTC.
19. In order to satisfy lateral track separation between aircraft using the same fix and Dead Reckoning, the aircraft:
- a. have to fly 45° separated at a distance of 15 miles or more from the fix.
 - b. have to fly 45° separated at a distance of 15 NM or more from the fix.
 - c. have to fly 30° separated at a distance of 15 NM or more from the fix.
 - d. have to fly 30° separated at a distance of 15 miles or more from the fix.
20. An aircraft making an approach must be told to make a missed approach, when no landing clearance has been received from the non-radar traffic controller, when the aircraft is at a distance of:
- a. 5 NM from the touchdown.
 - b. 1.5 NM from the touchdown.
 - c. 4 NM from the touchdown.
 - d. 2 NM from the touchdown.

21. Temporary changes of long duration in specifications for AIP supplements and information of short duration, which contains extensive text and / or graphical representation, has to be published as AIP supplements. Long duration is considered to be:
- 3 months or longer.
 - 2 months or longer.
 - 1 year or longer.
 - 6 months or longer.
22. How many red lights have to be seen by the pilot, whose aircraft on final approach follows a normal PAPI defined glide-path?
- 2
 - none
 - 3
 - 1
23. A clearway is a squared area that is established to:
- protect aircraft during take-off and landing.
 - enable the aircraft to stop in the case of an aborted take-off.
 - enable the aircraft to make a part of the initial climb to a specified altitude.
 - decrease the risk of damage to aircraft which run off the end of the runway.
24. It says in the annex of the ICAO convention that the sizes of airfields are specified by codes for different runways. What is the minimum width of a runway with runway code 4?
- 40 m.
 - 45 m.
 - 50 m.
 - 35 m.
25. When someone's admittance to a country is refused and he/she is brought back to the operator for transportation away from the territory of the state:
- the operator will not take any transportation costs from the passenger which arise from his/her inadmissibility.
 - the operator is not responsible for that person, to whom the admittance to the host country is refused.
 - the operator and state of the operator are both responsible for the refused person.
 - the operator will not be prevented from taking any transport costs from a person which arises out of his/her inadmissibility.
26. An aircraft which is not concerned with regular international flights and which makes a flight to or via a dedicated aerodrome of a member State and is temporarily free of taxes is admitted and will stay within that State without paying customs:
- during a period which is determined by the State.
 - during a period of 24 hours.
 - during a period of 12 hours.
 - during a period of 48 hours.

27. An aircraft flies over mountainous terrain at which a search and rescue operation is conducted to find survivors of a plane crash. The pilot sees a ground sign in the form of an "X". This indicates:
- we have found all personnel.
 - engineering assistance required.
 - landing impossible.
 - require medical assistance.
28. A controlled flight is required to inform the concerned ATC unit when the average TAS at cruising level deviates or is expected to deviate compared to that given TAS in the Flight Plan by at least plus or minus:
- 10%.
 - 3%.
 - 5%.
 - 2%.
29. Concerning aircraft registration markings, no combinations can be used if they can be mistaken for:
- codes which are used for identification of ICAO documents.
 - letter combinations beginning with XXX.
 - 3 letter combinations which are used by international code of signals.
 - 5 letter combinations which are used by international code of signals.
30. What is the rule concerning level or height the aircraft should maintain when flying IFR outside controlled airspace unless otherwise directed?
- 2000 ft above the highest obstacle within 8 km of the heading.
 - 1000 ft above the highest obstacle within 8 km of the estimated position of the aircraft.
 - 1000 ft above the highest obstacle within 8 NM of the planned track.
 - 2000 ft above the highest obstacle within 8 NM of the planned track.
31. An aircraft is expected to overtake another aircraft if it is closing from behind in a sector of:
- 50° both sides of the longitudinal axis.
 - 60° both sides of the longitudinal axis.
 - 80° both sides of the longitudinal axis.
 - 70° both sides of the longitudinal axis.
32. Aircraft A flies in VMC with an ATC clearance within a control area. Aircraft B without ATC clearance approaches at roughly the same height on a converging heading. Who has right of way?
- Aircraft A, regardless of the direction from which B approaches.
 - Aircraft B, regardless of the direction from which A approaches.
 - Aircraft A, if B is to the right of him.
 - Aircraft B, if A is to the left of him.

33. The person having overall responsibility of an aircraft during flight is the:
- pilot-in-command.
 - operator.
 - ATC Controller if the aircraft is in controlled airspace.
 - owner of the aircraft.
34. Pilots are not allowed to use the ident function on their SSR, unless:
- they operate outside controlled airspace.
 - if asked by ATC.
 - they are within controlled airspace.
 - they operate a transponder with mode C.
35. Transition Level:
- will be given by NOTAM.
 - is published on every approach and landing chart for every airfield.
 - will be calculated by the pilot-in-command.
 - will be calculated by the ATC service of an ATS unit.
36. It is permitted in a particular sector, if there is a conspicuous obstacle in the visual manoeuvring area outside the final and missed approach areas, to disregard that obstacle. When using this option, the published procedure shall be:
- circling is only permitted in VMC.
 - recommended not to execute a circling approach in the entire sector in which the obstacle is situated.
 - prohibit a circling approach for the concerned runway.
 - forbid a circling approach in the entire sector in which the obstacle is located.
37. If the track on an instrument departure is published, the pilot is expected to:
- correct for the known wind so as to maintain the published track.
 - ask ATC for another heading to steer correcting for wind.
 - ignore the wind and proceed with a heading equal to the track.
 - ask ATC for permission to correct heading for wind.
38. Close to an aerodrome that will be used for landing by aircraft, the vertical position shall be expressed as:
- altitude above sea level on or above transition altitude.
 - flight level on or under the transition altitude.
 - flight level on or under the transition level.
 - altitude above sea level at or below transition altitude.
39. A manoeuvre where a turn is made from a “designated track” followed by a turn in the opposite direction to enable the aircraft to fly the prescribed track is called a:
- base turn.
 - reverse track.
 - race track.
 - procedure turn.

- 40. The transition from altitude to flight level and visa versa is made:**
- a. on the transition level in the climb and transition altitude in the descent.
 - b. at the transition altitude in the climb and transition level in the descent.
 - c. at the transition level only.
 - d. at the transition altitude only.
- 41. Lights on an airfield or in the vicinity can be extinguished if they can be re-lit:**
- a. at least 5 minutes before the ETA of the aircraft.
 - b. at least 15 minutes before the ETA of the aircraft.
 - c. at least 30 minutes before the ETA of the aircraft.
 - d. at least 60 minutes before the ETA of the aircraft.
- 42. Air Traffic Service unit consists of:**
- a. Air Traffic Control Units and Flight Information Centres.
 - b. Flight Information Centres and Air Services Reporting offices.
 - c. Air Traffic Control Units, Flight Information Centres and Air Traffic Services Reporting offices.
 - d. Air Services Reporting offices and Air Traffic Control Units.
- 43. An aircraft is maintaining FL150 in Class C Airspace. Another aircraft below at FL140 receives a clearance to descend to FL70. There is severe turbulence in the area. When at earliest can a clearance be expected to descend to FL140 or lower?**
- a. When the other aircraft has reported to be descending through FL130.
 - b. When the other aircraft has reported to have left FL120.
 - c. When the other aircraft has reported to have left FL140.
 - d. When the other aircraft has reached FL70.
- 44. When the captain cannot comply with an ATC clearance:**
- a. the Captain must accept the ATC clearance, because it is based on a filed flight plan.
 - b. he/she may request an amended clearance and, if executable, he/she will accept that clearance.
 - c. he/she may ask for a new clearance and the appropriate ATC must grant him/her that clearance.
 - d. he/she may suggest a new clearance to ATC.
- 45. The transition from IFR to VFR is done:**
- a. on the Captain's initiative.
 - b. whenever an aircraft in VMC leaves controlled airspace.
 - c. if told by ATC.
 - d. at the clearance limit, disregarding the weather situation.
- 46. According to international agreements the wind direction must be given in degrees magnetic converted with local magnetic variation from the true wind direction:**
- a. before landing and taxi for take-off.
 - b. in anticipation of the upper wind for areas North of 60° N and South of 60° S.
 - c. when an aircraft is requested by the meteorological office or on specified points to give a PIREP.
 - d. when the local variation is greater than 10° East or West.

47. The longitudinal separation minimum based on time between aircraft at the same FL, where there is enough coverage for navigation aids and the preceding aircraft has a higher true airspeed of 20 kt minimum is:
- 3 minutes.
 - 15 minutes.
 - 5 minutes.
 - 10 minutes.
48. When independent parallel approaches are used on parallel runways and headings (vectors) are given to intercept the ILS, the given heading must be such that the aeroplane can establish on the localizer course or the MLS final approach track in level flight over at least:
- 2.5 NM before the ILS glide slope or the specified MLS elevation angle is intercepted.
 - 1.5 NM before the ILS glide slope or the specified MLS elevation angle is intercepted.
 - 3.0 NM before the ILS glide slope or the specified MLS elevation angle is intercepted.
 - 2.0 NM before the ILS glide slope or the specified MLS elevation angle is intercepted.
49. What is the length of the approach lighting system of a Cat II precision landing runway?
- 900 m.
 - 600 m.
 - 300 m.
 - 150 m.
50. A PAPI must consist of:
- a row of 4 multiple lights or paired units without transition zone, at equal distance from each other.
 - two rows of 4 multiple lights or paired units without transition zone, at equal distance from each other.
 - a row of 2 multiple lights or paired units without transition zone, at equal distance from each other.
 - two rows of 6 multiple lights or paired units without transition zone, at equal distance from each other.
51. Lights at the end of the runway shall be:
- steady unidirectional lights radiating white light in the direction of the runway.
 - steady white lights with controllable intensity.
 - steady omni-directional red lights with controllable intensity.
 - steady unidirectional lights radiating red light in the direction of the runway.
52. An aircraft is allowed to descend below the MSA if:
- the pilot follows the published approach procedures.
 - the aircraft receives radar vectors.
 - the pilot has visual contact with the runway and surrounding terrain and is able to maintain visual contact.
 - all of the above.

53. Repetitive flight plans (RPLs) cannot be used for flights other than those executed frequently on the same days of following weeks and:

- a. for at least 20 occasions or every day over a period of at least 20 consecutive days.
- b. for at least 20 consecutive days.
- c. for at least 10 occasions or every day over a period of at least 10 consecutive days.
- d. for at least 20 occasions.

54. The VMC minima for a VFR flight within ATS airspace class B are:

- a. 8 km visibility at or above 3050 m AMSL and clear of cloud.
- b. 5 NM visibility at or above 3050 m AMSL, 1500 m horizontal and 300 m vertical clear of cloud.
- c. 8 km visibility at or above 3050 m AMSL, 1500 m horizontal and 300 m vertical clear of cloud.
- d. 5 NM visibility at or above 3050 m AMSL and clear of cloud.

55. The minimum response time for the aerodrome rescue and fire fighting services to the end of each runway as well as to any other part of the movement area is:

- a. 3 minutes and not exceeding 4 minutes.
- b. 2 minutes and not exceeding 3 minutes.
- c. 2 minutes and not exceeding 4 minutes.
- d. 3 minutes and not exceeding 5 minutes.

56. The minimum number of rescue and fire fighting vehicles required for a Cat 8 Aerodrome is:

- a. 3
- b. 4
- c. 5
- d. None of the above is correct.

57. A fixed obstacle that extends above a take-off climb surface within..... shall be marked and, if the runway is to be used at night, must be lit.

- a. 3000 m
- b. 3000 ft
- c. 5000 m
- d. 2 NM

58. A marshaller crosses his/her hands in front of the face, palms outwards and then moves the arms outwards. What does this signal indicate?

- a. Clear to move forward.
- b. Brakes off.
- c. Remove chocks.
- d. Clear to close all engines.

59. What is required for an IFR flight in advisory airspace?

- a. No flight plan required.
- b. Flight plan required and PIC must notify of any changes regardless if wanting advisory service or not.
- c. Flight plan required but PIC need not notify of any changes.
- d. A flight plan is only required if advisory service is required.

60. **What is the separation that must be maintained before intercepting the ILS on an independent parallel approach?**
- a.. 1000 ft.
 - b. 500 ft.
 - c. 330 ft.
 - d. 660 ft.
61. **A Type Rating is applicable to:**
- a. an aircraft requiring a Certificate of Airworthiness.
 - b. an aircraft with a Certificate of Airworthiness issued by the State.
 - c. an aircraft that requires multi-pilot operation.
 - d. an aircraft that requires additional skills training.
62. **If an aircraft is radar vectored to intercept an ILS localizer, what is the maximum intercept angle?**
- a. 45° .
 - b. 30° .
 - c. 15° .
 - d. 20° .
63. **What are the objectives of ATC Services?**
- a. To prevent collisions between aircraft, to prevent collisions between aircraft on the manoeuvring area and obstructions on that area and to expedite and maintain an orderly flow of air traffic.
 - b. To prevent collisions between controlled aircraft and to expedite and maintain an orderly flow of air traffic.
 - c. To provide separation of aircraft and to expedite and maintain an orderly flow of air traffic.
 - d. To provide separation of controlled aircraft and to expedite and maintain an orderly flow of air traffic.
64. **Temporary changes of long duration (3 months or more) and information of short duration which contains extensive graphics and/or text are published as AIP Supplements. Check lists of these Supplements which are in force are sent to recipients at intervals of not more than:**
- a. one year
 - b. one month
 - c. one week
 - d. 2 weeks
65. **A check list of AIP Supplements is published:**
- a. annually.
 - b. monthly.
 - c. weekly.
 - d. every six months.

66. A heavy aircraft makes a missed approach on a parallel runway in the opposite direction. A light aircraft has a wake turbulence separation of 2 minutes. This wake turbulence separation will apply when the parallel runways are:
- more than 760 m apart.
 - more than 915 m apart.
 - less than 915 m apart.
 - less than 760 m apart.
67. A TODA consists of:
- the take-off run available excluding the clearway.
 - the take-off run available including the clearway.
 - the take-off run available excluding the stopway.
 - the take-off run available only.
68. The continued validity of a C of A of an aircraft is subject to the laws of:
- the State of Registration.
 - the State of Registration and the State of the Operator.
 - the State of the Operator.
 - the State of Registry and the State of Design.
69. ATIS will only broadcast cloud base information when the cloud base is:
- 3000 ft.
 - 5000 ft.
 - when Cb are present.
 - when the cloud base is below MSA.
70. Which International Agreement relates to Penal Law?
- Tokyo.
 - Montreal.
 - Hague.
 - Rome.
71. Voice ATIS:
- cannot be broadcast on a voice ILS.
 - cannot be broadcast on voice VOR.
 - is broadcast only on a discreet VFH frequency.
 - is broadcast on either a discreet VFH, VOR or an ILS frequency.
- 1 only is correct.
 - 2 only is correct.
 - 4 only is correct.
 - 1, 2 and 3 are correct.

72. The operator is responsible for the custody and care of the passengers. This responsibility shall terminate:
- from the moment they have been cleared through customs of the destination State
 - from the moment they step from the aircraft onto the passenger exit stairs
 - from the moment they have been admitted into the destination State
 - from the moment they step from the aircraft onto the ground of the destination State
73. Fixed distance markers, when provided, shall commence:
- 150 metres from the threshold
 - 300 metres from the far end threshold
 - 300 metres from the threshold
 - 150 metres from the far end threshold
74. What is the minimum width of a code 4 runway?
- 18 m.
 - 23 m.
 - 30 m.
 - 45 m.
75. What is the width of a code letter D taxiway used by aircraft with an outer gear wheel span of more than 9 m ?
- 10.5 m.
 - 15 m.
 - 23 m.
 - 18 m.
76. What is the meaning of the signal LLL from search parties?
- We have only found some personnel.
 - We have found all personnel.
 - Operation completed.
 - Nothing found.
77. An RNP1 route designated as A342Z, indicates that the route is at or below FL190 and all turns shall be made within the allowable RNP tolerance of a tangential arc between the straight leg segments with a radius of:
- 10 NM for turns between 30° and 90°.
 - 15 NM for turns between 30° and 90°.
 - 22.5 NM for turns between 30° and 90°.
 - 30 NM for turns between 30° and 90°.
78. An RNP1 route designated as A342Y, indicates that the route is at or above FL200 and all turns shall be made within the allowable RNP tolerance of a tangential arc between the straight leg segments with a radius of:
- 10 NM for turns between 30° and 90°.
 - 15 NM for turns between 30° and 90°.
 - 22.5 NM for turns between 30° and 90°.
 - 30 NM for turns between 30° and 90°.

79. If no ICAO identifier has been attributed to an aerodrome, what should be entered in Box 16 of the Flight Plan?
- ZZZZ
 - NNNN
 - A/N
 - A/D XXX
80. Which of the following is not a valid SSR mode A squawk?
- A5555
 - A5678
 - A2345
 - A3333
81. A separation minima shall be applied between a light or medium aircraft and a heavy and between a light and a medium aircraft when the heavier aircraft is making a low or missed approach and the lighter aircraft is utilizing an opposite direction runway on a parallel runway separated by:
- less than 915 m.
 - more than 760 m.
 - less than 760 m.
 - more than 915 m.
82. A contracting state which continues to require the presentation of a cargo manifest shall, apart from the information indicated in the heading of the format of the cargo manifest, not require more than the following items:
- airway bill number, and the number of packages only.
 - total weight and the number of packages only.
 - total weight and the nature of the goods only.
 - airway bill number, the number of packages and the nature of goods.
83. Contracting states shall carry out the handling, forwarding and clearance of airmail and shall comply with the documentary procedures as prescribed by:
- the Acts in force of the Universal Postal Union.
 - the Acts in force of the General Postal Union.
 - the Acts in force of the Warsaw Convention.
 - the Acts in force of the International Postal Union.
84. Unaccompanied baggage carried by air shall be cleared under a procedure applicable to:
- accompanied baggage or under a simplified customs procedure distinct and different from that normally applicable to other cargo.
 - cargo.
 - dangerous goods.
 - mail.

85. An area symmetrical about the extended runway centre line and adjacent to the end of the strip, primarily intended to reduce the risk of damage to an aircraft undershooting or overrunning the runway is defined as a:
- clearway.
 - runway strip extension.
 - runway end safety area.
 - altimeter operating area extension.
86. For an instrument runway, how far from the centre line of the runway is a “runway vacated” sign positioned?
- To a distance of the nearest Pattern ‘A’ holding position.
 - At the end of the ILS/MLS Sensitive Area.
 - It depends on the Aerodrome Category.
 - 85 m.
87. What is required if a stop bar is not provided at a runway entrance and the runway is to be used with RVR of less than 550 m?
- Both a Pattern ‘A’ and ‘B’ holding position.
 - High intensity taxiway centreline lights only.
 - Runway guard lights.
 - Both high intensity taxiway centre line lights and high intensity taxiway edge lights.
88. Independent parallel approaches may be conducted to parallel runways provided that an NTZ of at least:
- 915 m is established between extended centre lines.
 - 760 m is established between extended centre lines.
 - 1035 m is established between extended centre lines.
 - 610 m wide is established between extended centre lines.
89. ATIS broadcasts contain cloud details whenever the:
- Cloud ceiling is below 5000 ft or the highest MSA (whichever is the higher)
 - Cloud base is below 5000 ft or the highest MSA (whichever is the higher)
 - Cloud ceiling is below 1500 ft or the highest MSA (whichever is the higher)
 - Cloud base is below 1500 ft or the highest MSA (whichever is the higher)
90. What action should be taken if contact is lost with the runway during a circling approach?
- Descend to Decision Height and if still no contact with the runway, initiate a missed approach.
 - Land on the instrument runway.
 - Initiate a missed approach.
 - Return to the FAF.
91. The State of registration is:
- The State where the aircraft is first registered
 - The State where the aircraft is currently registered
 - The State where the aircraft is finally assembled
 - The State of the owner of the aircraft

92. When an aircraft subjected to unlawful interference has landed in a Contracting State, it shall notify by the most expeditious means the State of Registry and the State of the Operator of the landing and, in addition, shall similarly transmit all other relevant information to:

- a. each State whose citizens suffered fatalities or injuries, each State whose citizens were detained as hostages, each State whose citizens were known to be on board and ICAO.
- b. ICAO only.
- c. each State whose citizens were known to be on board only.
- d. ICAO and each State whose citizens were known to be on board only.

93. According to EASA Part-FCL, recognized instructor categories are:

- a. FI(A), TRI(A), CRI(A), IRI(A) only.
- b. FI(A) and CRI(A) only.
- c. FI(A) and IRI(A) only.
- d. FI(A), TRI(A), CRI(A), IRI(A), MCCI(A) and SFI(A) only.

Note: FI = Flying Instructor, TRI = Type Rating Instructor, CRI = Class Rating Instructor, IRI = Instrument Rating Instructor, MCCI = Multi-crew Co-operation Instructor, SFI = Synthetic Fight Instructor.

94. When a State renders valid a licence issued by another Contracting State, as an alternative to issuance of its own licence, the validity shall:

- a. not extend beyond 15 days after the validity of the licence.
- b. not extend beyond the period of validity of the licence.
- c. be at the discretion of the Contracting State rendering it valid.
- d. be at the discretion of ICAO.

95. Where in the AIP would you find details on instrument holding procedures?

- a. GEN
- b. ENR
- c. AD
- d. AGA

96. In the event of a delay of a controlled flight, the flight plan shall be amended or cancelled and a new flight plan submitted should that delay be in excess of:

- a. 60 mins of estimated off-blocks time (EOBT)
- b. 30 mins of estimated off-blocks time (EOBT)
- c. 60 mins of estimated time of ETD
- d. 30 mins of estimated time of ETD

97. The International Civil Aviation Organization (ICAO) establishes:

- a. standards and recommended international practices for contracting member states.
- b. aeronautical standards adopted by all states.
- c. proposals for aeronautical regulations in the form of 18 annexes.
- d. standards and recommended practices applied without exception by all states, signatory to the Chicago convention.

98. According to Annex 7, the registration mark shall be letters, numbers or a combination of letters and numbers and shall be that assigned by:
- the State of Registry or Common Mark Registering Authority.
 - the State of Registry only.
 - the International Civil Aviation Organisation.
 - the International Telecommunication Union.
99. According to EASA Part-FCL, the privileges of the holder of an unrestricted FI(A) rating are to conduct flight instruction for the issue of a CPL(A):
- provided that the FI(A) has completed not less than 15 hours on the relevant type in the preceding 12 months.
 - provided that the FI(A) has completed at least 500 hours of flight time as a pilot of aeroplanes including at least 200 hours of flight instruction.
 - without restriction.
 - provided that the FI(A) has completed 200 hours of flight instruction.
100. According to EASA Part-FCL, an applicant for a CPL (A) who has satisfactorily followed and completed an integrated flying training course shall have completed as a pilot of aeroplanes having a certificate of airworthiness issued or accepted by an EASA Member State at least:
- 150 hours of flight time.
 - 200 hours of flight time.
 - 150 hours of flight time plus 10 hours of instrument ground time.
 - 200 hours of flight time plus 10 hours of instrument ground time.
101. If radio communication is established during an interception but communications in a common language is not possible, which phrase should be pronounced by the intercepting aircraft to request the intercepted aircraft to descend for landing?
- Let down.
 - Descend.
 - Descend for landing.
 - You land.
102. An aircraft manoeuvring in an airport's circuit receives a series of red flashes from the control tower. This signifies that the aircraft must:
- not land because the airport is not available for landing.
 - give way to another aircraft.
 - return to land and that clearance to land will be communicated in due course.
 - not land for the moment regardless of previous instructions.
103. Which action shall be taken by an aircraft in the traffic pattern of an aerodrome, experiencing radio failure to indicate difficulties which compel it to land without requiring immediate assistance?
- Switching on and off three times the landing lights.
 - The repeated switching on and off of the landing lights.
 - Switching on and off four times the navigation lights.
 - Switching on and off four times the landing lights.

104. The main factor/s that dictate/s in general the design of an instrument departure procedure is/are:

- a. the terrain surrounding the aerodrome.
- b. ATC availability and requirements.
- c. availability of navigation aids.
- d. airspace restrictions applicable and in force.

105. One of the conditions to descent below the MDA on a circling approach is:

- a. the landing runway and an alternative landing possibility (runway) are in sight.
- b. the required visual references have been established and can be maintained.
- c. the ceiling is 1500 ft or higher.
- d. the horizontal visibility is at least 5 NM and the ceiling is 1500 ft or higher.

106. If for any reasons a pilot is unable to conform to the procedures for normal conditions laid down for any particular holding pattern, he should:

- a. advise ATC as early as possible.
- b. execute a non-standard holding pattern in accordance with the performance of his aeroplane.
- c. remain within the protected area, but may deviate from the prescribed holding.
- d. follow the radio communication failure procedure.

107. The Transition Level:

- a. shall be the lowest flight level available for use above the transition altitude.
- b. shall be the highest available flight level below the transition altitude that has been established.
- c. is published for the aerodrome in the Section ENR of the AIP.
- d. is calculated and declared for an approach by the pilot-in-command.

108. When the aircraft carries a serviceable Mode C transponder, the pilot shall continuously operate this mode:

- a. only when directed by ATC.
- b. unless otherwise directed by ATC.
- c. only when the aircraft is flying within controlled airspace.
- d. regardless of ATC instructions.

109. The speed limitation for VFR flights inside ATS airspace classified as C, when flying below 3050 m (10 000 ft) AMSL, is:

- a. not applicable.
- b. 240 kt IAS.
- c. 250 kt IAS.
- d. 250 kt TAS.

- 110. The VMC minima for a VFR flight inside an ATS airspace classified as B, is:**
- a. 5 NM visibility below 3050 m (10 000 ft) AMSL, clear of clouds.
 - b. 5 NM visibility when below 3050 m (10 000 ft) AMSL, 1500 m horizontal and 300 m vertical from cloud.
 - c. 8 km visibility when at or above 3050 m (10 000 ft) AMSL and clear of clouds.
 - d. 8 km visibility when at or above 3050 m (10 000 ft) AMSL, and 1500 m horizontal and 300 m vertical from clouds.
- 111. Area Control Centres issue clearances for the purpose of:**
- a. achieving separation between IFR flights.
 - b. achieving separation between controlled flights.
 - c. providing advisory service.
 - d. providing Flight Information Service.
- 112. FIS is provided to aircraft within:**
- a. Classes A, B, C, D, E, F & G classes of airspace
 - b. Classes C, D, E, F & G classes of airspace only
 - c. Classes F & G classes of airspace only
 - d. Classes A, B, C, D & E classes of airspace only
- 113. The Vertical Separation Minimum (VSM) for flights in accordance with IFR within controlled airspace below FL290 is:**
- a. 500 ft (150 m).
 - b. 2500 ft (750 m).
 - c. 1000 ft (300 m).
 - d. 2000 ft (600 m).
- 114. The “Clearance to fly maintaining own separation while in visual meteorological conditions” may be given by the appropriate ATS authority. This has to be requested by the pilot of a controlled flight and has to be agreed by the pilot of the other aircraft.**
The conditions are:
- a. Airspace Class C, VMC, hours of daylight.
 - b. Airspace Class D and E, VMC, hours of daylight.
 - c. Airspace Class B, C, D and E, VMC.
 - d. Airspace Class C, D, VMC.
- 115. For controlled traffic that shall be separated in the vicinity of an airport, separation minima may be reduced:**
- a. if the commander of the involved aircraft so requests.
 - b. only if the air traffic controller has the involved aircraft in sight.
 - c. when the commander in the following aircraft has the preceding aircraft in sight and is able to maintain own separation.
 - d. at the discretion of the air traffic controller.

116. In order to meet the wake turbulence criteria, what minimum separation should be applied when a medium aircraft is taking off behind a heavy aircraft and both are using the same runway?
- 3 minutes.
 - 2 minutes.
 - 1 minute.
 - 4 minutes.
117. Which does ATC Term “Radar contact” signify?
- Your aircraft has been identified on the radar display and radar flight instructions will be provided until radar identification is terminated.
 - Your aircraft has been identified and you will receive separation from all aircraft while in contact with this radar facility.
 - You will be given traffic advisories until advised that the service has been terminated or that radar contact has been lost.
 - ATC is receiving your transponder and will furnish vectors and traffic advisories until you are advised that contact has been lost.
118. When the transponder appears to be unserviceable prior to departure and restore is impossible, then:
- you must indicate the failure in the flight plan, after which the ATC will endeavour to provide for continuation of the flight.
 - departure to the nearest suitable airport where repair can be effected is allowed.
 - you are not allowed to commence the flight.
 - the flight can only continue in the most direct manner.
119. The publication containing information concerning general flight safety, technical, administrative and legislative ammeters of a state is called:
- AIP
 - AIC
 - AIRAC
 - NOTAM
120. Which part of the AIP contains a list with “Location Indicators”?
- ENR.
 - GEN.
 - LOC.
 - AD.
121. Which “code letter” shall be chosen to identify a taxiway to be used by an aircraft having a wheel base of 15 m?
- Code letter “B”.
 - Code letter “C”.
 - Code letter “E”.
 - Code letter “D”.

122. In a precision approach category I lighting system, the single, two and three light sources on the centre line have a length of:
- 250 m.
 - 200 m.
 - 150 m.
 - 300 m.
123. When a person is found inadmissible and is returned to the operator for transport away from the territory of the state, the operator:
- shall not be precluded from recovering from such person any transportation costs arising from his (her) inadmissibility.
 - shall not recover from such person any transportation costs arising from his (her) inadmissibility.
 - is not responsible for the person inadmissible for entry in the receiving state.
 - the state of the operator are both responsible for the person inadmissible.
124. Who is responsible for the initiation of an accident investigation?
- The Authority of the State in which the accident took place.
 - The Operators of the same aircraft type.
 - The aircraft manufacturer.
 - The State of design and manufacturer.
125. When it becomes apparent that an aircraft is in difficulty, the decision to initiate the alert phases is the responsibility of the:
- operational air traffic control centres.
 - flight information or control organizations.
 - air traffic co-ordination services.
 - search and rescue co-ordination centres.
126. An aircraft intercepted by a military aircraft shall immediately attempt to establish radio communication with the intercepting aircraft on the following frequencies:
- 121.5 MHz, and if communications cannot be established, on 243.0 MHz.
 - 121.5 MHz, and if communications cannot be established, on 406.0 MHz.
 - 121.5 MHz, and if communications cannot be established, on 282.0 MHz.
 - 243.0 MHz, and if communications cannot be established, on 121.5 MHz.
127. What are the differences between the rules and regulations in the UIR compared with the airspace below?
- The same rules apply.
 - They are agreed by the Air Navigation Meeting.
 - They are identical to the airspace below.
 - They do not have to be identical to the airspace below.

128. What is the distance normally associated with VOR change-over points?

- a. 100 NM
- b. 75 NM
- c. 60 NM
- d. 50 NM

129. The body, which governs licensing of pilot licences or the equivalent documents, must decide if the experience of the pilot in training done on a simulator is acceptable as part of the total flying time of 1500 hours. Exemption from such experience shall be limited to a maximum of:

- a. 100 hours, of which not more than 15 hours may be done on a flight procedure trainer or a synthetic flight trainer.
- b. 75 hours, of which not more than 20 hours may be done on a flight procedure trainer or a synthetic flight trainer.
- c. 100 hours, of which not more than 20 hours may be done on a synthetic flight trainer.
- d. 100 hours, of which not more than 25 hours may be done on a flight procedure trainer or a basic instrument flight trainer.

130. A Repetitive Flight Plan may be submitted by an Operator when a flight is operated on:

- a. the same day(s) of consecutive weeks and on at least 5 occasions
- b. every day over a period of at least 5 consecutive days
- c. every day over a period of at least 5 consecutive days but not more than 10 consecutive days
- d. the same day(s) of consecutive weeks and on at least 10 occasions

131. What are the characteristics of Intermediate Holding Position lights ?

- a. A flashing red light showing in the direction of the taxiing aircraft
- b. Traffic lights showing green for "go" and red for "stop"
- c. 3 fixed unidirectional lights showing yellow
- d. 3 fixed omni-directional lights showing yellow

132. What are the characteristics of Runway Threshold Identification lights ?

- a. Flashing yellow lights unidirectional in the direction of the approach to the runway
- b. Flashing white lights unidirectional in the direction of the approach to the runway
- c. Steady omni-directional green lights augmenting the runway threshold lights
- d. Low intensity steady white lights placed between each green runway threshold light

133. Which EU directive is the equivalent of ICAO Annex 13 ?

- a. EU Directive 94/56
- b. EU Directive 95/56
- c. EU Directive 13/01
- d. EU Directive 2003/42

134. What is the speed limit for IFR flight operating in Class C airspace ?
- a. Not applicable
 - b. 250 kt IAS below 10 000 ft.
 - c. 250 kt TAS below 10 000 ft.
 - d. 250 kt CAS below 10000 ft.
135. Unaccompanied baggage:
- a. shall be treated as cargo but processed using a simplified procedure
 - b. may, in exceptional circumstances, be carried in the passenger compartment
 - c. may be kept in the transit area for a maximum of 2 days
 - d. must be capable of being opened without damage to the baggage
136. For a controlled flight, the flight plan shall be amended or cancelled and a new flight plan submitted, should there be a delay of :
- a. 1 hour in excess of EOB (off blocks time)
 - b. 30 minutes in excess of EOB (off blocks time)
 - c. In excess of 1 hour of ETD entered in the Flight Plan
 - d. In excess of 30 minutes of ETD entered in the Flight Plan
137. A VFR flight constitutes essential traffic to other VFR flights, when operating in controlled airspace classified as:
- a. B, C, D and E
 - b. B, C and D
 - c. B and C
 - d. B
138. What is RTR?
- a. Radar terminating range
 - b. Radar terminated range
 - c. Radar termination range
 - d. Radar turning radius
139. What is the HF Maritime Distress frequency?
- a. 2182 kHz
 - b. 2.121 MHz
 - c. 2125 kHz
 - d. 2430 kHz
140. Road Holding Position lights may take the form of:
- a. a flashing red light
 - b. a steady red light
 - c. a flashing yellow light
 - d. a steady yellow light
141. VOR change-over points should be every:
- a. 120 NM
 - b. 210 NM
 - c. 60 NM
 - d. 90 km

142. Who is responsible for the costs of returning deportees?

- a. The Operator
- b. The Carrier
- c. The State
- d. The Owner

143. By what method is an AIRPROX(P) first filed?

- a. By RTF by the pilot
- b. By submission of a completed AIRPROX form (APX 452) by the Operator
- c. By the fastest method by the Controller
- d. By submission of a completed AIRPROX form (APX 500) by the Operator

144. What is the minimum visibility for a VM(C) approach in the case of a category B aircraft?

- a. 1.0 NM
- b. 1.5 NM
- c. 2.0 NM
- d. 2.5 NM

145. An aircraft has a V_{S1g} of 90 kt. What is its category?

- a. B
- b. A
- c. C
- d. D

146. An aircraft has suffered severe damage to a tyre. Is this an accident?

- a. No
- b. Yes
- c. No, but ICAO must be informed
- d. It depends whether or not the aircraft was moving at the time

147. ATIS broadcasts should contain cloud details, when:

- a. they are below 2500 m.
- b. they are below 5000 ft or MSA, whichever is the higher.
- c. they are below 1000 m.
- d. they are below 1000 m or MSA, whichever is the greater.

148. The State that registers an aircraft for the first time must inform:

- a. The State of the Operator
- b. The State of Design
- c. The State of Manufacture
- d. The State of the owner

149. ICAO is to be notified of any accident or serious incident involving an aircraft with a maximum mass of:
- over 2250 kg
 - 2250 kg or more
 - over 5700 kg
 - 5700 kg or more
150. A serious injury is an injury which is sustained by a person in an accident and which :
- requires hospitalization for 48 hours or more
 - requires hospitalization for 24 hours or more
 - requires hospitalization for more than 24 hours
 - requires hospitalization for more than 48 hours

Answers

1	2	3	4	5	6	7	8	9	10	11	12
a	c	c	c	b	a	d	d	b	b	d	a

13	14	15	16	17	18	19	20	21	22	23	24
c	b	a	b	a	c	b	d	a	a	c	b

25	26	27	28	29	30	31	32	33	34	35	36
d	a	d	c	d	b	d	d	a	b	d	d

37	38	39	40	41	42	43	44	45	46	47	48
a	d	d	b	d	c	a	b	a	a	c	d

49	50	51	52	53	54	55	56	57	58	59	60
a	a	d	d	c	c	b	a	a	c	b	a

61	62	63	64	65	66	67	68	69	70	71	72
c	a	a	b	b	d	b	a	b	a	a	c

73	74	75	76	77	78	79	80	81	82	83	84
b	d	c	c	b	c	a	b	c	d	a	a

85	86	87	88	89	90	91	92	93	94	95	96
c	b	c	d	b	c	b	a	d	b	b	b

97	98	99	100	101	102	103	104	105	106	107	108
a	a	b	a	b	a	b	a	b	a	a	b

109	110	111	112	113	114	115	116	117	118	119	120
c	d	b	b	c	b	c	b	a	b	b	b

121	122	123	124	125	126	127	128	129	130	131	132
b	d	a	a	a	a	d	c	d	d	c	b

133	134	135	136	137	138	139	140	141	142	143	144
a	a	a	b	d	c	a	a	c	c	a	b

145	146	147	148	149	150
a	a	b	b	a	d

EASA Specimen Examination

1. The 'standards' contained in the annexes to the Chicago Convention are to be considered:
 - a. advice and guidance for the aviation legislation within the member states.
 - b. binding for all member states.
 - c. binding for all member states that have not notified ICAO about a national difference.
 - d. binding for all airline companies with international traffic.
2. Which of the annexes deals with the transportation of cargo?
 - a. Annex 9 - Facilitation.
 - b. Annex 18 - Transportation of Dangerous Goods.
 - c. Annex 16 - Environmental Protection.
 - d. Annex 6 - Operation of Aircraft.
3. Which ICAO body furnishes the "Standards and Recommended Practices" (SARPs) for adoption by the Council?
 - a. The Assembly.
 - b. The Regional Air Navigation Meeting.
 - c. The Council itself.
 - d. The Air Navigation Commission.
4. To what did the Tokyo convention of 1963 address itself?
 - a. Licensing of scheduled air services.
 - b. Damage caused by a contracting state's aircraft to property in the same state.
 - c. Damage caused by a contracting state's aircraft to property in another state.
 - d. Interference with an aircraft in flight.
5. It is suspected that a person on board an aircraft will commit an act that would jeopardize the safety of the aircraft; the PIC may:
 - a. request the crew to detain the passenger.
 - b. ask the passenger to disembark.
 - c. order the other passengers to detain the passenger in question.
 - d. hand him/her over to the authorities.
6. What freedom covers landing and refuelling in another state?
 - a. 1st
 - b. 2nd
 - c. 3rd
 - d. 4th
7. Which of the following is permitted in the registration mark of an aircraft?
 - a. TTT
 - b. SRA
 - c. QEE
 - d. XXX

8. Which registration is disallowed?
- a. RCC
 - b. NNN
 - c. TTT
 - d. ZZZ
9. You can use simulator hours towards the 1500 hours required for an ATPL. How are simulator hours limited?
- a. Maximum of 100, not more than 15 in a procedural flight trainer.
 - b. Maximum of 100, not more than 30 in a procedural flight trainer.
 - c. Maximum of 100, not more than 25 in a procedural flight trainer.
 - d. Maximum of 100, not more than 50 in a procedural flight trainer.
10. The holder of a pilot licence when acting as co-pilot under supervision of the PIC and performing the functions and duties of the PIC shall be entitled to be credited:
- a. with 50% of the flight time towards the total time required for a higher grade of licence.
 - b. in full, but not more than 300 hrs towards the total time require for a higher grade of licence.
 - c. the flight time in full towards the total time required for a higher grade of licence.
 - d. the flight in full toward the total time required for a higher grade of pilot licence according to the requirements of the licensing authority.
11. Can a holder of a CPL(A) fly as PIC in any non-commercial aircraft?
- a. only if the aircraft is classified for single-pilot operations
 - b. Yes
 - c. No
 - d. Only if the aircraft has only one engine
12. When you are a newly qualified flying instructor (A) you have to be supervised by a qualified flying instructor. When will supervision cease?
- a. Once you have passed a competency check.
 - b. When you have completed 100 hours instruction and sent 25 students solo.
 - c. When you have completed 100 hours instruction and sent 100 students solo.
 - d. When you have completed 100 hours solo.
13. How long would a non-EASA licence be valid for if validated for use in an EASA state?
- a. 6 months.
 - b. 12 months.
 - c. 12 months if still valid in the State of Issue.
 - d. 3 months.

14. **What is the period of validity of a PPL class 2 medical in accordance with EASA Part-MED?**
- a. 24 months until age 30, then 24 months until 50, then 12 months until 65, then 6 months thereafter.
 - b. 24 months until age 30, then 24 months until 50, then 12 months until 65.
 - c. 60 months until age 30, then 24 months until 50, then 12 months until 65, then 6 months thereafter.
 - d. 60 months until age 30, then 24 months until 50, then 12 months until 65.
15. **Which of the following requires a class rating?**
- a. multi-engine turbine.
 - b. single-pilot multi-engine turbine.
 - c. microlight with fixed wings and able to move its surfaces in three dimensions.
 - d. touring motor glider.
16. **A CPL applicant undergoing integrated flight training shall have completed:**
- a. 150 hours flight time including 10 hours instrument ground time.
 - b. 150 hours flight time.
 - c. 200 hours flight time including 10 hours instrument ground time.
 - d. 200 hours flight time.
17. **How many hours would you have to spend in a clinic or hospital before you would have to inform the authorities?**
- a. 24 hrs.
 - b. 20 days.
 - c. 12 hours.
 - d. 12 days.
18. **Which of the quadrant levels should be used when true track is 358°; variation is 3°W and deviation is 5°E?**
- a. FL75.
 - b. FL60.
 - c. FL70.
 - d. FL65.
19. **Can a holder of a CPL(A) fly as PIC in any non-commercial aeroplane?**
- a. only if the aircraft is classified for single-pilot operations
 - b. Yes
 - c. No
 - d. Only if the aircraft has only one engine
20. **What are the VMC limits for class B airspace?**
- a. Clear of cloud and in sight of the surface.
 - b. 8 km flight visibility, 1000 ft vertically and 1500 m horizontally from cloud.
 - c. 5 km flight visibility, 1000 ft vertically and 1500 m horizontally from cloud.
 - d. The same as class C.

- 21.** According to ICAO, what minimum ground visibility is required to enable a SVFR flight to take off from an aerodrome in a CTR?
- a. 1000 m.
 - b. 1500 m.
 - c. 2000 m.
 - d. 3000 m.
- 22.** In a holding pattern, turns are to be made at a:
- a. rate of turn of $3^\circ/\text{sec}$.
 - b. rate of turn of $3^\circ/\text{sec}$ or 20° bank whichever is lesser.
 - c. rate of turn of $3^\circ/\text{sec}$ or at a bank angle of 25° whichever is lesser.
 - d. bank angle of 25° .
- 23.** What is the maximum track guidance distance for a turning departure?
- a. 10 km.
 - b. 10 NM.
 - c. 25 NM.
 - d. 25 km.
- 24.** Visual circling for a class B aircraft is conducted in visibility not less than:
- a. 1500 m
 - b. 1600 m
 - c. 2800 m
 - d. 5000 m
- 25.** At what distance from the holding navigation aid must an aircraft be established at the cleared holding level or altitude?
- a. 10 NM
 - b. 5 NM
 - c. 20 NM
 - d. 15 NM
- 26.** The obstacle clearance in the primary area of an intermediate approach is:
- a. not more than 150 m.
 - b. reduces from 300 m to 150 m.
 - c. equal to or greater than 300 m.
 - d. 500 m in mountainous terrain.
- 27.** What is considered to be “established” with regards to an NDB approach?
- a. within 5° of the Final Approach Track (FAT)
 - b. within 10° of the FAT
 - c. within half-scale deflection
 - d. once the threshold is in sight

28. What is the airspeed for holding area construction for a CAT B aircraft in a hold under normal conditions at 4250 m (14 000 ft)?
- Mach 0.83.
 - 490 km/hr (265 kt).
 - 315 km/hr (170 kt).
 - 520 km/hr (280 kt).
29. For the intermediate section of a missed approach, what is the minimum obstacle clearance?
- 30 m.
 - 100 m.
 - 50 m.
 - 120 m.
30. At what distance does an SRA normally terminate?
- 2 NM.
 - 1 NM.
 - 3 NM.
 - ½ NM.
31. Taxiway side stripe marking indicates:
- non-load bearing surfaces
 - that no vehicles are to cross
 - maintenance work in progress
 - areas that can be used by the widest aircraft
32. What is the minimum obstacle clearance in the final phase of a missed approach?
- 50 m
 - 30 m
 - 300 m
 - 600 m
33. For Mode 2 parallel approach operations, what is the minimum radar separation prior to an aircraft being established on the localizer?
- 3 NM
 - 2.5 NM
 - 5 NM
 - 2 NM
34. The 45° leg of a 45°/180° procedure turn for a Cat D aircraft is:
- 1 min.
 - 1 min 15 seconds.
 - 1 min 30 seconds.
 - continued until interception of the glide slope.

35. On a precision approach (ILS), the OCH(A) is based among other standard conditions, on the vertical limits between the flight path of the wheels and the glide path antenna. For a Category A aircraft this should not be more than:
- 6 m.
 - 9 m.
 - 3 m.
 - 12 m.
36. What is the lowest OCH on a circling approach for a Cat B aircraft?
- 120 m.
 - 135 m.
 - 140 m.
 - 150 m.
37. What is the category of aircraft with a V_{S1g} of 132 knots?
- B
 - C
 - E
 - D
38. When using a DR segment to take up an ILS instrument approach, what is the maximum length of the track that may be used to intercept the localizer?
- 10 NM.
 - 5 NM.
 - 10 minutes.
 - 5 minutes.
39. What Obstacle Clearance is guaranteed at a range greater than 5 NM from the edge of the holding area of a holding pattern?
- 100 m.
 - 250 ft.
 - 300 ft.
 - none.
40. A small fire occurs in the toilet of an aircraft but is quickly extinguished by the use of extinguishing agents. This is classed as:
- an accident
 - an occurrence
 - a serious occurrence
 - an incident
41. A VFR flight in Class F airspace is:
- required to submit a flight plan and is required to carry a radio
 - required to submit a flight plan but is not required to carry a radio
 - not required to submit a flight plan but is required to carry a radio
 - not required to submit a flight plan and is not required to carry a radio

42. What is the speed limit below 10 000 ft for an IFR flight in Class D airspace?

- a. 250 kt TAS.
- b. 250 kt IAS.
- c. not applicable.
- d. 200 kt IAS.

43. What phase of the Alert Service is declared when apprehension exists?

- a. INCEFA
- b. DETRESFA
- c. EMERGFA
- d. ALERFA

44. How must an AIRPROX (P) be initially reported?

- a. By RFT (aircraft radio)
- b. Submitted to the Operator in writing as soon as possible on landing
- c. By immediately declaring a MAYDAY
- d. Included in an URGENCY message to the Company Operations

45. Prohibited, Restricted and Danger areas must be designated by:

- a. country identifier, followed by P/R/D, followed by the identifier.
- b. country identifier followed by P/R/D.
- c. P/R/D followed by the identifier.
- d. country identifier followed by numbers.

46. In which class or classes of airspace would essential traffic information be given to VFR traffic about other VFR traffic?

- a. B
- b. B,C,D,E
- c. B,C
- d. B,C,D

47. The lowest height of a CTA above ground or water is:

- a. 300 m.
- b. 150 m.
- c. 200 m.
- d. 500 m.

48. RNP (Required Navigation Performance) is:

- a. based on Regional Air Navigation Orders (RANOs).
- b. based on RANOs and applied by the state.
- c. based on RANOs and applied by the state and ICAO.
- d. based on RANOs and applied by the ICAO.

49. In what class of airspace can both IFR and VFR fly and IFR traffic only receives an advisory service for separation?
- F
 - E
 - G
 - D
50. Must a Final Report be sent to ICAO following an accident to an aircraft with an MTOM of 2250 kg?
- Yes
 - Not unless the accident has resulted in a fatality of any sort
 - No
 - Not unless the accident has resulted in a fatality of any sort and serious damage to the aircraft
51. What is the delay for a controlled flight after which a flight plan has to be re-filed?
- 30 minutes EOBT.
 - 30 minutes ETD.
 - 60 minutes EOBT.
 - 60 minutes ETD.
52. What are the contents of section 2 of an AIREP?
- Present position and ETA.
 - Estimated time over the FIR boundary and endurance.
 - Estimated elapsed time (EET) and endurance.
 - ETA and endurance.
53. If you want to descend through the level of another aircraft on the same track, the minimum separation is:
- 20 minutes.
 - 10 minutes.
 - 5 minutes.
 - 15 minute.
54. If two aircraft are using the same VOR, by what lateral distance must the aircraft be separated before one of the two may commence a climb or descent?
- 5 NM.
 - 10 NM.
 - 15 NM.
 - 20 NM.
55. What does the signal XX from a search party indicate?
- We have not found all personnel
 - We are not able to continue. Returning to base
 - Nothing found
 - Operation completed

56. What is the greatest radar wake turbulence?
- a. 2 NM
 - b. 10 NM
 - c. 5 NM
 - d. 6 NM
57. What is the maximum speed for a Category C aircraft for a departure procedure?
- a. 120 kt
 - b. 165 kt
 - c. 290 kt
 - d. 265 kt
58. Where an aeroplane is approaching to land, what is the maximum time spacing applied between that aeroplane and any other taking off in any direction?
- a. 3 minutes
 - b. 5 minutes
 - c. 10 minutes
 - d. 2 minutes
59. Which of the following statements is incorrect with regards to parallel runways operations?
- a. The maximum incept angle to the final approach track for Mode 4 operations is 30°
 - b. Regardless of the weather all approaches are to be radar monitored
 - c. Only straight-in approaches may be conducted
 - d. All aircraft must have full ILS/MLS
60. For dependent parallel approaches what is the radar separation between two aircraft on the same ILS unless wake turbulence requires a greater separation?
- a. 3 NM
 - b. 5 NM
 - c. 1 NM
 - d. 10 NM
61. What is the separation for a light aircraft taking off after a medium aircraft providing they are both using the same runway?
- a. 5 min
 - b. 3 min
 - c. 1 min
 - d. 2 min

62. Between two aircraft on the same track what is the minimum radar separation which must be provided for wake turbulence?
- 4 NM
 - 2.5 NM
 - 2 NM
 - 3 NM
63. A heavy aircraft has made a missed approach to a runway in the opposite direction to normal take-off. What is the separation required for a light aircraft taking off?
- 2 minutes
 - 3 minutes
 - 1 minute
 - 5 minutes
64. Radar separation may be applied before an aircraft taking off and a preceding departing aircraft providing the departing aircraft can be identified from the end of the runway within:
- 5 NM
 - 3 NM
 - 2 NM
 - 1 NM
65. What is the minimum radar separation for two aircraft established on the same localizer?
- 5 NM
 - 5 NM when the first a/c is 20 kt faster than the second
 - 10 NM
 - 20 NM
66. Under normal circumstances, what is the radar separation applied between aircraft at the same altitude?
- 2 NM
 - 2.5 NM
 - 3 NM
 - 5 NM
67. If radar capability permits, the minimum longitudinal separation may be reduced to:
- 5 NM
 - 4.5 NM
 - 4 NM
 - 3 NM
68. A radar controller can request an aircraft to change speed when it is on the intermediate and final approach phase, except in certain conditions specified by the proper ATS authority. The speed change must not be more than:
- ± 15 kt
 - ± 8 kt
 - ± 10 kt
 - ± 20 kt

69. The minima that must be applied to aircraft which are landing after a “heavy” or “medium” aircraft complying with wake turbulence separation on a timed approach is:
- light aircraft behind medium aircraft ; 4 minutes
 - medium aircraft behind medium aircraft ; 2 minutes
 - medium aircraft behind heavy aircraft ; 3 minutes
 - medium aircraft behind heavy aircraft ; 2 minutes
70. An integrated aeronautical information package consists of:
- AIP and amendment service, supplement to the AIP, NOTAMs, Preflight Information Bulletins (PIBs), AICs, checklists and summaries
 - AIP and amendment service,, NOTAMs, Preflight Information Bulletins (PIBs), AICs, AIRACs, checklists and summaries
 - AIP and amendment service, supplement to the AIP, NOTAMs, AIRACs, AICs, checklists and summaries
 - AIP & Supplements, AIRACs, NOTAMs and pre-flight bulletins
71. AIP supplements with extensive text and graphics cover a short period; what is a long period in this respect?
- 1 year
 - 2 months
 - 3 months
 - 6 months
72. Regarding the AIS what is the time limit for a checklist of current NOTAMs to be issued?
- 7 days
 - 14 days
 - 28 days
 - one month
73. A VASI consists of:
- two sets of three lights positioned as wingbars
 - three sets of three lights positioned as wingbars
 - two sets of two lights positioned as wingbars
 - three sets of two lights positioned as wingbars
74. Which “code letter” has to be chosen to identify a taxiway that has to be used by an aircraft with a wheel-base of 15 metres?
- Code letter E
 - Code letter C
 - Code letter B
 - Code letter D

75. Which of the following is a non-standard Aerodrome Reference Code?
- 4A
 - 3F
 - 4G
 - 2E
76. What length should the approach lighting system for a CAT II Calvert design be?
- 900 m
 - 600 m
 - 1200 m
 - 400 m
77. What information must be passed to the Commander of an aircraft with regards to Law Enforcement Officers?
- The number on board, their names and their seat locations
 - The number on board and their seat locations
 - Their names and their seat locations
 - Only their seat locations
78. Medium intensity obstacle lighting will normally consist of flashing red lights except that they may be flashing white when used:
- in conjunction with high intensity obstacle lighting
 - in conjunction with low intensity obstacle lighting
 - in conjunction with runway obstacle lighting
 - in conjunction with the approach path obstacle lighting
79. Road Holding Position lights consist of either a controllable red (stop) /green (go) light or a:
- flashing red light
 - flashing yellow light
 - flashing blue light
 - flashing green light
80. The level of rescue and fire fighting facilities is dependent upon the category of the aerodrome. What factors determine this category?
- Aeroplane reference field length, wing span and outer main gear wheel span of the largest aircraft using that aerodrome
 - The length of the longest runway and the area to be covered
 - The overall length and the fuselage width of the longest aircraft using that aerodrome
 - The length of the longest runway and total area of hard standings including access roads

81. On departure, how many copies of the following are required:
1. the Gen Dec
 2. the stores list
 3. passenger manifest.
- a. 3 of each
 - b. 2 of 1; 2 of 2; 3 of 3
 - c. 2 of 1; 1 of 2; 2 of 3
 - d. 1 of 1; 1 of 2; 2 of 3
82. Which organizations are responsible for initiating the Alerting Service and moving from phase to phase?
- a. FIC and RCC
 - b. ACC and FIC
 - c. ACC and RCC
 - d. RCC and sub-units
83. Using the visual SAR signals the symbol for “we have found all personnel” is:
- a. + +
 - b. L L L
 - c. L L
 - d. Y
84. According to Annex 17, security is defined as “a combination of measures and human resources intended to safeguard:
- a. civil aviation operations against acts of unlawful interference”
 - b. international civil aviation operations against acts of unlawful interference”
 - c. international aviation operations against acts of unlawful interference”
 - d. aviation operations against acts of unlawful interference”
85. When an aircraft has sustained damage, the aircraft must be allowed to resume its flight provided that:
- a. the state where the aircraft is registered, the state where the aircraft is designed and the state where the prototype of the aircraft is declared to be airworthy, agree that the aircraft is still airworthy
 - b. the state where the aircraft is registered is of the opinion that the sustained damage is of such a nature that the aircraft is still airworthy
 - c. the state where the aircraft is designed and the state where the prototype of the aircraft is declared to be airworthy, send a message to the state where the aircraft is registered which says that the aircraft is still airworthy
 - d. the state where the prototype of the aircraft is declared to be airworthy has informed the state where the aircraft is registered that the sustained damage is of such a nature that the aircraft is still airworthy

Answers to Specimen EASA Examination

1	2	3	4	5	6	7	8	9	10	11	12
c	a	d	d	d	b	b	c	c	c	c	b

13	14	15	16	17	18	19	20	21	22	23	24
c	c	d	b	c	c	b	d	b	c	a	c

25	26	27	28	29	30	31	32	33	34	35	36
b	b	a	c	a	a	a	a	c	b	a	d

37	38	39	40	41	42	43	44	45	46	47	48
d	a	d	c	d	b	d	a	a	a	c	b

49	50	51	52	53	54	55	56	57	58	59	60
a	c	a	d	b	c	b	d	d	b	a	a

61	62	63	64	65	66	67	68	69	70	71	72
d	a	a	a	a	d	d	d	d	a	c	d

73	74	75	76	77	78	79	80	81	82	83	84
a	b	c	a	b	a	a	c	a	b	c	b

85
b

Chapter

27

EU Regulation 216/2008

Introduction.....	549
Definitions.....	549
Applicability of EU Regulation 216/2008	550

Introduction

1. This Regulation shall apply to:

- (a) the design, production, maintenance and operation of aeronautical products, parts and appliances, as well as personnel and organisations involved in the design, production and maintenance of such products, parts and appliances;
- (b) personnel and organisations involved in the operation of aircraft.

2. This Regulation shall not apply when products, parts, appliances, personnel and organisations referred to in paragraph 1 are engaged in military, customs, police, or similar services. The Member States shall undertake to ensure that such services have due regard as far as practicable to the objectives of this Regulation.

Definitions

Definitions

For the purposes of this Regulation:

'continuing oversight' shall mean the tasks to be conducted to verify that the conditions under which a certificate has been granted continue to be fulfilled at any time during its period of validity, as well as the taking of any safeguard measure.

'Chicago Convention' shall mean the Convention on International Civil Aviation and its Annexes, signed in Chicago on 7 December 1944.

'certification' shall mean any form of recognition that a product, part or appliance, organisation or person complies with the applicable requirements including the provisions of this Regulation and its implementing rules, as well as the issuance of the relevant certificate attesting such compliance.

'certificate' shall mean any approval, licence or other document issued as the result of certification.

'operator' shall mean any legal or natural person, operating or proposing to operate one or more aircraft.

'commercial operation' shall mean any operation of an aircraft, in return for remuneration or other valuable consideration, which is available to the public or, when not made available to the public, which is performed under a contract between an operator and a customer, where the latter has no control over the operator.

'complex motor-powered aircraft' shall mean:

(i) an aeroplane:

- with a maximum certificated take-off mass exceeding 5700 kg, or
- certificated for a maximum passenger seating configuration of more than nineteen, or
- certificated for operation with a minimum crew of at least two pilots, or

- equipped with (a) turbojet engine(s) or more than one turboprop engine, or

(ii) a helicopter certificated:

- for a maximum take-off mass exceeding 3175 kg,

or

- for a maximum passenger seating configuration of more than nine, or

- for operation with a minimum crew of at least two pilots,

or

(iii) tilt rotor aircraft

'flight simulation training device' shall mean any type of device in which flight conditions are simulated on the ground; they include flight simulators, flight training devices, flight and navigation procedures trainers and basic instrument training devices.

'rating' shall mean a statement entered on a licence, setting forth privileges, special conditions or limitations pertaining thereto.

Applicability of EU Regulation 216/2008

Article 4: Basic Principles and Applicability

1. Aircraft, including any installed product, part and appliance, which are:

(a) designed or manufactured by an organisation for which the Agency or a Member State ensures safety oversight.

or

(b) registered in a Member State, unless their regulatory safety oversight has been delegated to a third country and they are not used by a Community operator.

or

(c) registered in a third country and used by an operator for which any Member State ensures oversight of operations or used into, within or out of the Community by an operator established or residing in the Community.

or

(d) registered in a third country, or registered in a Member State which has delegated their regulatory safety oversight to a third country, and used by a third-country operator into, within or out of the Community

shall comply with this Regulation.

2. Personnel involved in the operations of aircraft referred to in paragraph 1(b), (c) or (d) shall comply with this Regulation.

3. Operations of aircraft referred to in paragraph 1(b), (c) or (d) shall comply with this Regulation.

4. Paragraph 1 shall not apply to aircraft referred to in Annex II (see below).
5. Paragraphs 2 and 3 shall not apply to aircraft referred to in Annex II (see below), with the exception of aircraft referred to in points (a)(ii), (d) and (h) thereof when used for commercial air transportation.
6. This Regulation shall not affect the rights of third countries as specified in international conventions, in particular the Chicago Convention.

Annex II of EU Regulation 216/2008

Article 4(1), (2) and (3) do not apply to aircraft falling in one or more of the categories set out below:

(a) historic aircraft meeting the criteria below:

(i) non-complex aircraft whose:

- initial design was established before 1 January 1955,

and

- production has been stopped before 1 January 1975.

or

(ii) aircraft having a clear historical relevance, related to:

- a participation in a noteworthy historical event.

or

- a major step in the development of aviation.

or

- a major role played into the armed forces of a Member State;

(b) aircraft specifically designed or modified for research, experimental or scientific purposes, and likely to be produced in very limited numbers;

(c) aircraft of which at least 51 % is built by an amateur, or a non-profit making association of amateurs, for their own purposes and without any commercial objective;

(d) aircraft that have been in the service of military forces, unless the aircraft is of a type for which a design standard has been adopted by the Agency.

(e) aeroplanes, helicopters and powered parachutes having no more than two seats, a maximum take-off mass (MTOM), as recorded by the Member States, of no more than:

- (i) 300 kg for a land plane/helicopter, single-seater.

or

- (ii) 450 kg for a land plane/helicopter, two-seater.

or

(iii) 330 kg for an amphibian or floatplane/helicopter single-seater;

or

(iv) 495 kg for an amphibian or floatplane/helicopter two-seater, provided that, where operating both as a floatplane/helicopter and as a land plane/helicopter, it falls below both MTOM limits, as appropriate.

(v) 472.5 kg for a land plane, two-seater equipped with an airframe mounted total recovery parachute system.

(vi) 315 kg for a land plane single-seater equipped with an airframe mounted total recovery parachute system;

and, for aeroplanes, having the stall speed or the minimum steady flight speed in landing configuration not exceeding 35 knots calibrated air speed (CAS);

(f) Single and two-seater gyroplanes with a maximum take off mass not exceeding 560 kg.

(g) Gliders with a maximum empty mass, of no more than 80 kg when singleseater or 100 kg when two-seater, including those which are foot launched.

(h) Replicas of aircraft meeting the criteria of (a) or (d) above, for which the structural design is similar to the original aircraft.

(i) Unmanned aircraft with an operating mass of no more than 150 kg.

(j) any other aircraft which has a maximum empty mass, including fuel, of no more than 70 kg

Chapter
28
Index

Symbols

45°/180° Procedure Turn	189	Annex 2	31
80°/260° Procedure Turn	190	Annex 3	31
A			
A/7500	256	Annex 4	31
A/7600	256	Annex 5	31
A/7700	256	Annex 6	31
Advisory Airspace	268	Annex 7	31
Advisory Service	347	Annex 8	31
Aerodrome Beacon	428	Annex 9	31
Aerodrome Control Service	281	Annex 10	31
Aerodrome obstacles	449	Annex 11	31
Aerodrome Reference Code	378	Annex 12	31
Aerodrome Reference Field Length	379	Annex 13	31
Aerodrome Reference Point	382	Annex 14	31
Aeronautical Beacons	428	Annex 15	31
Aeronautical Information Circulars (AICs) ... 360		Annex 16	31
Aeronautical Information Publication (AIP).. 360		Annex 17	31
Aeronautical Part	378	Annex 18	31
Aeroplane Search Procedure Checklist	486	Applicable Law	24
AIP Amendments	362	Approach Control Service	281
AIP Supplements	360	Approach Lighting Systems	428
AIRAC	362	Apron	378
Airborne Collision Avoidance System (ACAS)	257	Apron Management Service	455
Aircraft Lights	110	Apron Safety Lines	407
Aircraft Markings	62	Area Control Centre (ACC)	265
Aircraft Proximity Reports (AIRPROX)	289	ARP	382
Aircraft Stand Markings	410	Arrival Segments	179
AIREP	289	Article 37	463
AIREP SPECIAL	289	Article 38	26
AIRMET	285	ASDA	383
Air Navigation Commission	30	ASHTAM	366
Airport Design	484	Assembly	29
AIRPROX	289	ATC Clearance	114
Air-side	378	ATC Clearances	282
Air Traffic Advisory Service	347	ATCU	268
Air Traffic Control Service	281	ATIS	286
Air Traffic Flow Management (ATFM)	284	Authority of the Commander	34
Air Traffic Incident Reports (ATIR)	289	Automatic Dependent Surveillance (ADS)	288
Air Traffic Services (ATS)	281	Automatic Terminal Information Service Broadcasts (ATIS)	286
AIS	359	B	
ALERFA	288	Barrettes	428
Alert Phase	288	Base Turn	191
Altimeter Accuracy	234	Bermuda Agreement	33
Altimeter Setting Procedures	229	Bilateral Agreements	25
Altitude	106	Buffer Zone	222
Annex 1	31	C	
Cabotage			
Calculation of DA/H			

Calculation of MDA/H	187	Deportees	485
Calvert System	428	Deportees and Persons in Custody	485
Cargo Manifest.....	465	Descent Gradient	188
Carriage of Weapons	487	Detention on the Ground	485
Categories of Aircraft.....	175	DETRESFA	288
Certificate of Airworthiness	55	Direct Entry.....	220
Certification of Registration	62	Distress and Urgency Signals	129
Changing from IFR to VFR	125	Distress Phase	288
Chicago Convention.....	23	Document 4444	281
Circling	177	Documents to be Carried in Aircraft.....	26
Circling Guidance Lights	439	DR Segment	183
Classes of Airspace	268		
Clearances.....	115		
Clearance to Maintain Own Separation in VMC	301	EASA	38
Clearways	387	ECAC	37
Closed Runways and Taxiways	453	EET	125
C M C	466	Emergency Descent	348
C of A	55	Emergency Frequencies	477
Combination Signs	416	Emergency Lights.....	427
Commercial Freedoms	32	Emergency Phase	473
Commissions and Committees	29	Emergency Vehicles	284, 451
Common Mark	62	En Route Obstacles.....	453
Common Mark Registering Authority ..	62	Entry Sectors	219
Communications Failure	117	Essential Local Traffic	317
Communication with Survivors	475	Essential Traffic Information	299
Composite Separation	299	EU Regulations Passenger Rights.....	39
Condition of the Movement Area.....	383	European Aviation Safety Agency	38
Constant Approach Slope	185	European Civil Aviation Conference	37
Continuing Airworthiness	56	Expected Approach Time (EAT)	320, 345
Control Areas and Zones	267		
Control Areas (CTAs)	265	F	
Controlled Airspace (CAS)	268	Facilitation	25
Control of Persons and Vehicles at Aero- dromes	284	FAF	184
Control Zones (CTRs)	265	FAP	184
Co-ordinated Universal Time	114	Final Segment	179
Corrosion Control	56	Fire Stations	455
Council.....	29	Fixed Distance Markers	420
Crew Members' Certificates	466	Fixes and Fix Accuracy	180
Crossing Track	304	Flight Information Centre	265
Cruising Levels.....	106	Flight Information Regions (FIR)	265
Custody and Care of Passengers.....	467	Flight Information Service (FIS)	268
Customs and Excise	25	Flight Information Service Officers (FISOs) ..	285
D		Flight Levels	106
Danger Area	130	Flight Strips.....	333
Dangerous Cargo	28	Freedoms of the Air	25
Declared Distances.....	382	Fuel Jettison	348
Delays	318		
Delays of Flight Plans	114	G	
		General Declaration.....	463
		General Rules	105

Geneva Convention	39	Isolated Aircraft Parking Position	393
Geographical Separation.....	302		
Ground-Air Visual Signal Code	476		
Ground Control	282	L	
Ground Servicing to Aircraft	456	Land After Clearance	340
		Landing Direction Indicator	401
H		Lateral Separation	302
Hague Convention	33	Law Enforcement Officers.....	484
High Intensity Lights	452	LDA	383
High Seas	24	Least-risk Bomb	487
Holding Area	222	Level Occupancy.....	258
Holding Bays.....	391	Lighting of Aircraft.....	452
Holding Procedures	217	Location Signs.....	414
Horizontal Separation	301	Longitudinal Separation	303
I		Lowest Useable Flight Level.....	229
IATA.....	37	Low Intensity Lights	452
ICAO	23	Low Visibility Operations	284
ICAO Precision Approach CAT I Lighting System.....	431	M	
ICAO Secretariat.....	30	Mach Meter.....	56
Identification Beacon	428	Mach Number Technique	308
IFR.....	103	Mandatory Information Marking	411
Illumination of Signs	417	Mandatory Instruction Signs	412
ILS	177	Manifests	465
Inadmissible Persons	487	Manoeuvring Area	378
Inadvertent Changes	115	Markers.....	418
INCEFA	288	Marking of Droppable Supplies	477
Incident.....	498	Marshalling Signals	139
Information for Arriving Aircraft	345	Medium Intensity Lights	452
Information for Departing Aircraft	342	MEHT	436
Information Signs	414	Minimum Eye Height	436
Initial Segment.....	179	Minimum Flight Altitudes	234
Instrument Departure Procedures.....	161	Minimum Sector Altitude.....	166
Instrument Runway.....	385	Missed Approach Procedure	179
Integrated Aeronautical Information Package	360	MOC	179
Interception of Civil Aircraft	118	Mode 1: Independent Parallel Approaches	241
Interception Phraseology.....	120	Mode 2: Dependent Parallel Approaches	242
Intermediate Holding Position Lights	441	Mode 3: Simultaneous Instrument Departures	244
Intermediate Holding Position Marking.	410	Mode 4: Segregated Departures/Arrivals	245
Intermediate Segment.....	179	Montreal Convention	33
International Airports.....	377	Mountainous Terrain	162
International Air Services Transit Agreement.	25	Movement Area.....	378
International Air Transport Agreement	25	MSA	166
International Air Transport Association	37	N	
International Civil Aviation Organisation .	23	Nationality Mark.....	61
International Conference on Civil Aviation	23	NDB	177
Intoxicating Liquor, Narcotics or Drugs .	105	Non-load-Bearing Surfaces.....	453
Investigation	498	Non-precision.....	177
		Non-scheduled flights	25

Normal Operating Zone (NOZ)	246
NOTAM	360
NOTAM Checklists	363
No Transgression Zone (NTZ)	246
O	
Obstacle Clearance.	160
Obstacle Identification Surfaces	449
OCA/H	185
Oceanic Control Areas (OCAs)	266
Offset Entry	220
OFIS	286
OIS.	449
Omni-directional Departures.	165
Open FIR	265
Outer Main Gear Wheel Span.	379
P	
PANS	31
PANS ATM	281
PAPI	435
PAR	337
Parallel Entry.	219
Paris Convention	61
Passenger Baggage	465
Passengers	485
Pavement Strengths.	382
PDG	162
Persons in Custody	485
Photographic Apparatus.	27
PIBs.	360
Position Reports.	116
Potentially Disruptive Passengers.	485
Precision Approach	176
Precision Approach Category II/III Lighting System.	432
Precision Approach CAT I Lighting System.	430
Precision Approach Path Indicators (PAPI)	434
Pre-flight Altimeter Check Location	382
Procedural Separation	333
Procedure Turn.	189
Prohibited Area	130
Prohibited Objects	484
Prohibited, Restricted and Danger Areas	266
Prohibition of VFR Flight	124
Proximity and Right of Way	107
Pyroclastic Ash Plume/Cloud.	367

Q	
QDM	404
QFE	229
QNE	230
QNH	229
R	
Racetrack Procedure	192
Radar Identification	335
Radar Separation Standard	311
Radar Services.	334
Radar Vectoring	336
Radar Vectoring Area (RVA)	336
Radar Wake Turbulence Separation	316
Radio Altimeter Operating Area.	388
RAN	30
Rapid Exit Taxiways	389
RCC.	473
Reduced Radar Separation.	311
Regional Air Navigation	30
Regional Supplementary Procedures	32
Registration Mark.	61
Repetitive Flight Plan (RPL)	114
Required Navigation Performance (RNP)	270
Rescue and Fire Fighting.	454
Rescue Co-ordination Centre	473
Resolution Advisories (RAs)	257
Responses by Intercepted Aircraft.	122
Response Time	455
Restricted, Prohibited or Danger Areas	130
RFF	454
Right of Way	107
RNAV	167, 197
RNAV Approach Procedures	197
Road-holding Position	393
Road-holding Position Lights.	441
Road-holding Position Signs	417
Rome Convention.	36
Route Designators	271
Rules of the Air.	103
Runway Centre Line Lights	438
Runway Centre Line Marking	404
Runway Designation Marking.	403
Runway Edge Lights.	438
Runway End Lights.	438
Runway End Safety Area (RESA).	386
Runway Guard Lights.	441
Runway Holding Position Marking	408
Runway Holding Positions	391
Runway Lead-in Lights	439
Runway Markings.	402

Runways	385	State of Design	498		
Runway Side Stripe Marking	407	State of Manufacture	55		
Runway Strips	386	State of Occurrence	498		
Runway Surface Description	366	State of Registry	56		
Runway Threshold and Wing Bar Lights	438	Step-down Fix	184		
Runway Threshold Identification Lights	438	Stop Bars	441		
Runway Touchdown Zone Lights	438	Stopway Lights	439		
Runway Vacated Sign	415	Stopways	387		
RVSM	127, 128	Stores List	466		
S					
Safety of Passengers and Crew	485	Straight Departure	163		
SARPs	27	Straight-in Approach	179		
SAR Regions	473	Strayed and Unidentified Aircraft	348		
SAR Signals	476	Structural Integrity Programme	56		
Scheduled Flight	25	SVFR	128		
Search and Rescue	26	System Minima	177		
Searching of Aircraft	28	T			
Secondary Surveillance Radar (SSR)	255	Taxiway Centre Line Lights	441		
Sector 1 (Parallel Entry)	219	Taxiway Centre Line Marking	408		
Sector 2 (Offset Entry)	220	Taxiway Curves	391		
Sector 3 (Direct Entry)	220	Taxiway Designators	417		
Security	483	Taxiway Edge Lighting	439		
Semi-circular Flight Rules	127	Taxiways	388		
Separation Minima	311	Technical Freedoms	32		
Serious Incident	498	Territorial Airspace	24		
Serious Injury	498	Territory	24		
Shuttle	221	The Chicago Convention	23		
SIGMET	285	Threshold Marking	404		
Signal Area	402	Time	114		
Signalling Lamp	401	Time Based Longitudinal Separation	304		
Signals Area	134	Timed Approaches	345		
Signals by Intercepting Aircraft	122	TODA	383		
Signals for Aerodrome Traffic	131	Tokyo Convention	33		
Simple Approach Lighting System	429	T O R A	382		
Simulated IMC	111	Touchdown Zone Marking	406		
Simultaneous Parallel Instrument Approaches	241	Track Reversal and Racetracks	189		
Single European Sky (SES)	39	Track Separation	302		
S N O W C L O	365	Traffic Advisories (TAs)	257		
SNOWTAM	364	Transition	231		
Special VFR	128	Transition Altitude	231		
Speed Control	343	Transition Layer	232		
Speed Limit	268	Transition Level	232		
Squawk Ident	255	Transit Passengers	467		
SRA	338	Transponder Failure	256		
S S R	129	Transverse Stripe	405		
Stabilised Approach	185	Turning Departure	164		
Stacking	320	U			
Standards and Recommended Practices	23	Unaccompanied Baggage	466		
Stand Markings	410	Uncertainty Phase	288		
		Unlawful Interference	118		

Unruly Passengers	487
Upper Information Regions (UIRs)	265
UTC	114

V

VASI. Standard Visual Approach Slope Indicator.....	436
Verification of Special SSR Codes	488
Vertical Separation During Ascent or Descent	301
Vertical Separation Minima.....	299
VFR Flight Levels	124
Visual Approach	177
Visual Ground Signals	133
Visual Manoeuvring	177
Visual Manoeuvring (Circling) Area	209
Visual Manoeuvring (Circling) (VM(C)) .	209
Visual Runway	384
Visual Separation.....	316
VMC Criteria	105
Voice - ATIS.....	286
Volcanic Eruption	367
VOR	177

W

Wake Turbulence Categories	312
Warsaw Convention.....	35
Wheel Braking on Wet Runways	365
Width of Runways	385
Width of Taxiways.....	390
Wind Direction Indicator	401