




SCHEDULE \ LEGEND

KEY	ITEM DESCRIPTION	SIZE	ROUGH OPENING
SC	36" X 80" STEELCRAFT DOOR W/ 6x27PANE	36X80	40 1/2" X 82"
RO	36" X 80" ROUGH OPENING	36X80	40 1/2" X 82"
M	36" X 80" MOHAWK HOLLOW CORE DOOR	36X80	37 1/4" X 81"
H2	24"x52" AWT. V.S. BRONZE/CLEAR WINDOW (DIG) LOW E W/ MINIBLINDS	24X52	24" X 52" UP 28"

 = SHEARWALL (3/8" SMARTPANEL)

SW = SHEARWALL (3/8" SMARTPANEL)

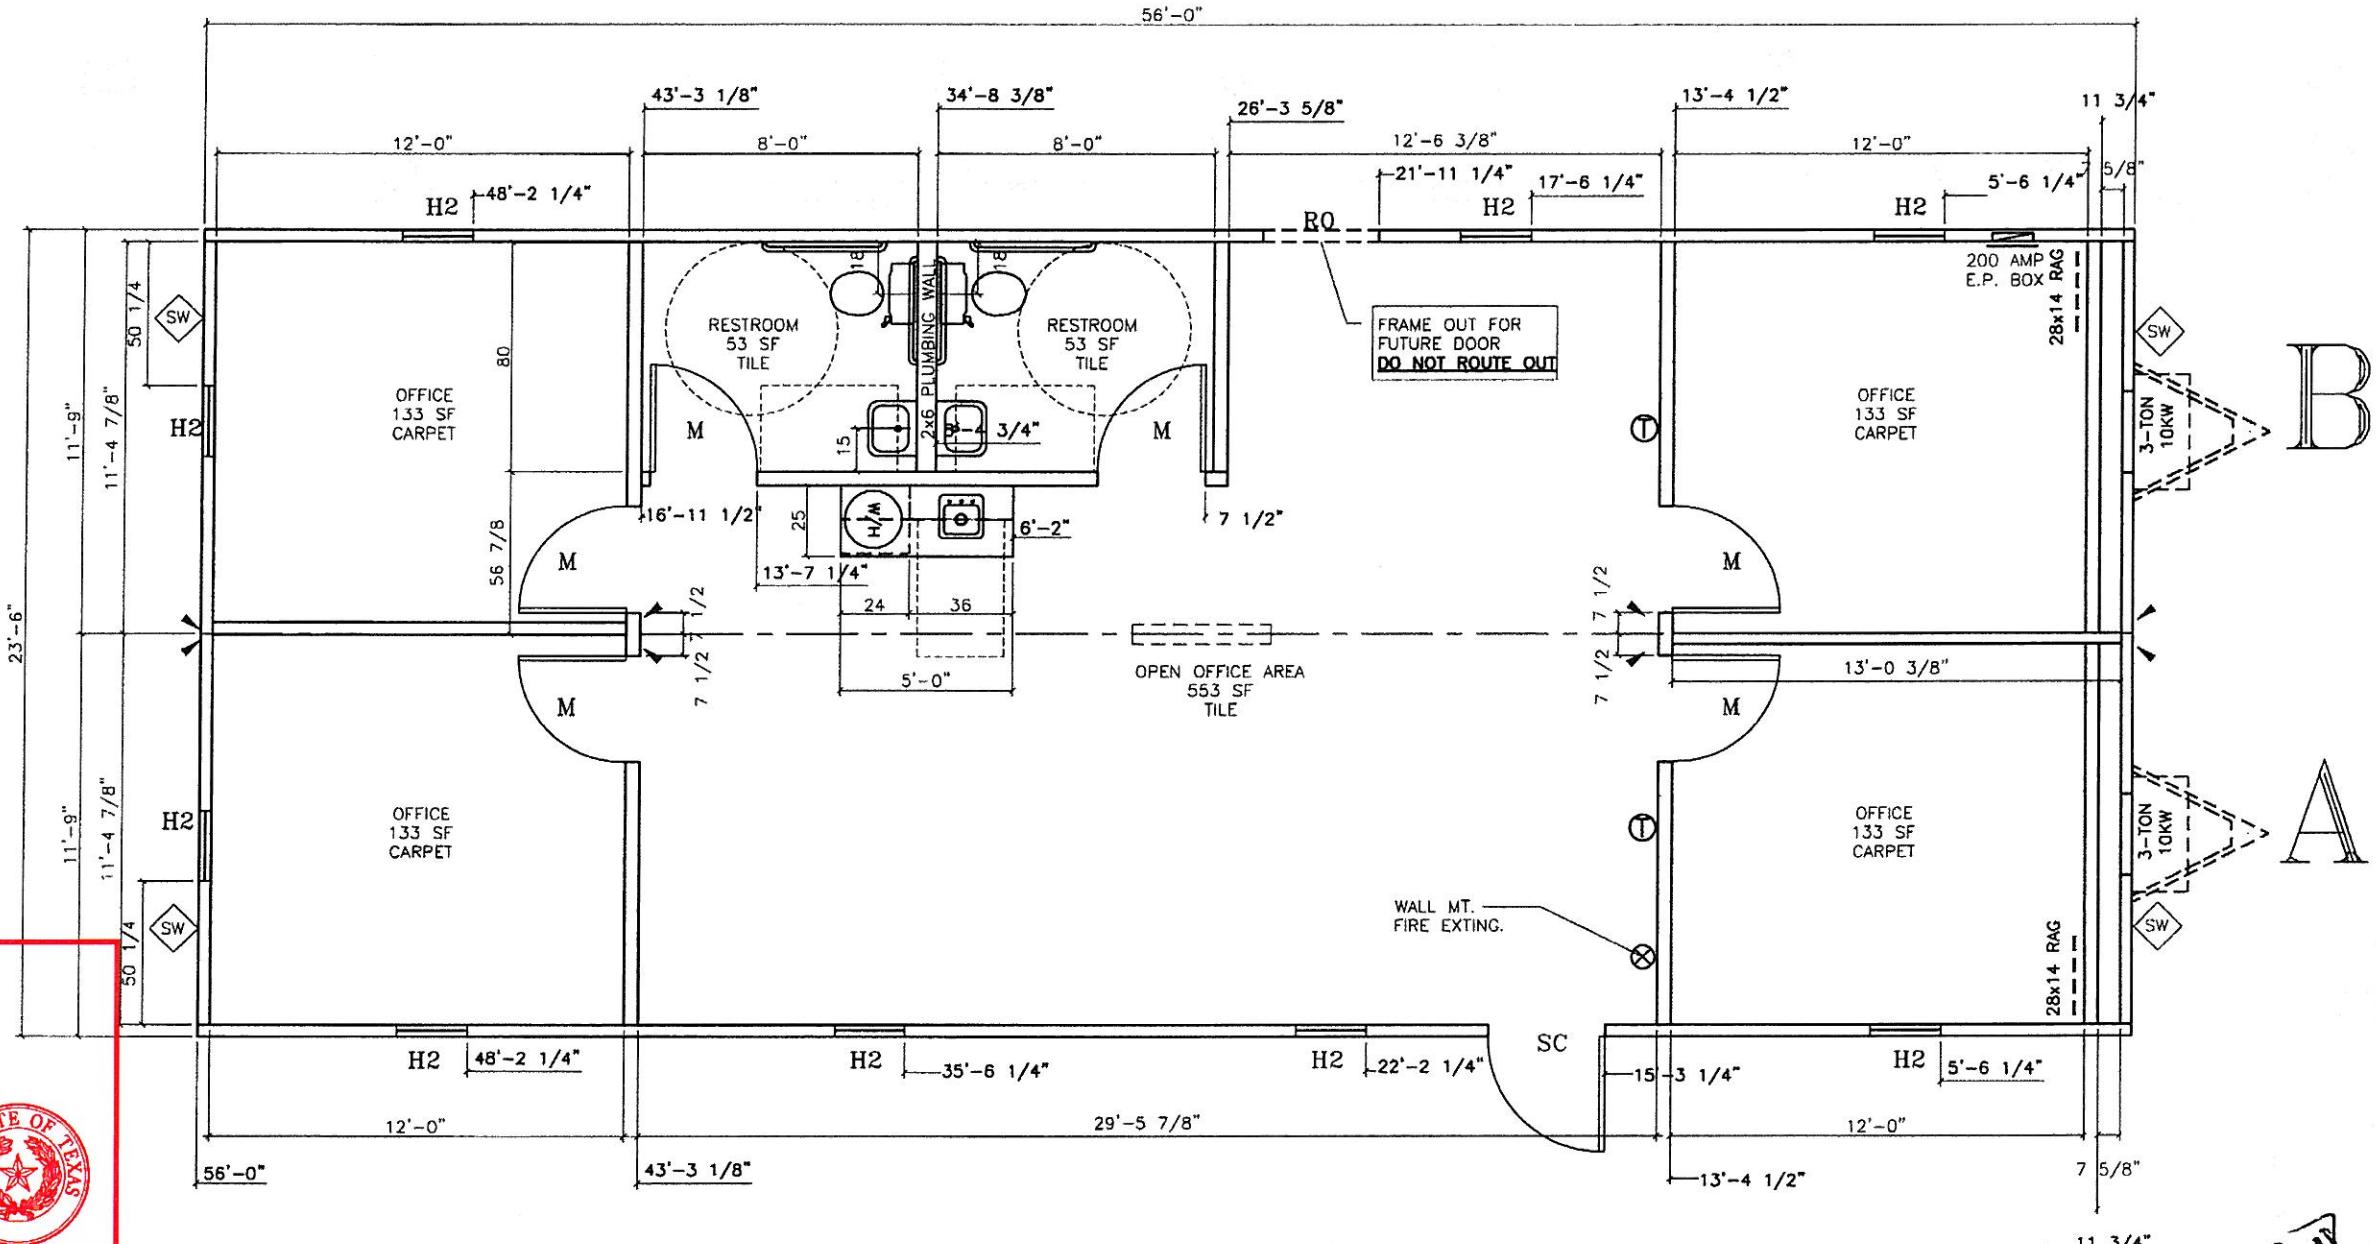

NOTE:
ALL FRAMED OPENINGS REQUIRE
TWO EACH KING STUDS ON EACH
SIDE OF OPENING

► = MINIMUM 3-2x4 STUD SYP No. 2 COLUMNS WITH MIN.
2-20ga x 1 1/4" STRAPS FASTENED WITH MINIMUM
8-EACH No 8 SCREWS EACH END OF EACH STRAP.

INTERIOR COLUMNS WITH 3-EACH 20gax1 1/4" STRAP
WITH 8-EACH No. 8 SCREWS EACH END OF EACH
STRAP.

JOSEPH W. STEEDE, JR.

19689

REGISTERED PROFESSIONAL ENGINEER

LTR	REVISION	BY	DATE	DRAWN BY: R.C.	PROJECT: NORTEX MODULAR SPACE LEWISVILLE, TEXAS	TITLE: FLOOR PLAN	JOE STEEDE, P.E. 13999 GOLDFMARK, SUITE 374 DALLAS, TX 75250 PHONE: (972) 238-1611
				DATE: 9/16/08	SCALE: 3/16" = 1'-0"	DWG. NO. N2460-15	SHEET A-2
							AMTEX CO. 832 EAST WALNUT GARLAND, TX 75040 (972) 276-7626 FAX: (972) 276-5105