
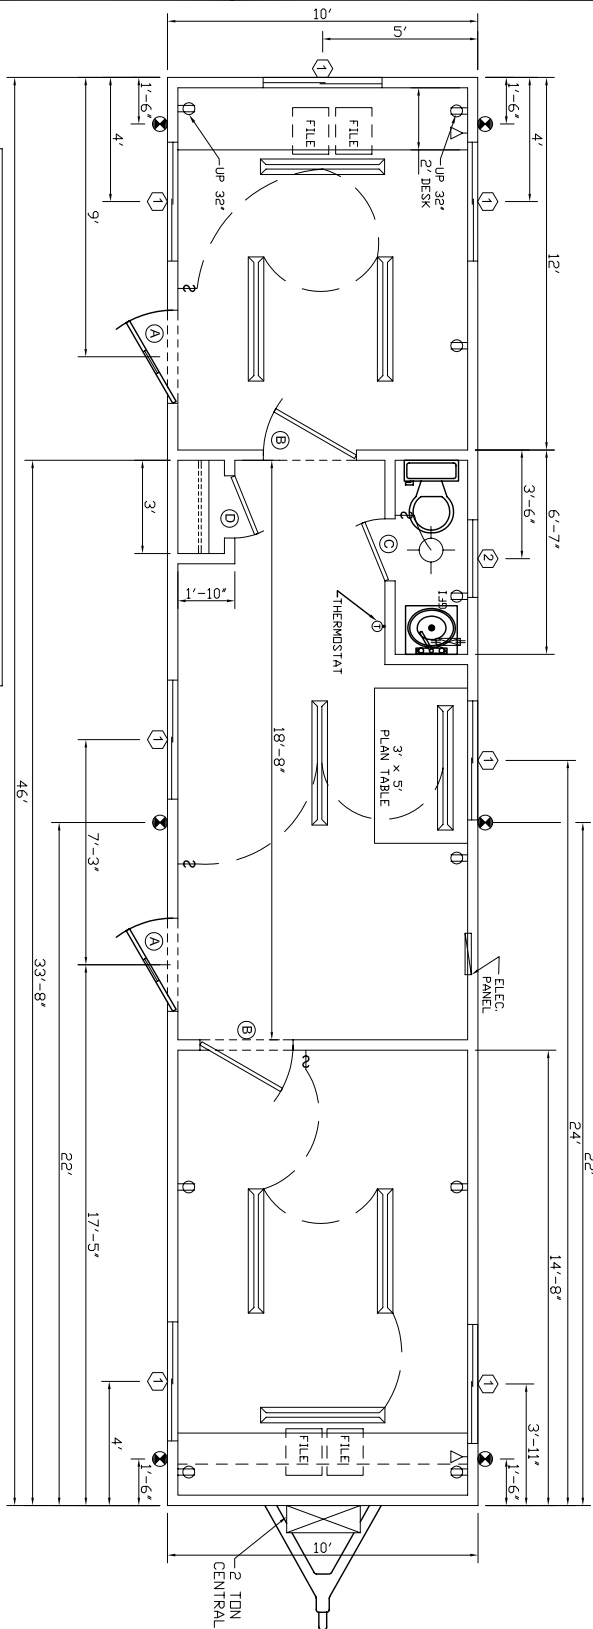










NOTES:

- 1: INSTALL 10 x10 LITE, ENTRY LOCKSET
AND DEAD BOLT IN DOOR
- 2:  INDICATES TIE DOWN LOCATION (4 PLACES)



SYMBOL LEGEND FOR ELECTRICAL

-  = 64-WATT FLUORESCENT 2-TUBE, DIFFUSED LIGHT
-  = 110V DUPLEX RECEPTACLE
-  = 110V GFI DUPLEX RECEPTACLE
-  = 125 AMP BREAKER BOX
-  = INTERIOR LIGHTS SWITCHES
-  = PHONE "J" BOX
-  = GLOBE LIGHT
-  = 9.5 KW INLINE WATER HEATER

DOOR SCHEDULE			
MARK	SIZE	DISCRIPTION	HARDWARE
A	36 x 80	TELL SERIES	SEE NOTE #1
B	36 x 80	PREFIN. H. C.	PRIVACY
C	26 x 80	PREFIN. H. C.	PRIVACY
D	26 x 80	PREFIN. H. C.	PASSAGE

WINDOW SCHEDULE	
MARK	SIZE
1	46 x 27
2	14 x 27

GENERAL SHELTERS OF TEXAS, INC.



Serving The Southwest
"Exclusively Through Independent Dealers"

TITLE: FLOOR PLAN

CUSTOMER: NORTEX

PROJECT: 10' x 46' MOBILE OFFICE

JOB NO. 051908

SHEET FP-1

DATE: 5/19/08

SCALE: NONE

10' x 46' MOBILE OFFICE

SPECIFICATIONS

BOX SIZE: 10' x 46'
TYPE: MOBILE BOWSTRING

FRAME:

TYPE: OUTRIGGER
BEAM: 10"
HITCH: STANDARD
AXLES: 2
TIRES: (4) 8-PLY

FLOOR:

BOTTOM BOARD: ROLL
INSULATION: R11 KRAFT FACED FIBERGLASS
JOISTS: 2x6 #3 SYP @ 16" O.C.
DECKING: 3/4" TONGUE & GROOVE PLYWOOD
COVERING: 1/8" TILE (ARMSTRONG COOL WHITE)
SKID: NONE

EXTERIOR WALLS:

STUDS: 2x4 STUD GRADE (SYP) @ 16" O.C. (8'-0" WALL HT)
BOTTOM PLATE: 2x4 SINGLE BOTTOM PLATE
TOP PLATE: 2x4 DOUBLE TOP PLATE
COVERING: 1/4" PANELING (HAMPTON GRAY VINYL)
SHEATING: NONE
INSULATION: R11 KRAFT FACED FIBERGLASS
SIDING: 29 GA. PAINTED GALV. STEEL (LT. STONE)
TRIM: 26 GA. PAINTED GALV. STEEL (EVERGREEN)

INTERIOR WALLS:

STUDS: 2x4 STUD GRADE (SYP) @ 16" O.C. (8'-0" WALL HT.)
COVERING: 1/4" PANELING (HAMPTON GRAY VINYL)
INSULATION: NONE
CLOSETS: 3'

ROOF:

RAFTERS: BOW STRING TRUSS @ 24" O.C.
CEILING: 5/16" TEXTURED GYPSUM
INSULATION: R-19 KRAFT FACED FIBERGLASS
SHEATING: 3/8" O.S.B. SHINEY SIDE DOWN
ROOFING: .045 EPDM RUBBER
MANSARD: NONE
TIE DOWN: (3) PER SIDE

DOORS:

EXTERIOR DOORS: (2) 36" x 80" TELL DOOR W/ ENTRY LOCKSET,
DEADBOLT & 10"x10" WINDOW,
INTERIOR DOORS: (2) 36" x 80" PREFIN. H.C. DOOR W/ PRIVACY LOCKSET
(1) 26" x 80" PREFIN. H.C. DOOR W/ PRIVACY LOCKSET
(1) 26" x 80" PREFIN. H.C. DOOR W/ PASSAGE LOCKSET

WINDOWS:

WINDOW 1: (7) 46x27 H.S. CLEAR GLASS (SINGLE STRENGTH)
W/ MINI-BLINDS
WINDOW 2: (1) 14x27 V.S. OBSCURE GLASS (SINGLE STRENGTH)

ELECTRICAL:

LOAD PANEL: (1) 125-AMP SINGLE-PHASE W/ 1-1/2" EMT THRU FLOOR
RACEWAY: CONCEALED ROMEX (#14 WIRE MINIMUM)
LIGHTS: (8) DIFUSED 4' FLUORESCENT 2-BULBSTRIIP,
(1) GLOBE LIGHT
RECEPTACLES: (8) 110-VOLT 15-AMP DUPLEX,
GFI RECEPTACLES: (1) 110-VOLT GFI 15-AMP DUPLEX
MISCELLANEOUS: (2) EMPTY J-BOX

PLUMBING:

WATER CLOSETS: (1) TANK TYPE
MODESTY PARTITION: NONE
URINAL: NONE
LAVATORY: (1) 19"x17" VANITY CABINET
WATER HEATER: (1) 9.5 KW INLINE
SHOWER: NONE
DWV: PVC W/ (1) 1 1/2" SEWER VENT
ACCESSORIES: (1) MIRROR
MISSCELLANEOUS: ALL DRAIN LINES CONNECTED

HVAC:

A/C - HEATING: (1) 2 TON CENTRAL
DUCT: FIBERGLASS CEILING
DIFFUSERS: (4) 8'x10" 3-WAY
RETURNS: AT UNIT
EXHAUST FANS: NONE

MISC:

DESK: (2) 24" x 120" COUNTER TOP (TERRA ROCCA)
(1) PLAN TABLE
MISC.: (4) FILE CABINETS
(1) 12" SHELFs x 120"

GENERAL SHELTERS OF TEXAS, INC.



TITLE: SPECIFICATIONS

CUSTOMER: NORTEX

PROJECT: 10' x 46' MOBILE OFFICE

JOB NO. 051908

SHEET SS-2

DATE: 5/22/08

SCALE: NONE