
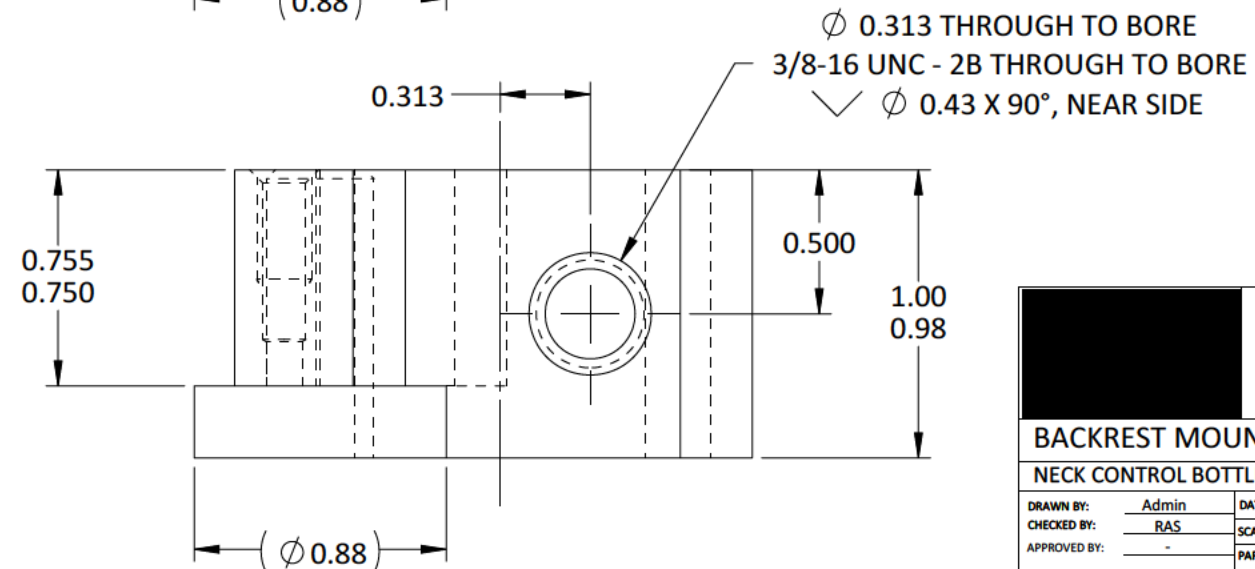
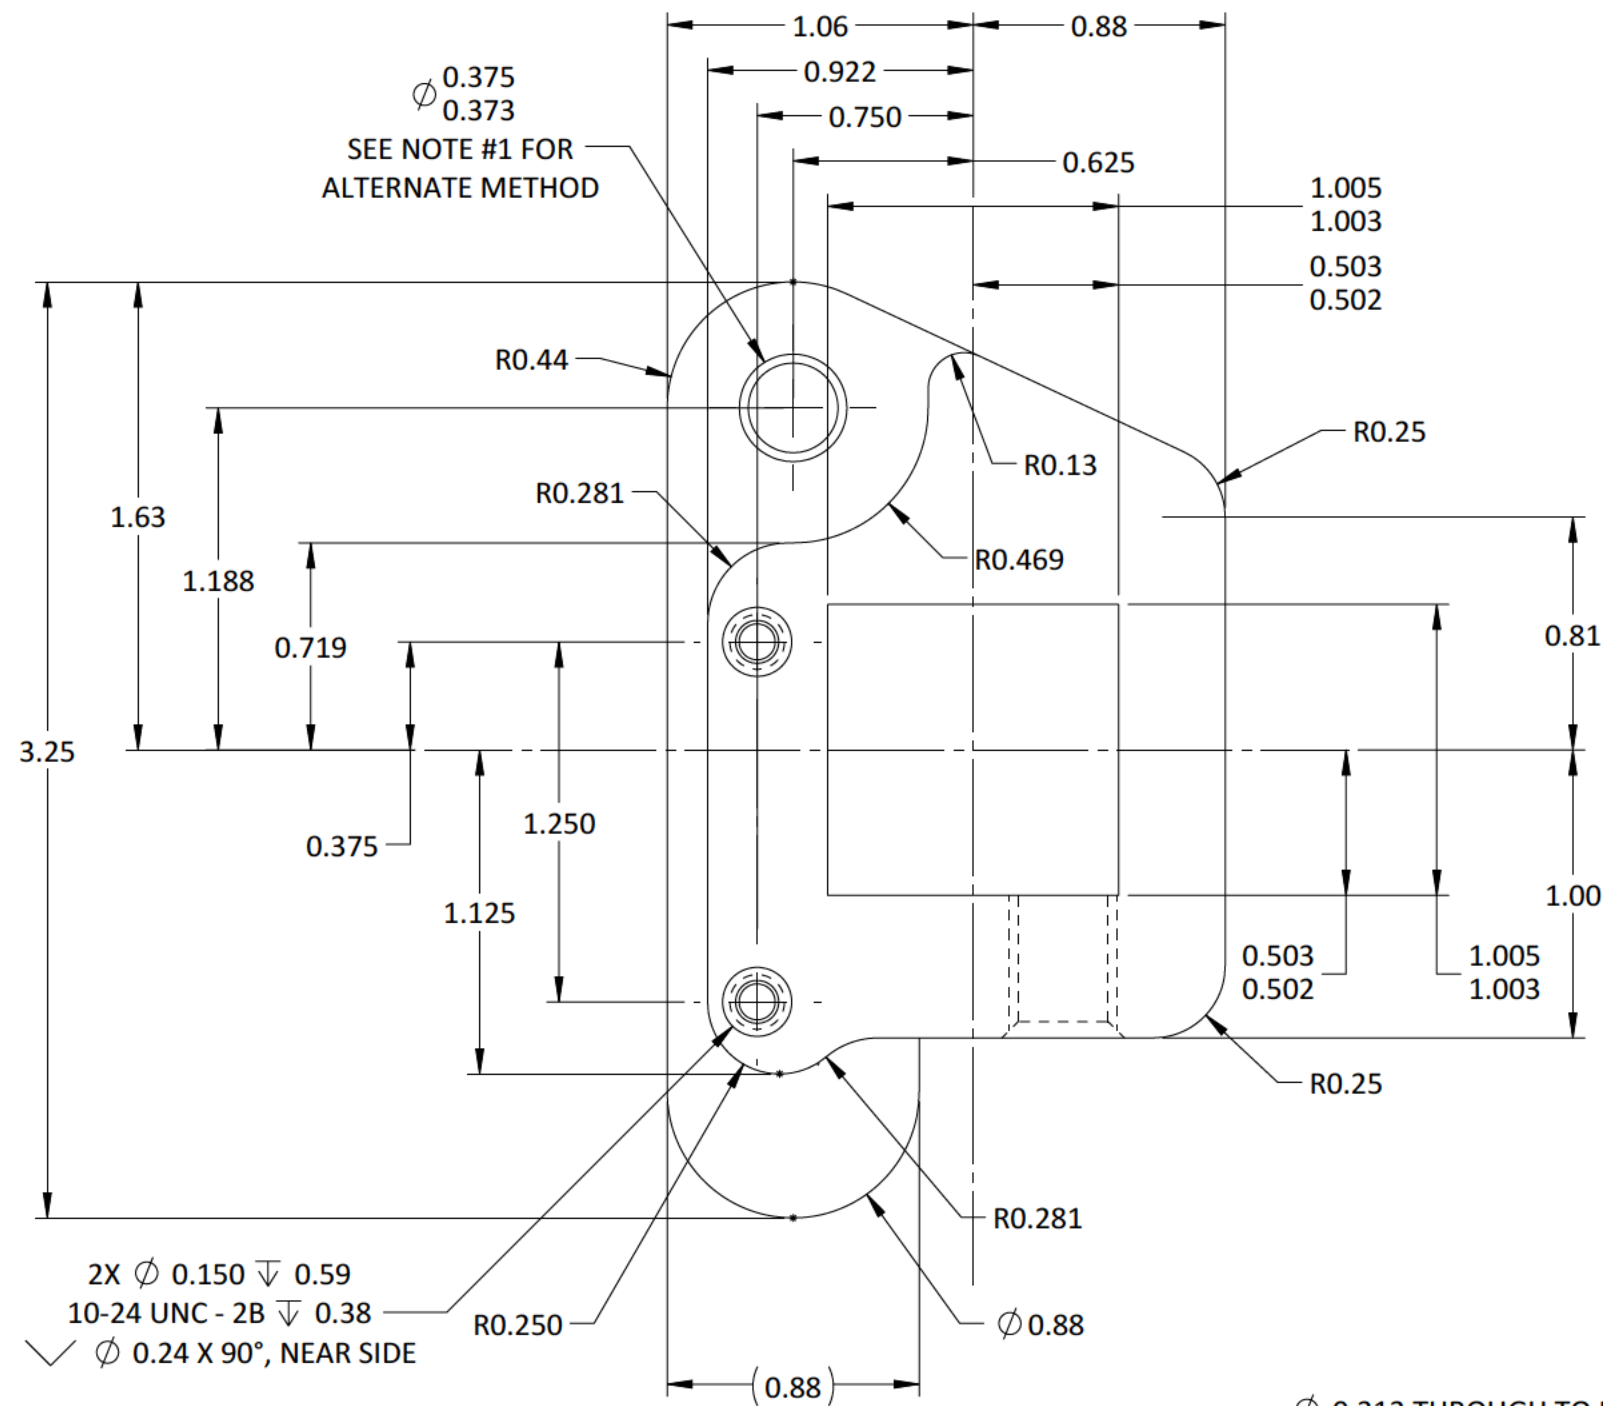
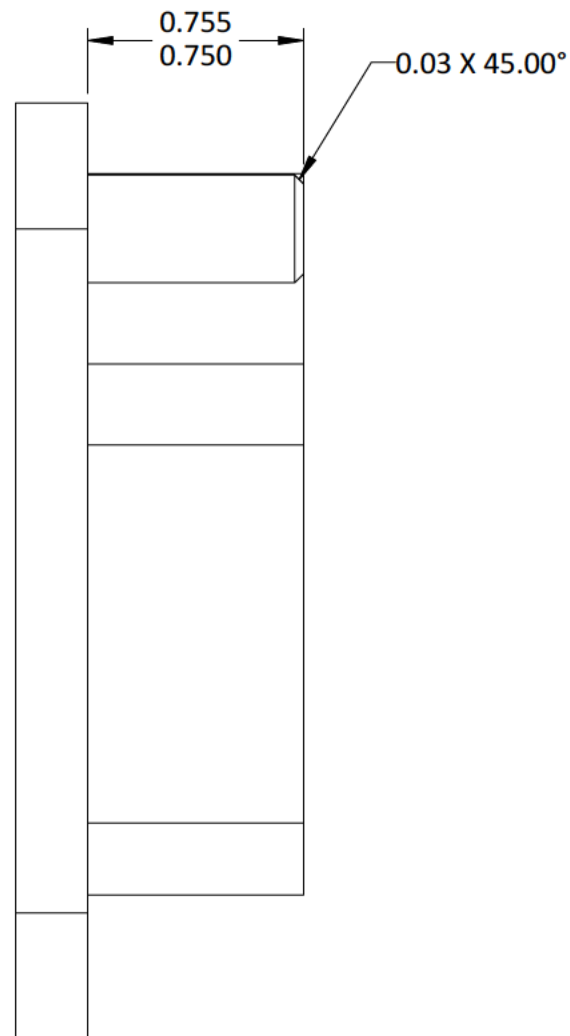


<u>TOLERANCES UNLESS SPECIFIED</u>	
.0 _____	±0.020
.00 _____	±0.010
.000 _____	±0.005
X/X ±1/32	
ANGLE ±0.5°	
BREAK ALL CORNERS AND EDGES .03 ±.01 (UNLESS OTHERWISE NOTED)	
125 ✓	ALL MACHINED SURFACES UNLESS SPECIFIED

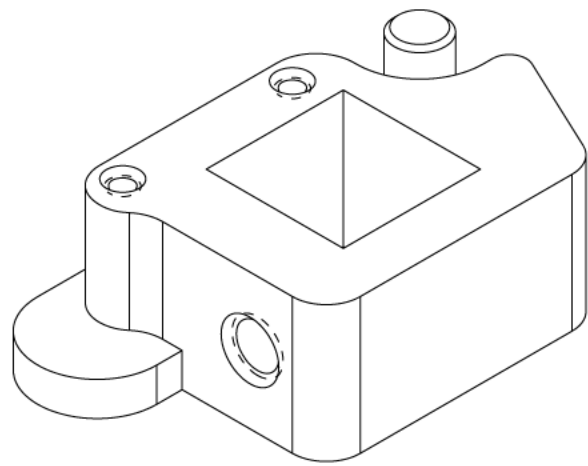

NOTE #1: ALTERNATE METHOD OF MANUFACTURE; THIS STUB POST MAY BE REPLACED WITH A DOWEL PIN. TO DO SO, FOLLOW THIS PROCEDURE:

- 1) DRILL AND REAM $\varnothing$ 0.3735/0.3745 ON LOCATION
- 2) PRESS $\varnothing$ 0.375x1.00" DOWEL PIN (FDP-375100S) FLUSH W/
BOTTOM SURFACE.
- 3) FUSE WELD DOWEL PIN FROM BOTTOM SURFACE.

NOTE #2: ELECTROPOLISH PER ASTM B912 UPON COMPLETION

DATE:		06/03/24	
BY:		RAW	
REV: B		ECR: N/A	
CHK'R -		APP'R	
ADDED "POST" TO PART. ALLOWED FOR TRADITIONAL DOWEL PIN ASSY. MODIFIED TOLERANCES. ADDED ELECTROPOLISH SPECS			
DATE:		4/15/2024	
BY:		JWB	
REV: A		ECR: N/A	
CHK'R -		APP'R	
OBSOLETE ACAD DRAWING			

CONFIDENTIALITY NOTICE
THIS DOCUMENT AND INFORMATION
CONTAINED IN IT CONSTITUTE CONFIDENTIAL
AND PROPRIETARY INFORMATION BELONGING
TO [REDACTED] NEITHER THE DOCUMENT
NOR ITS CONTENTS MAY BE USED,
REPRODUCED OR DISCLOSED IN WHOLE OR IN
PART EXCEPT AS SPECIFICALLY AUTHORIZED BY

4711 E. 355th STREET
WILLOUGHBY, OHIO 44094
U.S.A.
www.bevcorp.com
(440) 954-3500
(440) 954-3501 FAX

BACKREST MOUNTING BLOCK

NECK CONTROL BOTTLE SUPPORT ASSEMBLY

DRAWN BY: Admin	DATE: 12/9/2003	SEE ALSO: BEV820-A-00	
CHECKED BY: RAS	SCALE: 1.5:1	SHEET 1 OF 1	REV.
APPROVED BY: -	PART NO:		
MAT'L: AISI 304	BEV820-BM-01		B