

Home Search Collections Journals About Contact us My IOPscience

Liquid volume monitoring based on ultrasonic sensor and Arduino microcontroller

This content has been downloaded from IOPscience. Please scroll down to see the full text.

2016 IOP Conf. Ser.: Mater. Sci. Eng. 128 012026

(http://iopscience.iop.org/1757-899X/128/1/012026)

View the table of contents for this issue, or go to the journal homepage for more

Download details:

IP Address: 154.70.154.151

This content was downloaded on 08/08/2016 at 11:59

Please note that terms and conditions apply.

Liquid volume monitoring based on ultrasonic sensor and Arduino microcontroller

M Husni*, D O Siahaan, H T Ciptaningtyas, H Studiawan and Y P Aliarham

Department of Informatics, Faculty of Information Technology, Institut Teknologi Sepuluh Nopember, Indonesia

*Corresponding author: husni@its-sby.edu

Abstract. Incident of oil leakage and theft in oil tank often happens. To prevent it, the liquid volume insides the tank needs to be monitored continuously. Aim of the study is to calculate the liquid volume inside oil tank on any road condition and send the volume data and location data to the user. This research use some ultrasonic sensors (to monitor the fluid height), Bluetooth modules (to sent data from the sensors to the Arduino microcontroller), Arduino Microcontroller (to calculate the liquid volume), and also GPS / GPRS / GSM Shield module (to get location of vehicle and sent the data to the Server). The experimental results show that the accuracy rate of monitoring liquid volume inside tanker while the vehicle is in the flat road is 99.33% and the one while the vehicle is in the road with elevation angle is 84%. Thus, this system can be used to monitor the tanker position and the liquid volume in any road position continuously via web application to prevent illegal theft.

1. Introduction

Oil theft by taking small amount of the liquid inside the tank often happen, the latest case happened in Riau. The incident causes loss about IDR 1.3 trillion. The oil theft is done by creating small hole in the tank so the fluid can leak and distributed to the other party. This illegal act caused loss to the company (Pertamina) and also Indonesia [1].

To overcome this problem, Pertamina uses ATG (*Automatic Tanks Gauge*) but it only calculates the liquid volume in the gas station not in the oil tank[1]. To calculate the liquid volume inside tank, fluid velocity sensor which is embedded in the oil tap can be used. This method can be implemented if the leakage comes from the oil tap [1]. But, if it comes from the other hole, this method won't success.

The other method is using fuel level sensor inside the oil tanker and GPS sensor to monitor the oil tanker [2][3]. The monitoring result is already well presented by using maps, but, the fuel sensor will fail if the oil tanker is on the tilted road. To overcome the disadvantage, fuel level sensor mounted on the fuel tanker with arm on floater can be used [4]. But this approach can have less accuracy since it only has 1 sensor. It also only send the OK data in a plain teks so it's hard for the user to monitor the location and the fuel volume.

Aim of this study is to calculate the liquid volume inside oil tank on any road condition and send the volume data and location data to the user. This research contribution is the system can calculate the fuel volume even in a tilted road with more accurate than previous study. The advantage of this

Content from this work may be used under the terms of the Creative Commons Attribution 3.0 licence. Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.

system is user doesn't have to request the data. The system will send the data regularly to the server, save it on the database, and displayed the record in the user's browser in a visual way.

This system uses ultrasonic sensors to monitor the fluid height, Bluetooth modules to sent data from the sensors to the Arduino microcontroller, Arduino microcontroller to calculate the liquid volume, GPS / GPRS / GSM Shield module to get location of vehicle and sent it to the Server. From the server, the data will be processed and the output is displayed in a web browser. It will display a map and show the location of the oil tank and the liquid volume.

2. Literature Study

The literature study explains the object used for this research.

2.1. Ultrasonic Sensor

Ultrasonic sensor is electronic device that change the electrical energy into mechanical energy in the form of ultrasonic sound waves. Ultrasonic sensors are most commonly used due to its simplicity and low cost. The sensor consists of a series of ultrasonic transmitter and receiver. The accuracy of the measured distance is dependent on the separation between the ultrasonic transmitter and receiver [5].

Example of ultrasonic usage is distance measurement of an object in the path of a person, equipment, or a vehicle, stationary or moving is used in a large number of applications such as robotic movement control, vehicle control, blind man's walking stick, medical applications, binary gas mixture fraction, etc [6][7][8].

This tool is used to measure the ultrasonic waves. Ultrasonic waves are mechanical waves which have the characteristic longitudinal and typically have a frequency above 20 kHz. Ultrasonic waves can propagate through the solid, liquid or gas. Ultrasonic waves are waves of energy propagation and mechanical momentum that propagate through the third element as the interaction with the molecule and the nature of the medium inertia path [9].

2.2. Arduino

The Arduino integrated development environment (IDE) is a cross-platform application written in Java. Arduino programs are written in C or C++ [10]. The Arduino Uno Boards are uploaded with specific programs that enable them to perform their required operation [11]. Arduino is flexible (offers a variety of inputs, interface, and output), inexpensive, and can communicate with software running on your computer [12].

2.3. GPS

GPS (Global Positioning System) is a radio-based navigation system that provides information about the coordinates of the position, velocity, and time to users worldwide. The use of GPS satellites service is not charged. Users only need a GPS receiver to determine the coordinates of the location. The accuracy of location coordinates depending on the type of GPS receiver. GPS consists of three parts: satellites orbiting the Earth (The GPS satellites orbit the earth twice a day), control and monitoring stations on Earth, and the GPS receiver [13]. Example of GPS implementations are: land vehicle navigation [14], human activity [15], and tracking system [16][17].

GPS output data format is defined by the NMEA (National Marine Electronics Association). Example of GPS data is '\$ GPGGA, 061 648, 0.276513, S, 112.791692, E, 1, 09, 0.8, 70.0, M, 1.5, M,, * 5E'. The explanation of the code can be seen in table 1 [18].

GPS output	Description	GPS output	Description
'GPGGA'	Sentence identifier	'1'	position (0 = invalid, 1 = valid)
'061 648'	Time	'09'	Number of satellites
'0.276513'	Latitude	'0.8'	Precision horizontally
'S'	Indicator ($S = South, N = North$)	'70 M'	Altitude
'112.791692'	Longitude	'1.5 M'	Height
'E'	Indicator ($E = East, W = West$)	'5E'	Checksum

Table 1. GPS Data Description

2.4. GPS/GPRS/GSM Shield

GPS / GSM / GPRS Shield version 3.0 is a product of DF Robot. The shield supports Quad-band GSM / GPRS frequency at 850 MHz, 900 MHz, 1800 MHz, and 1900 MHz. The shield is also equipped with a GPS antenna for satellite navigation purposes which enable system to send data location over GSM networks [19][20].

This shield needs specific command called AT command. Examples of AT commands which used in this system can be seen in table 2 [21][22][23].

AT Command	Description	AT Command	Description
AT+CGPSPWR	turn on the GPS	AT+HTTPINIT	HTTP mode Initiation
AT+CGPSRST	Set the GPS Mode	AT+HTTPTERM	HTTP mode Termination
AT+CGPSINF	Obtain location information	AT+HTTPPARAM	Set the URL to be visited
AT+CGREG=?	Checking the network status		

Table 2. AT Command on GPS/GPRS/GSM Shield V3.0

2.5. Bluetooth Module HC 05 & HC 06

Bluetooth technology has been considered as a cheap, reliable, and power efficient replacement of cables for connecting electronic devices in a short range [24][25]. Bluetooth is a great protocol for wireless communication because it's capable of transmitting data at nearly 1MB/s, while consuming 1/100th of the power of Wi-Fi [26].

HC 05 and HC 06 is a Bluetooth module that is compatible with Arduino microcontroller. This module serves as a plug in on Arduino. It act as the media data recipient or sender through the air (wireless). Both modules use the AT command. Examples of AT commands which used in this system can be seen in Table 3 [27].

AT Command	Description	HC 05	HC 06
AT + RESET	Reset module	$\sqrt{}$	-
AT + RMAAD	Disconnect the connected device	$\sqrt{}$	-
AT + INIT	Initialize module	$\sqrt{}$	-
AT + LINK	Connecting to other devices with the MAC address parameter	$\sqrt{}$	-
AT + ROLE	Set mode (slave / master)	\checkmark	-
AT + NAME	Rename the device	$\sqrt{}$	$\sqrt{}$

Table 3. AT Command on Bluetooth HC 05 and HC 06


3. Methodology

This research creates a monitoring system of liquid volume inside the fuel tank by combining some components: Ultrasonic sensors, Arduino microcontroller, Bluetooth module and GSM/GPRS/GPS Shield v3.0. These components are designed to form a simple wireless network for obtaining liquid volume data in the tank and get the location of the tank. The system sends the data to the server, processed by the server, and displayed via web-based application.

To monitor an oil tank, the vehicle, capacity, the route, and the liquid volume should be registered before it leaves the base. As long as the vehicle has not reached the destination, the components which are embedded in the vehicle will continuously send liquid volume data and vehicle location data every 10 seconds. In the web application, the vehicle icon will continuously move according the coordinates of the monitored vehicle. The vehicle icons contained information on the percentage of the volume of the tank on the monitored vehicle. This system uses leaflet.js API for drawing the map and the vehicle in the browser.

3.1. Workflow Process

There are 3 workflow processes that occur in the system, the first is the process flow of the child node (figure 1), the second is the process flow of the centre node (figure 2), and the third is a process flow of the monitoring application (figure 3).

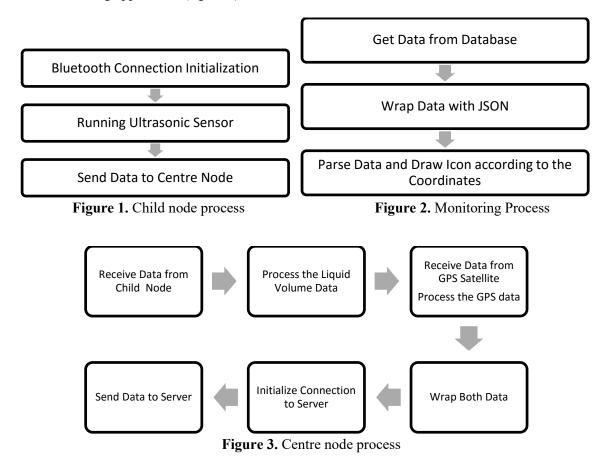

3.2. System Architecture

The ultrasonic sensor used to capture the depth of the liquid in the tank. To increase the data validity, this system uses two ultrasonic sensors. Create integration system between those sensors is necessary, so we set up a small network wireless using Bluetooth module as a medium of communication

between nodes. An additional GPS/GSM/GPRS Shield module is needed to capture location data and send it to the server. The system architecture in figure 4 shows that there are two child nodes to capture liquid level data in the tank. While the centre node assigned to receive sensor data from child node, receives location data from the GPS, and transmits the data to a server. Users can monitor the liquid volume via web-based application, so it can be viewed anywhere and anytime. Overview of the monitoring process can be seen in figure 5.

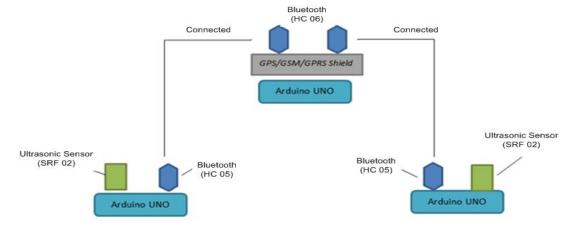


Figure 4. System Architecture

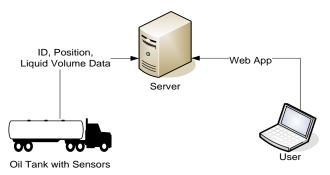


Figure 5. Monitoring Process

4. Implementation

Child node consists of Ultrasonic sensor, Bluetooth module (HC 05), and Arduino microcontroller. Centre node consists of Bluetooth module (HC 06), GPS/GSM/GPRS Shield module, and Arduino microcontroller. Implementation of components child node and centre node can be seen in Figure 6 and Figure 7 for the diagram (figure 6.a and figure 7.a) and also the implementation (figure 6.b and figure 7.b). Server specification has Intel Core i3 processor, 4 GB RAM, 64-bit Windows Operation System. The tank prototype is a box container with height x width x length = 48.5 x 32.7 x 65.4 cm and the liquid height = 15 cm.

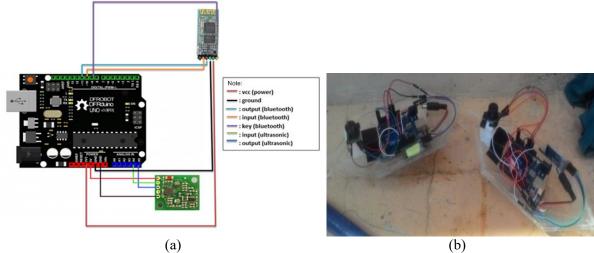


Figure 6. Child Node: (a) Diagram; (b) Implementation

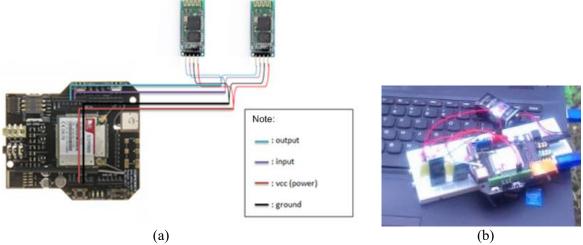


Figure 7. Centre Node: (a) Diagram; (b) Implementation

5. Experimental Result

To determine the accuracy level of sensor components when detecting liquid volume in the tank, we create three test scenarios. Those tests are performed on a prototype tank contains water. The last scenario is to check the web based application.

5.1. First Scenario

The first testing scenario is to check the component accuracy under normal circumstances. The components and the tank prototype can be seen in figure 8. This scenario is performed for 70 seconds, and managed to send 5 data to the server. Graph accuracy rate sensor in the first scenario can be seen in figure 9. The blue line shows real volume of the liquid while the red one shows the detected volume. The accuracy rate of the system in normal circumstances is 99.33%. It is almost the same with previous study [2][3].



Volume in The First Scenario



Figure 9. Liquid volume in the First Scenario

5.2. Second Scenario

The second testing scenario is to check the component accuracy when the tank is tilted 10⁰. The components and the tank prototype can be seen in figure 10. This scenario is performed for 75 seconds, and managed to send 5 data to the server. Graph accuracy rate sensor in the second scenario can be seen in figure 11. The blue line shows real volume of the liquid while the red one shows the detected volume. The accuracy rate of the system in tilted circumstances is 84%.



35000.00 30000.00 25000.00 20000.00

Volume in The Second Scenario

1 2 3 4 5

Figure 10. Second Scenario

Figure 11. Liquid volume in the Second Scenario

5.3. Third Scenario

The third testing scenario is to check the component accuracy when the tank leakage happens in a flat road. The components and the tank prototype can be seen in figure 12. This scenario is managed to send 10 data to the server. Graph of the leakage in the third scenario can be seen in figure 13. The blue line shows the liquid height. When the liquid height decreases gradually over a certain period in different locations, it can be suspected as leakage or illegal theft.



Height In the Third Scenario




Figure 12. Third Scenario

Figure 13. Liquid height in the Third Scenario

5.4. Fourth Scenario

The fourth testing scenario is to check the registration process and output of monitoring system in a web based application. The result can be seen in figure 14 and figure 15. The interface for monitoring fuel inside is better than just text based [4] and give more details than the other research [2][3].

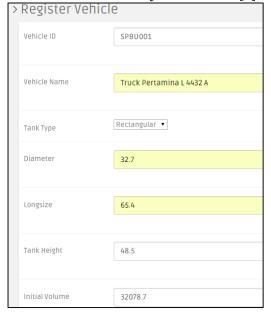


Figure 14. Registration Process

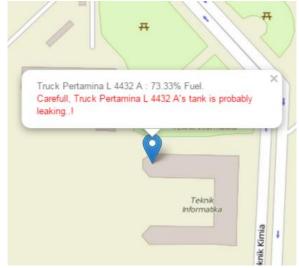


Figure 15. Monitoring System

6. Conclusion

From the experimental result, we can draw conclusions as follows:

- 1. This system that consists of ultrasonic sensors, Arduino microcontroller, GSM/GPRS/GPS Shield modules and Bluetooth module can monitor the liquid volume inside tank and detect the leakage via web based application continuously.
- 2. The road condition (flat or tilt) is affecting the accuracy rate of the sensor. In the normal road the accuracy rate is 99.33% while in tilted road the accuracy rate drop until 84%. This system can be implemented in any road condition.

Acknowledgments

This research was supported by PUPT Lab Research Grant 2015 at Institut Teknologi Sepuluh Nopember (ITS), Surabaya with Research ID 003246.45/IT2.11/PN.08/2015.

References

- [1] Husni M, Djanali S, Ciptaningtyas H T, Wicaksono H 2014 Aplikasi Pemantauan Pendistribusian Bahan Bakar Minyak Menggunakan GPS pada Perangkat Android dan Sensor Kecepatan Air Berbasis Mikrokontroler Arduino Proc. Seminar Nasional Teknologi Terapan SNTT 2014 (Yogyakarta, Indonesia, 15 November 2014) ISBN: 978-602-1159-06-4.
- [2] Sachin S A and Kokate R D 2012 Fuel Monitoring and Vehicle Tracking Using GPS, GSM, and MSP430F149 J. International Journal of Advances in Engineering & Technology IJAET vol. 4, Issue 1, pp 571-578.
- [3] Daniel O G, Dayo O and Anne O O 2011 Monitoring And Controlling Fuel Level Of Remote Tanks Using Aplicom 12 GSM Module J. Asian Research Publishing Network ARPN vol. 6, No. 1, January 2011 pp 56-60.
- [4] Obikoya G D 2014 Design, construction, and implementation of a remote fuel-level monitoring system J. EURASIP Journal on Wireless Communication and Engineering 2014:76.
- [5] Shrivastava A K, Verma A and Singh S P 2009 Effect Of Variation Of Separation Between The Ultrasonic Transmitter And Receiver On The Accuracy Of Distance Measurement J. International Journal of Computer science & Information Technology (IJCSIT), Vol 1, No 2, November 2009 pp 19-28.
- [6] Shrivastava A K, Verma A, and Singh S P 2010 Distance Measurement of an Object or Obstacle by Ultrasound Sensors using P89C51RD2 J. International Journal of Computer Theory and Engineering, Vol. 2, No. 1 February, 2010 pp 64-68.
- [7] Bates R, Battistin M, Berry S, et.al 2014 Implementation of Ultrasonic Sensing for High Resolution Measurement of Binary Gas Mixture Fractions J. Sensors, Vol. 14 pp 11260-11276.
- [8] Tahir M B and Abdullah M 2012 Distance Measuring (Hurdle detection System) for Safe Environment in Vehicles through Ultrasonic Rays J. Global Journal of researches in engineering Automotive engineering Vol.12(1) Ver.1 February 2012 pp 15-21.
- [9] Carullo A and Parvis M *An Ultrasonic Sensor for Distance Measurement in Automotive application* J. Sensor Vol. 1(2) August 2011 pp 145.
- [10] Anusha D, Sarma P M, and SandhyaRani M N 2013 Appliance Remote Control Using Arduino J. International Journal of Latest Trends in Engineering and Technology (IJLTET) Vol. 2(4) July 2013 pp. 35-41.
- [11] Purkayastha A, Prasad A D, Bora A, Et Al. 2014 *Hand Gestures Controlled Robotic Arm* J. Journal Of International Academic Research For Multidisciplinary Vol. 2(4) May 2014 pp. 234-240.
- [12] Kumar P and Kumar P 2013 Arduino Based Wireless Intrusion Detection Using IR Sensor and GSM J. International Journal of Computer Science and Mobile Computing IJCSMC Vol. 2(5) May 2013 pp 417-424.
- [13] Ahamed S S R 2009 *Technological Strategy Of Using Global Positioning System: An Analysis* J. International Journal of Engineering Science and Technology Vol.1(1) 2009 pp 8-16.
- [14] Abbot E and Powell D 1999 Land-Vehicle Navigation Using GPS Proc. IEEE Vol. 87 (1) January 1999 pp 145-162.
- [15] Spek S V D, Schaick J V, Bois P D, et al. 2009 Sensing Human Activity: GPS Tracking J. Sensors No. 9 pp. 3033-3055.
- [16] Al-Khedher M A 2011 *Hybrid GPS-GSM Localization of Automobile Tracking System* J. International Journal of Computer Science & Information Technology (IJCSIT) Vol 3 (6) December 2011 pp. 75-85.

- [17] Verma P and Bhatia J S 2013 Design And Development Of GPS-GSM Based Tracking System With Googlemap Based Monitoring J. International Journal of Computer Science, Engineering and Applications (IJCSEA) Vol. 3(3) June 2013 pp. 33-40.
- [18] DFRobot 2014 *DFRobot NMEA Reference Manual Rev* 2.7 *Dec07* http://www.dfrobot.com/image/data/TEL0051/3.0/NMEA%20Reference%20Manual-Rev2.1-Dec07.pdf Accessed December 2014.
- [19] Selvapriya C, Sathya P S2, Abdulrahim M, et al. 2013 *LPG Leakage Monitoring and Multilevel Alerting System* J. International Journal Of Engineering Sciences & Research Technology IJESRT Vol. 2(11) November 2013 pp. 3287-3290.
- [20] Zaghloul M S 2014 GSM-GPRS Arduino Shield (GS-001) with SIM 900 chip module in wireless data transmission system for data acquisition and control of power induction furnace J. International Journal of Scientific & Engineering Research IJSER Vol. 5(4) April 2014 pp. 776-780.
- [21] Libellium *Cooking Hacks* https://www.cooking-hacks.com/projects/arduino-realtime-gps-gprs-vehicle-tracking Accessed March 2015.
- [22] Shanghai SIM 2011 SIM 908 AT Command Manual V1.01.
- [23] DFRobot GSM Module V3
 http://www.dfrobot.com/wiki/index.php/GPS/GPRS/GSM_Module_V3.0_(SKU:TEL0051)
 Accessed December 2014.
- [24] Minar N B I and Tarique M 2012 Bluetooth Security Threats And Solutions: A Survey J. International Journal of Distributed and Parallel Systems IJDPS Vol. 3(1) January 2012 pp 127-148.
- [25] Chanana A, Singh H, Miglani D, et al. 2012 Research on Bluetooth Technology J. International Journal of Innovative Technology and Exploring Engineering IJITEE Vol. 1(6) November 2012 pp 36-41.
- [26] Singh P, Sharma D, and Agrawal 2011 *A Modern Study of Bluetooth Wireless Technology* J. International Journal of Computer Science, Engineering and Information Technology IJCSEIT Vol. 1(3) August 2011 pp 55-63.
- [27] Instructables Team *AT Command Mode of HC05* http://www.instructables.com/id/AT-command-mode-of-HC-05-Bluetooth-module/ Accessed March 2015.