




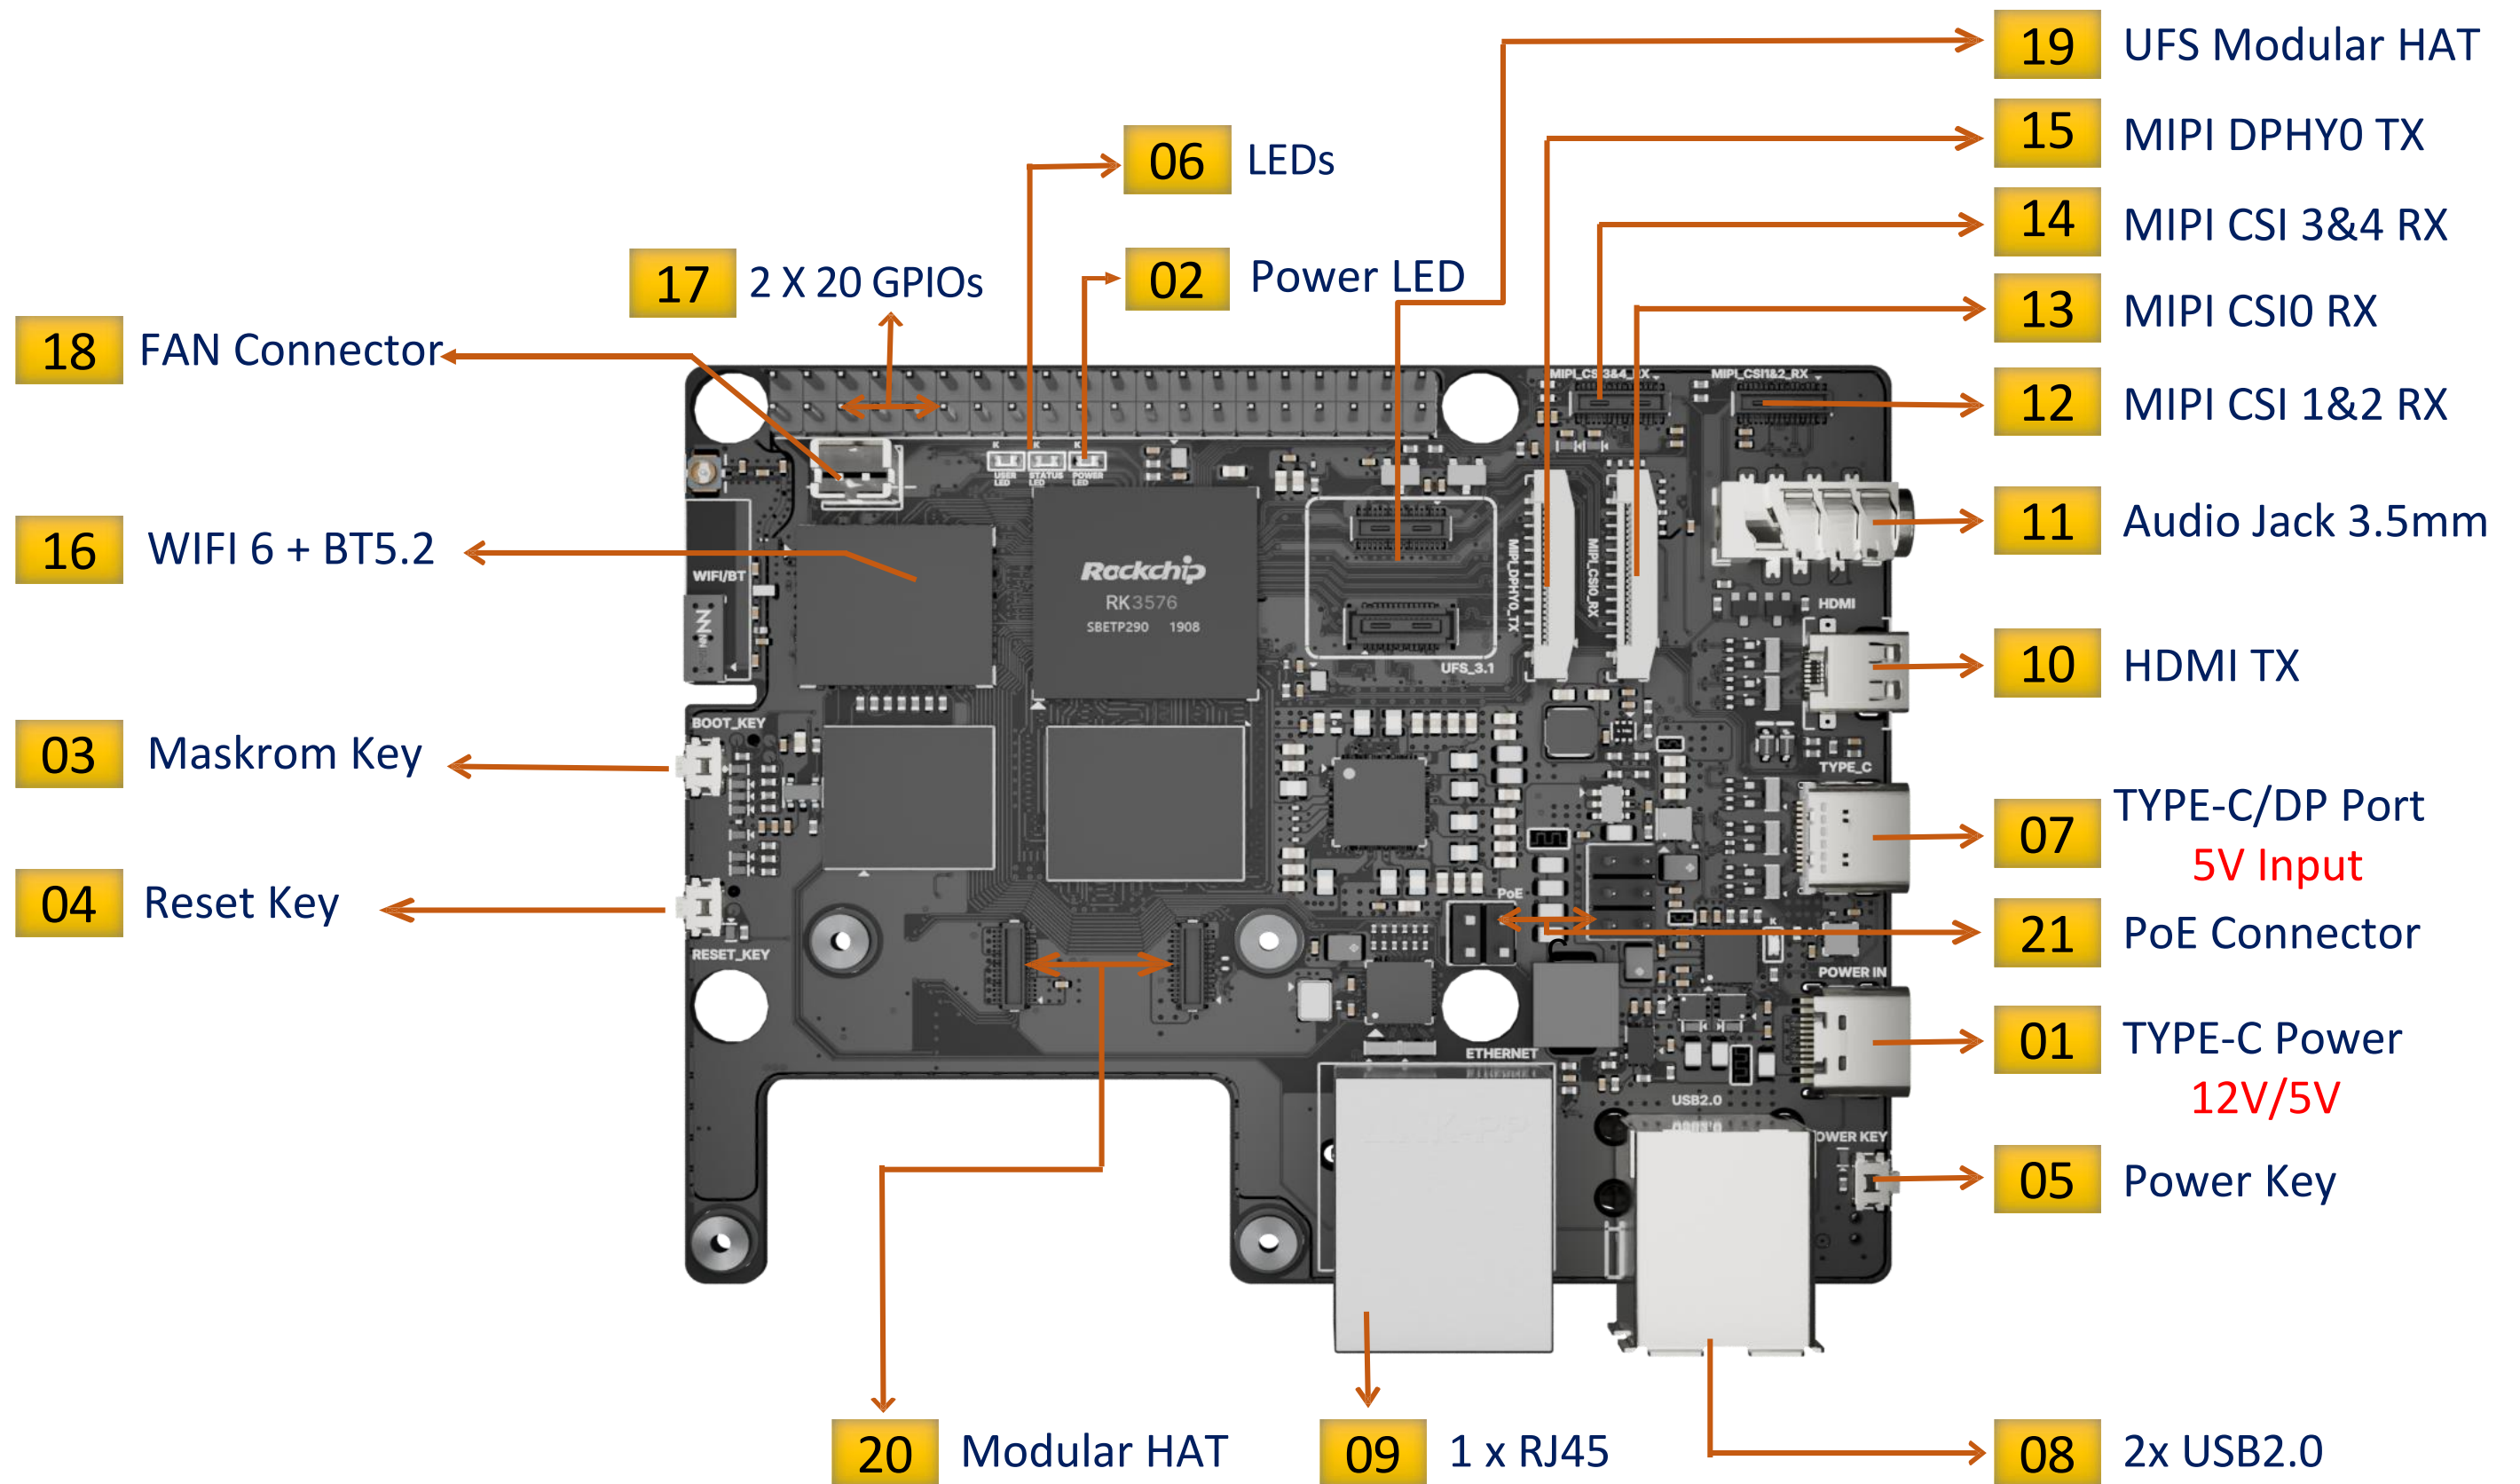

TOP SIDE

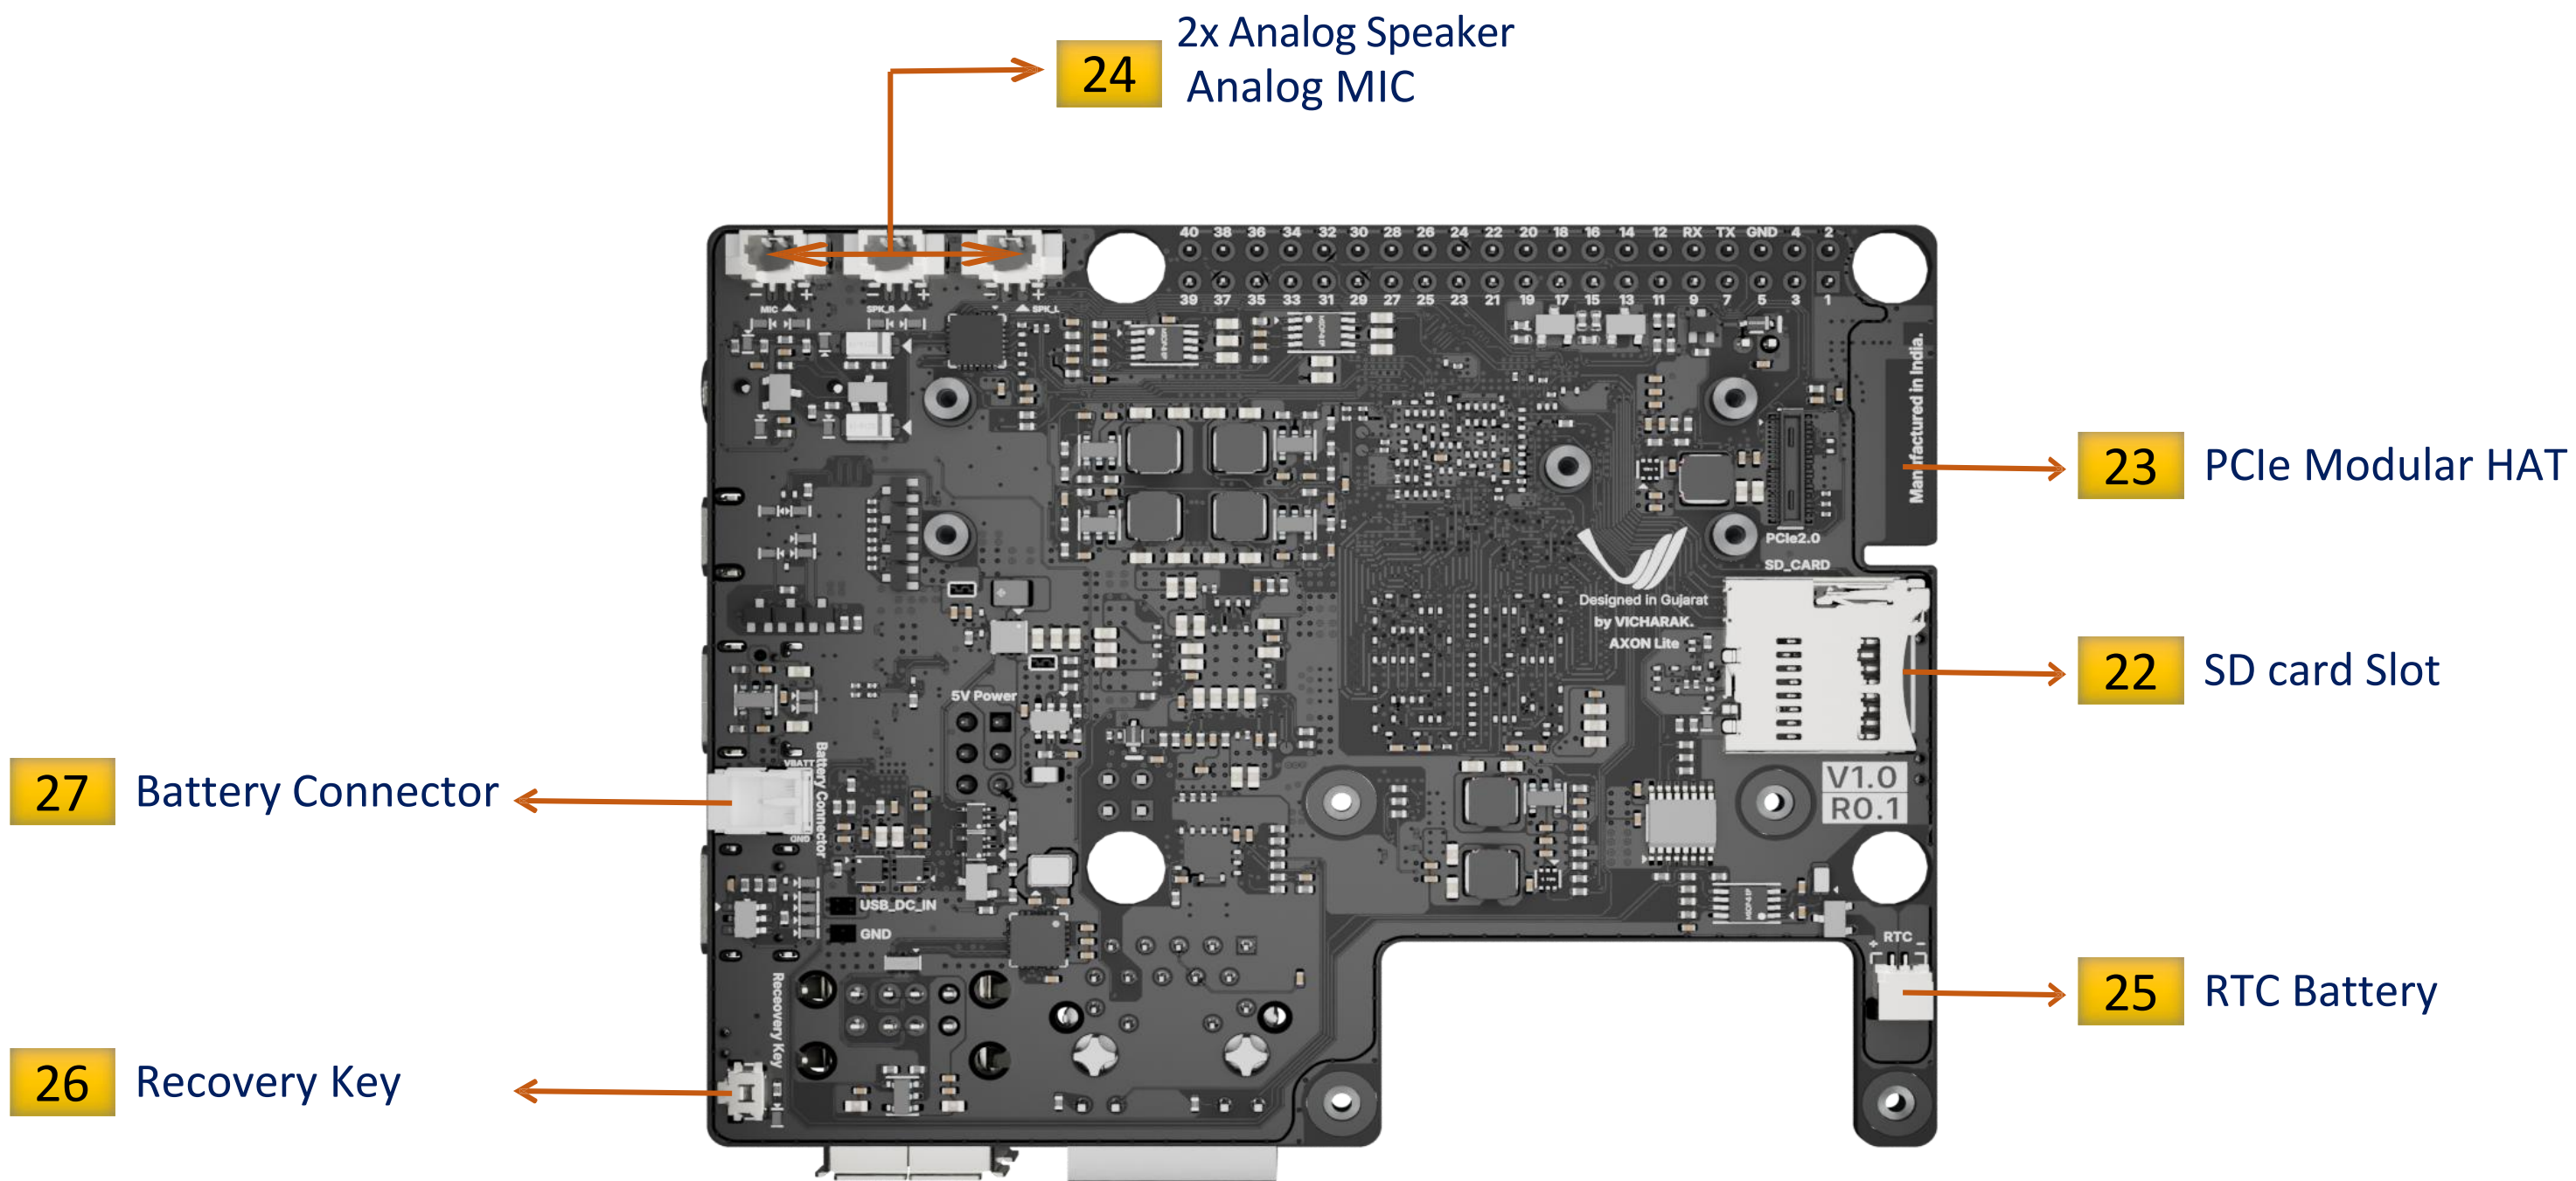

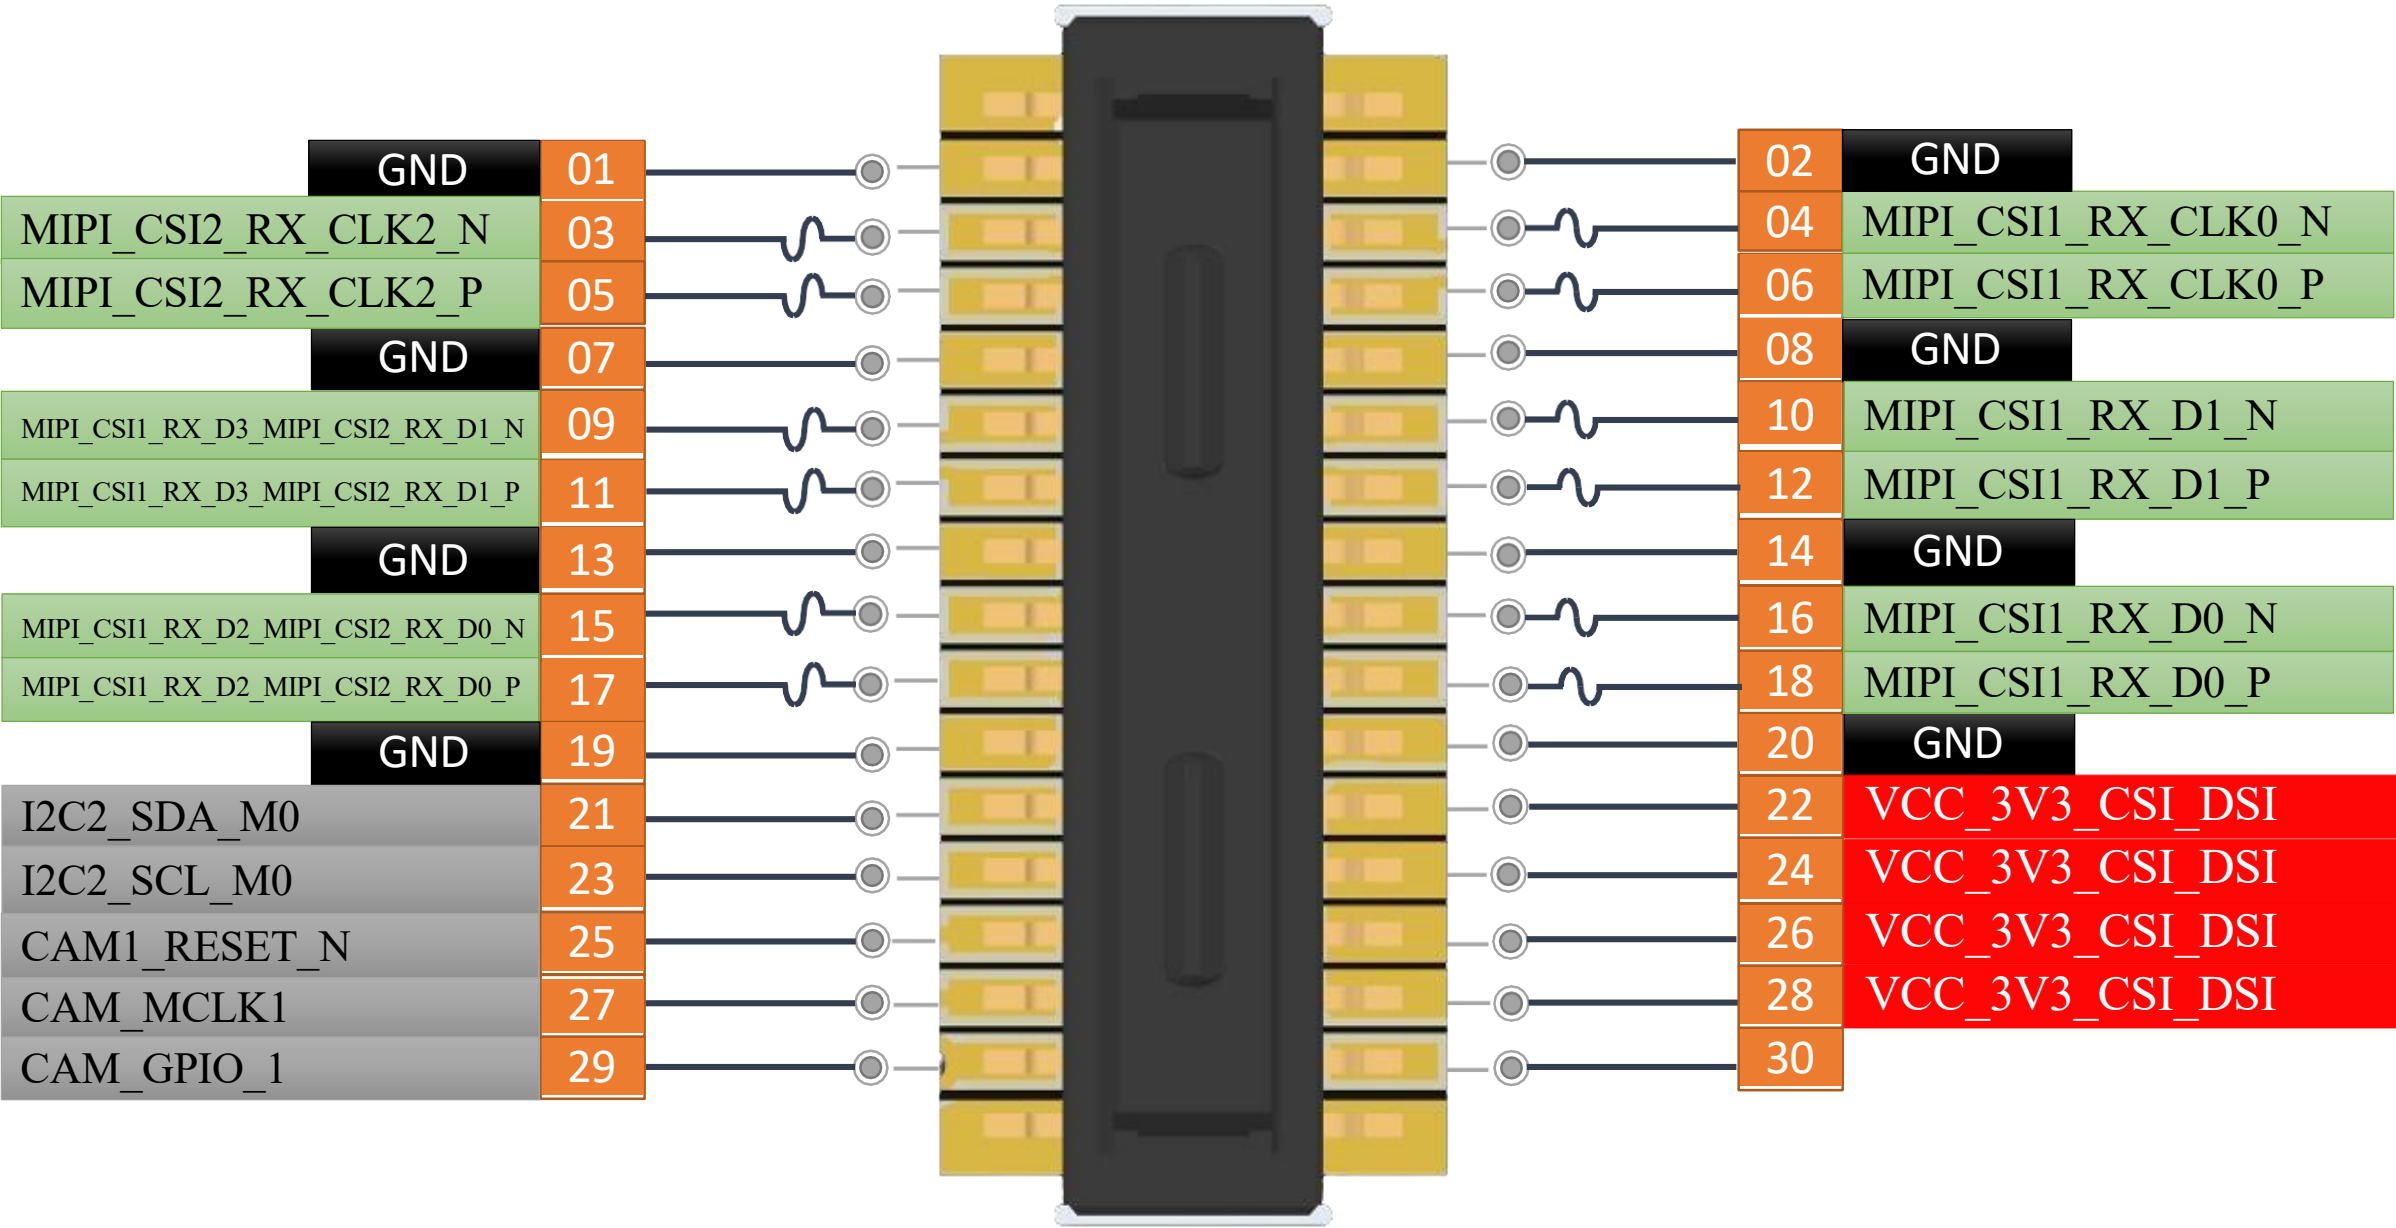


MIPI_CSI 1&2 RX


On-Board Connector

30 Pin
0.4mm Pitch
Current Rating (Max): 300mA each pin
MPN : DF40C(2.0)-30DP-0.4V(51)

Mating Connector


30 Pin
0.4mm Pitch
MPN : DF40C(2.0)-30DS-0.4V(51)

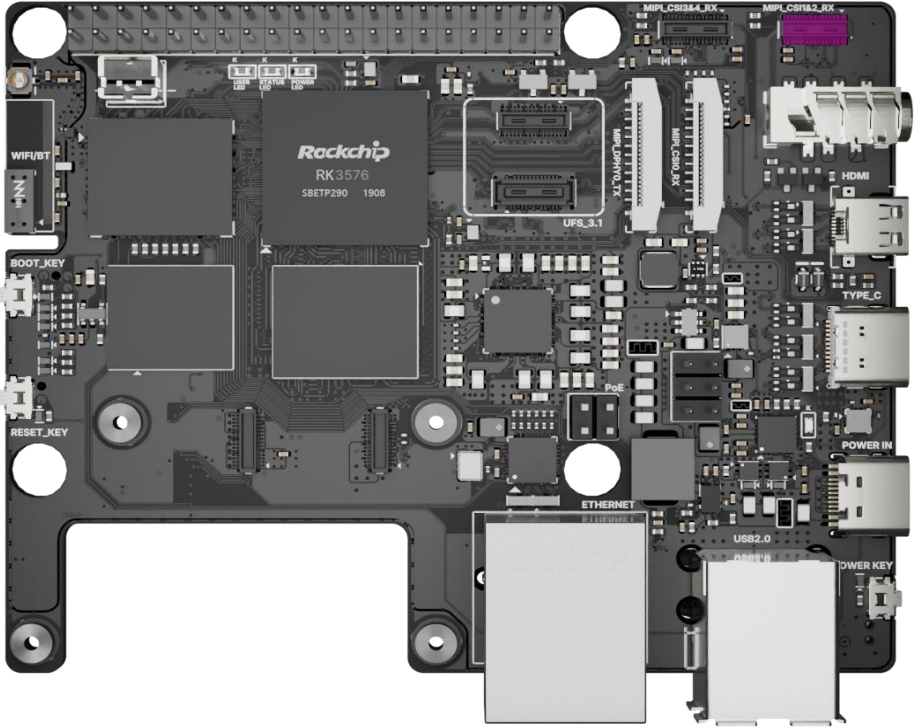


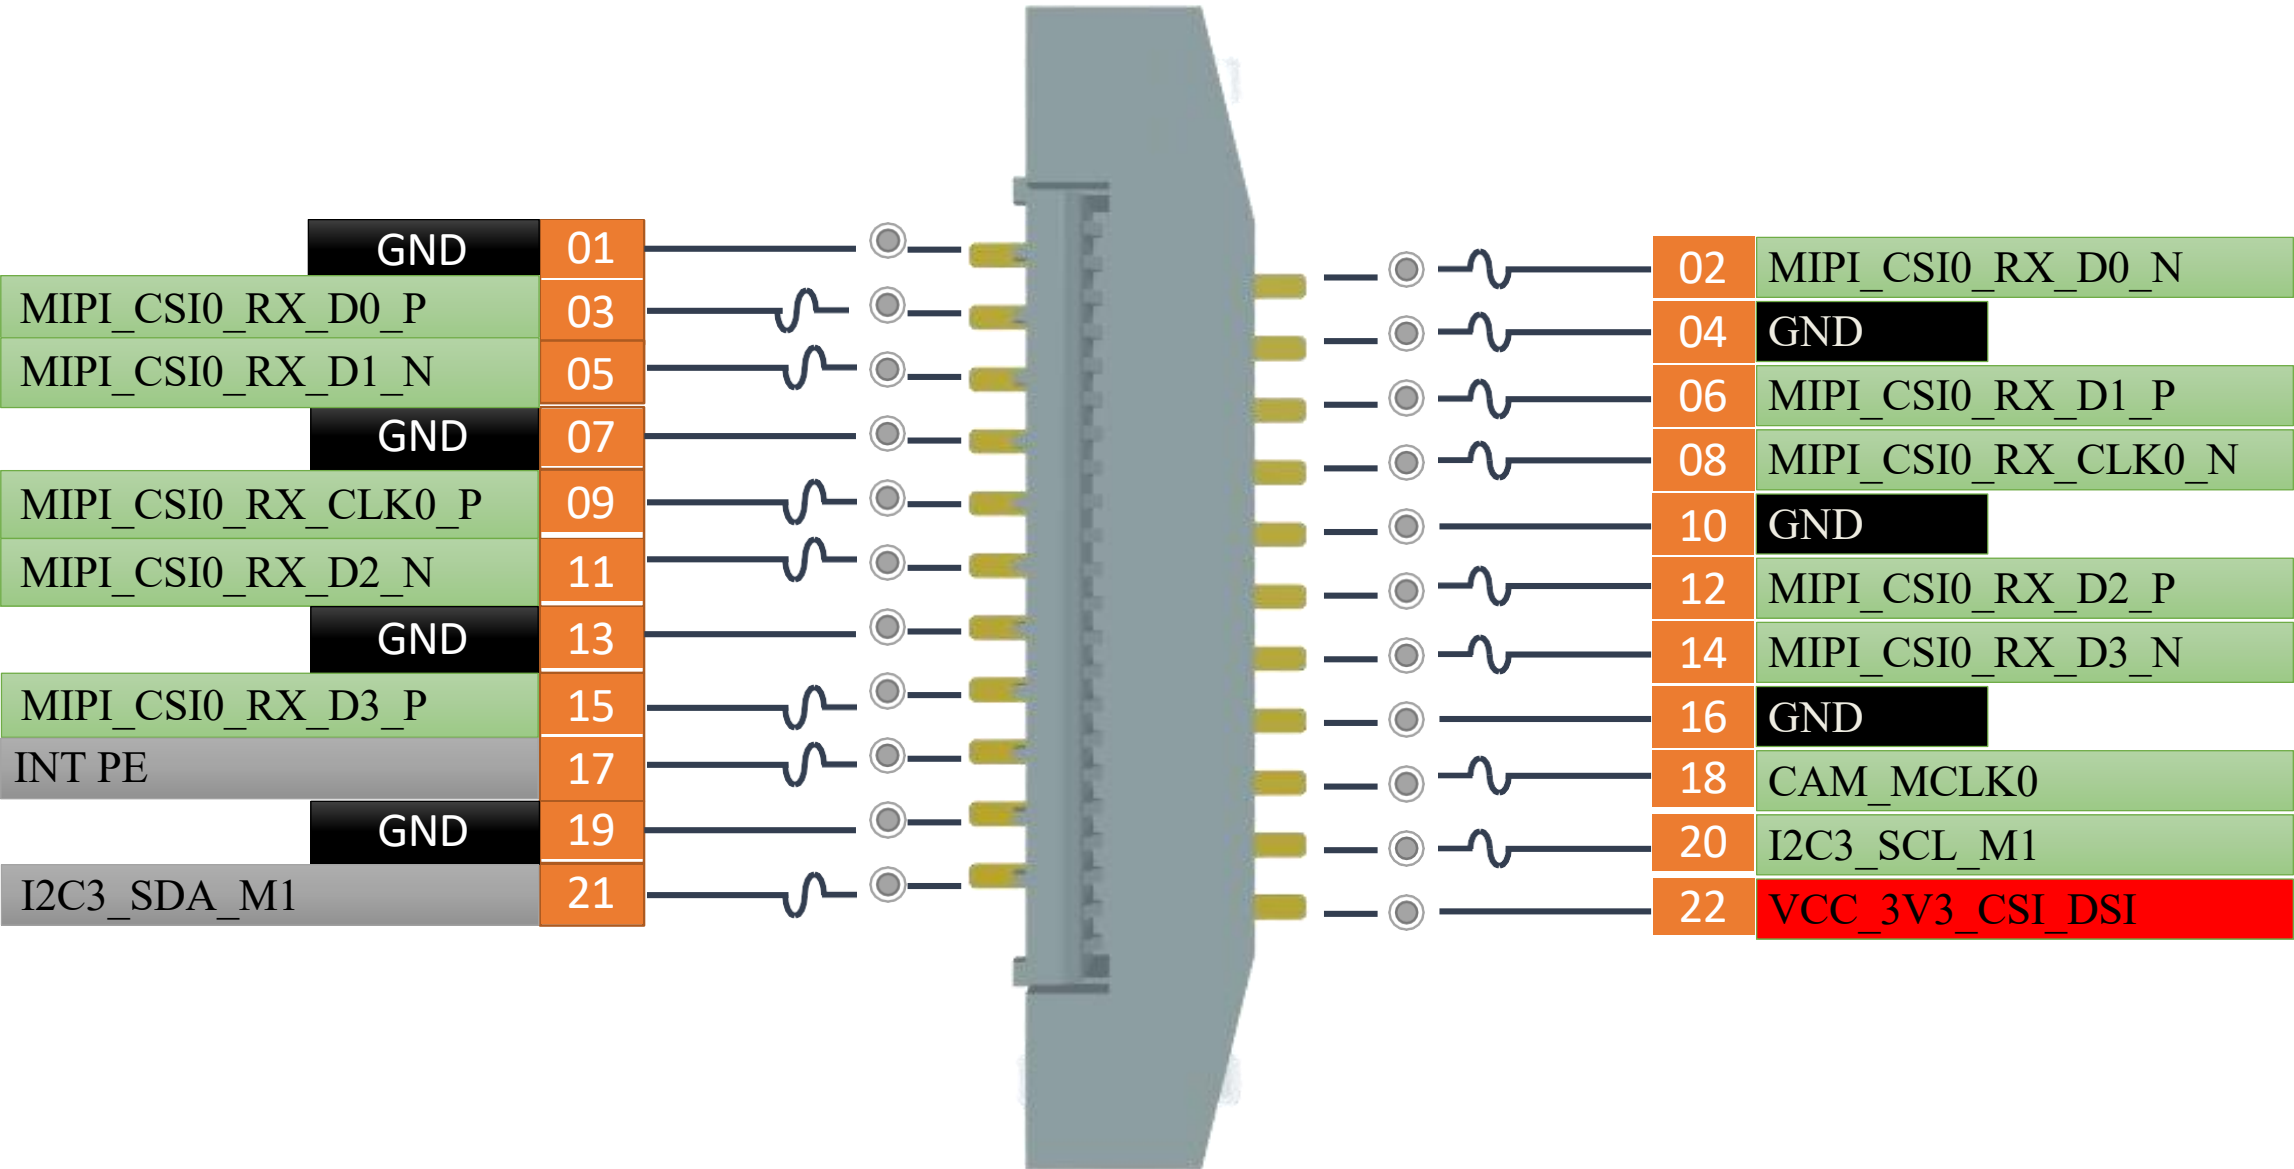

MIPI CSI RX PORT0

FPC Connector
RPI Compatible
22 Pin
0.4mm Pitch
Current Rating (Max): 300mA each pin
MPN : AFC11-S22ICA-00

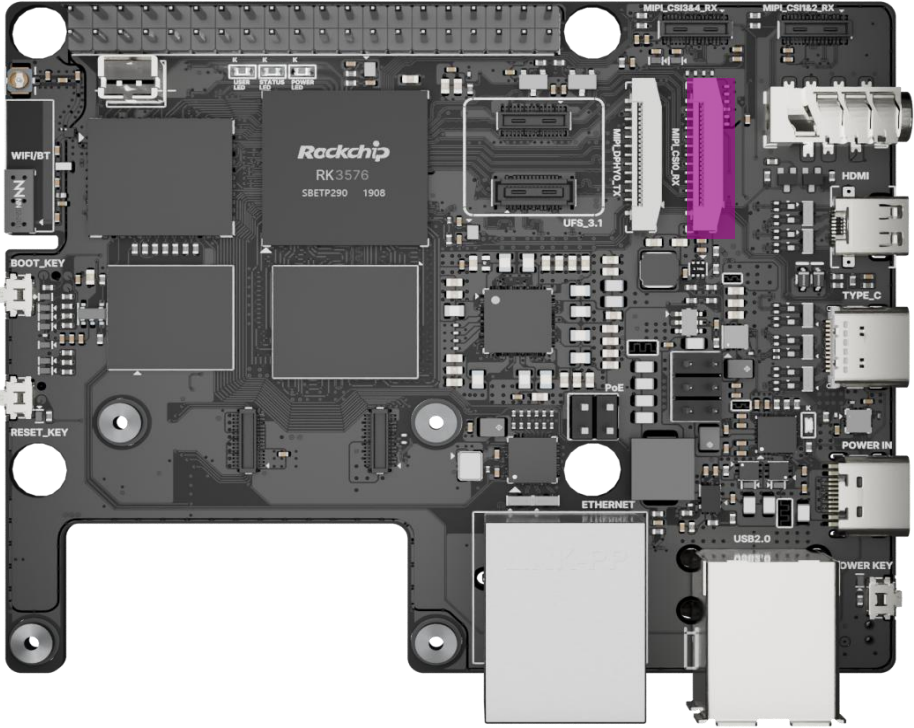

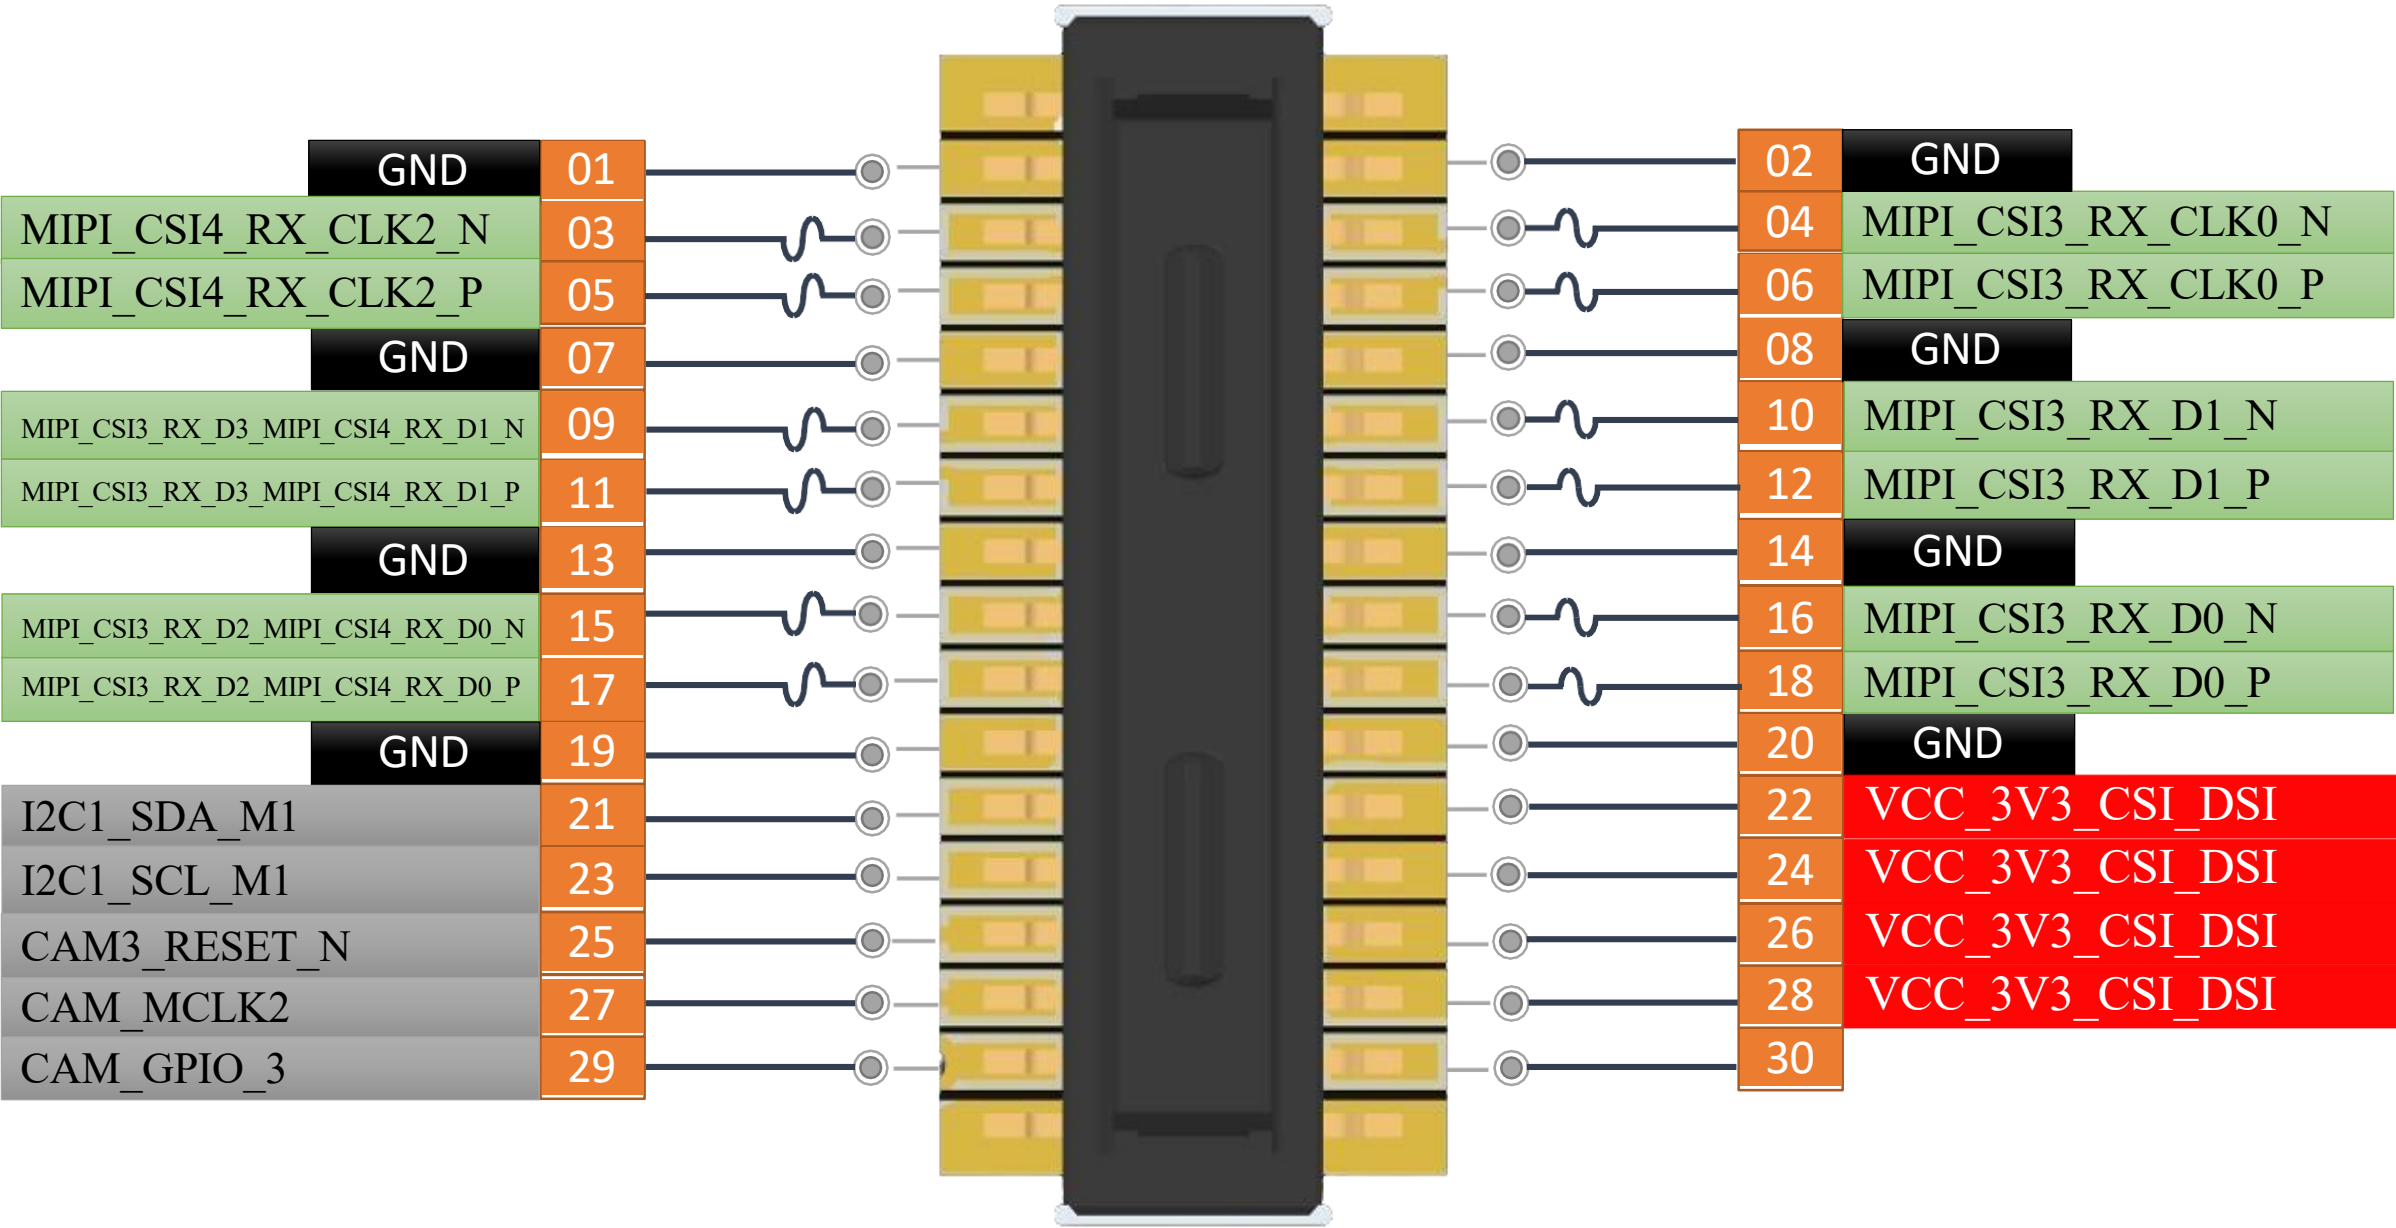


MIPI_CSI2/CSI4_RX


On-Board Connector

30 Pin
0.4mm Pitch
Current Rating (Max): 300mA each pin
MPN : DF40C(2.0)-30DP-0.4V(51)

Mating Connector


30 Pin
0.4mm Pitch
MPN : DF40C(2.0)-30DS-0.4V(51)

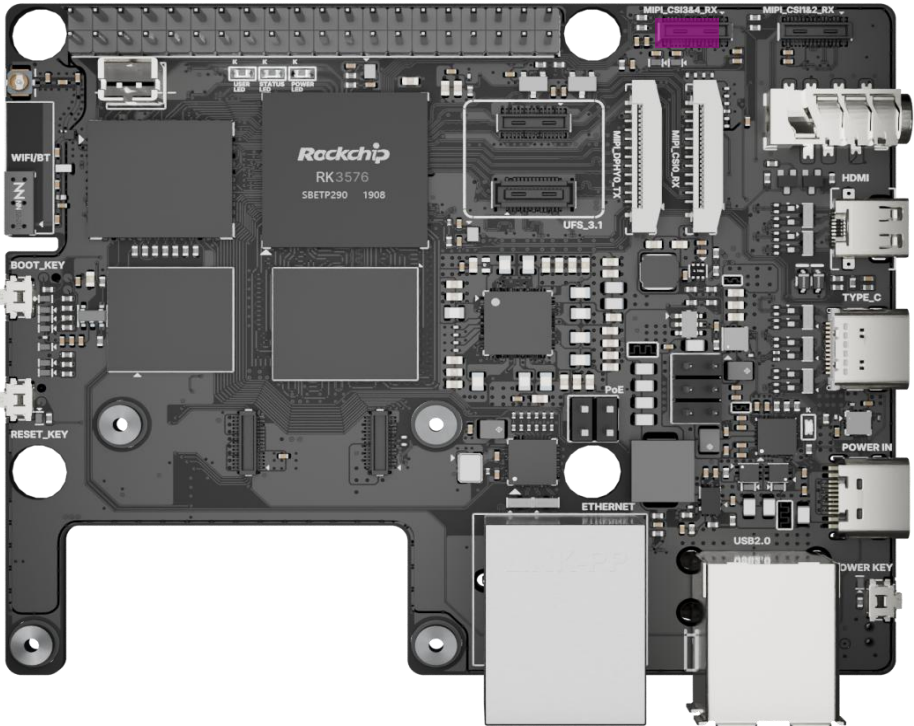


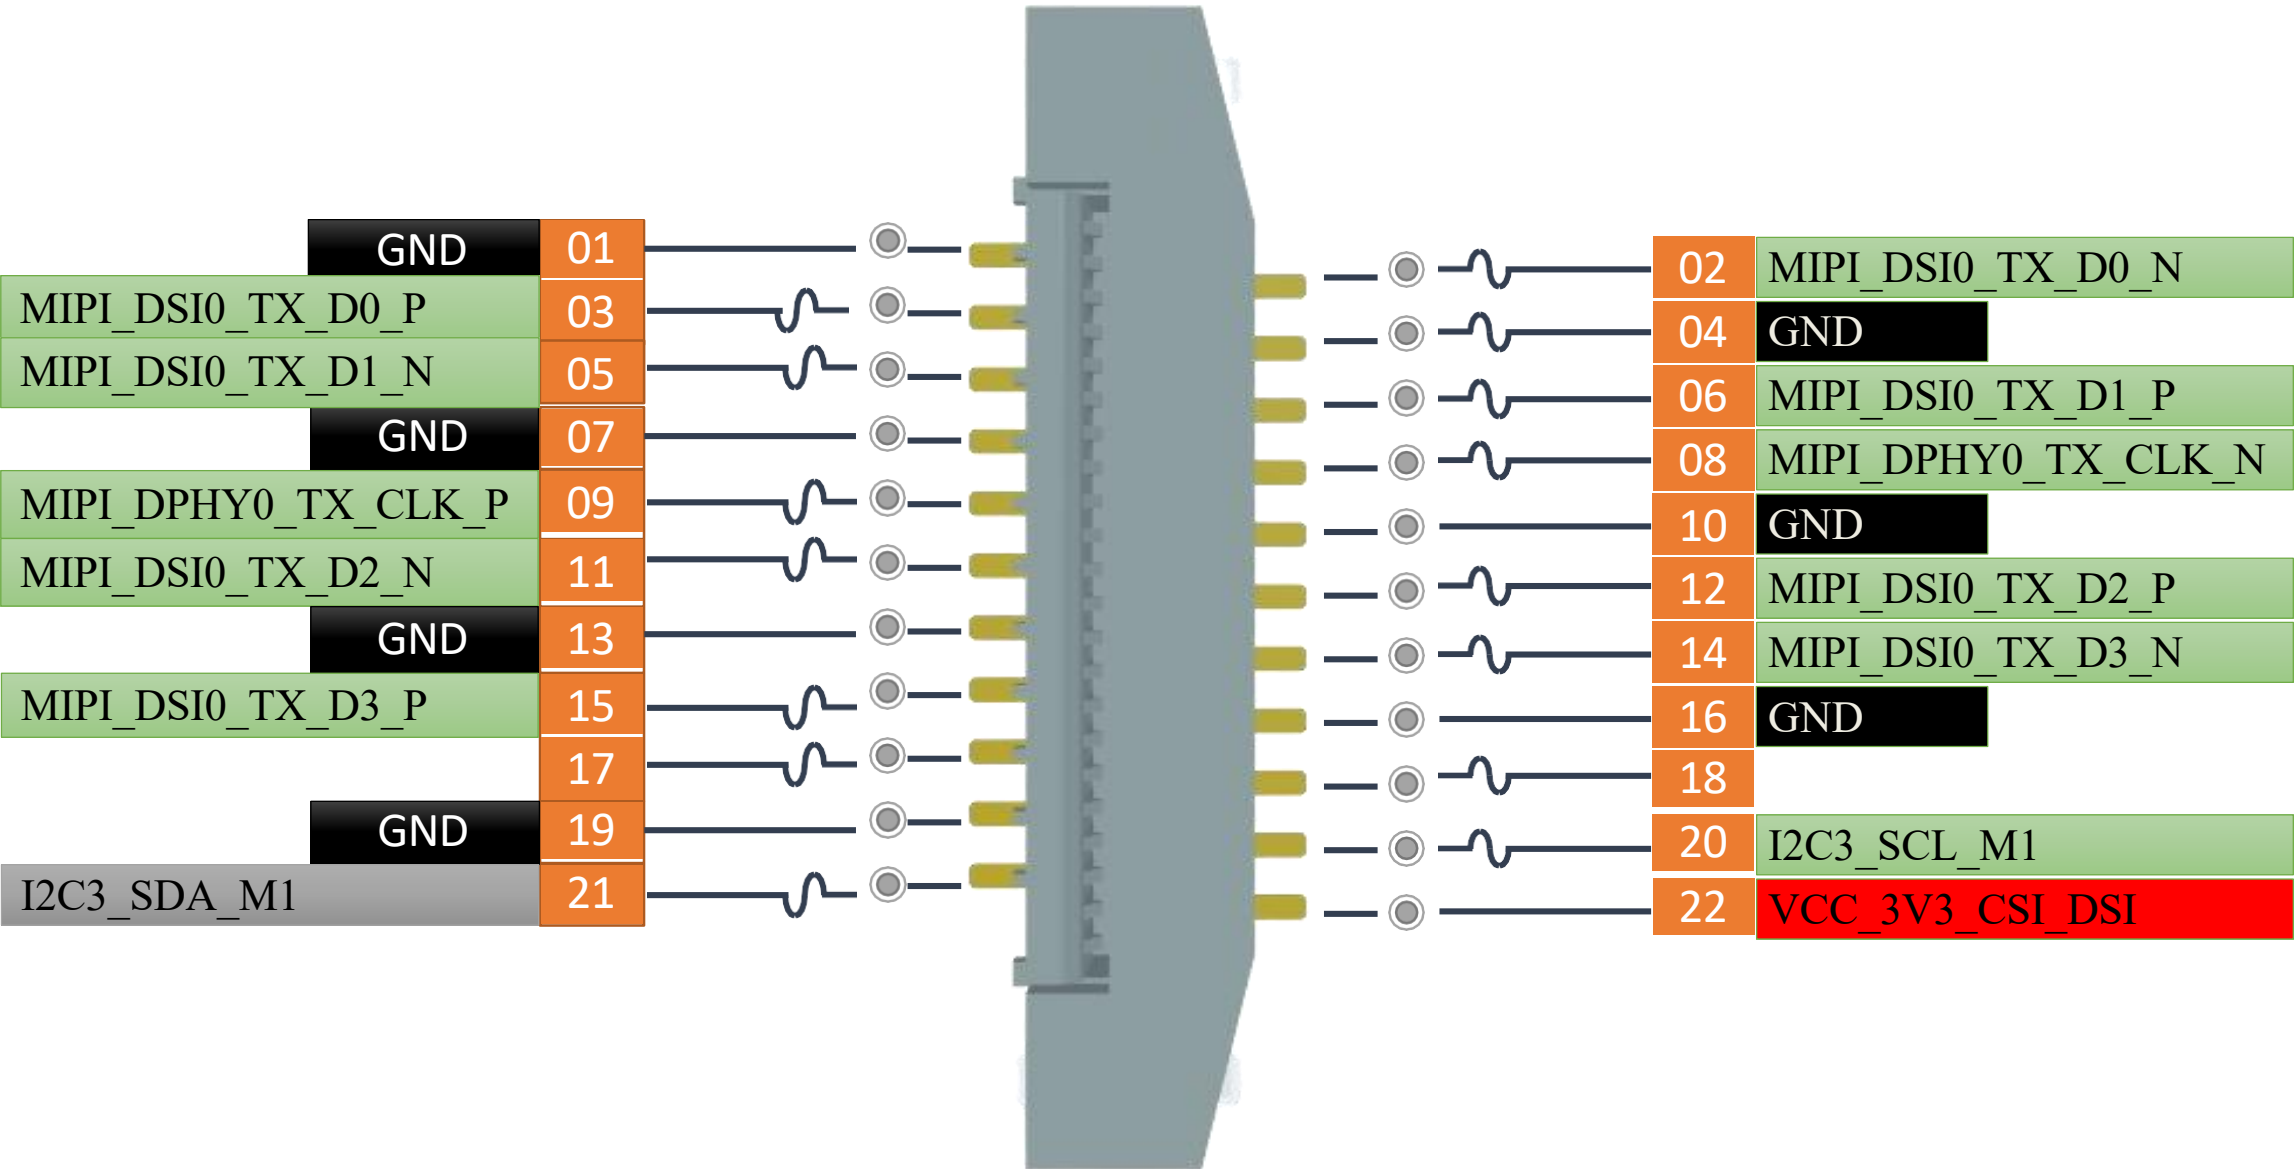

MIPI_DPHY0_TX

FPC Connector
RPI Compatible
22 Pin
0.4mm Pitch
Current Rating (Max): 300mA each pin
MPN : AFC11-S22ICA-00

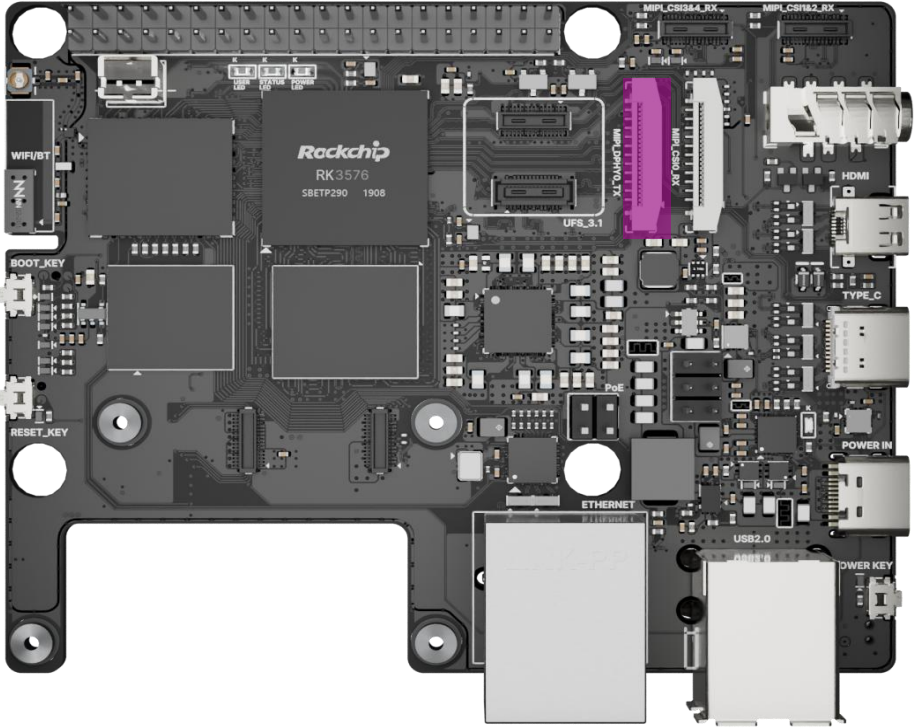

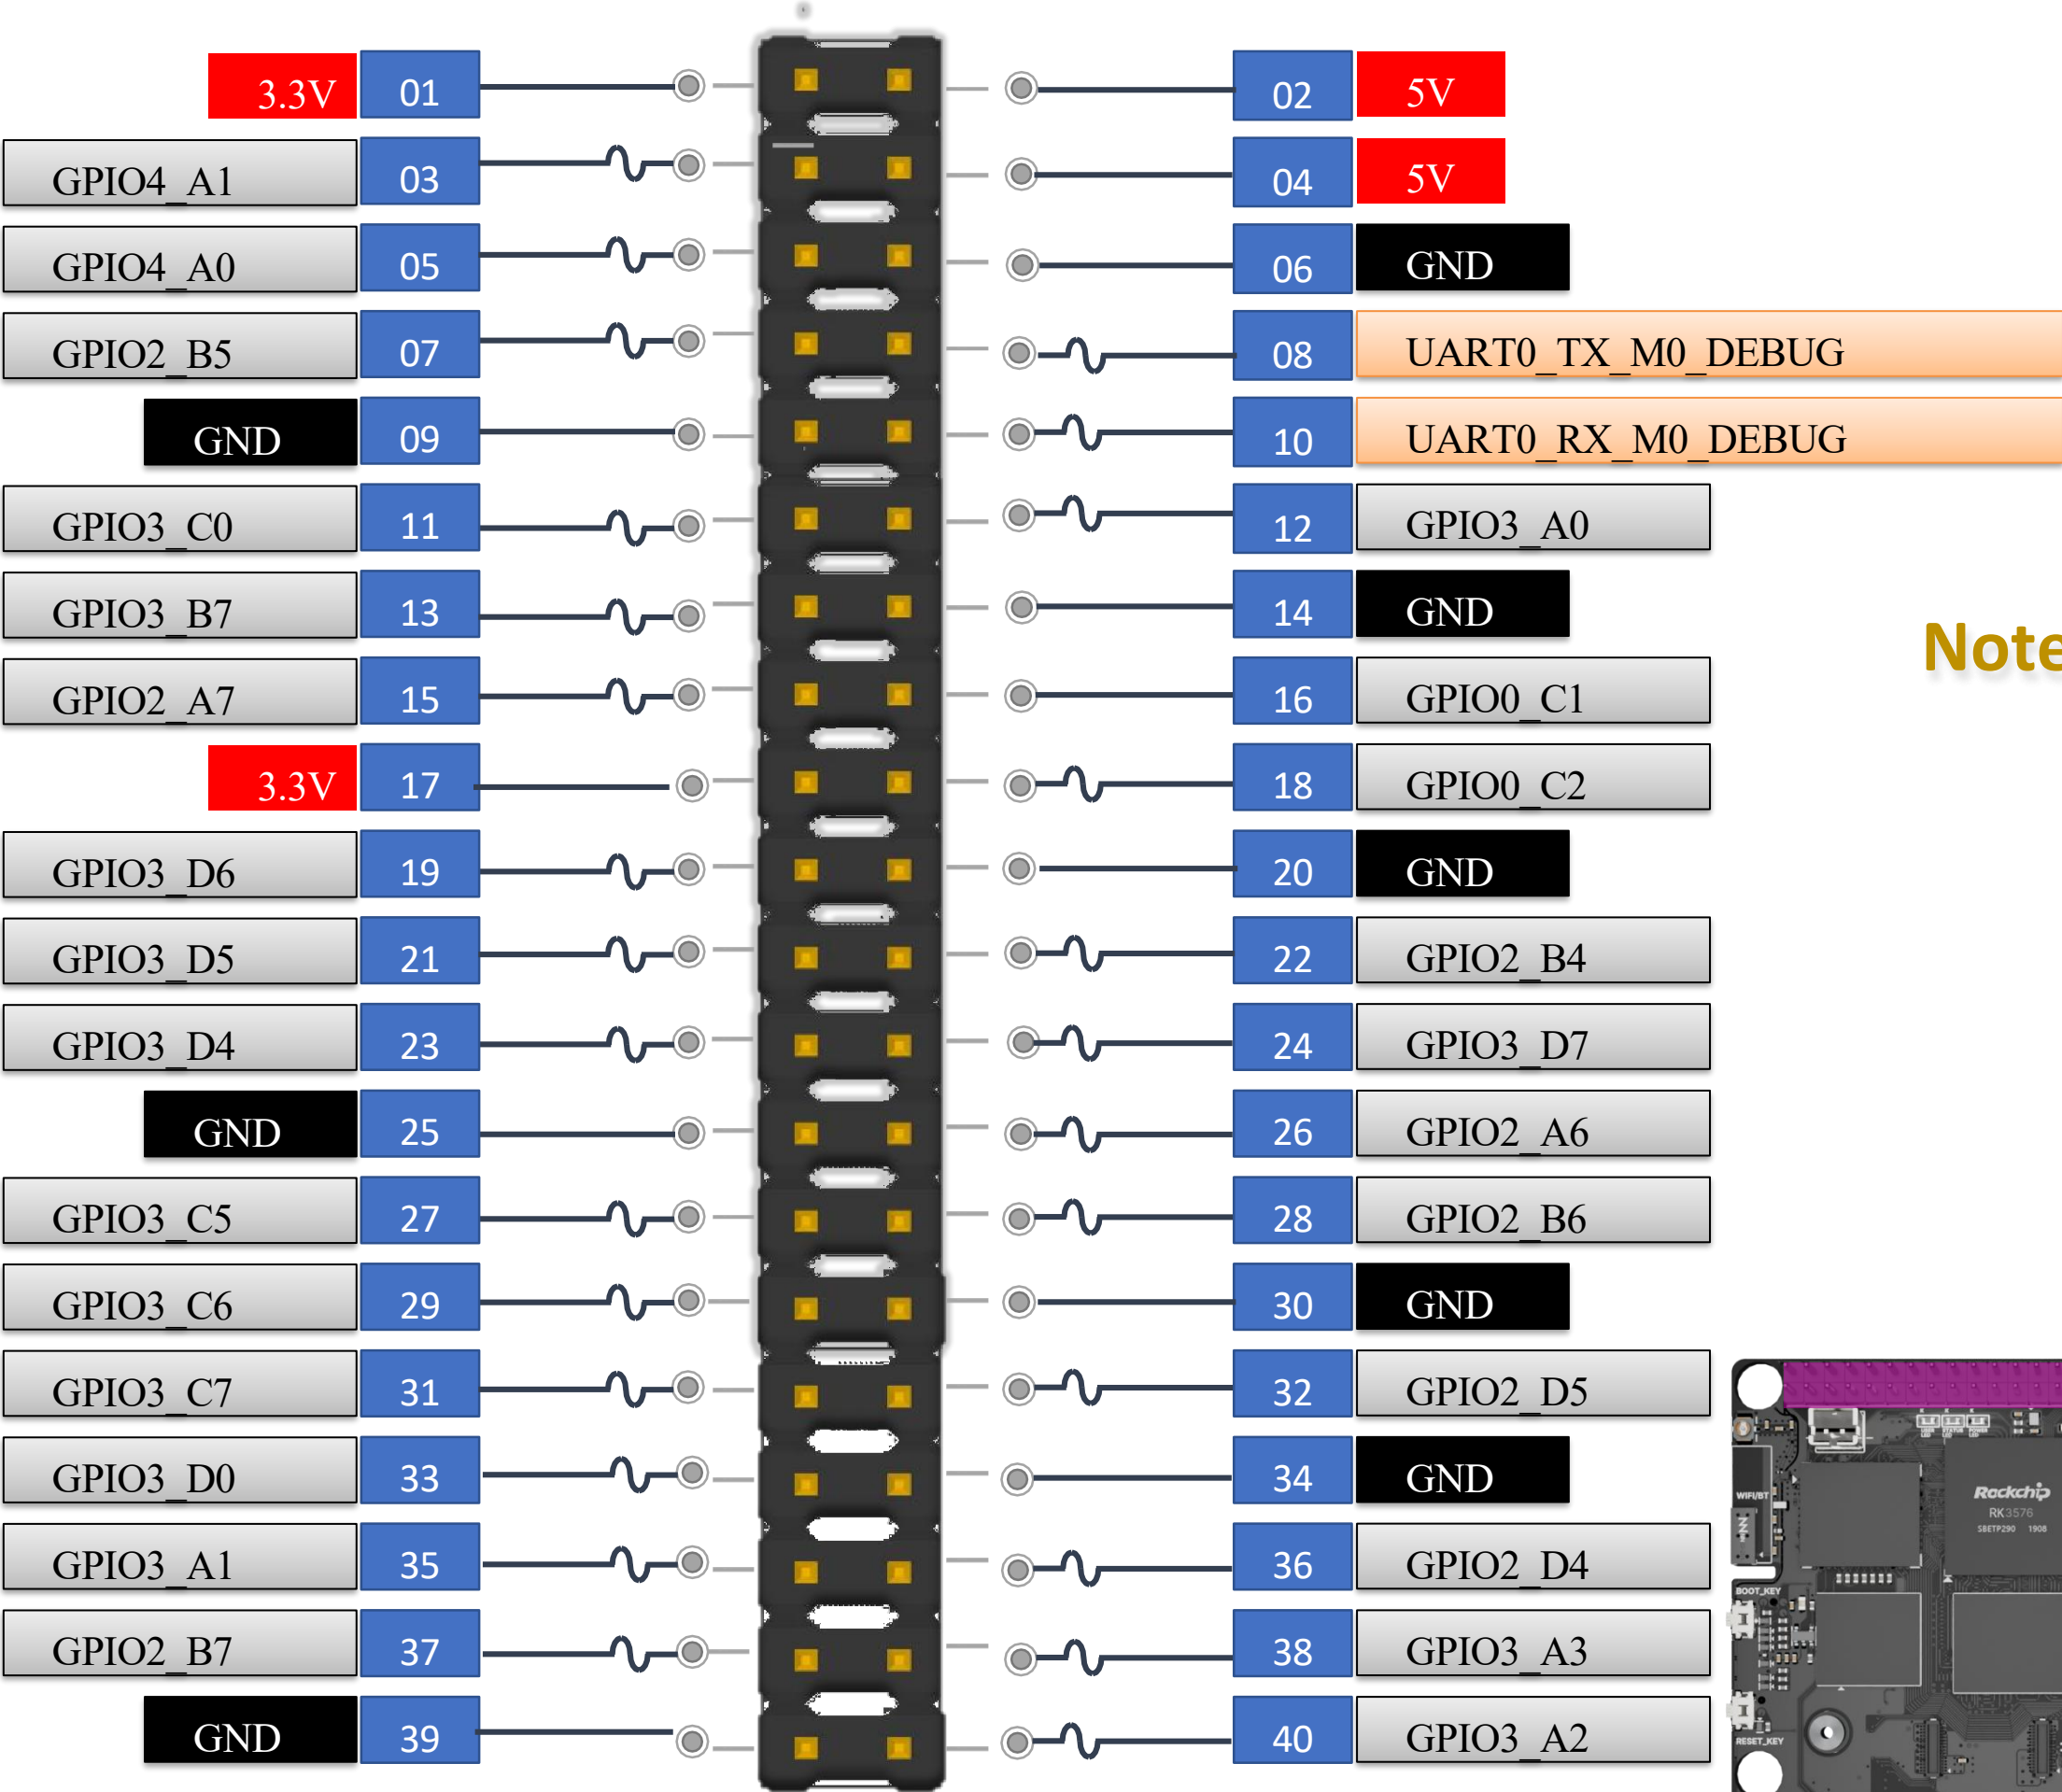

Note : Debug UART

RK3576 40Pin GPIO Header 2.54mm

