# Trainings

## Inspect for Reuse

**⚠ WARNING ⚠**

**When using solvents, acids, or alkaline materials for cleaning, follow the manufacturer's recommendations for use. Wear goggles and protective clothing to reduce the possibility of personal injury.**

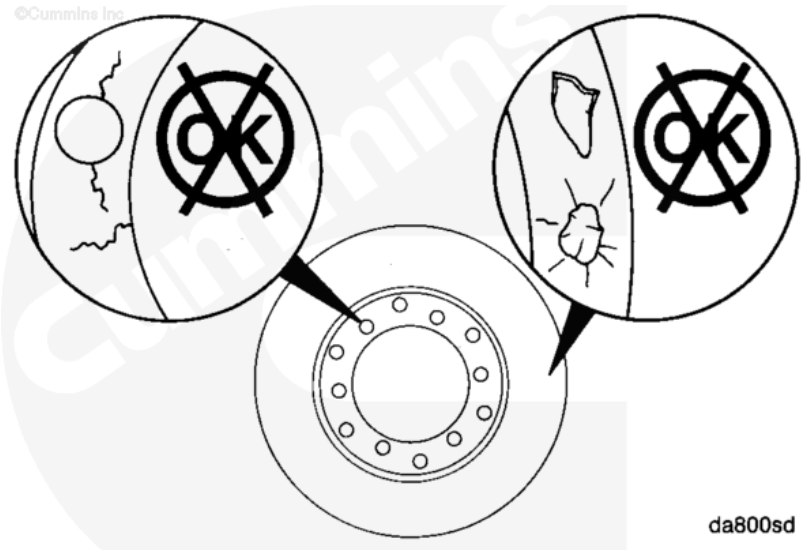


Vibration dampers have a limited service life. The vibration dampers **must** be inspected at 10,000 hours of service and replaced at 24,000 hours of service in all applications except haul trucks. Haul truck dampers can be replaced at rebuild.

Do **not** attempt to repair or balance a viscous vibration damper in the field.

Use solvent to clean the exterior of the vibration damper.

Inspect the mounting flange for cracks.

Inspect the housing for dents or bulges.

If the vibration damper is damaged, it **must** be replaced.

## Measure

**⚠ WARNING ⚠**

**When using solvents, acids, or alkaline materials for cleaning, follow the manufacturer's recommendations for use. Wear goggles and protective clothing to reduce the possibility of personal injury.**

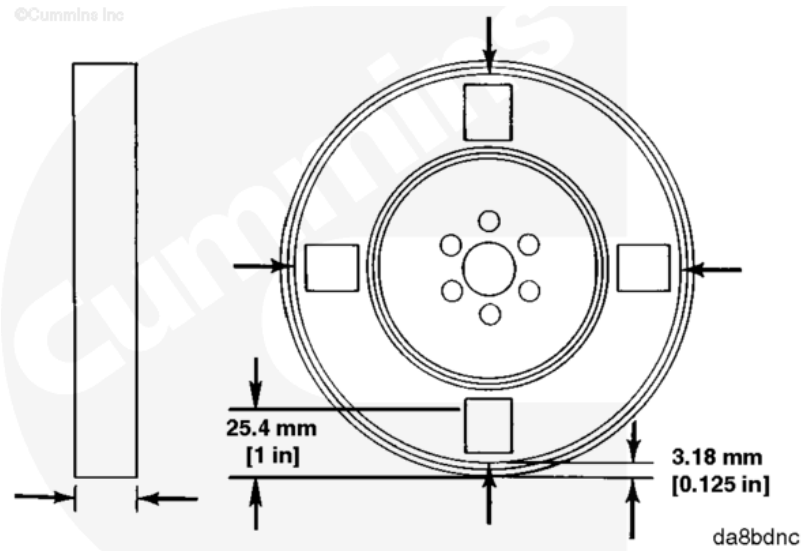


Use a paint solvent and fine emery cloth. Remove paint from the front and back of the housing at the four locations as shown in the drawing.

If the vibration damper has been in service for 24,000 hours or more, it **must** be replaced, regardless of the thickness measurement. Haul truck dampers can be replaced at rebuild.

Measure the vibration damper thickness no less than 3.0 mm [0.125 in] and 25.4 mm [1 in] from the outside circumference to be sure readings are taken on a flat surface.

Measure the thickness at two points in four locations around the vibration damper, 90 degrees apart. The readings **must not** vary more than 0.25 mm [0.010 in]. If the thickness exceeds these specifications, the vibration damper **must** be replaced.

| Maximum Vibration Damper Thickness | | |
|---|---|---|
| mm | | in |
| 65.66 | MAX | 2.585 |

## Leak Test

If inspection found signs of leakage, a thorough leakage detection is required.

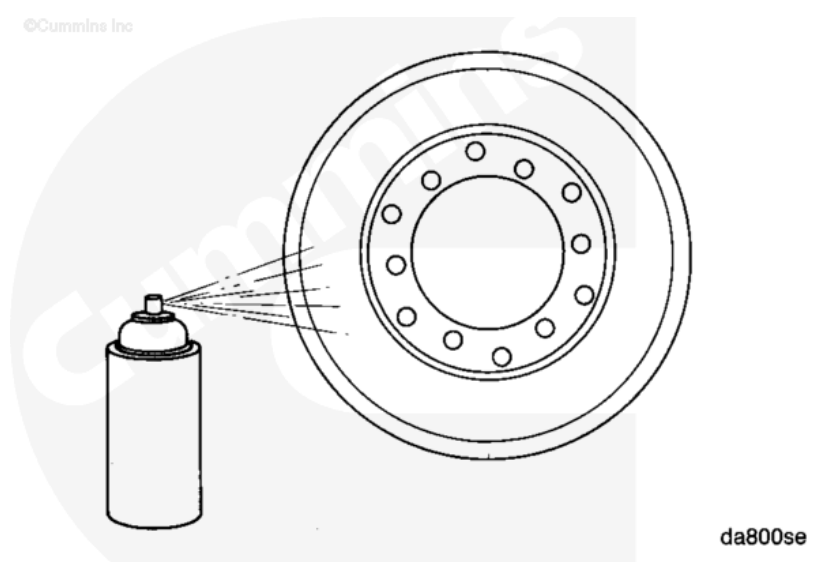


The Crack Detection Kit, Part Number 3375432, contains the necessary cleaner, penetrant, and developer to check for cracks using the dye penetrant method.

Use detection developer, Part Number 3375434, or equivalent.

Spray the rolled lip of the vibration damper and inspect for cracks.

If cracks are found, the vibration damper **must** be replaced.

Check for fluid leakage around the rolled lip.

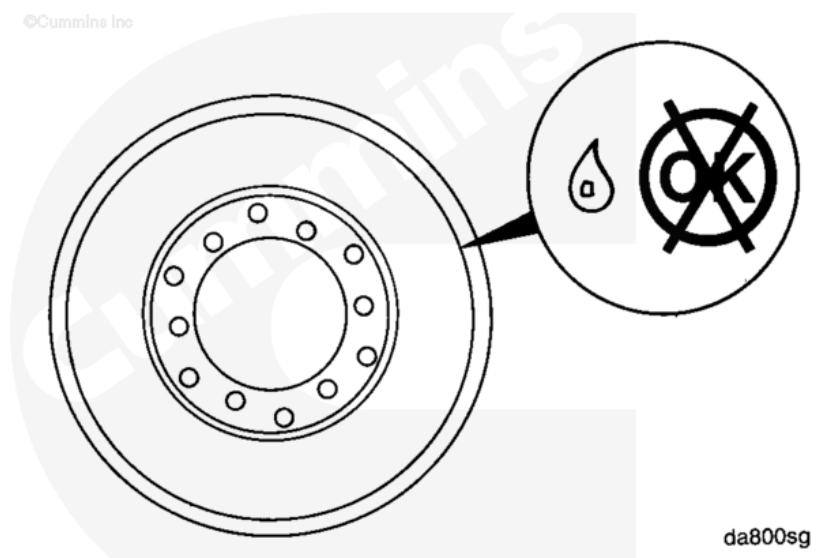


The vibration damper **must** be replaced if there is any fluid leakage.

**Last Modified: 14-Oct-2019**