

Trainings ▾


Calibrate

⚠ WARNING ⚠

To reduce the possibility of personal injury, avoid contact of hot oil with your skin.

⚠ WARNING ⚠

Some state and federal agencies have determined that used engine oil can be carcinogenic and cause reproductive toxicity. Avoid inhalation of vapors, ingestion, and prolonged contact with used engine oil. If not reused, dispose of in accordance with local environmental regulations.

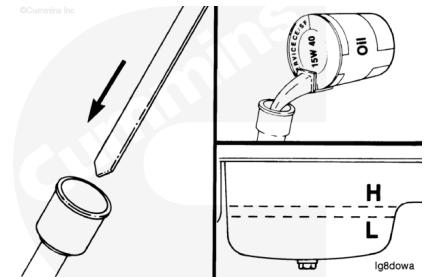

Make sure the vehicle is sitting on a level surface.

Drain the oil. Use the following procedure in the Operation and Maintenance Manual. Refer to Procedure 007-002 in Section 5. (</qs3/pubsys2/xml/en/procedures/18/18-007-002.html>) Use the following procedure in the Service Manual. Refer to Procedure 007-037 in Section 5. (</qs3/pubsys2/xml/en/procedures/18/18-007-037-tr.html>)

Install the dipstick into the dipstick tube housing.

Use the correct volume of clean 15W-40 engine oil. Fill the oil pan to the specified LOW or L oil level.


Use the lubricating oil system specifications for the correct engine oil capacity for the application. Refer to Procedure 018-017 in Section V. (</qs3/pubsys2/xml/en/procedures/18/18-018-017.html>)

⚠ CAUTION ⚠

Use care when marking the dipstick, or the dipstick will break if the scribe mark is too deep.

Remove the dipstick and scribe a mark across it at the oil level. Label the mark "L" to indicate the low oil level.


If a new, blank dipstick is being used, cut the dipstick approximately 38 mm [1.5 in] below the LOW or L oil level mark.

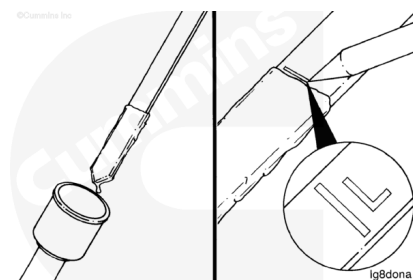

Wipe the excess oil from the dipstick and install it into the dipstick housing.

Use the correct amount of oil to fill the oil pan to the specified HIGH or H oil level.

Use the lubricating oil system specifications for the correct engine oil capacity. Refer to Procedure 018-017 in Section V. (</qs3/pubsys2/xml/en/procedures/18/18-018-017.html>)

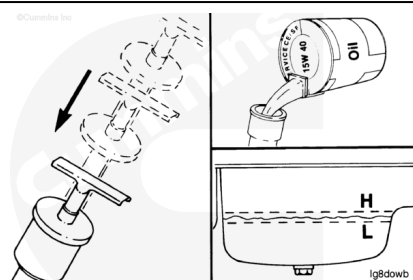

⚠ CAUTION ⚠

Use care when marking the dipstick, or the dipstick will break if the scribe mark is too deep.

Remove the dipstick and scribe a mark across it at the oil level. Label the mark "H" to indicate the high oil level.

