

Trainings ▾


General Information

ReCon® has implemented a new stamping code for all K and QSK cylinder heads to visually identify the correct injector sealing ring size. The following injector protrusion measurement procedure need **only** be completed after resurfacing of cylinder heads, or for ReCon® cylinder heads which do **not** have the seal size indicating mark. Refer to Procedure 002-004 in Section 2. (</qs3/pubsys2/xml/en/procedures/20/20-002-004-tr.html>)

Measure

⚠ CAUTION ⚠


Support the cylinder head to prevent damage to the injector tip that protrudes from the combustion face.

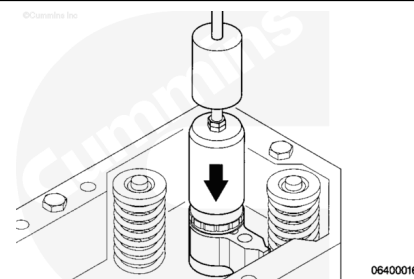

Note : Engines with electronically actuated injectors do **not** require the injector protrusion to be measured.


Install the injector in the cylinder head. Refer to Procedure 006-026 in Section. (</qs3/pubsys2/xml/en/procedures/20/20-006-026-tr.html>)

Use a depth gauge, Part Number 3823495, or equivalent. Turn the cylinder head over.

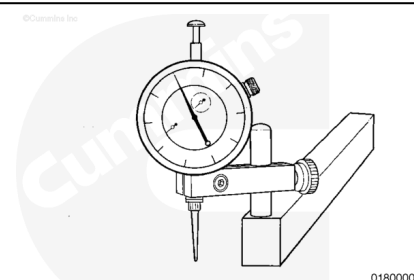


Measure the injector protrusion. If the protrusion is **not** within specifications, use an oversized sealing ring.

Injector Protrusion		
mm		in
2.42	MIN	0.095
2.92	MAX	0.115

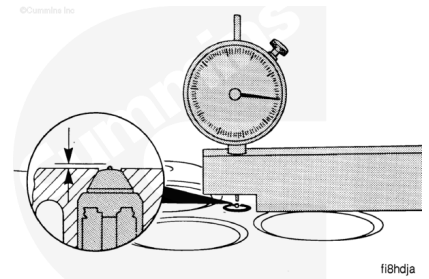

fi8hdja

Injector Sealing Rings			
Wall Thickness		Protrusion Change	
mm	in	mm	in
0.343/0.419	[0.0135/0.0165]	0.00	[0.000]
0.470/0.546	[0.0185/0.0215]	0.25	[0.010]
0.596/0.673	[0.0235/0.0265]	0.51	[0.020]
0.724/0.800	[0.0285/0.0315]	0.76	[0.030]

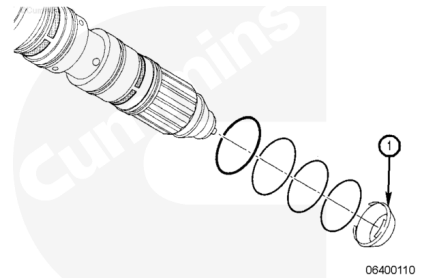

06400110

Note : The 0.343 mm to 0.419 mm [0.0135 in to 0.0165 in] is the standard sealing ring (1).