


Trainings ▾

General Information

with Mechanically Actuated Injector

The QSK19 utilizes the Outer Base Circle (OBC) overhead set procedure.

The OBC procedure requires the use of an accurate inch-pound torque wrench. Torque wrench kit, Part Number 3824783, is available. A torque wrench with a range from 0 to 35 N·m [0 to 300 in-lb] is required. The torque wrench needs to be checked on a routine basis for proper calibration.

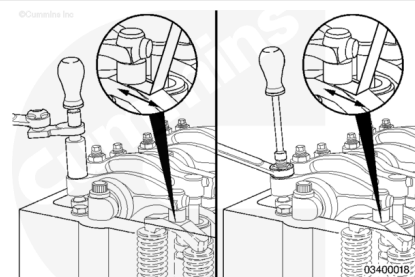


The QSK19 valve rocker lever incorporates a ball and socket to minimize crosshead wear and reduce tipping of the valves.

Note : The intake and exhaust rocker levers are not interchangeable.


Both the intake and the exhaust levers contain a blind rivet and the injector lever contains a plug ball. The rivets and plug balls, plug the oil drilling in the lever. The rivets and plug balls **must** be present.

All of the rocker levers contain replaceable bushings.

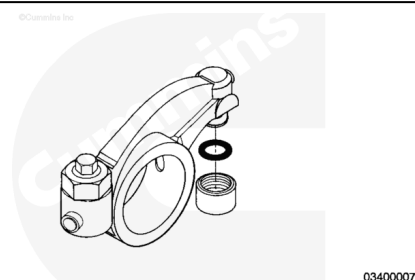


The rocker lever covers are available **with** and **without** crankcase breathers.

The engine should have 3 breathers, but the locations can vary. The rocker covers without breathers should have a service plug (for the injector cut out tool) installed.

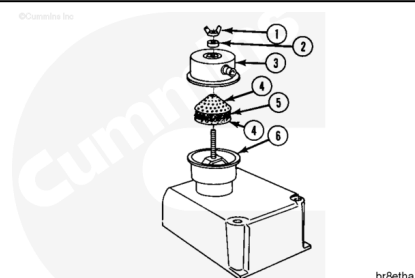

Rail Applications

The QSK19 Rail Engine uses a Mann & Hummel™ open crankcase breather system. The two Mann and Hummel™ canisters (A) are mounted on a modified lubricating oil pan adapter hand hole cover.

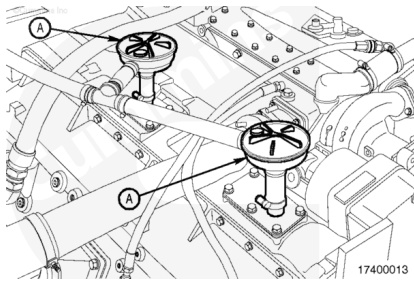

Last Modified: 28-Jun-2006
