


Trainings ▾

General Information

⚠ CAUTION ⚠

The cam follower mounting capscrews are special 12-point flange heads. Failure will result if standard capscrews are used.

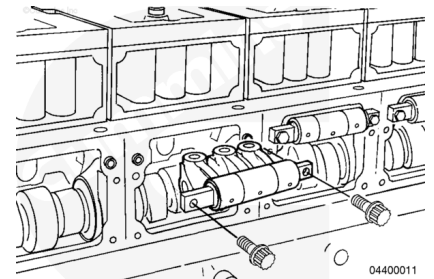

Note : Shown are the QSK19 cam followers for the mechanically actuated injector equipped engine. The QSK19 electronically actuated injector equipped engine cam followers do not have the center injector cam follower. It is replaced with a spacer.


Pressurized engine oil is supplied to each cam follower assembly through an oil cavity around the mounting capscrews of each assembly.

The oil drilling in the cam follower shaft has a cup plug at both ends. This allows either end of the shaft to be installed toward the front of the engine. The cup plugs in the ends of the shaft keep the flow of pressurized oil in the shaft, instead of dumping the oil into the camshaft cavity in the block. The cup plugs **must** be installed on the ends of the shaft, outside the capscrew hole. The ring dowel bores **must not** have any burrs.

The QSK19 utilizes a one-piece cam follower cover with a steel carrier paper gasket.

QSK19 cam followers are **not** rebuildable in the field, due to the fit between the pin and lever. Liquid nitrogen is required to shrink the pin sufficiently to slide through the bores in the lever.

New cam follower and roller assemblies are coated with a heavy preservative compound. They **must** be cleaned and lubricated with engine oil before each assembly is installed on the engine.

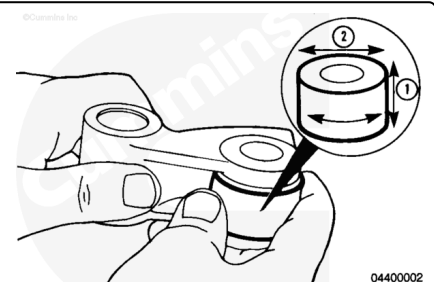

Rail Applications

The QSK19 Rail cam follower cover has been modified to allow two lubricating oil scavenging tubes to be attached. The tubes allow lubricating oil to be scavenged from the cam follower cover to an oil manifold on the suction side of the gear driven scavenge pump.

