


Trainings ▾

Initial Check

with Mechanically Actuated Injector


Refer to the fuel consumption check list sheets in the back of this section.

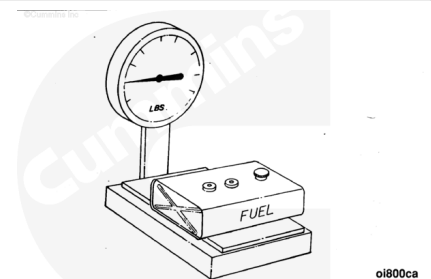

Install a remote fuel tank (1) with enough capacity to run 1 hour.

Fill the fuel tank. Weigh the tank with the fuel. The weight of Number 2 diesel fuel is nominally 0.844 kg per liter [7.03 pounds per gallon].


Note : Use a scale capable of measuring within 0.045 kg [0.1 lb] to weigh the fuel tank.

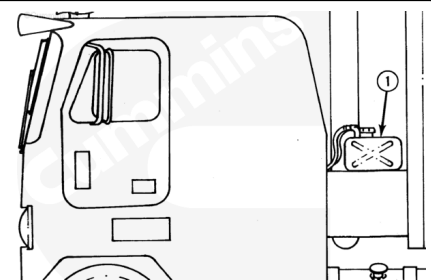

Test


Off-Highway Applications

Measure the time with a stopwatch.

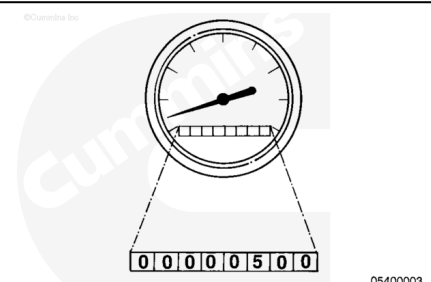

After one hour of operation, weigh the fuel remaining, and compute the fuel used in liters [gallons] as required.

Compute the fuel consumption. Fuel used divided by the time equals the fuel consumption rate.

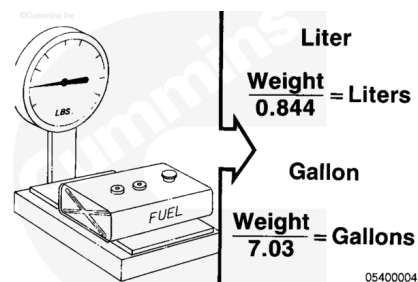

with Electronically Actuated Injector

Use INSITE™ electronic service tool to monitor fuel consumption.

