

Trainings ▾

Specifications

Note : For performance and fuel rate values, see the engine data sheet or the fuel pump code for the particular model involved.

Note : No injector adjustments are required for engines with electronic injectors.

Engine Speed	Refer to the Fuel Pump Calibration Data for optional speed rating
--------------	---

Displacement	19 liters [1150 cu in]
--------------	------------------------

Bore and Stroke	158.75 mm x 158.75 mm [6.25 in x 6.25 in]
-----------------	---

Engine Weight (Approximate):

Dry 1720 kg [3800 lb]Wet 2045 kg [4504 lb]

Firing Order	1-5-3-6-2-4
--------------	-------------

Valve and Injector Settings (Mechanical Injectors):

Intake Valve Adjustment 0.36 mm [0.014 in]Intake Valve Limits 0.28 to 0.43 mm [0.011 to 0.017 in]Exhaust Valve Adjustment 0.81 mm [0.032 in]Exhaust Valve Limits 0.74 to 0.89 mm [0.029 to 0.035 in]Injector OBC Method Adjustment (in engine) 19 N•m [165 in-lb]

Valve Settings (Electronic Injectors):


Intake Valve Adjustment 0.36 mm [0.014 in]Intake Valve Limits 0.28 to 0.43 mm [0.011 to 0.017 in]Exhaust Valve Adjustment 0.69 mm [0.027 in]Exhaust Valve Limits 0.69 to 0.77 mm [0.027 to 0.030 in]

Compression Ratio:

525 to 600 hp - Jacket Water Aftercooled 17.0:1600 to 750 hp - Low-Temperature Aftercooled (LTA) 15.0:1Engines with Electronic Injectors 16.0:1

Crankshaft Rotation (viewed from the front of the engine)	Clockwise
---	-----------


QSK19 Cylinder Location

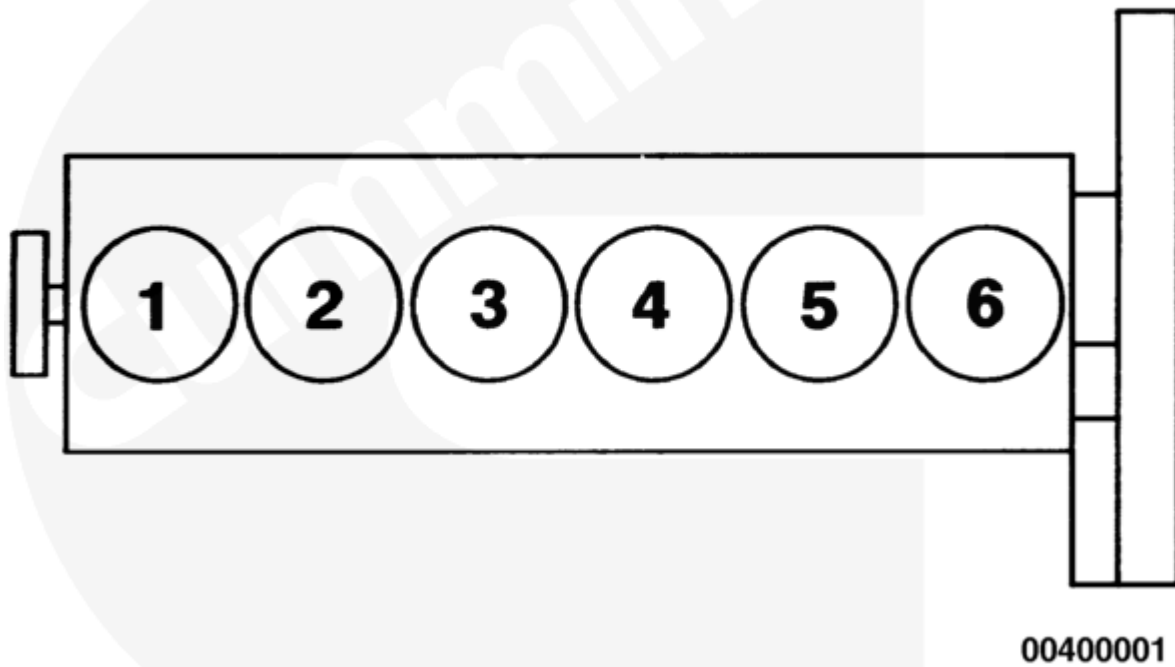

The above illustration indicates the cylinder locations.

©Cummins Inc

- **Intake**
- **Exhaust**

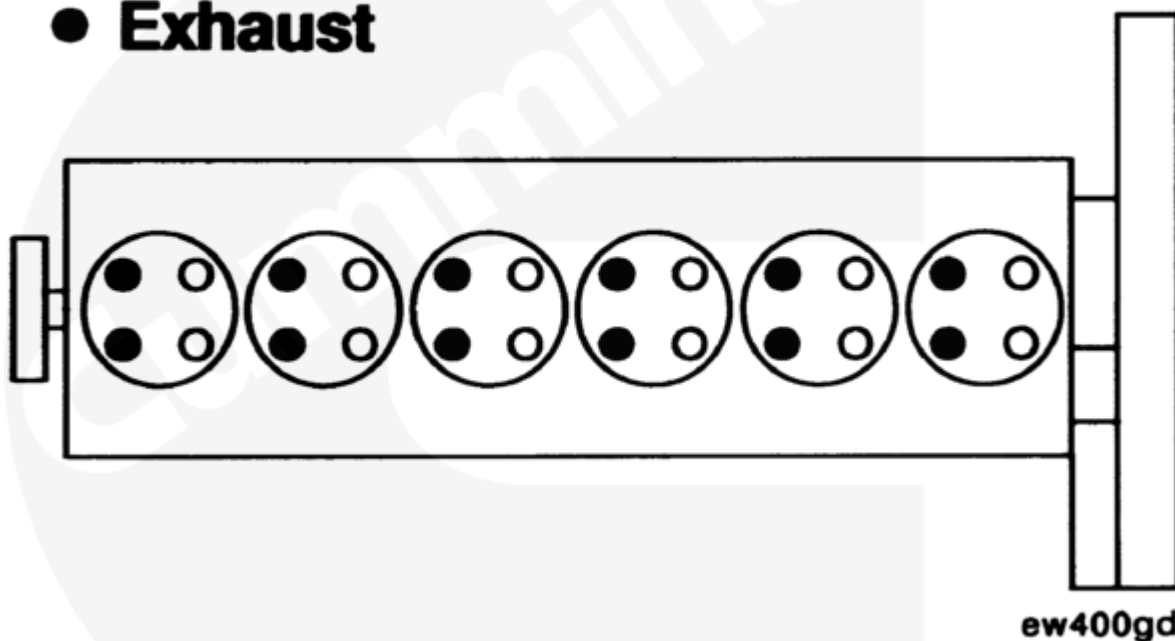

The above illustration indicates the intake and exhaust valve locations.

