

Trainings ▾


Install

Note : Not all engines are equipped with this option.

Note : If the engine has two vibration dampers, a longer idler arm than shown is required.

Note : If the engine has a fan hub with 457 mm [18 in] center (low mount fan), an adapter plate is required between the idler arm and the front gear cover.

Note : Check to be sure the spring on the idler arm is not under tension. This will aid the future installation of the fan hub.

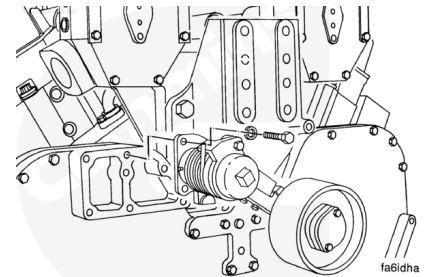

⚠ WARNING ⚠

This component or assembly weighs greater than 23 kg [50 lb]. To prevent serious personal injury, be sure to have assistance or use appropriate lifting equipment to lift this component or assembly.

Install the fan belt idler assembly, the three lock washers, and capscrews.

Torque Value: 60 n•m [45 ft-lb]