

Trainings ▾

Maintenance Check


The following step is for engines with a solid control rod.

Note : One of the nuts has left-hand threads.

The fan belt **must** be installed and under the tension of the fan idler arm spring to adjust the control rod. The fan belt and a portion of the flat washer is **not** shown for clarity.

Turn the adjusting screw (10) until the end of the slot on the lower control rod end (9) is touching the spacer (1).


Hold the adjusting screw and tighten the two jam nuts (11).

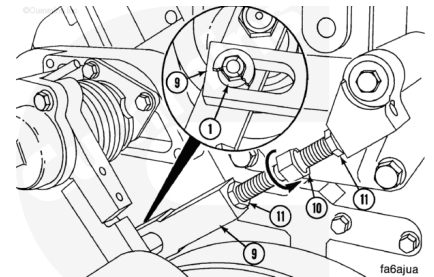

⚠ CAUTION ⚠

Do not tighten the inner jam nut excessively. If the jam nut is too tight, the spring retainer will bend, causing the control rod to fail.

Turn the inner jam nut until the spring retainer washer (24) touches the cylinder on the lower control rod end (27). Hold the inner jam nut and tighten the outer jam nut.

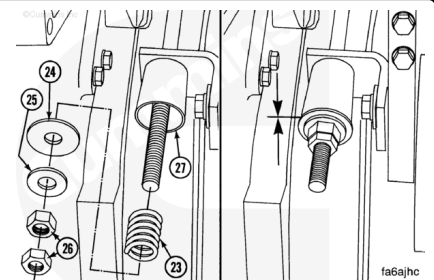

The following step is for a engine with a shock absorber.

There is no adjustment required for engines with a shock absorber.

