



Trainings ▾

General Information

Injector protrusion can affect the amount of power that is output from the engine. In addition to a single sealing washer (A) on the injector, the thickness (B) of the head gasket also controls the injector protrusion.

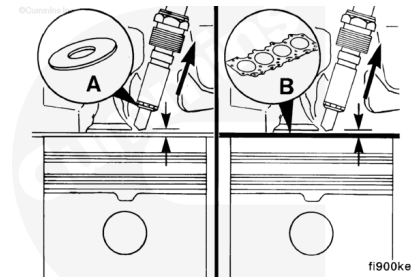


Thicker service head gaskets are used if the cylinder head combustion surface or the cylinder block head deck has been machined.

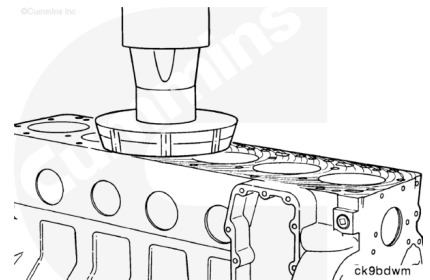

After machining, the block is identified as follows:

- A. Standard None
- B. 0.25 mm [0.010 in] Undersized X
- C. 0.50 mm [0.020 in] Undersized XX

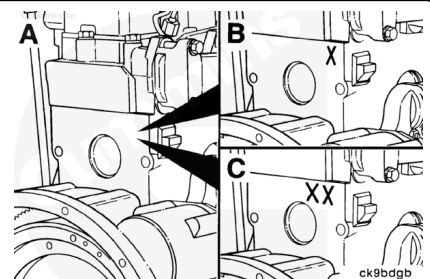

After determining the amount of machining that has been performed, refer to the parts catalog for the proper oversize head gasket.

