


Trainings ▾

Preparatory Steps

Bosch®

Clean debris.


Remove fuel filters.

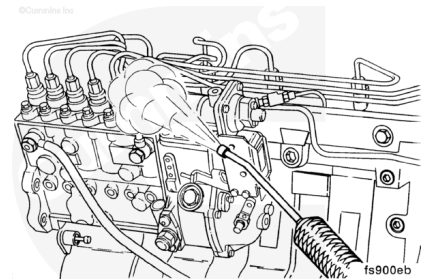

Remove

Bosch®

Remove the retaining nut, fuel filter head adapter, and sealing washers.

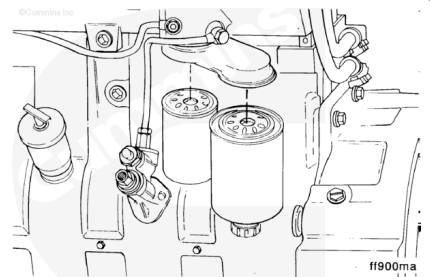


Install

Bosch®

Install in the reverse order of removal.

Torque Value: 32 n•m [24 ft-lb]

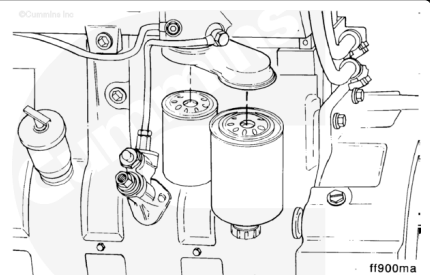

Last Modified: 12-Aug-2002