


Trainings ▾

Initial Check

External

⚠ WARNING ⚠

Wear safety glasses or a face shield, as well as protective clothing, to prevent personal injury when using a steam cleaner or high-pressure water.

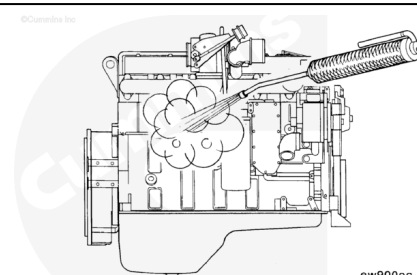


The first step in diagnosing excessive lube oil consumption is to verify that there are no external oil leaks.

Use a steam cleaner or high-pressure washer to clean the engine.


A black light kit, Part Number 3163338, can be very helpful when locating the source of an oil leak.

Add the fluorescent tracer, Part Number 3376891, before running the engine. The tracer will be highlighted by the black light to help identify the source of the leak.

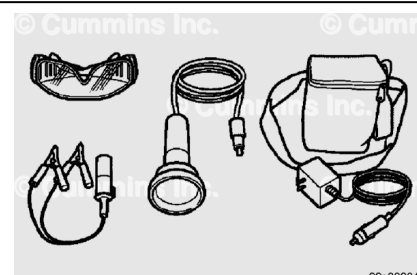


Operate the engine until the coolant temperature reaches 82°C [180°F]. If necessary, run the engine under load to recreate the conditions of the oil leak. Perform a stall test, or a road test. Inspect the exterior of the engine for leaking gaskets, seals, o-rings, pipe plugs, or fittings.

Note : Before replacing any gaskets, check the capscrews to make sure they are tightened to the correct torque values. Refer to Procedure 018-009 in Section V. (</qs3/pubsys2/xml/en/procedures/99/99-018-009.html>)

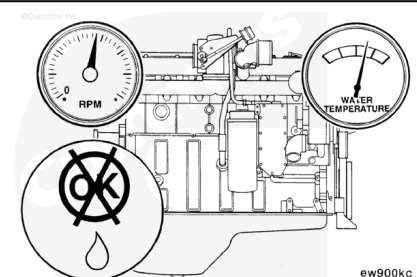

Inspect the engine crankcase breather tube and hose for restriction. Refer to Procedure 003-018 in Section 3. (</qs3/pubsys2/xml/en/procedures/100/100-003-018.html>)

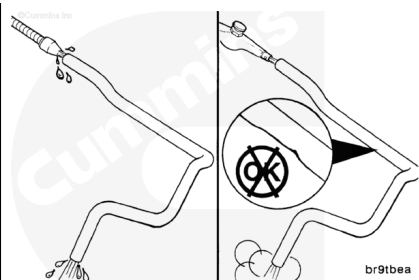

Check for a loose or missing oil dipstick tube, dipstick, or oil fill cap.

