


Trainings ▾

Coolant Blending and Mixing

Check the antifreeze concentration. Use ethylene-glycol base antifreeze to protect the engine to -37°C [-35°F] throughout the year.

Antifreeze is essential in all climates. It broadens the operating temperature range by lowering the coolant freezing point and by raising the coolant boiling point.

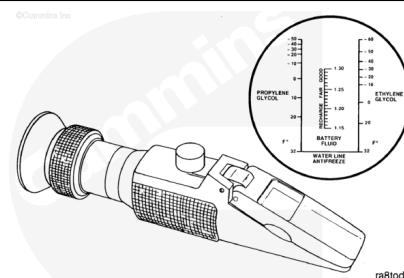

⚠ CAUTION ⚠


Inadequate concentration of the coolant additive can result in major corrosive damage to cooling system components. Overconcentration can cause formation of "gel" that can cause restriction, plugging of coolant passages, and overheating.



Note : If the engine coolant is changed, the coolant filters **must** also be changed.

The cooling system **must** contain the proper coolant additive units to provide the best chemical protection. Refer to the Engine Specifications (Section V).

DCA4 Test Kit: Use **only** DCA4 coolant test kit, Fleetguard® Part No. CC-2626, to check the coolant additive concentration in the cooling system.

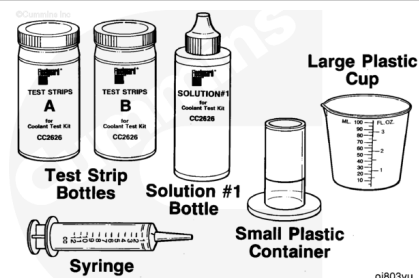

Fleetguard® DCA4 Service Filters and Liquid Precharge

The correct coolant filter to be used is determined by the total cooling system capacity and other operational factors.

Refer to the DCA4 Maintenance Guide in Engine Specifications
(Section V) for the correct selection of the filter.



Last Modified: 13-May-2003
