

Trainings ▾


Test

On-Highway Applications

⚠ CAUTION ⚠


Refer to Chassis Dynamometer - General Engine Test before operating the engine to avoid internal component damage.

Operate the engine at 1500 to 1800 rpm in high gear for the first 80 to 160 km [50 to 100 mi] after rebuild.

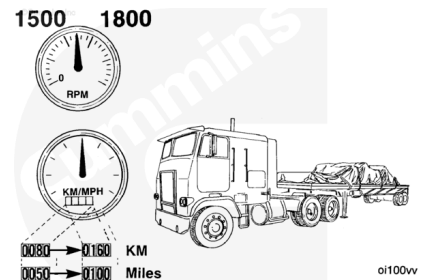

⚠ CAUTION ⚠

Do not idle the engine for more than 5 minutes at any one time during the first 160 km [100 mi] of operation.

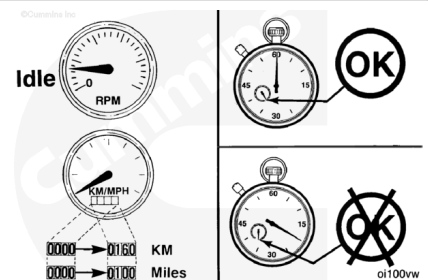


Off-Highway Applications


⚠ CAUTION ⚠

Refer to Chassis Dynamometer - General Engine Test before operating the engine to avoid internal component damage.


Operate the engine as follows during the first 3 hours after rebuild:

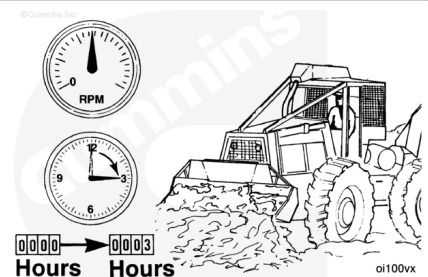

1. Do **not** idle the engine for more than 5 minutes at any one time.
2. Operate the engine at 75-percent throttle while loaded.

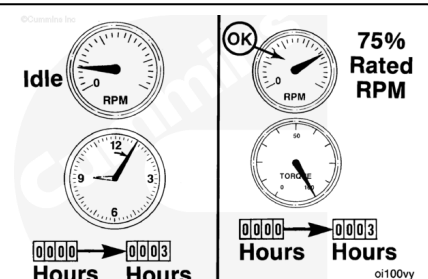

3. Do **not** operate the engine at rated speed (rpm) and full load for more than 5 minutes at any one time.

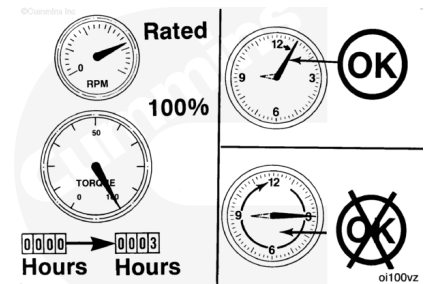

Change the lubricating oil and oil filter after 800 km [500 mi] or 20 hours of operation; refer to Procedure 007-037 (</qs3/pubsys2/xml/en/procedures/100/100-007-037.html>).

