

Trainings ▾

Preparatory Steps


Note : Not all engines are equipped with this option.

- Disassemble the fan drive idler arm assembly. Refer to Procedure 008-029 in Section 8.
(/qs3/pubsys2/xml/en/procedures/57/57-008-029.html)




Disassemble

Remove the capscrews, lock washers, plate, and gasket.

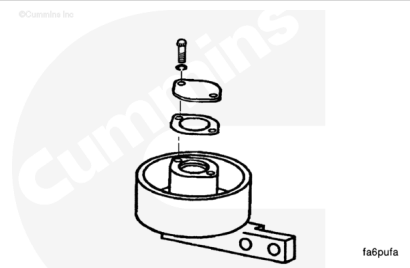


Note : The locknut has a left-hand thread.

Remove the locknut (1). Lift the pulley (2) from the shaft.

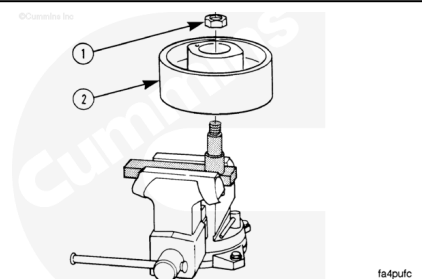

Remove the inner spacer (3) and rear seal (5).

Remove the front bearing (3) and the rear bearing (6). Tag them for future identification.

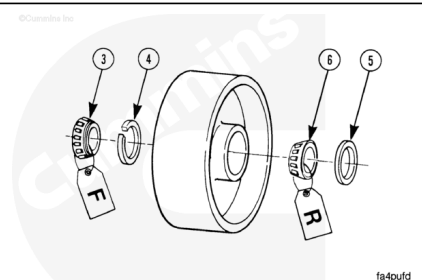

Clean and Inspect for Reuse

⚠ CAUTION ⚠


Do not allow the force of the compressed air to turn the bearing when cleaning. Bearing damage will result due to lack of lubrication.

⚠ WARNING ⚠

When using solvents, acids, or alkaline materials for cleaning, follow the manufacturer's recommendations for use. Wear goggles and protective clothing to reduce the possibility of personal injury.

⚠ WARNING ⚠

Wear appropriate eye and face protection when using compressed air. Flying debris and dirt can cause personal injury.

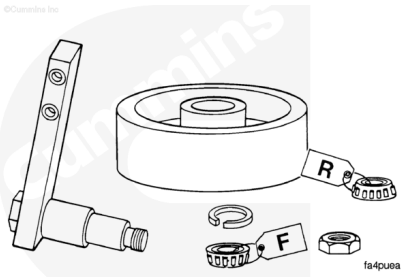

Use solvent to clean the parts.


Dry with compressed air.

Inspect the front and rear bearings.

The bearings and spacers are part of a kit. See equipment manufacturer service information.

Inspect the shaft for wear at the seal locations.

Shaft Outside Diameter		
mm		in
21.961	MIN	0.8646
21.974	MAX	0.8651

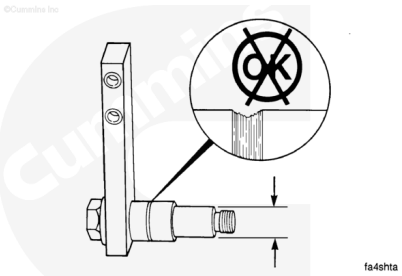


Remove the locknut and lock washer.

Be sure the shaft is tight in the bracket. If the shaft is loose, replace both pieces.

Install the parts.

Torque Value: 205 n•m [151 ft-lb]

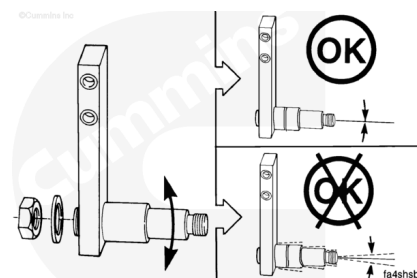

Assemble

⚠ CAUTION ⚠

Do not lubricate the seal or the seal surface of the shaft. The seal and seal surface must be clean and dry.

Use high performance, general purpose industrial-type grease (NLGI Grade No. 2) Chevron™ SRI Grease 2 or Mobilux™ EP 2 grease, or its equivalent.


If above greases are **not** available locally, contact a Cummins® Distributor for advice on other Cummins® approved equivalents.

Lubricate the rear bearing (6) and the bearing race.

Slide the bearing (6) into the bore of the idler pulley.

Use a mandrel (7) to install the seal (5).


The seal **must** be even with the top surface or no more than 0.51 mm [0.020 inch] below the top surface.

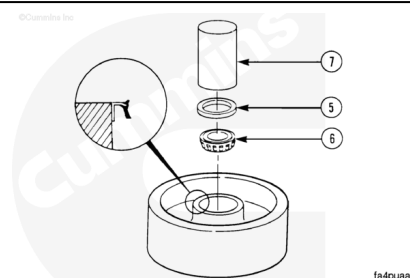

Install the pulley.

The bearing **must** slide easily over the shaft.

If it does **not** slide easily over the shaft, check for chips and burrs.

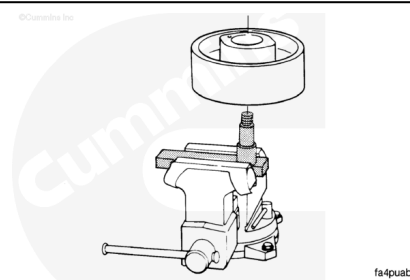


Install the bearing inner spacer (4).

Use high performance, general purpose industrial-type grease (NLGI Grade No. 2) Chevron™ SRI Grease 2 or Mobilux™ EP 2 grease, or its equivalent.

If above greases are **not** available locally, contact a Cummins® Distributor for advice on other Cummins® approved equivalents.

Lubricate the front bearing (3) and the bearing race.

Install the bearing (3).




fa4puac

Note : The locknut has a left-hand thread.


Install and tighten the locknut.

Torque Value: 150 n•m [111 ft-lb]



fa4puad

Install the cover plate.




fa6pufa

Measure

Use a dial indicator to measure the end clearance.

Bearing End Clearance		
mm		in
0.08	MIN	0.003
0.25	MAX	0.010



fa4puta

If the clearance is **not** within specification, be sure the spacer was installed correctly.

The bearings **must** touch the spacer. The bearing races **must** touch the retaining ring.

Lubricate


Remove the capscrews, lock washers, cover plate, and gasket.

Use high performance, general purpose industrial-type grease (NLGI Grade No. 2) Chevron™ SRI Grease 2 or Mobilux™ EP 2 grease, or its equivalent.

If above greases are **not** available locally, contact a Cummins® Distributor for advice on other Cummins® approved equivalents.

Fill the front cavity 2/3 full of grease.

Install the cover plate.

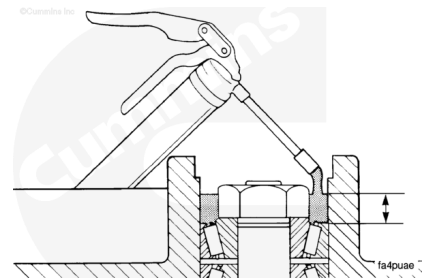

Finishing Steps

- Assemble the fan drive idler arm assembly. Refer to Procedure 008-029 in Section 8. (</qs3/pubsys2/xml/en/procedures/57/57-008-029.html>)

