


Trainings ▾

Flow Diagram

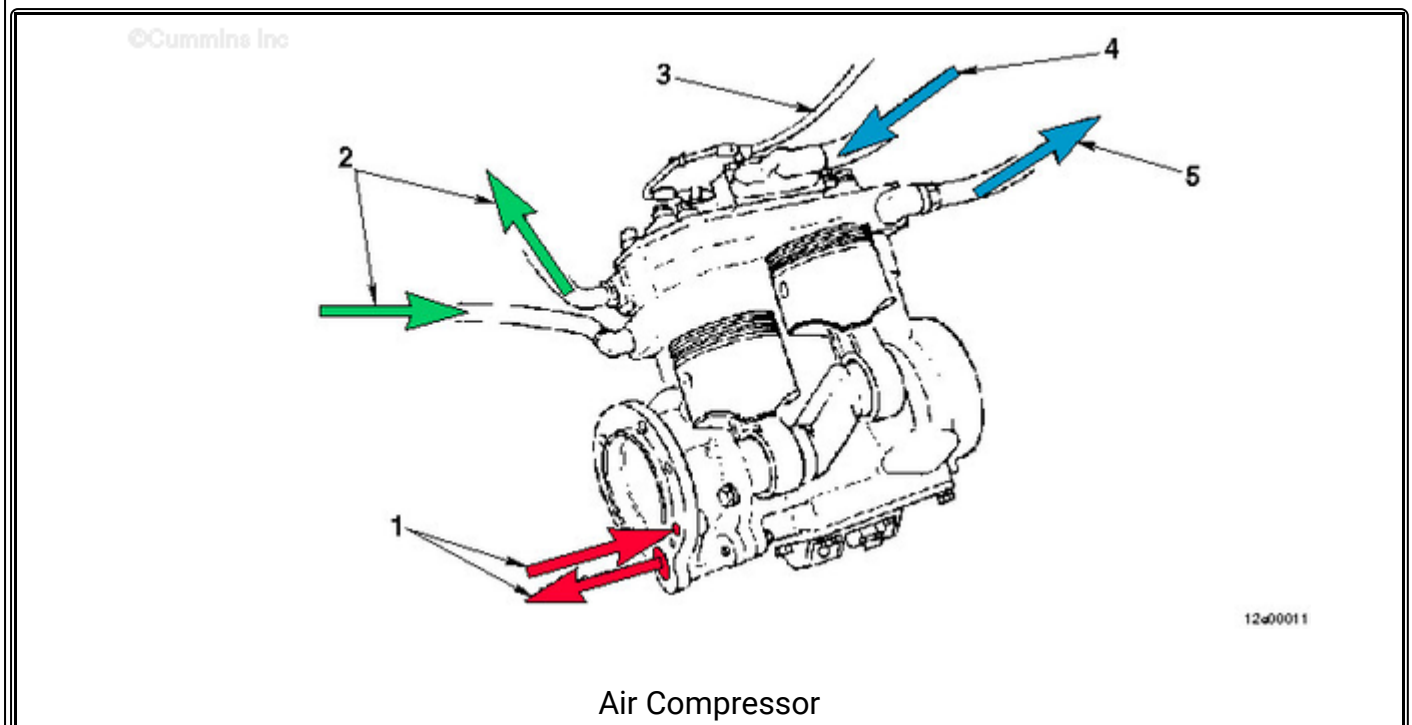

The **only** Cummins Inc. compressor used on QST30 engines is the two-cylinder, 850-liter-each-minute [30-cfm] compressor. For the complete rebuild instructions of the Cummins compressor, refer to Bulletin 3666121, Cummins Two-Cylinder Air Compressor Shop Manual.

For complete rebuild instructions for any air compressor other than Cummins, refer to the original equipment manufacturer.

1. Lubricant
2. Coolant
3. Air governor signal
4. Air inlet from aftercooler
5. Compressed air outlet.