


Trainings ▾


General Information

The J1939 backbone harness connects the primary and secondary ECMs in addition to providing a service tool interface connector.

The J1939 backbone harness is required to have two terminating resistors (120 ohms each) in parallel with the J1939 data link positive (+) and J1939 data link negative lines. These terminating resistors are on each end of the backbone harness.

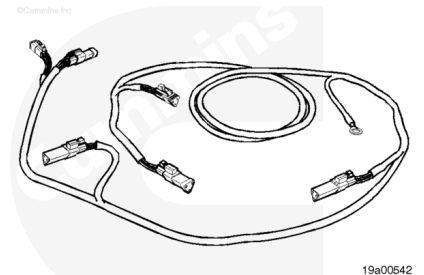


In addition, the backbone harness is shielded to reduce electrical interference on the data link. This shielded line is grounded to the engine block.

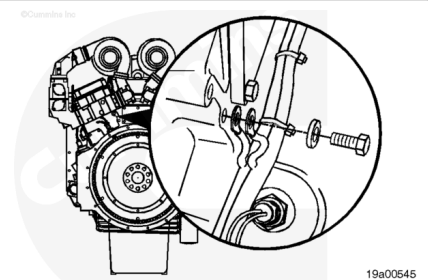


The QST30 backbone harness consists of four interface connectors, which are triangular 3-pin Deutsch™ connector bodies.

The QST30 backbone harness also consists of two terminating resistor plugs. The resistors are inserted into the cap and connect through to the data link circuit when plugged into a terminal.

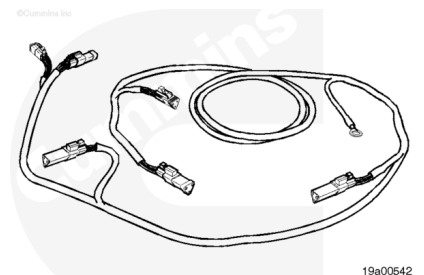

To determine if a capped plug is a service tool interface plug or a terminating resistor plug, remove the cap and examine the inside. The terminating resistor caps are blue in color, with two pins visible on the inside.

The service tool interface terminal caps are orange in color and have no pins in the cap. This is the proper place to connect the service tool to communicate with the ECMs.

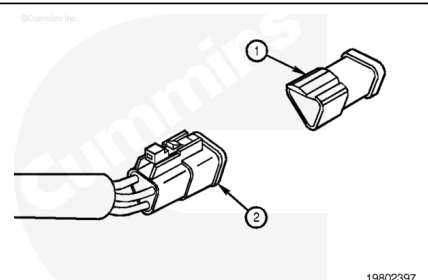


Note : By plugging into either of the two service tool interface connectors, the data link has communication with both ECMs.

The two 6-pin engine-side data link connectors are **not** used with the service tool. They are J1587/1708 data link ports and are **only** used for a generic tool. INSITE™ electronic service tool for QST30 engines requires a J1939 communication protocol with an INLINE™ II adapter.


On engines with a 9-pin engine-side data link connector, the service tool interface terminals on the J1939 backbone have been removed. Use this 9-pin data link connector with the service tool to communicate with both ECMs.

Note : Engines with two round 6-pin Deutsch™ connectors **must** use the triangular 3-pin Deutsch service tool interface connector. The 6-pin connectors **will not** work with the INSITE™ electronic service tool.

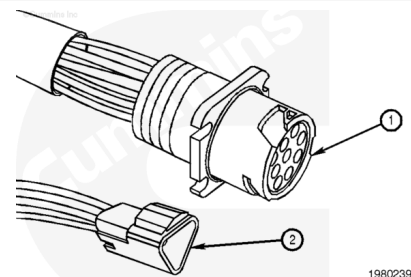


Remove

Disconnect the 3-pin J1939 backbone harness connectors from the J1939 data link harness.

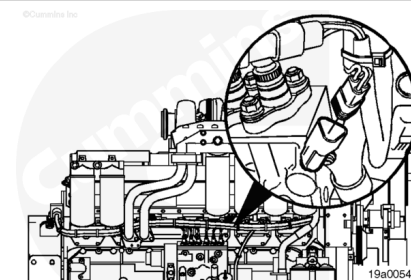


Disconnect the engine block ground from the block.

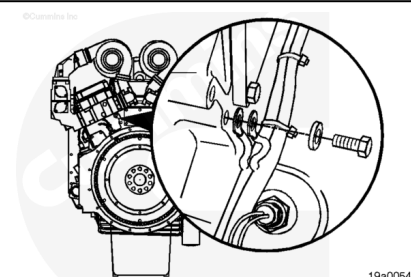


Cut the ties on the J1939 backbone harness.

Remove the J1939 backbone harness from the engine.

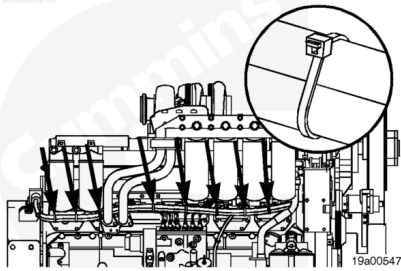


Inspect for Reuse

Repair or replace the engine harness if there is an open circuit or a short circuit found under the protective covering of the harness body.

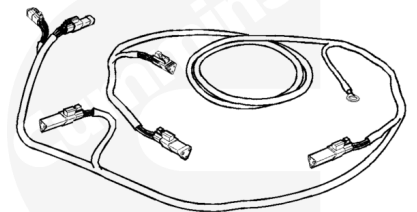


Install

Install the J1939 backbone harness onto the engine.

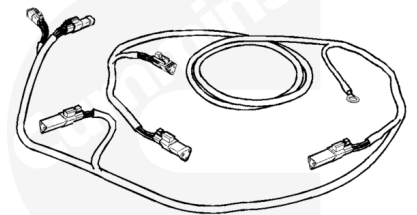


Connect the 3-pin J1939 backbone harness connectors to the left- and right-bank harnesses.

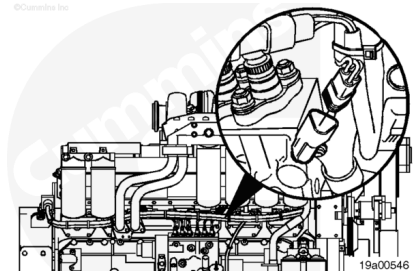

Connect the engine block ground to the block.


©Cummins Inc.

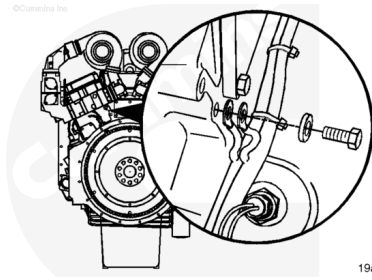

19a00545

Secure the J1939 backbone harness to the engine using coated wire ties.

©Cummins Inc.

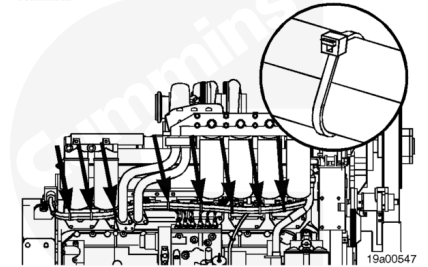

19a00547

Last Modified: 17-Jan-2008
