

Trainings ▾

General Information

⚠ CAUTION ⚠

A sulfated ash limit of 1.85 percent has been placed on all engine lubricating oils recommended for use in Cummins engines. Higher ash oils can cause valve and/or piston damage and lead to excessive oil consumption.

The use of quality engine lubricating oils, combined with appropriate oil drain and filter change intervals, is a critical factor in maintaining engine performance and durability.

Cummins Inc. recommends the use of high-quality SAE 15W-40 heavy-duty engine oil, such as Valvoline® Premium Blue®, which meets performance specifications as listed below.

Note : In areas where CG-4 or CH-4 lubricating oils are **not** available, CES20075 can be used, but, the lubricating oil change **must** be reduced by 50 percent of the Maintenance Schedule oil change interval.

Cummins Engineering Standard Classification (CES)	American Petroleum Institute Classification (API)	International Classifications	Comments
	API CD API CE API CG-4/SH	ACEA E-1	OBSOLETE - DO NOT USE.
CES-20075	API CF-4/SG	ACEA E-2 ACEA E-3 JAMA DH-1	Minimum acceptable oil classification for midrange engines.
CES-20071 CES-20076	API CH-4/SJ API CH-4	Global DHD-1	Acceptable oil classification for midrange engines.
CES-20072 CES-20077	API CH-4	ACEA E-5 Global DHD-1	Similar in performance to CES-20071 but validated under European test standards. Excellent oil for midrange engines.
CES-20078	API CI-4/SK API CI-4		Excellent oil for midrange engines.

A sulfated ash limit of 1.0 mass percent is suggested for optimum valve and piston deposit and oil consumption control.

For further details and discussion of engine lubricating oils for Cummins engines, refer to Cummins Engine Oil Recommendations, Bulletin 3810340 ([/qs3/pubsys2/xml/en/bulletin/3810340.html](http://qs3/pubsys2/xml/en/bulletin/3810340.html)).

The API service symbols are shown in the accompanying illustration. The upper half of the symbols displays the appropriate oil categories.


The lower half can contain words to describe oil energy-conserving features.

The center section identifies the SAE oil viscosity grade.



As the engine oil becomes contaminated, essential oil additives are depleted. Lubricating oils protect the engine as long as these additives are functioning properly. Progressive contamination of the oil between oil and filter change intervals is normal. The amount of contamination will vary depending on the operation of the engine, kilometers or miles on the oil, fuel consumed, and new oil added.

Extending oil and filter change intervals beyond the recommendations will decrease engine life due to factors such as corrosion, deposits, and wear.

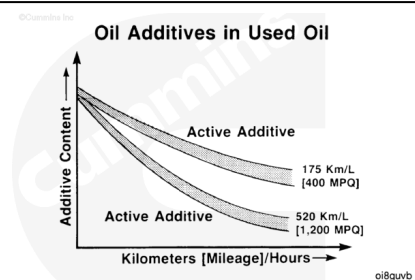

New Engine Break-in Oils

Special “break-in” engine lubricating oils are **not** recommended for new or rebuilt Cummins® engines. Use the same type of oil during the break-in as is used in normal operation.

Additional information regarding lubricating oil availability throughout the world is available in the EMA Lubricating Oils Data Book for Heavy-Duty Automotive and Industrial Engines. The data book can be ordered from the Engine Manufacturers Association, Two North LaSalle Street - Suite 2200, Chicago, IL, U.S.A. 60602. The telephone number is (312) 827-8733.



Arctic Operation

⚠ CAUTION ⚠

The use of a synthetic-base oil does not justify extended oil change intervals. Extended oil change intervals can decrease engine life due to factors such as corrosion, deposits, and wear.

The use of low-viscosity oils, such as 10W or 10W-30, can be used to aid in starting the engine and in providing sufficient oil flow at ambient temperatures below -5°C [23°F]. However, continuous use of low-viscosity oils can decrease engine life due to wear. Refer to the accompanying chart.

If an engine is operated in ambient temperatures consistently below -23°C [-9°F] and there are no provisions to keep the engine warm when it is **not** in operation, use a synthetic CH/SI or CH/SK or higher API classification engine oil with adequate low-temperature properties such as 5W-20 or 5W-30.

The oil supplier is responsible for meeting the performance service specifications represented with its product.

