

Trainings ▾


Remove

Automotive with CM875, CM870 and CM570

Loosen the tube nuts at the EGR connection tube and the sensor adapter.

Do **not** distort the sensor tubes.

Remove the EGR differential pressure sensor tubes.

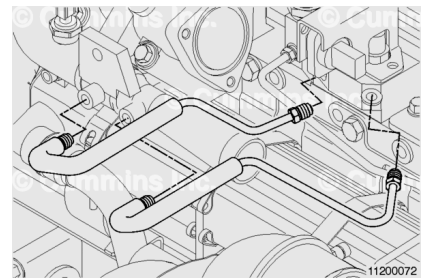

Automotive with CM876

Loosen the tube nuts at the venturi connections.

Loosen the hose clamps at the differential pressure sensor adapter.

Remove the EGR differential pressure sensor tubes.

