

Trainings ▾

Specifications

Automotive Applications

Coolant Capacity (engine only)

With CM570	9.5 liters [10 qt]
With CM875	11.7 liters [12.4 qt]
With CM876	11.7 liters [12.4 qt]
Standard Modulating Thermostat - Range	82 to 93°C [180 to 200°F]

Cylinder Block Coolant Pressure (pressure cap removed)

Minimum - Closed Thermostat, 1800 rpm - No Load	138 kPa [20 psi]
Maximum - Closed Thermostat	275 kPa [40 psi]
Maximum Allowable Operating Coolant Temperature	100°C [212°F]
Minimum Recommended Operating Coolant Temperature	70°C [160°F]


Minimum Recommended Pressure Cap

With CM570	48 kPa [7 psi]
With CM875	69 kPa [10 psi]
With CM876	69 kPa [10 psi]
Maximum Allowable Coolant Flow to Accessories (liters/minute [gpm])	75.5 Liters/min [20 gpm]

Coolant Sensing Fan Control

With CM570 - On	96°C [205°F]
With CM570 - Off	91°C [195°F]

With CM875 - On	95°C [203°F]
With CM875 - Off	92°C [198°F]
With CM876 - On	95°C [203°F]
With CM876 - Off	92°C [198°F]

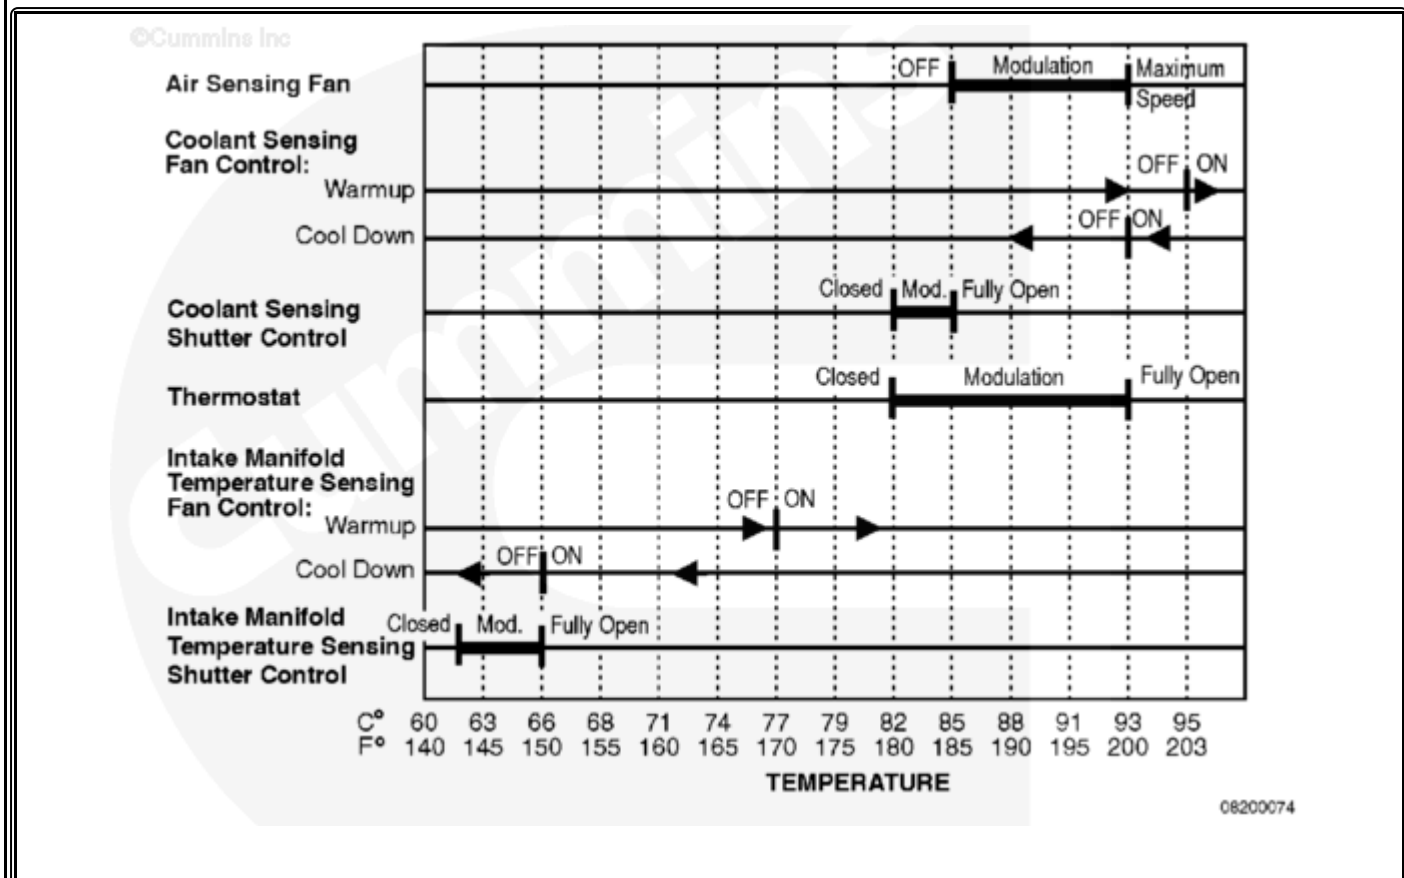

The temperatures listed in this chart for coolant temperature sensing fan control and intake manifold temperature sensing fan control are correct for vehicles that allow the ECM to control the on/off operation of the cooling fan. Consult the OEM for other types of control.

Marine Applications

Coolant Capacity:

Engine with Heat Exchanger	29.4 liters [8 gal]
Minimum Drawdown	15.2 liters [4 gal]
Standard Thermostat Modulating Range	71 to 79.4°C [106 to 175°F]

Block coolant Pressure with Closed Thermostat (pressure cap removed)

Maximum	246 kPa [36 psi]
---------	------------------

Coolant Inlet Pressure with Open Thermostat and No Cap:

Minimum	64 mm Hg [2.5 in Hg]
---------	----------------------

Maximum Coolant Temperature	96°C [205°F]
Minimum Fill Rate	18.9 liters/min [5 gpm]
Minimum Initial Fill Time	2 minutes
Maximum Deaeration Time	10 minutes
Minimum Coolant Expansion Space:	
Percent of Cooling system	5%
External Pressure Loss in Cooling System:	
Maximum	35 kPa [5 psi]
Static Pressure of Coolant:	
Maximum - Exclusive of Pressure Cap	103 kPa [15 psi]
Maximum Sea Water Pressure	103 kPa [15 psi]
Maximum Sea Water Pump Inlet Restriction	-127 mm Hg [5 in Hg]
Maximum Sea Water Pump Initial Suction Lift	3 m [10 ft]
Pressure Cap Rating (with heat exchanger)	103 kPa [15 psi]
Maximum Allowable Coolant Flow to Accessories	37.9 liters/min [10 gal/min]
Industrial Applications	
Coolant Capacity	9.5 liters [2.5 gal]
Standard Modulating Thermostat Range	82 to 93°C [180 to 200°F]
Cylinder Block Coolant Pressure (pressure cap removed):	
Minimum:	
Closed Thermostat (1800 rpm no load)	138 kPa [20 psi]
Cylinder Block Coolant Pressure (pressure cap removed):	
Maximum:	
Closed Thermostat	275 kPa [40 psi]
Maximum Allowable Operating Coolant Temperature	100°C [212°F]

Minimum Recommended Operating Coolant Temperature	70°C [160°F]
Maximum Allowable Deaeration Time	35 minutes
Minimum Recommended Pressure Cap	48 kPa [7 psi]
Generator Set Applications	
Coolant Capacity:	9.5 liters [2.5 gal]
Standard Modulating Thermostat Range	82 to 93°C [180 to 200°F]
Minimum Pressure Cap	48 kPa [7 psi]
Maximum Coolant Friction Head External to Engine	
1500 rpm	55 kPa [8 psi]
1800 rpm	69 kPa [10 psi]
Maximum Static Head of Coolant Above Engine Crank Centerline	14 m [46 ft]
Maximum Top Tank Temperature for Standby/Prime Power	104/100°C [220/212°F]

Last Modified: 01-May-2012
