


Trainings ▾

General Information

The long-term integrity of the charge air cooler system is the responsibility of the vehicle and component manufacturers; however, the following can be checked by any Cummins Authorized Repair Facility.

Note : If the engine experiences a turbocharger failure or any other occasion where oil or debris is put into the charge air cooler, the charge air cooler **must** be cleaned.

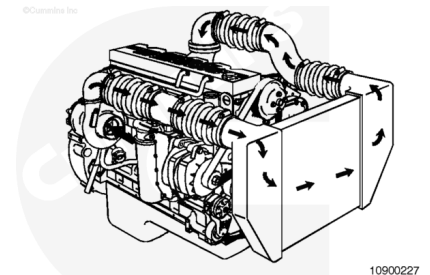


Initial Check

Inspect the charge air cooler for cracks, holes, and damage.

Inspect the tubes, fins, and welds for tears, breaks, or other damage. If any damage causes the charge air cooler to fail the air leak check, the charge air cooler **must** be replaced.


Inspect the charge air cooler plumbing for cracks and damage.

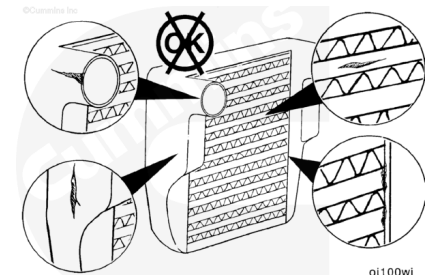

Clean

⚠ WARNING ⚠

When using solvents, acids, or alkaline materials for cleaning, follow the manufacturer's recommendations for use. Wear goggles and protective clothing to reduce the possibility of personal injury.

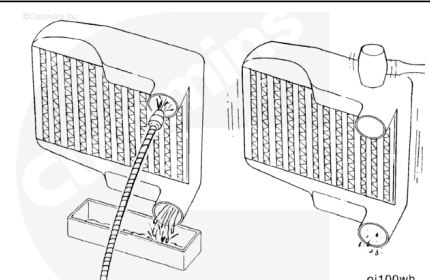

⚠ WARNING ⚠

Some solvents are flammable and toxic. Read the manufacturer's instructions before using.

⚠ CAUTION ⚠

**Do not use caustic cleaners to clean the charge air cooler.
Damage to the charge air cooler will result.**


Flush the charge air cooler internally with solvent in the opposite direction of normal airflow. Shake the charge air cooler and lightly tap on the end tanks with a rubber mallet to dislodge trapped debris. Continue flushing until all debris or oil is removed (i.e., the water runs clear).

Note : Make sure that the tubes are in the vertical direction when flushing.

If the debris can **not** be totally removed from the charge air cooler, the charge air cooler **must** be replaced.

⚠ WARNING ⚠

When using solvents, acids, or alkaline materials for cleaning, follow the manufacturer's recommendations for use. Wear goggles and protective clothing to reduce the possibility of personal injury.

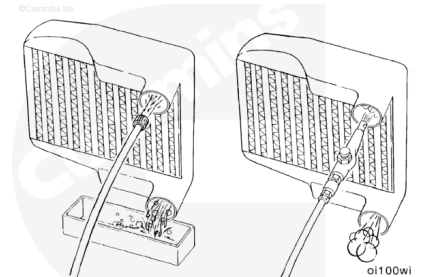

⚠ WARNING ⚠

Wear appropriate eye and face protection when using compressed air. Flying debris and dirt can cause personal injury.

⚠ CAUTION ⚠

The charge air cooler must be rinsed, dried, and cleaned of solvent, oil, and debris, or engine damage will result.

After the charge air cooler has been thoroughly cleaned of all oil and debris with solvent, wash the charge air cooler internally with hot, soapy water to remove the remaining solvent. Rinse thoroughly with clean water.

Blow compressed air through the inside of the charge air cooler in the opposite direction of normal airflow until the charge air cooler is dry internally.

Last Modified: 30-Jun-2005
