

Trainings ▾

Specifications

Automotive Applications


Horsepower	Refer to engine dataplate
Engine Speed @ Maximum Output	Refer to engine dataplate
Bore and Stroke	125 mm [4.921 in] x 147 mm [5.787 in]
Displacement	10.8 liters [659 C.I.D.]
Firing Order	1-5-3-6-2-4
Engine Weight (with standard accessories)	

Dry Weight

without EGR	940 kg [2072 lb]
with CM875 or Combined CM870 and CM570	989 kg [2180 lb]
with CM876	1033 kg [2277 lb]


Wet Weight

without EGR	1045 kg [2303 lb]
with CM875 or Combined CM870 and CM570	996 kg [2195 lb]
with CM876	1080 kg [2382 lb]
Crankshaft Rotation (viewed from the front of the engine)	Clockwise

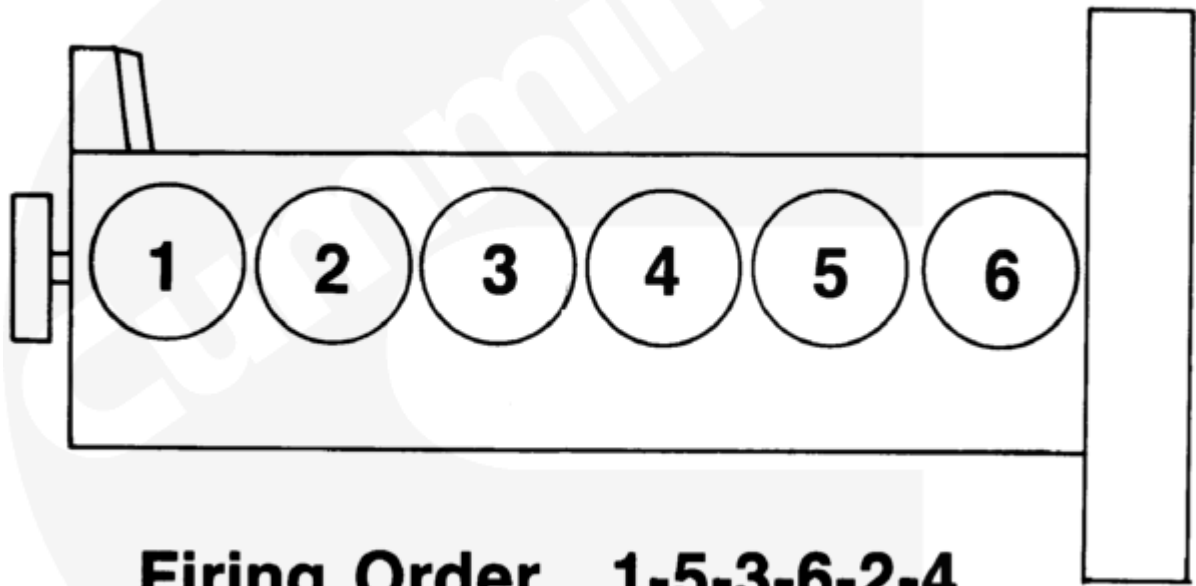

ew800va

Cylinder Location and Firing Order

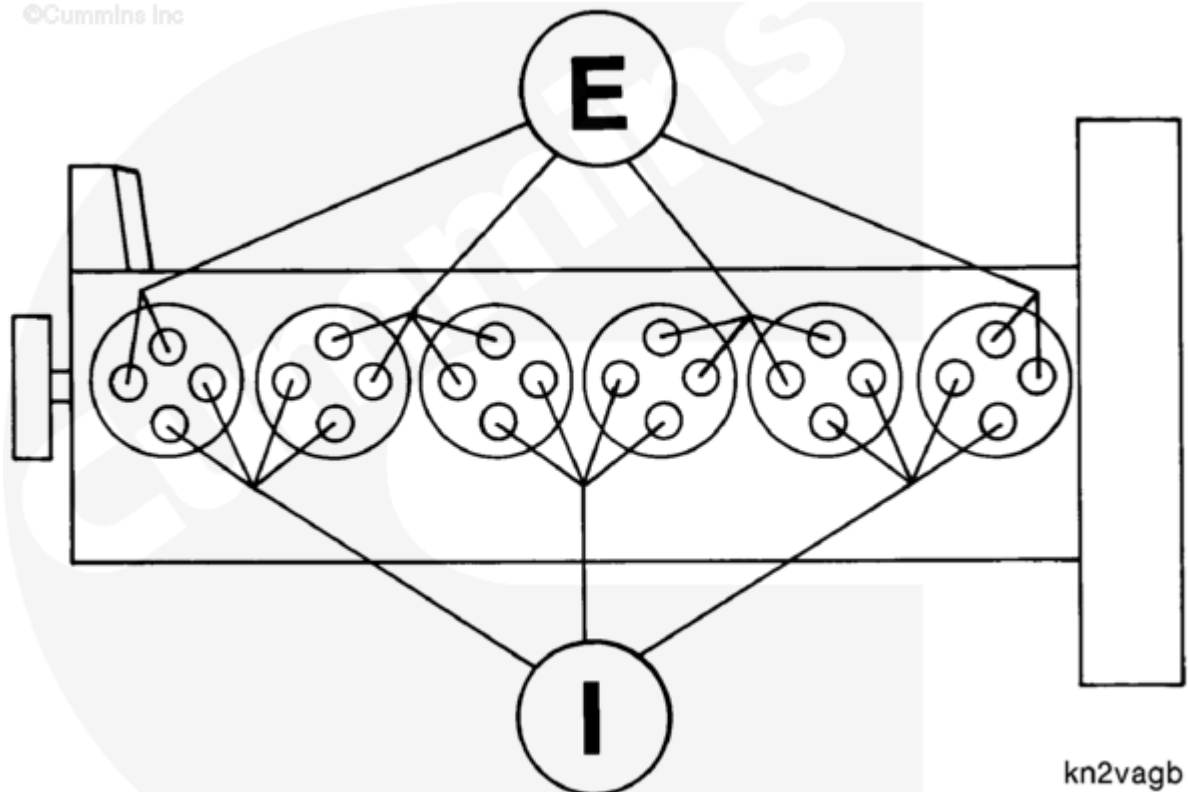

kn2vagb

Intake and Exhaust Valve Locations

Type	Four-cycle, In-line six-cylinder, four-valves per cylinder
Horsepower	Refer to engine dataplate
Engine Speed at Maximum Output	Refer to engine dataplate
Bore and Stroke	125 mm [4.921 in] x 147 mm [5.787 in]
Displacement	10.8 liters [659 C.I.D.]
Firing Order	1-5-3-6-2-4
Engine Weight (with standard accessories):	
Dry Weight	1124 kg [2478 lb]
Crankshaft Rotation (viewed from the front of the engine)	Clockwise
Industrial and Generator Drive	
Type	Four-cycle, In-line six-cylinder, four-valves per cylinder
Horsepower	Refer to engine dataplate
Engine Speed at Maximum Output	Refer to engine dataplate
Bore and Stroke	125 mm [4.921 in] x 147 mm [5.787 in]
Displacement	10.8 liters [659 C.I.D.]
Firing Order	1-5-3-6-2-4
Engine Weight (with standard accessories):	
Industrial Applications	
Dry Weight	940 kg [2072 lb]
Wet Weight	996 kg [2196 lb]
Generator Drive Applications	
Dry Weight	970 kg [2145 lb]
Wet Weight	1007 kg [2220 lb]
Crankshaft Rotation (viewed from the front of the engine)	Clockwise

Last Modified: 05-Apr-2011
