


Trainings ▾

Cylinder Head

Tool Number
3162892
Valve Guide Installer
Used to press the valve guides into the cylinder head to the proper assembled height.
©Cummins Inc 3162892

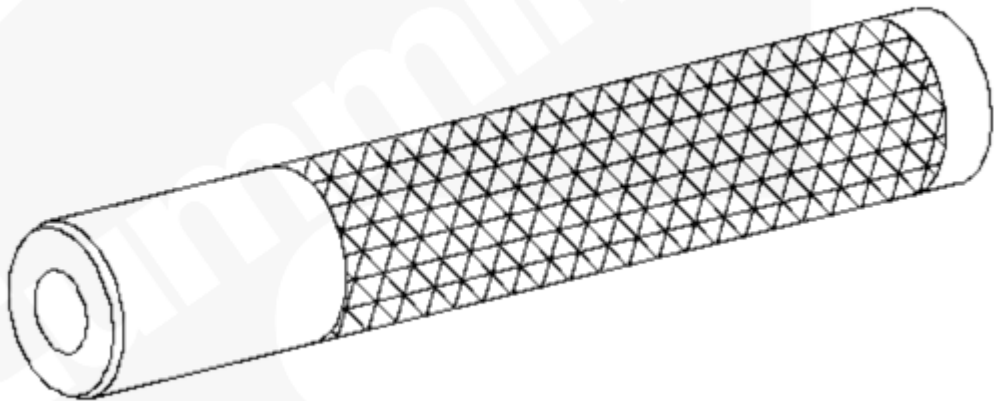


Tool Number

3163059

Air Impact Wrench

A tool which produces the amount of torque required to rotate Signature™ 600 capscrews. It has a square drive size of 3/4-inch, an output of 75 to 900 ft-lbs, and a continuous working torque of 500 ft-lb when using a 3/8 inch unrestricted hose and a 90 psi pressure source.

©Cummins Inc

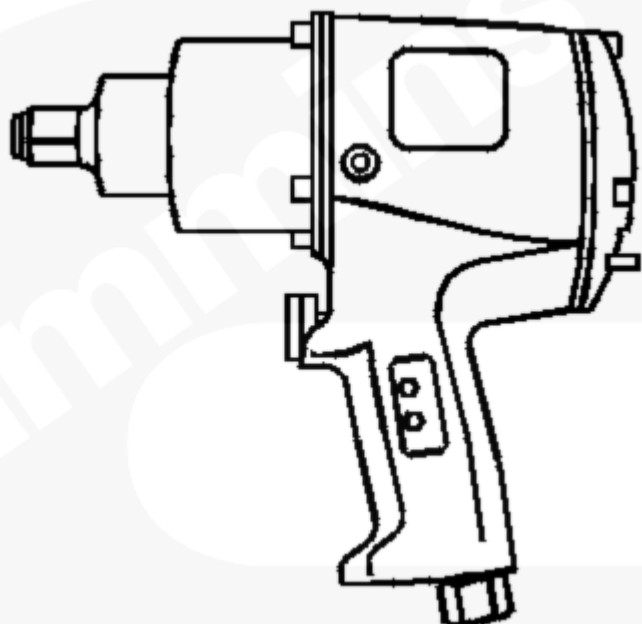

3163059


Tool Number

3163162

Head Bolt Stretch Gauge

Used to measure head bolts.

©Cummins Inc

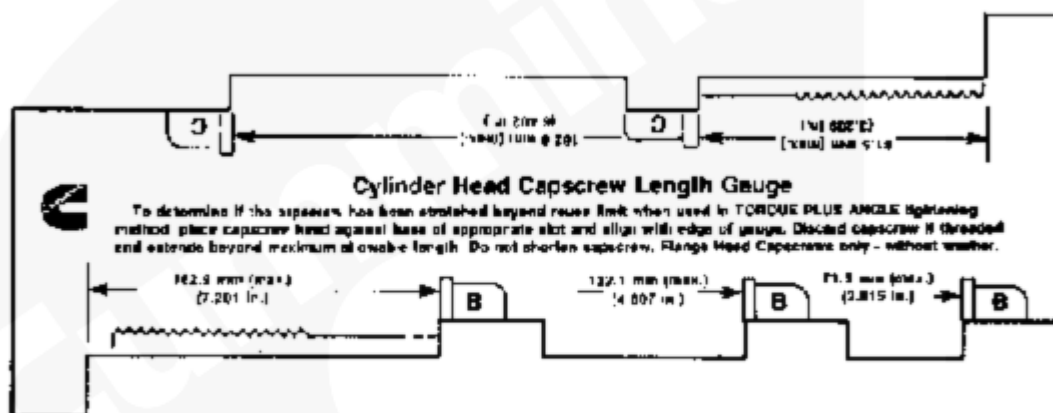

3163162


Tool Number

3163293

Valve Seal Puller

Used to remove the valve seal.

©Cummins Inc

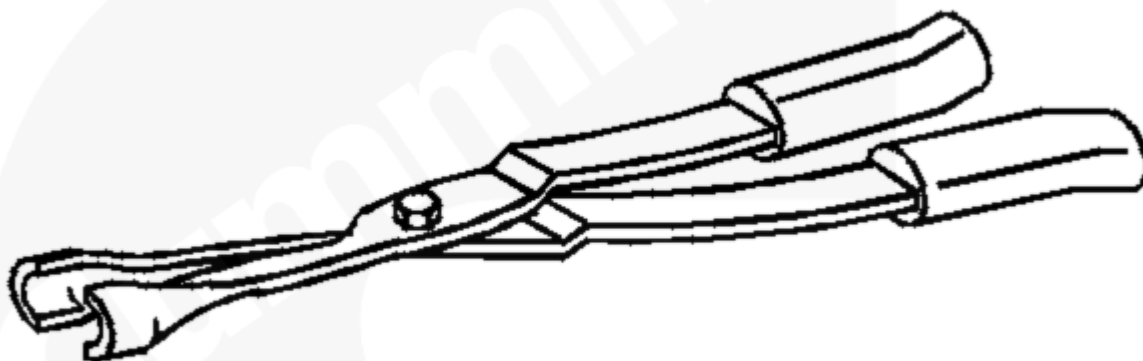

3163294


Tool Number

3163318

Intake Seat Installer

Used to install the intake valve seat into the cylinder head.

©Cummins Inc

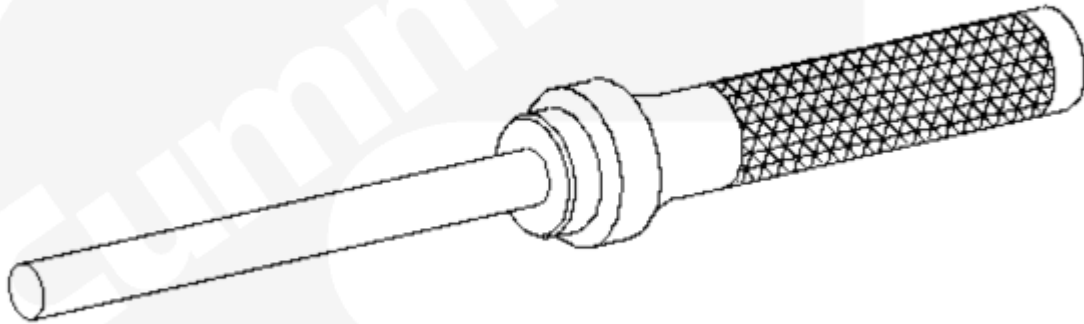**3163318**


Tool Number

3163319

Exhaust Seat Installer

Used to install the exhaust valve seat into the cylinder head.

©Cummins Inc

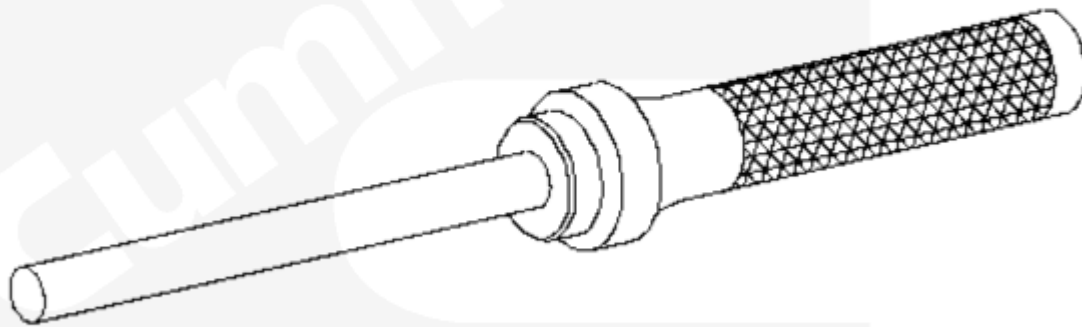**3163319**


Tool Number

3163321

Valve Guide Removal Tool

Used to remove the valve guides from the cylinder head.

©Cummins Inc

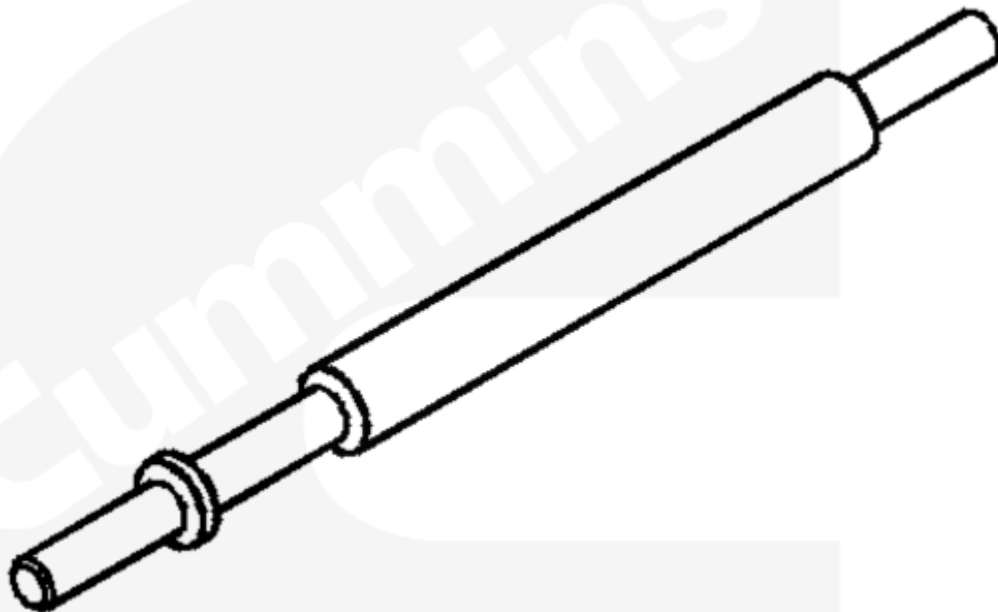

3163321


Tool Number

3164088

Valve Camshaft Bushing Installation and Removal Tool

Used with the hydraulic camshaft bushing installation and removal tool, Part Number 3823621.

©Cummins Inc

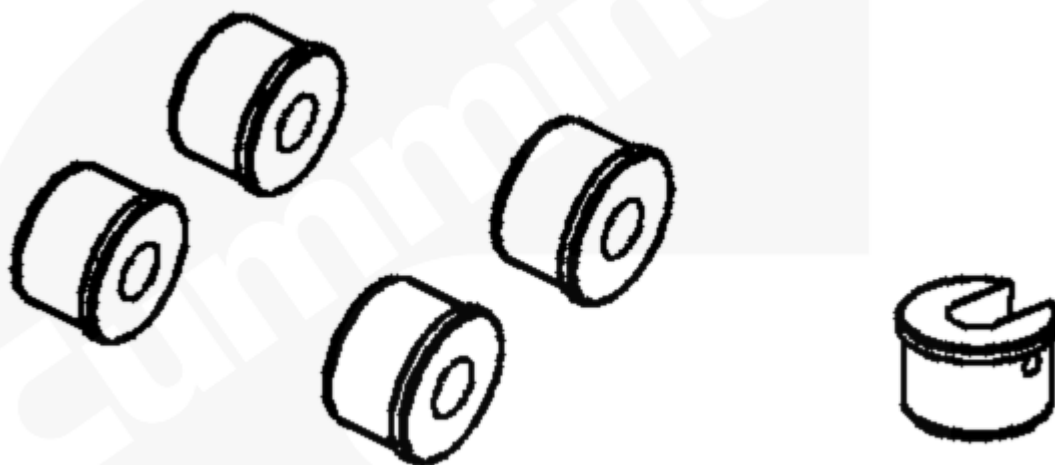

3164088


Tool Number

3164231

Leak Test Kit (Air Pressure Regulator)

Used to regulate air pressure to test various passages for leaks.

©Cummins Inc

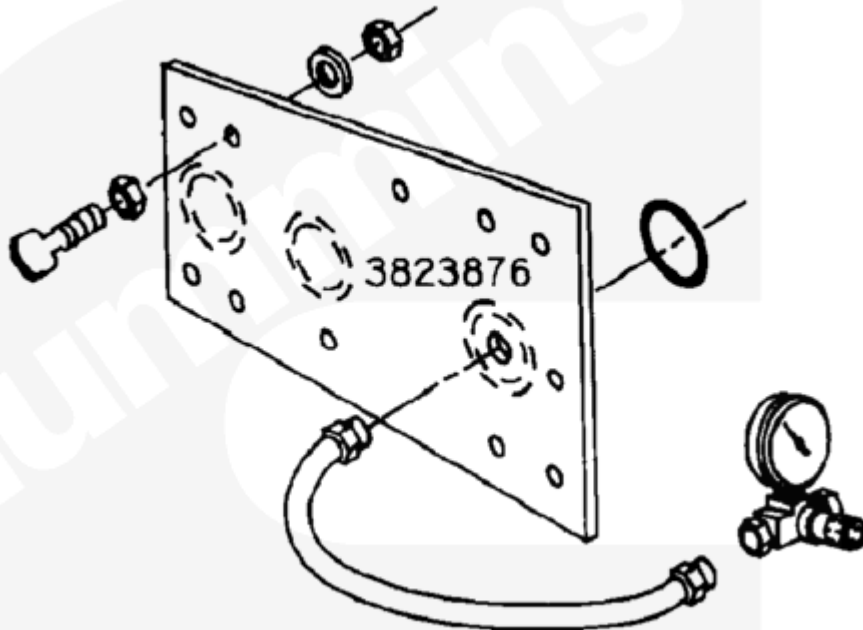


Tool Number

3164438

Depth Gauge Assembly

Used to measure liner protrusion, injector protrusion, cylinder block counterbore depths, and valve intrusion and/or protrusion.

©Gummine Inc

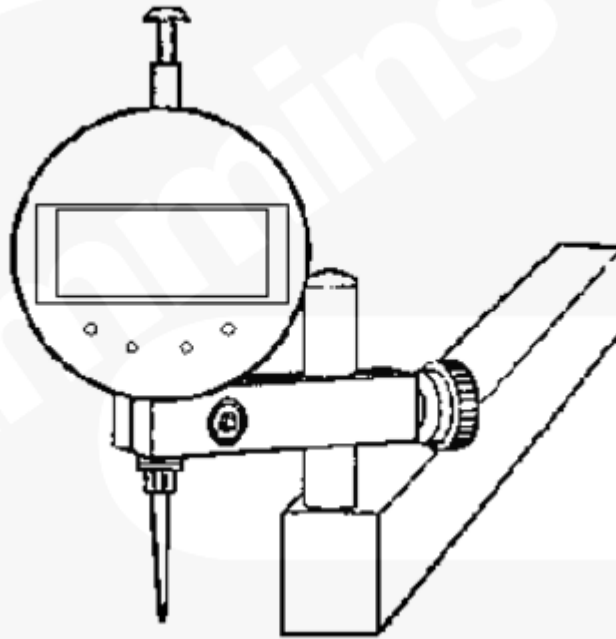

3164438


Tool Number

3165161

24 mm Impact Socket

Used to tighten both the cylinder head bolts and the main bearing cap bolts. The socket has sufficient length for Signature™ 600 and is laser marked at 90 degree increments.

©Cummins Inc

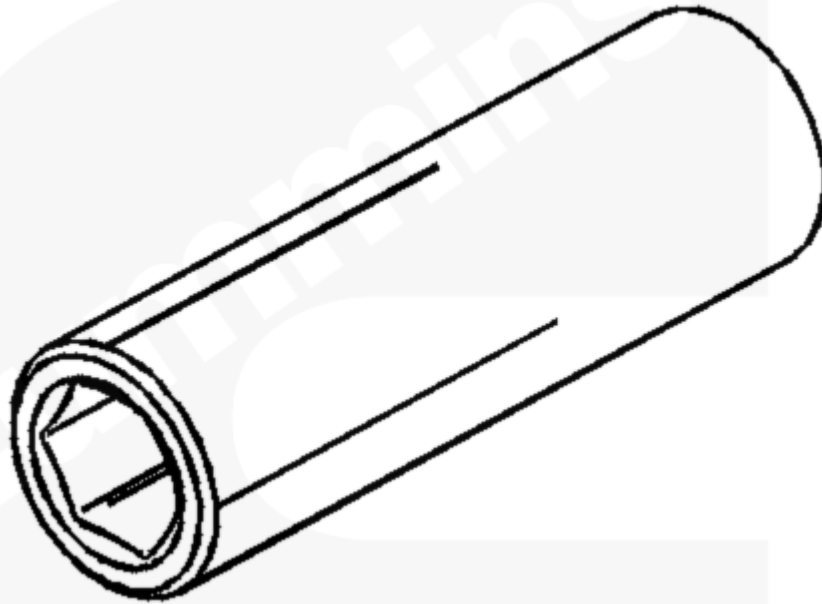

3163484

Tool Number

3375182

Valve Spring Tester

Used to measure the valve spring load at the valve spring working height.

©Cummins Inc

3375182




Tool Number

3376405

Valve Seat Grooving Tool

Used to cut a groove circumferentially in the inside diameter of a valve seat to allow the seat extractor a suitable grip area.

©Cummins Inc

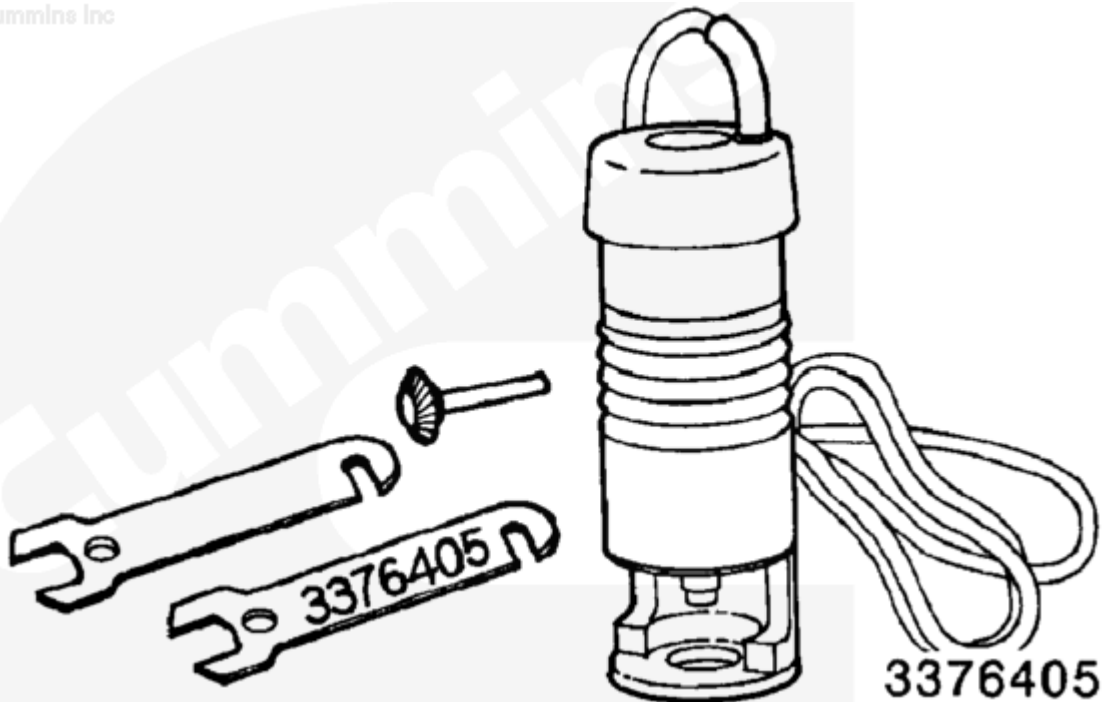


Tool Number

3376617

Slide Hammer Assembly

Used with the valve seat puller to remove the valve seat insert from the cylinder head.

©Cummins Inc

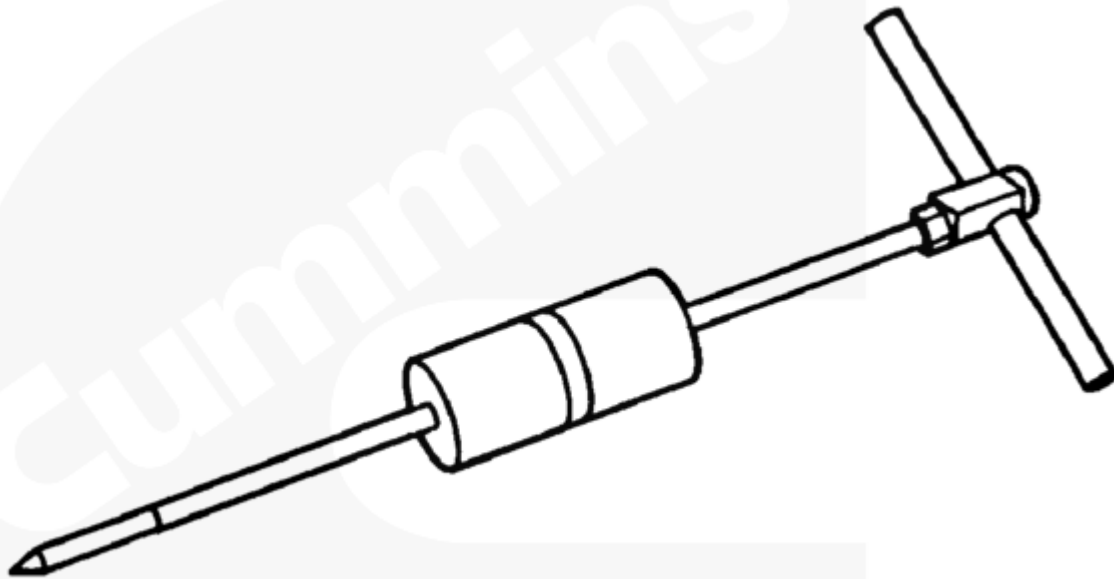

bp8togd


Tool Number

3823258

Scotch-Brite™ 7448

Used to clean carbon, rust, and corrosion from the engine block and other parts.

©Cummins Inc

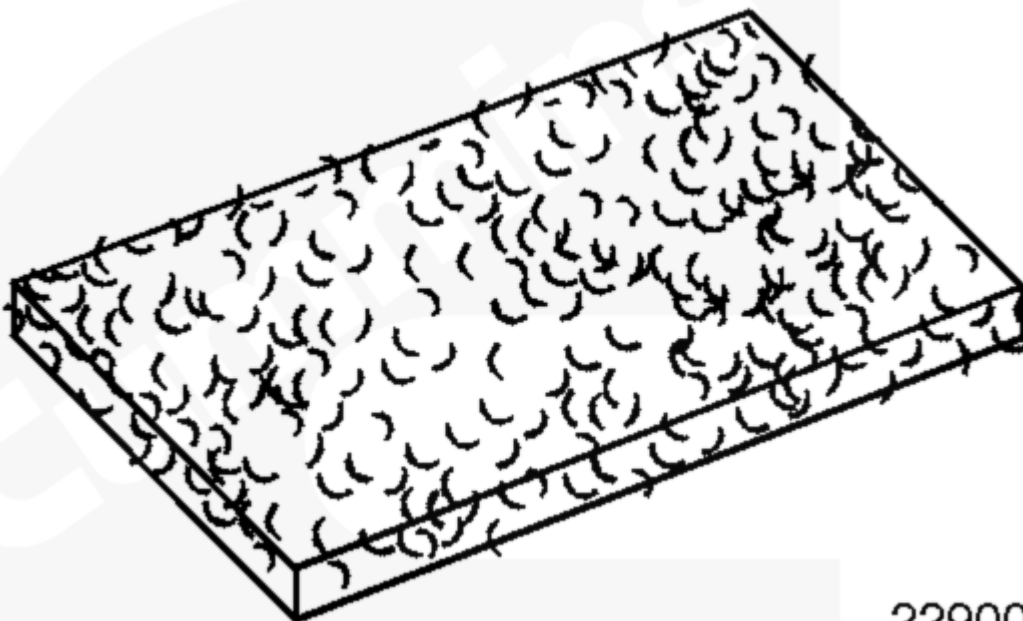

22900039


Tool Number

3823621

Hydraulic Camshaft Bushing Installation and Removal Tool

Used to remove and install camshaft bushings.

©Cummins Inc

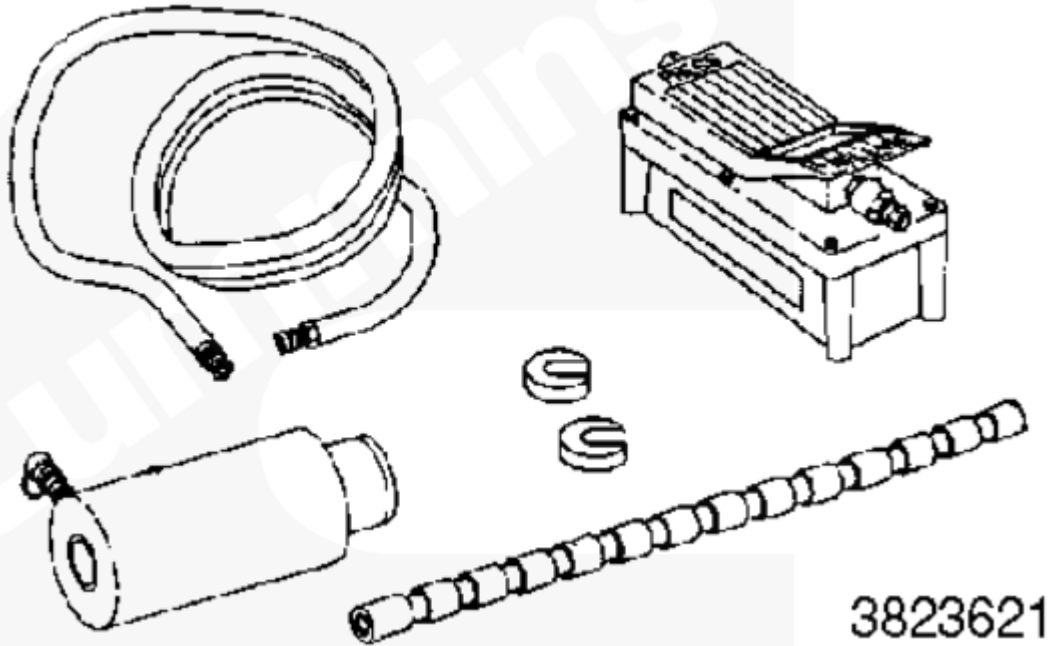

3823621


Tool Number

3824277 (110V) / 3824278 (220V)

Valve Vacuum Tester

Used to determine if the valves are correctly seated in the cylinder head. The seal ring, Part Number ST1257-35, and vacuum cup, Part Number ST1257-6, are purchased separately.

©Cummins Inc

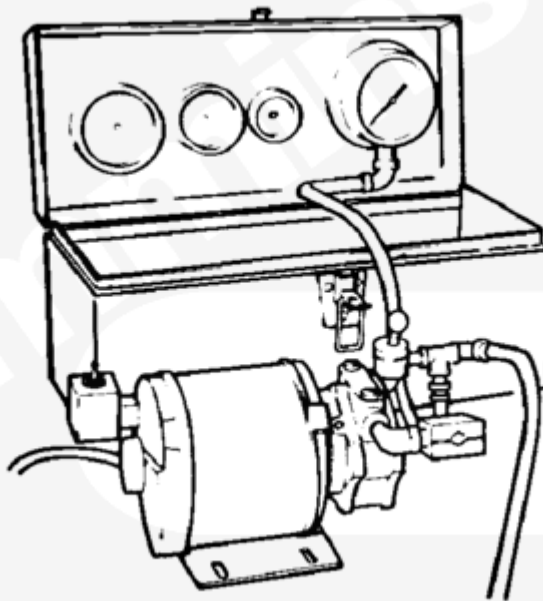

kn8togr


Tool Number

3824864

Spacer

Used with the Camshaft Bushing Replacer Kit, Part Number 3164088.

©Cummins Inc

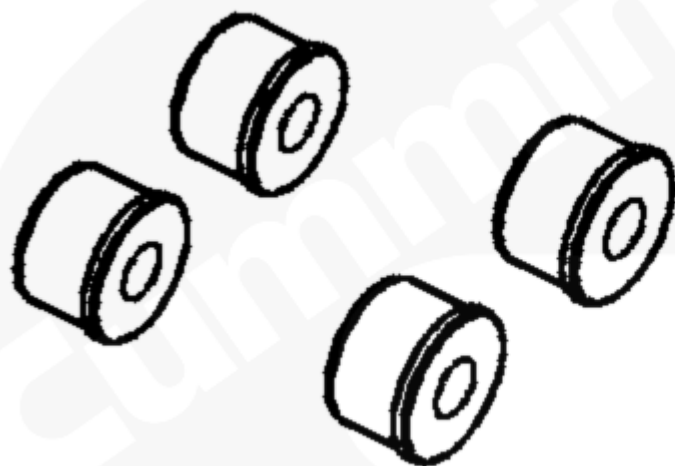

3164088


Tool Number

4918319

Protective Plug Kit

Used to plug oil passages and drillings during a repair process.

©Cummins Inc

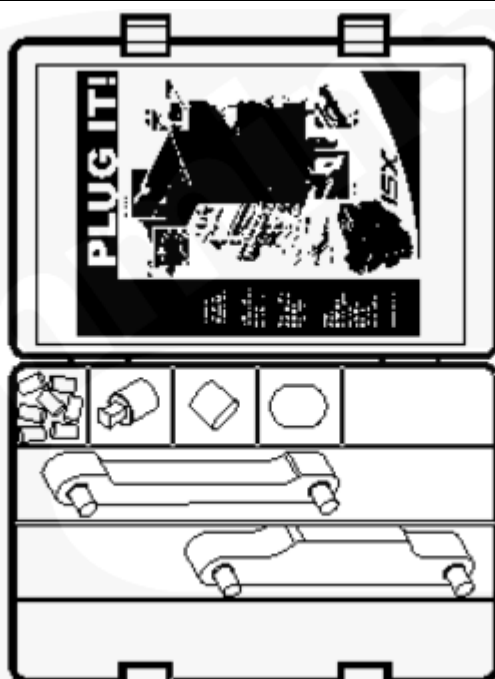


22c00256

Tool Number

4919358

Four-Valve Spring Compressor

Used to remove or install valve spring retainers, valve springs, and valve seals.

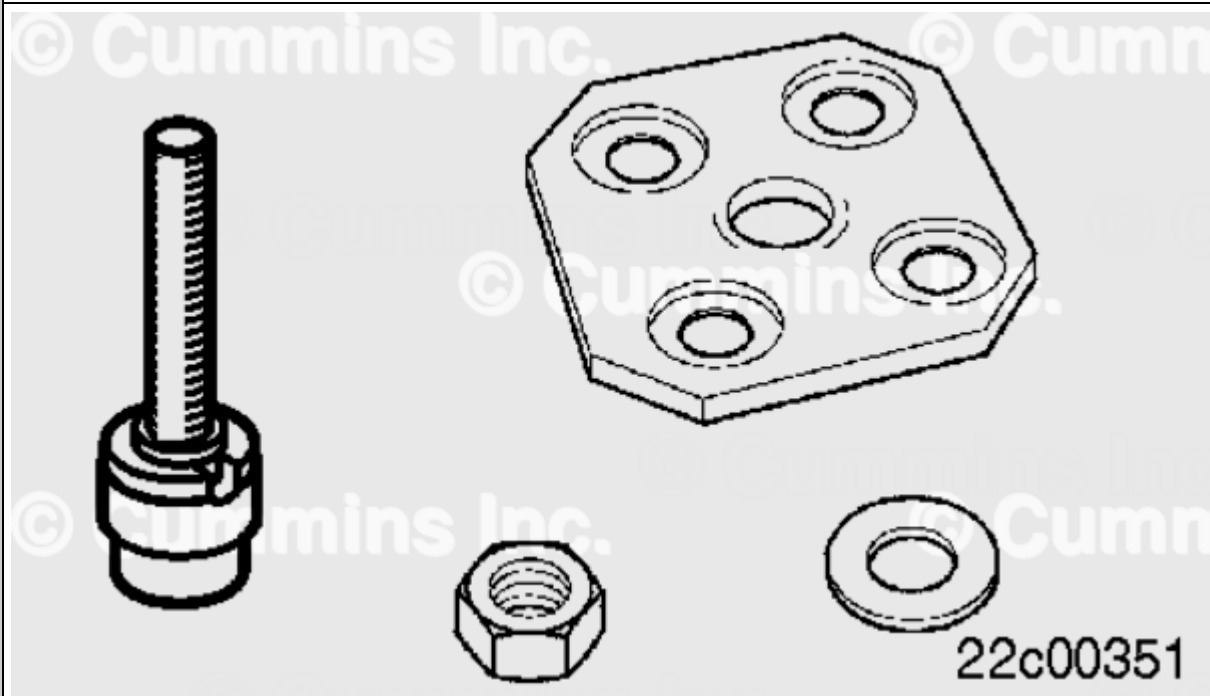


Tool Number

4919360

Cylinder Head Lifting Kit


Used to remove the cylinder head from the cylinder block. The kit includes the cylinder head lifting fixture, Part Number 4919361, and mounting capscrews.

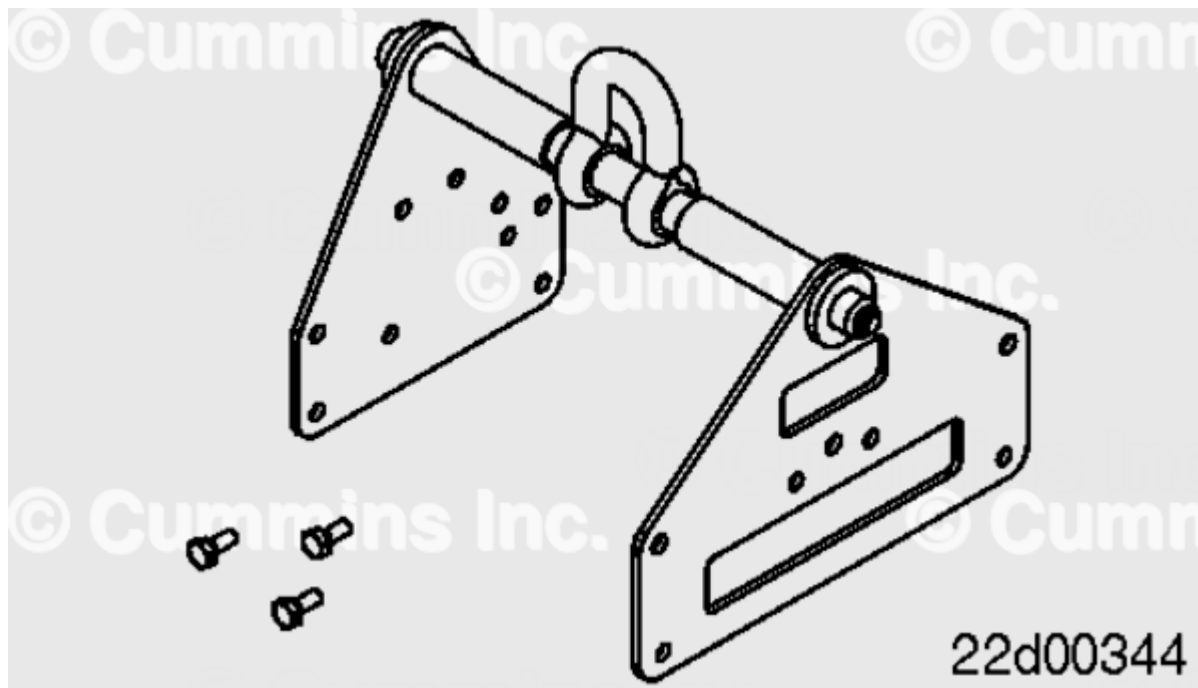**Tool Number**

4919546

Cylinder Head Fuel Passage Leak Test Kit

Used to test the fuel passages in the cylinder head. Use with Leak Test Kit, Part Number 3164231, purchased separately.

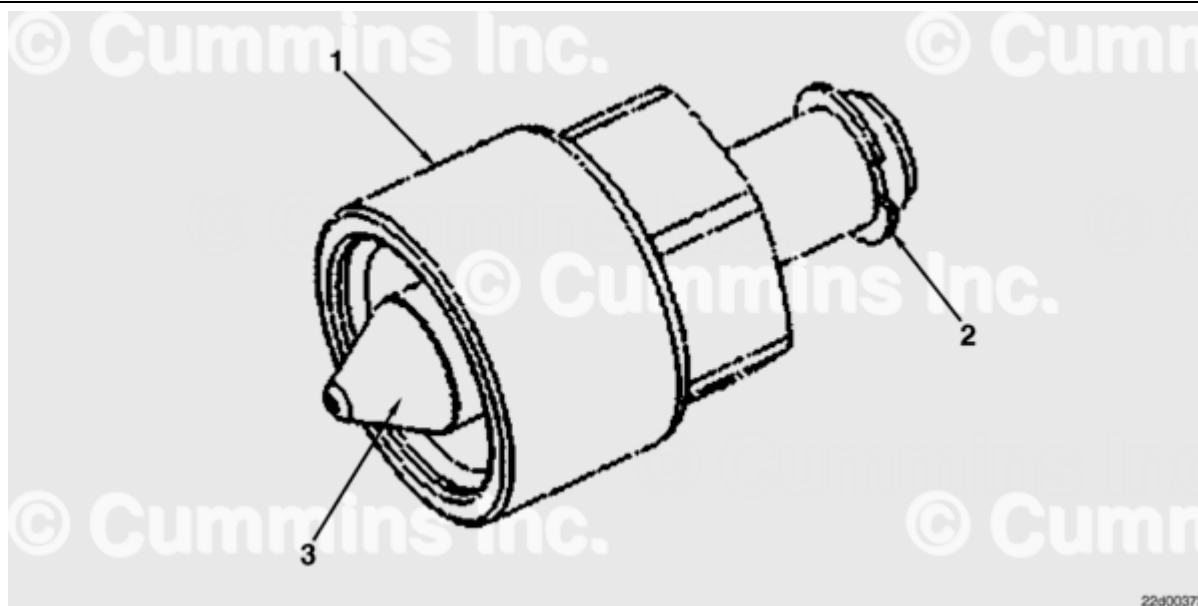


Tool Number

5299837

Valve Camshaft Installation and Removal Kit

Used to install valve camshaft into the cylinder head. The kit includes a sleeve, Part Number 5299841, that fits over the camshaft gear nose to allow installation from the rear of the cylinder head.

©Cummins Inc

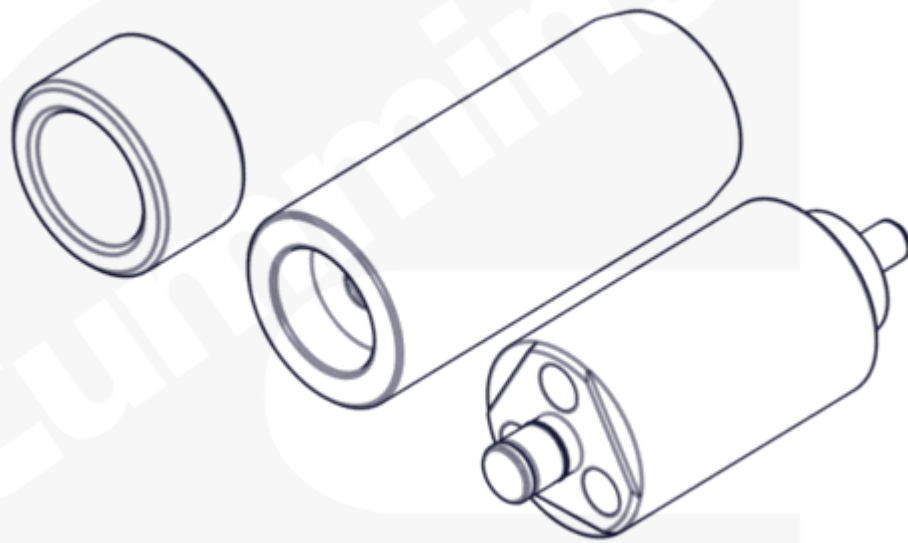

01t00030


Tool Number

5394735

Retaining Ring Installer

Used to install a retaining ring that will recreate a seal around the top of the injector sleeve to prevent further leaks of coolant into the fuel or fuel into the coolant.

©Cummins Inc

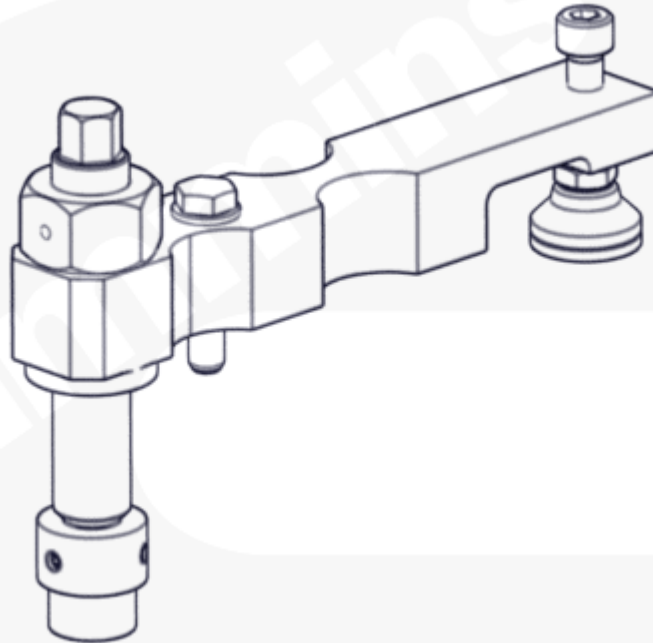

22d00440

Tool Number

5395348

Camshaft Removal and Installation Kit

Used to remove the camshaft from the cylinder head.



22a00294


Tool Number

ST1166-1

Magnetic Crack Detector

Used to inspect cylinder heads and other ferrous castings that can not be magnafluxed for crack detection.

©Gummine Inc

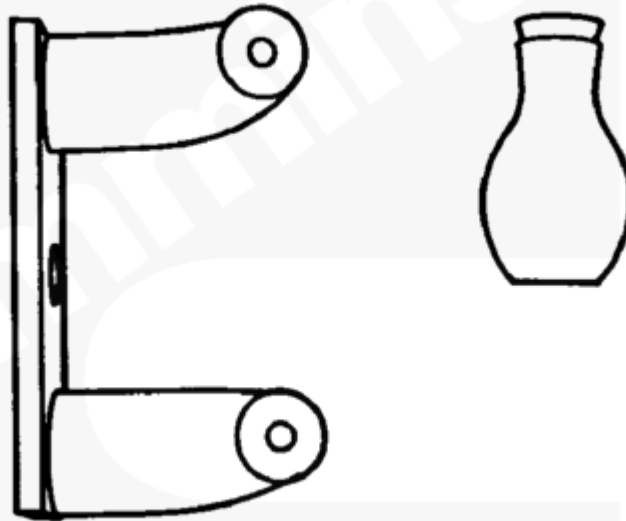

kn8togo


Tool Number

ST1276-1

Exhaust Seat Puller

Used to remove the exhaust valve seat from the cylinder head.

©Cummins Inc

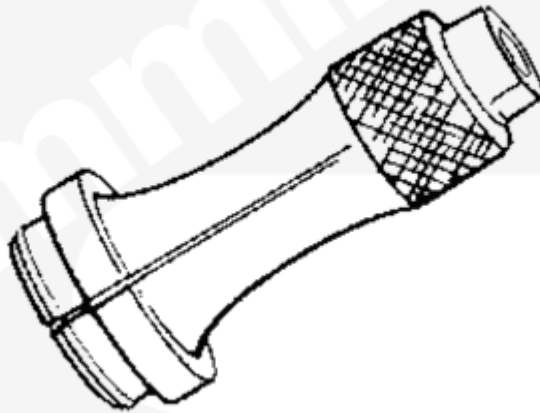

ST1276-1


Tool Number

ST1279-1

Intake Seat Puller

Used to remove the intake valve seat from the cylinder head.

©Cummins Inc

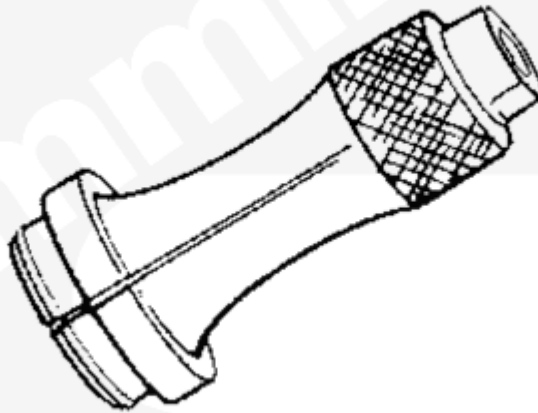

ST1279-1