

Trainings ▾


Install

Distributor-Type Pump

Note : Use new sealing washers when installing the tube.

Assemble in the reverse order of removal.

Torque Value: 9 n•m [80 in-lb]

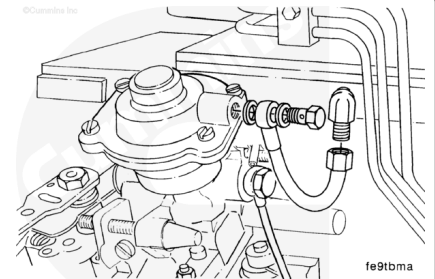

In-Line Pump

Install the AFC tube in the reverse order of removal.

Torque Value: 24 n•m [18 ft-lb]

