


Trainings ▾

General Information


Air forced through the fins of the radiator by a fan cools the coolant pumped through the radiator. Environmental debris (such as paper, straw, lint, and dust) can obstruct the fins and stop the flow of air, which will reduce the cooling effect of the radiator.

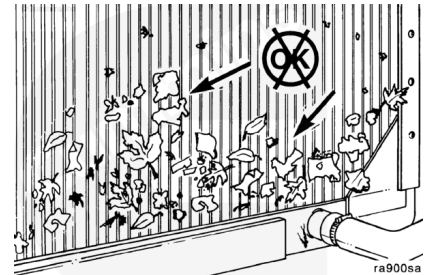

Initial Check

⚠ CAUTION ⚠

Wear appropriate eye and face protection when using compressed air. Flying debris and dirt can cause bodily injury.

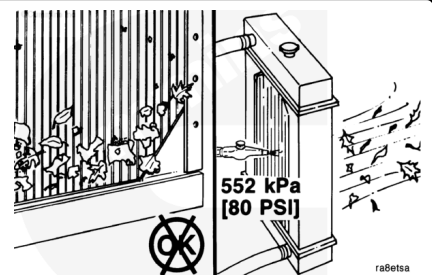

Inspect for plugged radiator fins.

Use compressed air to blow out the dirt and debris.


Measurements

	kpa	psi
Air Pressure:	552	80

Inspect for bent or broken fins.


Inspect for radiator core and gasket leaks.

If the radiator **must** be replaced, refer to the equipment manufacturer's replacement procedures.

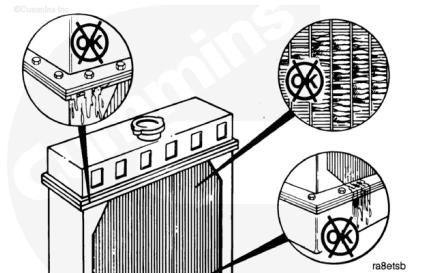

⚠ WARNING ⚠

If a liquid refrigerant system must be removed before removing the radiator, wear eye and face protection. Wrap cloth around the fittings before removal. Liquid refrigerant can cause serious eye and skin injury.

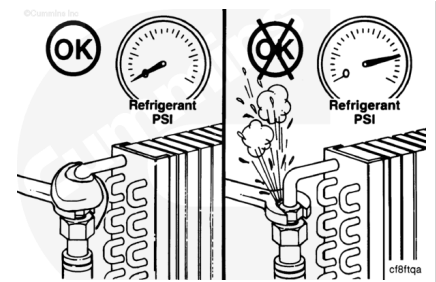

⚠ WARNING ⚠

To protect the environment, liquid refrigerant systems must be properly emptied and filled using equipment that prevents the release of refrigerant gas into the atmosphere. Federal law requires capturing and recycling the refrigerant.