


Trainings ▾


General Information with Mechanically Actuated Injector

The QSK45 engine has six cam box covers and the QSK60 engine has eight cam box covers.

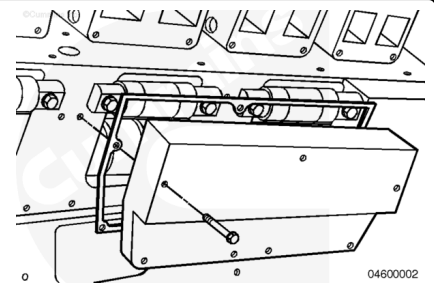


Pressurized engine oil is supplied to each cam follower assembly through an oil cavity around the mounting capscrews of each assembly.

The oil drilling in the cam follower shaft has a cup plug at both ends. This allows either end of the shaft to be installed toward the front of the engine. The ring dowel bores **must not** have any burrs to install the assembly by hand. The cup plugs in the end of the shaft keep the flow of the pressurized oil in the shaft instead of dumping the oil into the camshaft cavity in the block. The cup plugs **must** be installed in the ends of the shaft.

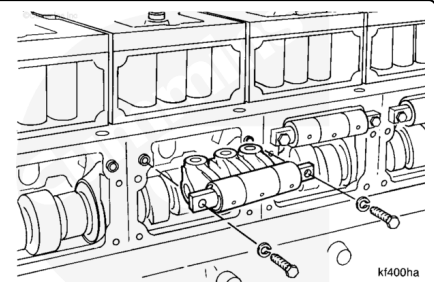


QSK45 and the QSK60 cam followers are **not** rebuildable in the field due to the fit between the pin and lever. Liquid nitrogen is required to shrink the pin sufficiently to slide it through the bores in the lever.

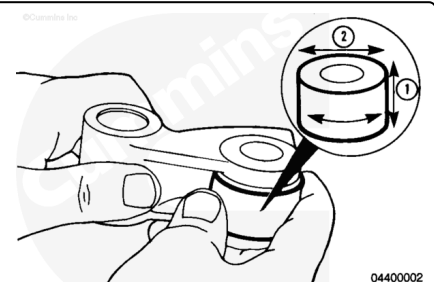


with Electronically Actuated Injector

The QSK45 engine has six cam box covers and the QSK60 engine has eight cam box covers.

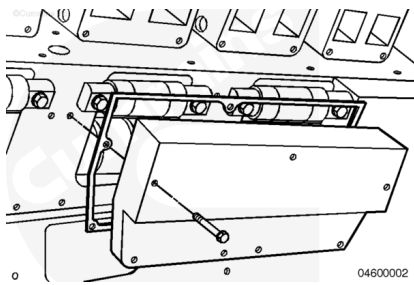

Pressurized engine oil is supplied to each cam follower assembly through an oil cavity around the mounting capscrews of each assembly.

The oil drilling in the cam follower shaft has a cup plug at both ends. This allows either end of the shaft to be installed toward the front of the engine. The ring dowel bores **must not** have any burrs to install the assembly by hand. The cup plugs in the end of the shaft keep the flow of the pressurized oil in the shaft instead of dumping the oil into the camshaft cavity in the block. The cup plugs **must** be installed in the ends of the shaft.

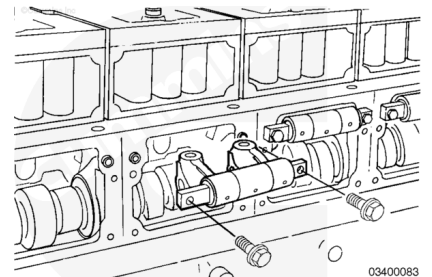

QSK45 and the QSK60 cam followers are **not** rebuildable in the field due to the fit between the pin and lever. Liquid nitrogen is required to shrink the pin sufficiently to slide it through the bores in the lever.

