

Trainings ▾


Remove

⚠ WARNING ⚠

To reduce the possibility of personal injury, avoid direct contact of hot oil with your skin.

⚠ WARNING ⚠

Some state and federal agencies have determined that used engine oil can be carcinogenic and cause reproductive toxicity. Avoid inhalation of vapors, ingestion, and prolonged contact with used engine oil. If not reused, dispose of in accordance with local environmental regulations.

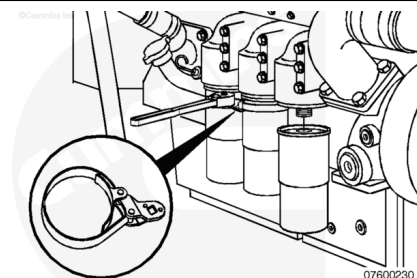

The QSK45 engine has three combination oil filters and the QSK60 has four combination oil filters.

Use an oil filter wrench, Part Number 3375049 or equivalent, to remove the oil filters.

Discard the filters if **not** required for failure analysis.

Some QSK60 Power Generation engines have an oil by-pass line from the PRELUB™ to the fuel pump accessory drive with a small oil filter installed.

Use an oil wrench, Part Number 3400158 or equivalent, to remove the oil filter, if applicable.

Discard the filter if **not** required for failure analysis.

