


Trainings ▾

General Information


The QSK23 engine has two spin-on lubricating filter canisters. These filters can be replaced with Fleetguard® media with a wire mesh backing to obtain 10-micron filtering capability and long life.

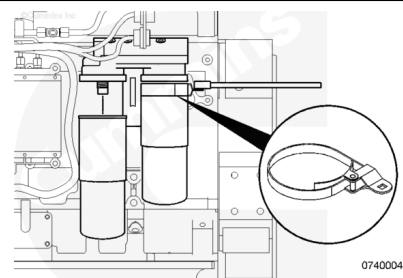

The venturi combo filter design provides for both full-flow and bypass lubricating oil filtration in the same canister, eliminating the requirement for bypass filters. The filters are **only** mounted on the left side (fuel pump side) of the engine.

Cummins Inc. recommends using Fleetguard® venturi combo filters, Part Number LF9325, at each oil change interval.


The QSK23 uses an oil pump idler gear which drives the lubricating oil pump at the front of the engine.

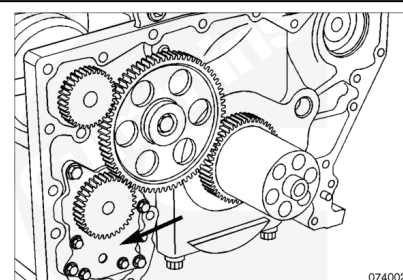

The QSK23 high-pressure relief valve is located internally in the lubricating oil pump. The relief pressure is 883 kPa [128 psi].

The high-pressure relief valve also serves as the primary oil pressure regulator located internal to the lubricating oil pump. Regulated oil pressure is 393 to 552 kPa [57 to 80 psi] at rated rpm.

The QSK23 uses two oil coolers in parallel. Each cooler housing contains a thermostat which begin opening at 85°C [185°F] and fully open at 100°C [212°F].

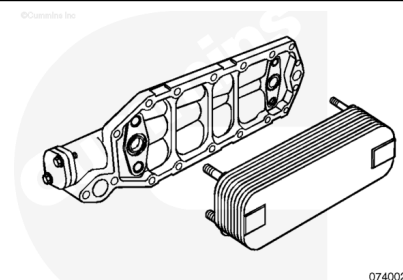

Lubricating oil is routed from the oil pump through the oil coolers, across the rear of the engine, and to the oil filters. The oil then flows to the main oil gallery which supplies oil to the crankshaft, rod bearings, piston cooling nozzle gallery, camshaft, front and rear gear train, and turbocharger.

There are multiple oil pressure ports for OEM usage.

