


Trainings ▾

General Information

The QSK23 air intake system uses a remote charge air cooler to reduce the air temperature into the intake manifold. The charge air from the engine turbocharger is routed to the intake manifold by means of a radiator mounted (air-to-air) cooler rather than through the conventional integral engine mounted aftercooler core (air-to-coolant) design. The advantage of cooling charge air directly by ambient air is that the lowest practical charge air temperature can be attained with the minimum cost penalty.

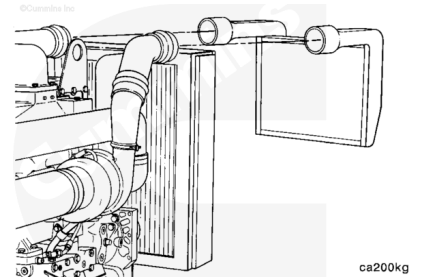

The QSK23 engine uses a single high-efficiency Holset® HX82 single-stage turbocharger on the power generator application and a Schwitzer S500 turbocharger on the industrial application. The QSK23 turbocharger is mounted on the right side of the engine.

