


Trainings ▾

Initial Check

⚠ WARNING ⚠

Wear appropriate eye and face protection when using compressed air. Flying debris and dirt can cause personal injury.

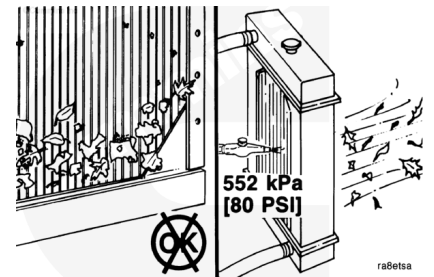

Inspect for plugged radiator fins.

Use compressed air to blow out the dirt and debris.


Measurements

	kpa	psi
Air Pressure:	552	80

Inspect for bent or broken fins.


Inspect for radiator core and gasket leaks.

If the radiator **must** be replaced, refer to the manufacturer's replacement procedures.

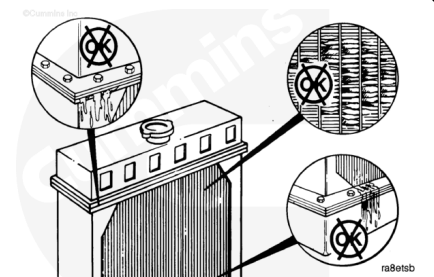

⚠ WARNING ⚠

If a liquid refrigerant system (air conditioning) is used, wear eye and face protection, and wrap a cloth around the fittings before removing. Liquid refrigerant can cause serious eye and skin injuries.

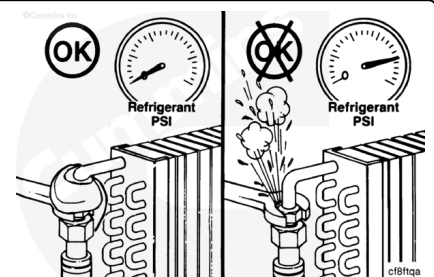

⚠ WARNING ⚠

To protect the environment, liquid refrigerant systems must be properly emptied and filled using equipment that prevents the release of refrigerant gas into the atmosphere. Federal law requires capturing and recycling the refrigerant.

For environmental protection, federal regulations require that refrigerants **must** be recycled and **not** vented into the atmosphere. Check local regulations for capturing and recycling the refrigerant.

Last Modified: 23-Jan-2009
