

Trainings ▾


Tool Number

ST-434

Vacuum Gauge 0-763 mm-Hg [0 to 30 in. Hg]

Used to check fuel inlet restriction. Hose adapters, Part Numbers ST-434-1, 3375845, and 3376922, are required and must be ordered separately.

©Cummins Inc

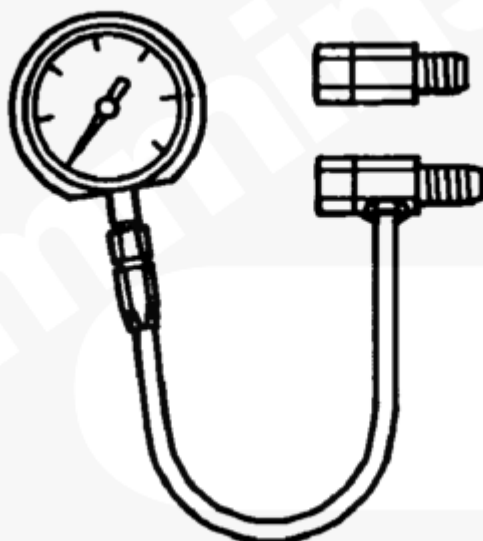

eg8togc


Tool Number

ST-434-1

Hose Adapter

Used with the vacuum gauge, Part number ST-434. The hose adapter is used with a Number 8 hose.

©Cummins Inc

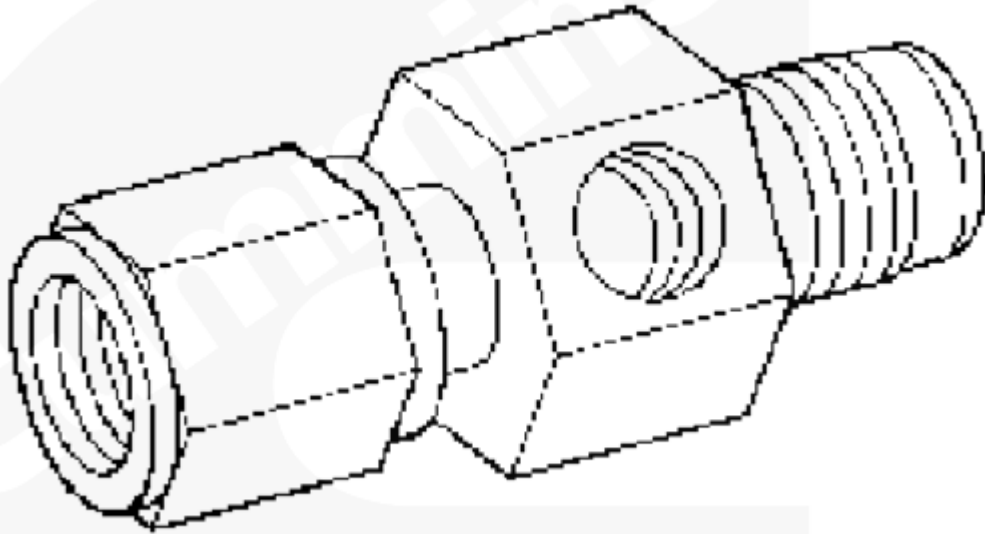

22c00320


Tool Number

ST-434-2

Hose Adapter

Used with the vacuum gauge, Part number ST-434. The hose adapter is used with a Number 10 hose.

©Cummins Inc

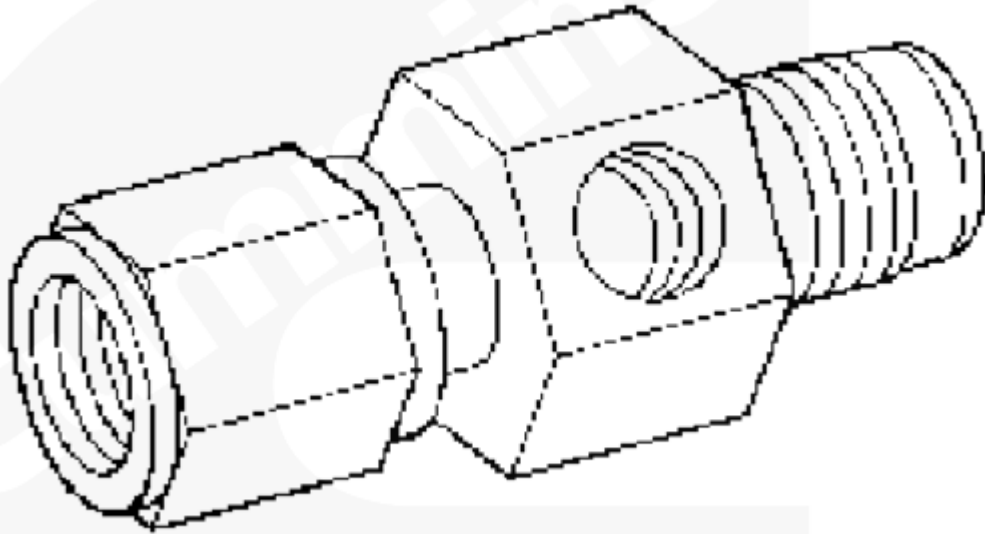

22c00320


Tool Number

3375845

Hose Adapter

Used with the vacuum gauge, Part number ST-434. The hose adapter is used with a Number 12 hose.

©Gummine Inc

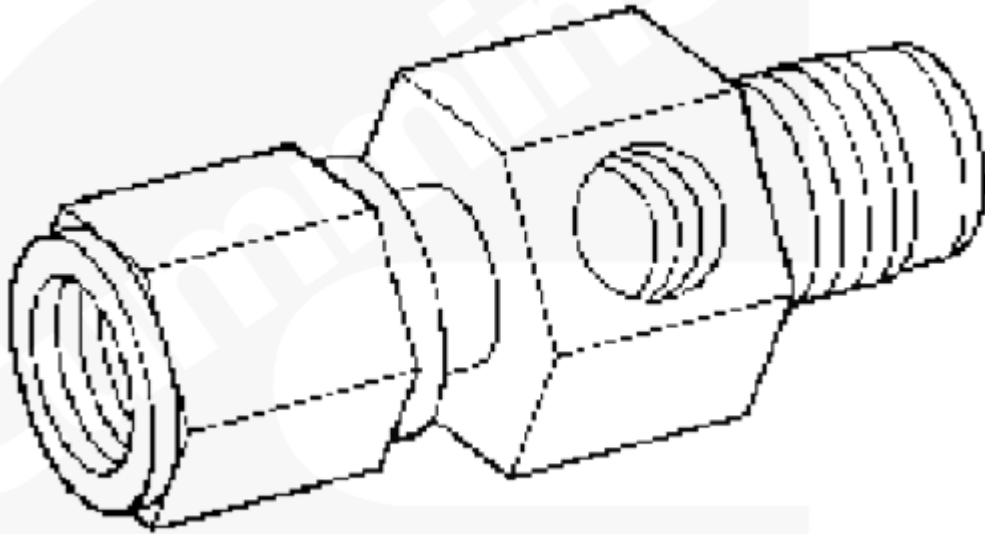

22c00320


Tool Number

3376922

Hose Adapter

Used with the vacuum gauge, Part number ST-434. The hose adapter is used with a Number 16 JIC hose.

©Cummins Inc

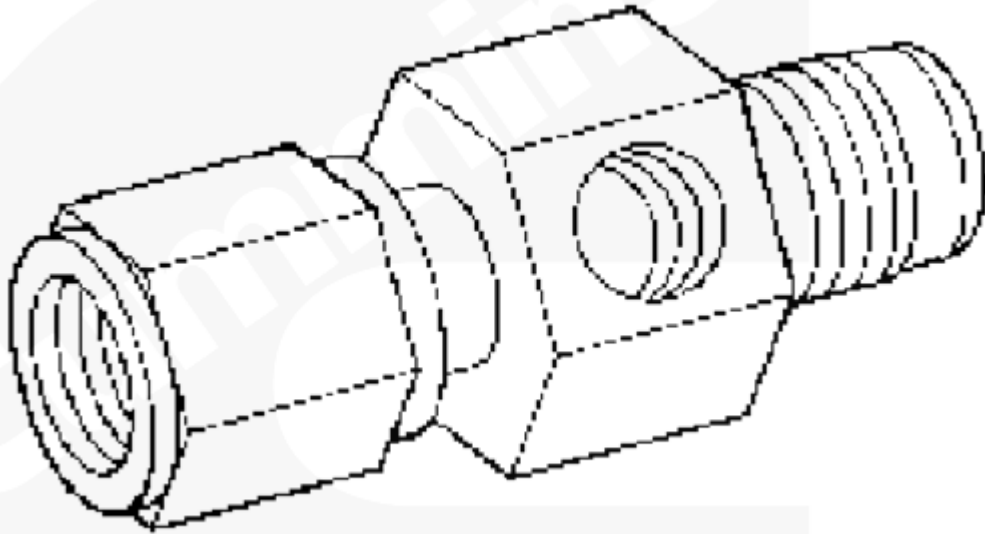

22c00320


Tool Number

3164383

Sight Glass

Used with a number 10 hose to check for air in the fuel suction.

©Cummins Inc

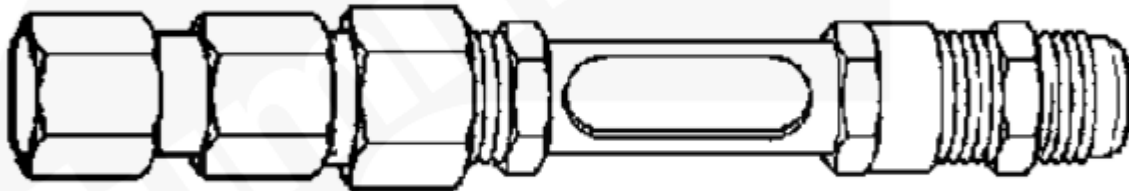

22c00319


Tool Number

ST-1111-3

Mercury-Filled Slack Tube Manometer

Used to measure the fuel drain line restriction.

©Cummins Inc

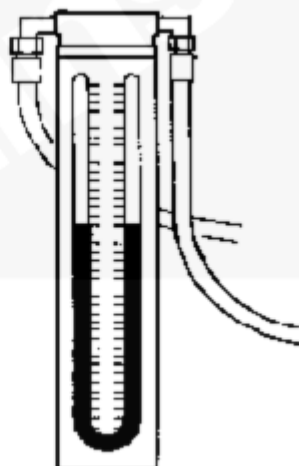

st-1111-3


Tool Number

ST-1272-11

Chip Removing Unit

Used to remove carbon from the top of the piston.

©Cummins Inc

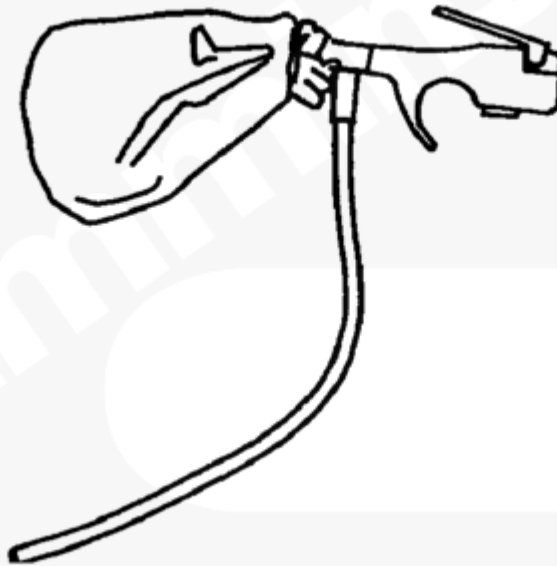

st-1272-11


Tool Number

3823461

Super Chip Vacuum Kit

Used to remove small machining chips during salvage operations.

©Cummins Inc

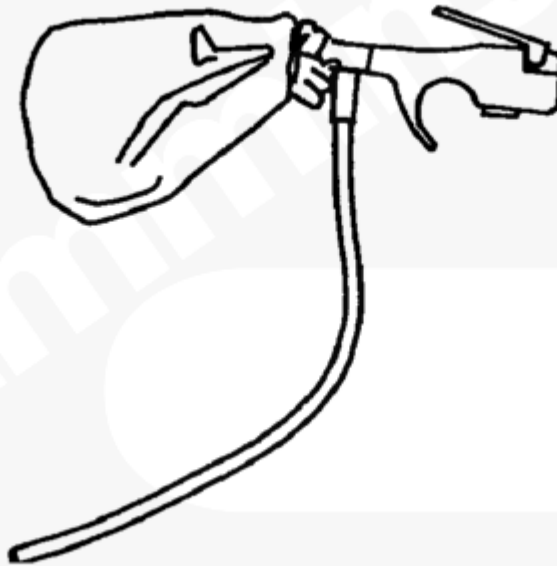

st-1272-11


Tool Number

3376807

Filter Wrench

Used to remove or tighten spin-on fuel filters.

©Cummins Inc

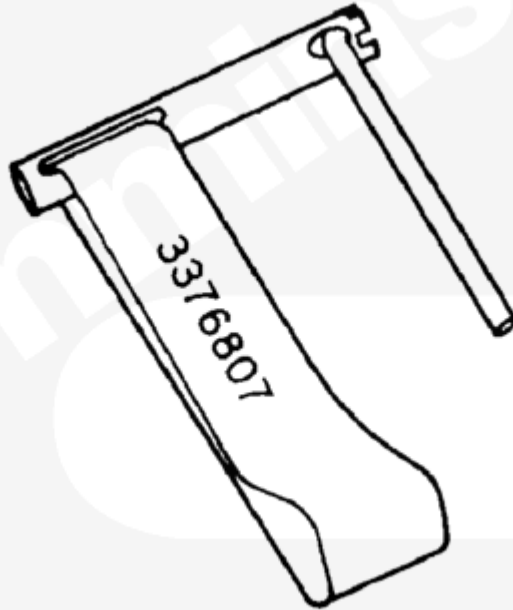

3376807


Tool Number

3823451

Static Injection Timing Tool

Used to measure static timing.

©Cummins Inc

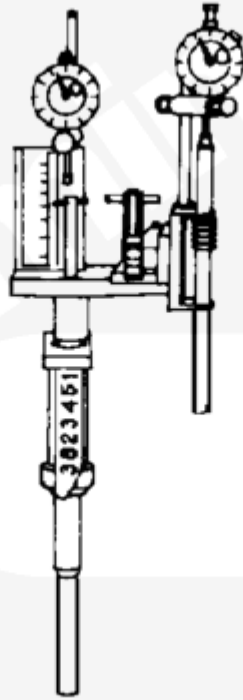

3823451

Tool Number

3823579

CELECT™ Injector Puller and Driver Assembly

Used to remove and install CELECT™ injectors.

©Cummins Inc

