


Trainings ▾


Remove

Front Gear Train

Remove the manifold cover, gasket, and grid heater (if equipped).

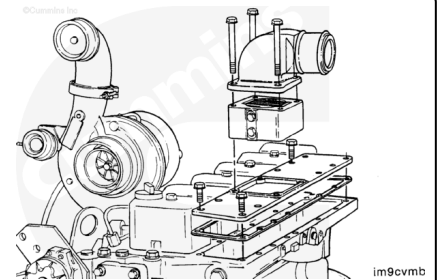

If the air intake manifold will be off for a prolonged period of time, tape off the intake manifold opening to prevent debris from entering the intake system.

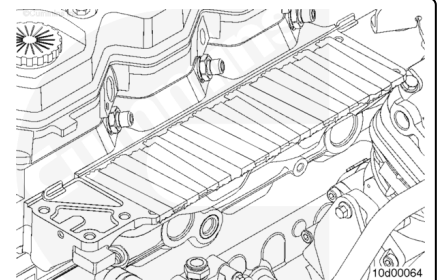


Rear Gear Train


Remove the intake manifold mounting capscrews.

Note : The intake manifold uses RTV sealant between the manifold and cylinder head. Be careful not to damage the intake manifold and sealing surfaces when removing the intake manifold.

Remove the intake manifold.

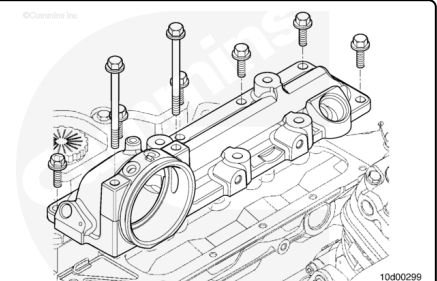

If the air intake manifold will be off for a prolonged period of time, tape off the intake manifold opening to prevent debris from entering the intake system.

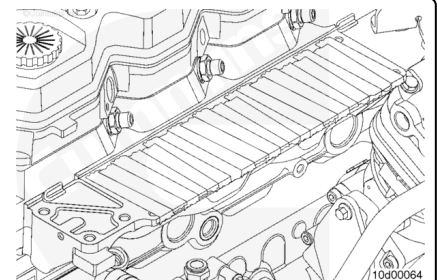

Last Modified: 24-Apr-2006
